



iJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 6 Issue: I Month of publication: January 2018

DOI: <http://doi.org/10.22214/ijraset.2018.1011>

www.ijraset.com

Call: ☎ 08813907089

E-mail ID: ijraset@gmail.com

A Wideband Multiband CPW Fed Wineglass Shaped Patch Antenna with Tuning Stub for 4G Wireless Communication Application

Anurima Majumdar¹, Sisir Kumar Das², Annapurna Das³

^{1, 2, 3}Guru Nanak Institute of Technology, India

Abstract: A novel design of a wineglass shaped patch antenna with tuning stub is inspected in this paper. FR4_epoxy with $\epsilon_r=4.4$ is used as dielectric substrate with height 1.6 mm. The antenna resonates at design frequency 3.4 GHz and gives multifrequency response at 3.1 GHz, 1 GHz and 4.4 GHz. The impedance bandwidth below -10dB return loss is 19.35 % at 3.4 GHz with return loss -25 dB. The analysis of the antenna is done using HFSS simulation tool.

Keywords: Wideband, multiband, CPW feed, tuning stub, wireless communication

I. INTRODUCTION

Microstrip Antennas are very useful and efficient different radio communication systems starting from wireless communication to satellite communication. Different techniques has been investigated to improve the performance parameters of the patch antennas like getting multi frequency multi band response or higher impedance bandwidth response, better gain. Yao Chen, Longfang Ye, Jianliang Zhuo, Yanhui Liu, Liang Zhang, Miao Zhang, and Qing Huo Liu reported a reconfigurable circular patch antenna with an arc shaped slot loaded in the ground plane in their paper[1]. They have used 5 PIN diodes for matching. By changing the length of the arc slot six frequency band reconfigurations were achieved. Nozomu Ishii, Kiyohiko Itoh has discussed the mechanism of tuning stub for a circular polarised annular microstrip antenna in their paper [2]. D. D. Krishna, M. Gopikrishna, C. K. Anandan P. Mohanan and K. Vasudevan has discussed[3] a compact dual frequency slotted circular microstrip patch antenna with a dielectric superstrate which improves the bandwidth and lowers the resonant frequencies. The size reduction is reported to be 60 % along with better antenna performance. Surendra K roy and Lalan Jha has discussed the effect of the length modification of tuning stub on resonant frequency in their paper[4]. In this paper a CPW fed wine glass shaped patch antenna with tuning stub is investigated for multiband operation and bandwidth enhancement.

II. DESIGN SIMULATION AND RESULTS

A wine glass shaped patch antenna is designed using HFSS tool showed in Fig.1. Here the co planar waveguide fed technique is used for feeding. The design frequency is at 2.4 GHz. A tuning stub is used for better impedance matching. FR4_epoxy with $\epsilon_r = 4.4$ is used as dielectric substrate with height 1.6 mm. The dimension of the dielectric substrate is 55mm X 55mm. The ground plane is introduced with a circular slot of radius 17mm. All the design parameters are given in details in the below mentioned table I.

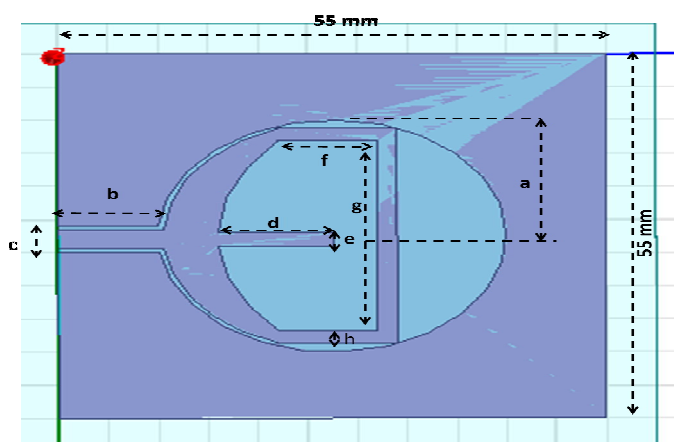


Fig 1 : A CPW fed wine glass shaped patch antenna with tuning stub

Table I
Antenna design parameters in mm

a	b	c	d	e	f	g	h
17	10.5	3	11	2	10	13	2

Result : From the S 11 vs frequency response of the simulation it is seen that a multiband operation is achieved. The resonant frequencies are 3.1 GHz, 3.4 GHz , 4.4 GHz and 1 GHz with return loss of -22 dB , -25 dB , -24 dB and -25 dB respectively . The -10dB impedance bandwidth is 19.35 %i.e 800 MHz at the design frequency 3.1 GHz .

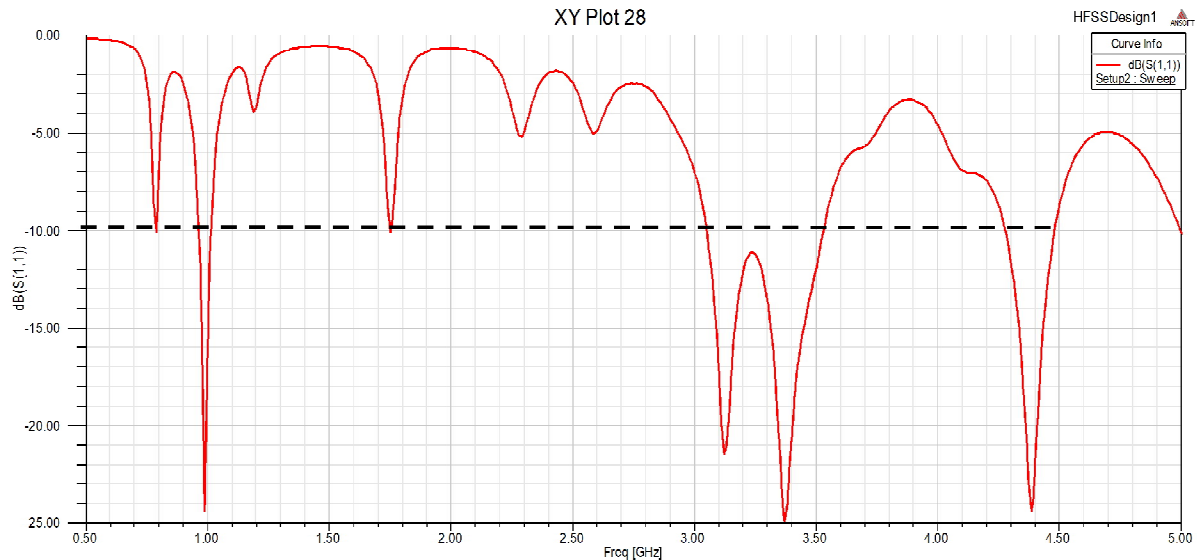


Fig 2.S 11vs Frequency response of the antenna

The computed gain of the antenna by the simulator is 11.5 dB

The tuning stub length is varied accordingly to achieve the best matching and shown in the below table II

Table II :

d in mm	f _i in GHz	Bandwidth in %	S11 in dB
1	3.2	15.1%	-20
2	3.2	15.4%	-20
3	3.3	14.43%	-20.5
4	3.3	16.12%	-20
5	3.3	16.36%	-21
6	3.4	17.32%	-21
7	3.4	17.58%	-22
8	3.4	18.13%	-23
9	3.4	18.56%	-24
10	3.4	18.93%	-25
11	3.4	19.35 %	-25
12	3.4	19.1%	-25

By varying the dimension of the stub it is observed that at length 11 mm it gives the best matching and bandwidth at the design frequency 3.4 GHz.

The Gain pattern and the radiation pattern is mentioned in Fig 3 and Fig 4

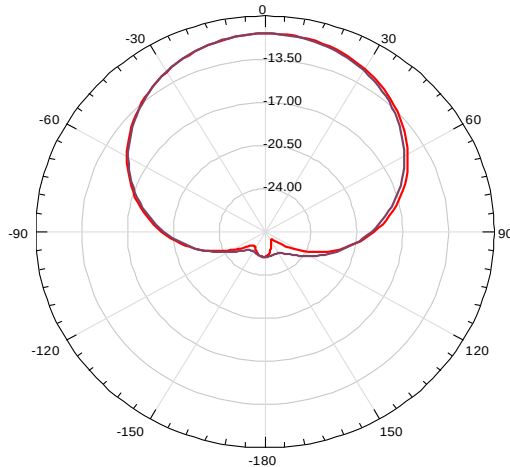


Fig 3: Gain of the antenna

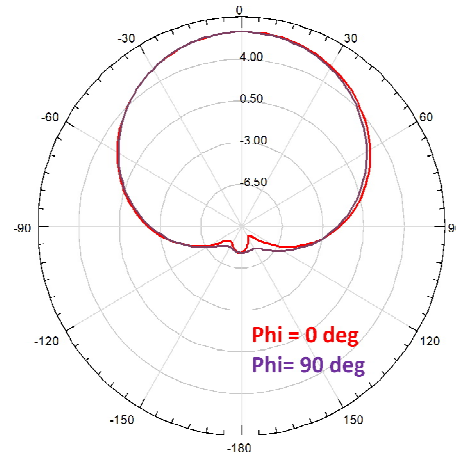


Fig 4: Radiation Pattern of the antenna

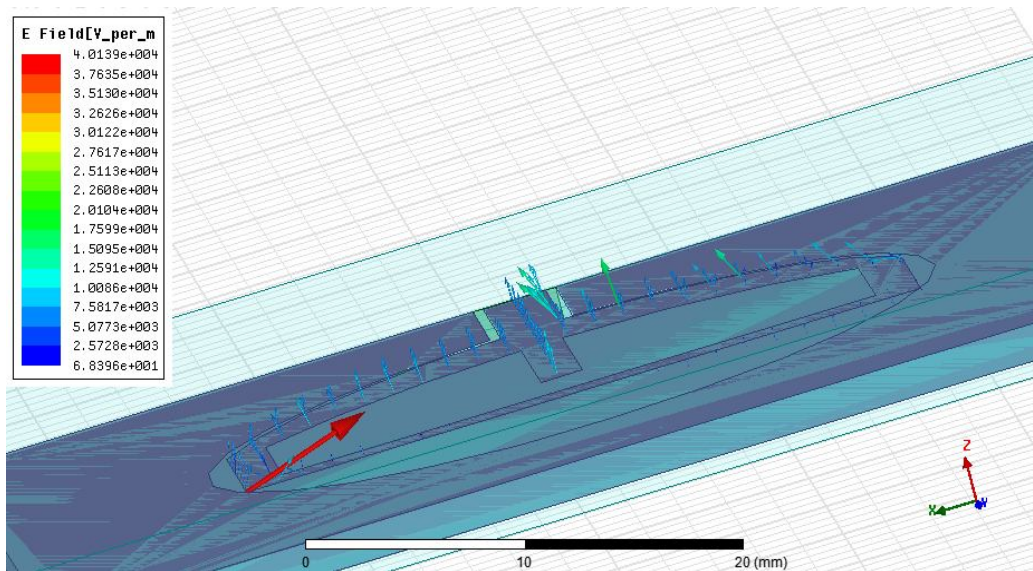


Fig 5 : E field distribution of the antenna

III. CONCLUSION

The proposed antenna in this paper resonates at 3.4 GHz (Sband) with -25 dB return loss which is applicable for satellite and optical communication. The proposed antenna also resonates at 1 GHz (IEEE L band) which is applicable for satellite navigation and telecommunication uses and 4.4 GHz (IEEE C Band) which is applicable for radio communication and wireless communication. The proposed antenna gives 19.35 % impedance bandwidth at design frequency 3.4 GHz hence wide bandwidth is achieved through this design. The proposed antenna is applicable for 4 G WIMAX application (3.4 GHz).

IV. ACKNOWLEDGEMENT


The authors would like to thank Guru Nanak Institute of Technology for experimental support. The first author acknowledges UGC, India for financial assistance.

REFERENCES

- [1] Yao Chen, Longfang Ye, Jianliang Zhuo, Yanhui Liu, Liang Zhang, Miao Zhang, and Qing Huo Liu ; Frequency Reconfigurable Circular Patch Antenna with an Arc-Shaped Slot Ground Controlled by PIN Diodes; International Journal of Antennas and Propagation Volume 2017 (2017), Article ID 7081978,
- [2] Nozomu Ishii, Kiyohiko Itoh Analysis on the mechanism of a tuning stub for circular-polarized annular microstrip antenna Electronics and Communications in Japan (Part I: Communications)
- [3] D. D. Krishna, M. Gopikrishna, C. K. Aanandan P. Mohanan and K. Vasudevan COMPACT DUAL BAND SLOT LOADED CIRCULAR MICROSTRIP ANTENNA WITH A SUPERSTRATE Progress In Electromagnetics Research, PIER 83, 245–255, 2008



- [4] Surendra K roy and LalanJha “Effects of tuning stub on Microstrip Patch Antenna” Indian Journal of Radio and Space physics Vol 35 April 2005 pp 139-141
- [5] K.-L. Wong and J.Y. Sze, Dual frequency slotted rectangular microstrip antenna, Electron Lett 34 (1998), 1368-1370
- [6] AnurimaMajumdar ,AntaraGhosal, Sisir K Das, Annapurna Das “Analysis of a dual Frequency Slotted Circular microstrip Antenna” International Journal of Electronics and Computer Science Engineering –V2N4-1257- 1264
- [7] Annapurna Das, Sisir K Das Antenna and Propagation ,TMH publication
- [8] AnurimaMajumdar , AntaraGhosal ,Sisir k Das,Annapurna Das “The Effect of Defective Ground Plane on A Wide Band Dual Frequency Circular Patch Antenna” International Journal of Advanced Research in Computer and Communication Engineering Vol. 4, 201
- [9] AnurimaMajumdar , SwatilekhaSarkar ,GargiMajumdar , ShubhamkumarMaurya , SangeetaHazra “Design and Analysis of a Wideband CPW fed Circular Patch Antenna for Wireless Communication Applications” International Journal of Innovative Research in Computer and Communication Engineering Vol. 4, Issue 5, May 2016

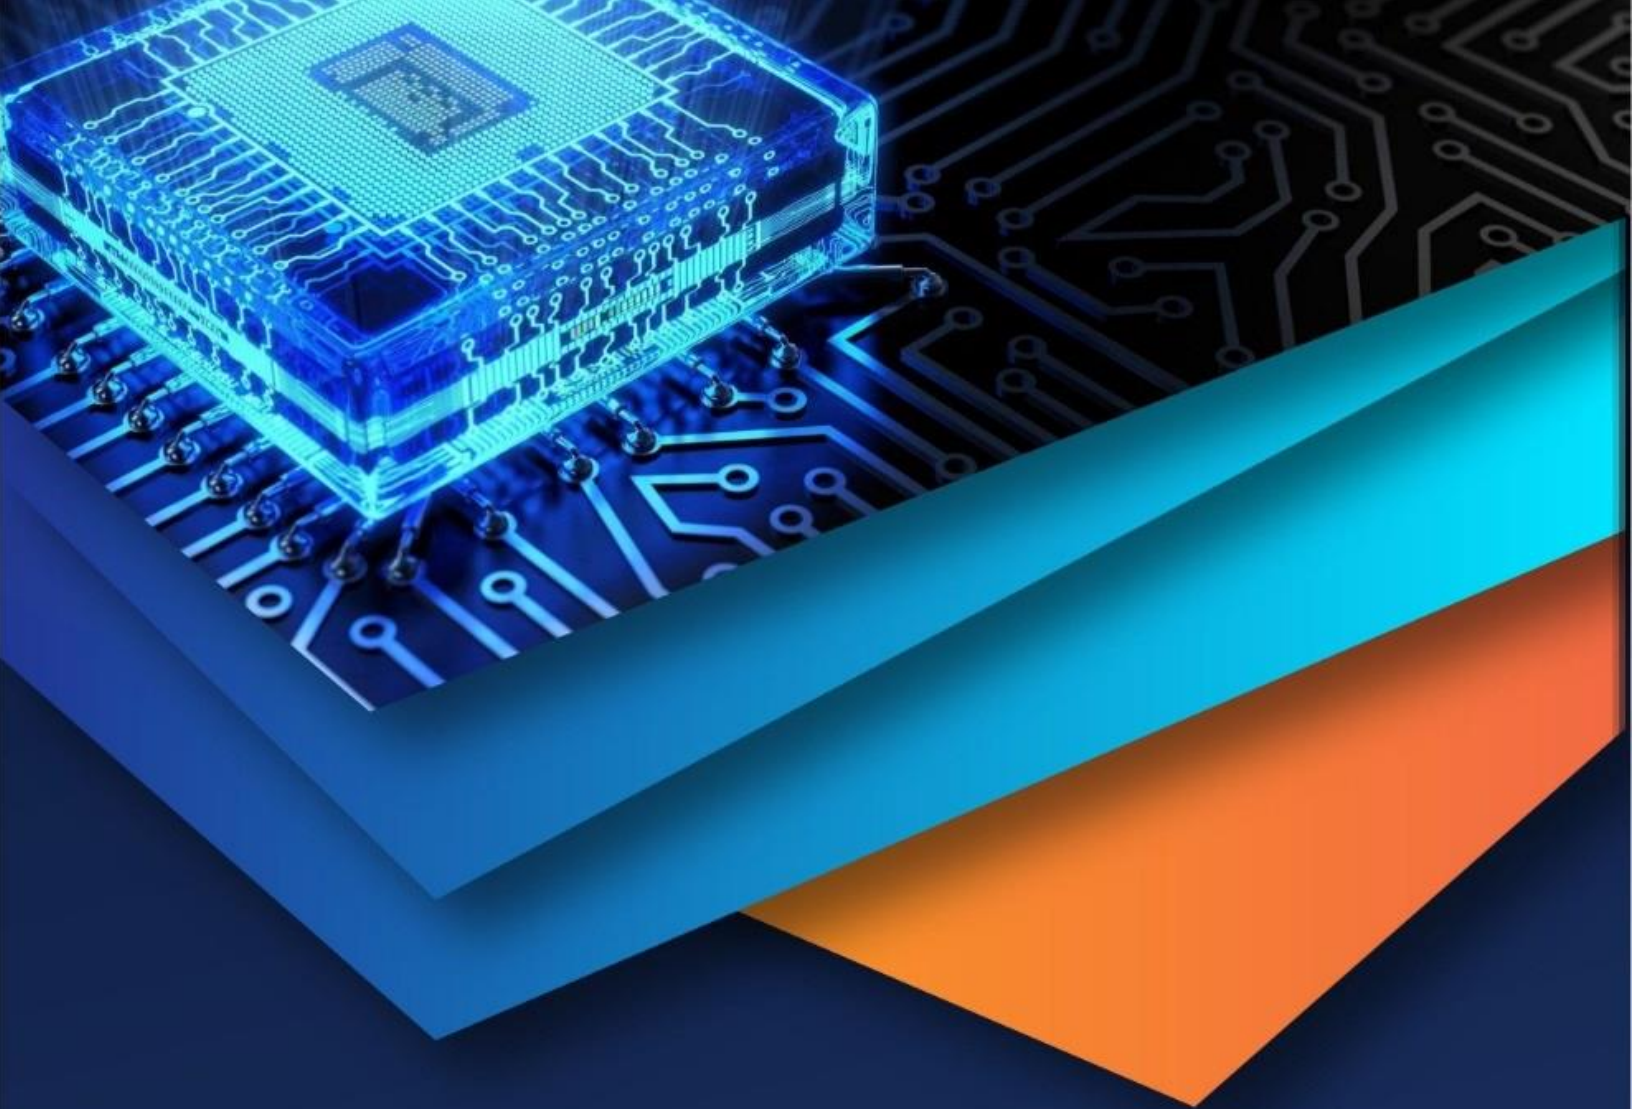

10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)