



# **iJRASET**

International Journal For Research in  
Applied Science and Engineering Technology



---

# **INTERNATIONAL JOURNAL FOR RESEARCH**

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume: 7      Issue: VIII      Month of publication: August 2019**

**DOI: <http://doi.org/10.22214/ijraset.2019.8031>**

**[www.ijraset.com](http://www.ijraset.com)**

**Call: ☎ 08813907089**

**E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)**

# Proximity Coupled Micro-Strip Antenna for Bluetooth Application

Madhusudhana K<sup>1</sup>, S Jagadeesha<sup>2</sup>, Amith K Jain<sup>3</sup>

<sup>1,2, 3</sup>Department of Electronics & Communication, S D M Institute of Technology, Ujire, Dakshina Kannada, Karnataka,

**Abstract:** This paper presents a design and analysis of proximity coupled feeding microstrip antenna (PCMSA) to operate at 2.42GHz frequency for Bluetooth application. The antenna is fabricated using FR4 substrate with a dielectric constant of 4.4. The impedance bandwidth, gain, return loss of the proposed antenna: 4.669%, 3.515dB and -17.237dB. There is a good agreement between the simulated and measurement results are found. The simulating is done by IE3D tool.

**Keywords:** Microstrip, proximity coupled, bandwidth and antenna.

## I. INTRODUCTION

The proximity-coupling in which non-contact is made between the feed-line and the element is a feeding mechanism. In contrast to the edge- and probe-fed geometries, the proximity-coupled feeding mechanism has inherently greater bandwidth [1]. In the year 1981, H. G. Oltman and D. A. Huebner researched electromagnetically coupled microstrip dipoles [2]. Many works have been devoted to enhancing the bandwidth of proximity-coupled microstrip antennas, such as appending parasitic radiator [3]–[5], impedance matching network [1], [6], L-probe feeding [7], [8], U-slot patch fed by U-shaped or double U-shaped stub [9]–[11], V-slot patch fed by Y-shaped stub [12], tooth-like-slot-patch [13], and an H-shaped slot in the ground plane [14]–[16], etc.

In this paper, proximity coupled microstrip antenna is designed; optimized by varying the length and width of the feed line to get the good response.

## II. ANTENNA DESIGN AND ANALYSIS

The reference proximity coupled microstrip antenna (PCMSA) as shown in figure 1. The PCMSA is designed by using two substrate made up of FR4, each substrate of thickness 1.6 mm which are placed one above the other. The dimensions of designed antenna are as follows:  $h_1=1.6\text{mm}$ ,  $L_y=29\text{mm}$ ,  $W_x=29\text{mm}$ ,  $L_f=24.41\text{mm}$ ,  $W_f=3.021\text{mm}$  and  $h_2=1.6\text{mm}$ . The ground plane of dimension of the PCMSA is  $38.6 \times 43.8 \text{ mm}^2$ . The signal feeding patch is placed between two substrates and it is connected to SMA connector with impedance of  $50\Omega$ .


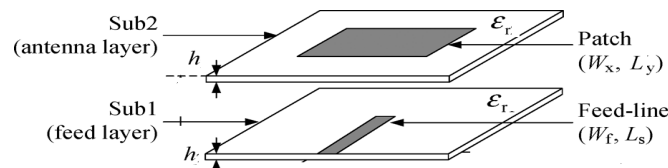


Fig 1: Configuration of Proximity coupled microstrip

The top view of the substrate 1 and the top view of the substrate 2 practical Proximity coupled microstrip antenna (PCMSA) show in fig 2.



a) Top view of substrate 1



b) Top view of substrate 2

Fig 2: Practical of Proximity coupled microstrip antenna

The dimension of microstrip antenna is calculated by using the following formula.

Calculation of the Width ( $W_p$ ): The width of the Microstrip patch antenna is given as,

$$W_p = \frac{v_o}{2f_r} \sqrt{\frac{2}{\epsilon_r + 1}}$$

Calculation of Effective dielectric constant ( $\epsilon_{\text{reff}}$ ):

$$\epsilon_{\text{reff}} = \frac{\epsilon_r + 1}{2} + \frac{\epsilon_r - 1}{2} \left(1 + 12 \frac{h}{W}\right)^{-1/2}$$

Calculation of the Effective length ( $L_{\text{eff}}$ )

$$L_{\text{eff}} = \frac{v_o}{2f_r \sqrt{\epsilon_r}}$$

Calculation of the length extension ( $\Delta L$ )

$$\Delta L = 0.412h \frac{(\epsilon_{\text{reff}} + 0.3) \left(\frac{W}{h} + 0.264\right)}{(\epsilon_{\text{reff}} - 0.258) \left(\frac{W}{h} + 0.8\right)}$$

The design specification is shown in table 1.

Table1: Design specifications

| Parameter               | Specification |
|-------------------------|---------------|
| Resonant frequency      | 2.4GHz        |
| Dielectric constant     | 4.4           |
| Height of the substrate | 1.6mm         |
| Length of the patch     | 29mm          |
| Width of the patch      | 29mm          |
| Length of the feedline  | 24.41mm       |
| Width of the feedline   | 3.021mm       |

Calculation of actual length of patch ( $L_p$ )

$$L_p = L_{\text{eff}} - 2\Delta L$$

The optimization of antenna is done by analysing the performance of microstrip antenna by varying the feeding length and width.

### III.RESULT AND DISCUSSION

The return loss variation of PCMSA is plotted with respect to feed strip length variation shown in fig 3.

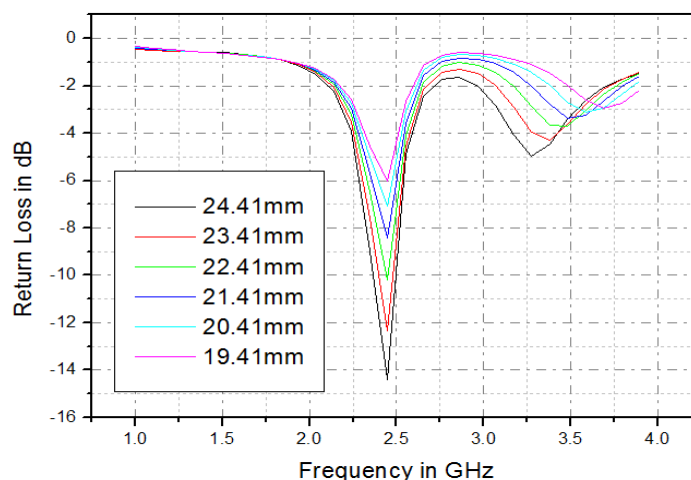


Fig 3: Return loss variation width feed strip length Variation

The return loss variation of PCMSA is plotted with respect to feed strip width variation shown in fig 4.

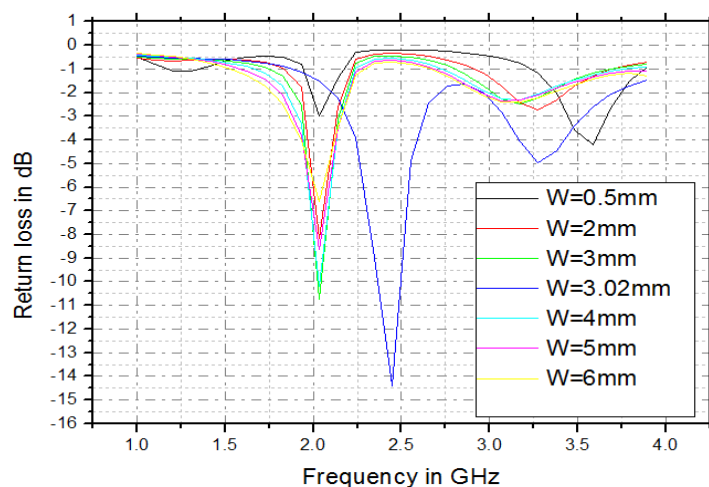


Fig 4: Return loss variation width feed strip width Variation

From the fig 3 and fig 4 its clearly shows the Proximity coupled microstrip antenna will gives a good response for the feed strip length of 24.41mm and width of 3.021mm. The simulated and practical results of the optimized antenna show in fig 5.

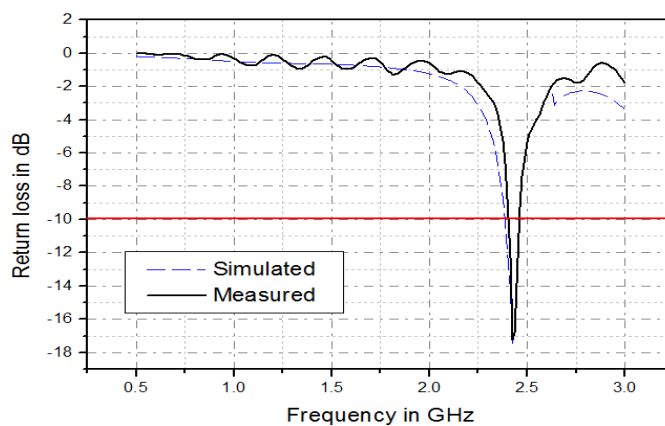


Fig 5: Return loss versus frequency of Proximity coupled microstrip antenna

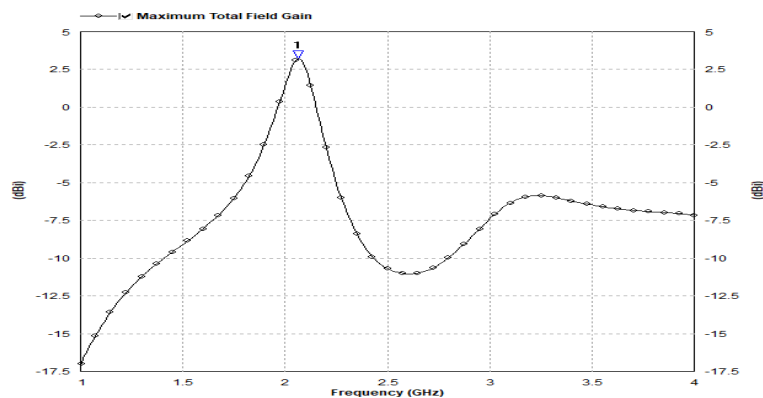


Fig 6: Gain versus frequency of PCMSA

The performance characteristic behaviour in terms of return loss of simulated and practical PCMSA with shown in figure 5. The simulated gain response with respect to frequency is shown in figure 6. The return loss, gain and bandwidth values are summarized in table 2.

Table 2: Results of the Proximity coupled microstrip antenna Simulated and practical results

|                 | Frequency<br>(GHz) | Return loss<br>(dB) | Bandwidth<br>(MHz) | %Bandwidth | Gain<br>(dBi) |
|-----------------|--------------------|---------------------|--------------------|------------|---------------|
| Simulated PCMSA | 2.425              | -14.41              | 121.86             | 4.948      | 3.515         |
| Measured PCMSA  | 2.42               | -17.46              | 113                | 4.669      | -             |

#### IV.CONCLUSIONS

The proximity coupled microstrip antenna (PCMSA) is designed and optimized by varying the width and length of the feed strip line. The optimized PCMSA is operating at resonant frequency of 2.42GHz, return loss of -17.46dB, Bandwidth of 113MHz and gain 3.515dBi. The simulated results are good agreement with the measured results.

#### REFERENCES

- [1] R. B. Waterhouse, Microstrip Patch Antennas: A Designer's Guide. Boston, MA: Kluwer Academic, 2003.
- [2] H. G. Oltman and D. A. Huebner, "Electromagnetically coupled microstrip dipoles," IEEE Trans. Antennas Propag., vol. AP-29, no. 1, pp. 151–157, Jan. 1981.
- [3] P. B. Katehi, N. G. Alexopoulos, and I. Y. Hsia, "A bandwidth enhancement method for microstrip antennas," IEEE Trans. Antennas Propag., vol. AP-35, no. 1, pp. 5–12, Jan. 1987.
- [4] K. M. Luk, K. F. Lee, and Y. L. Chow, "Proximity-coupled stacked circular-disc microstrip antenna with slots," Electron. Lett., vol. 34, no. 5, pp. 419–420, Mar. 1998.
- [5] W. S. T. Rowe and R. B. Waterhouse, "Investigation into the performance of proximity coupled stacked patches," IEEE Trans. Antennas Propag., vol. 54, no. 6, pp. 1693–1698, Jun. 2006.
- [6] D. M. Pozar and B. Kaufman, "Increasing the bandwidth of a microstrip antenna by proximity coupling," Electron. Lett., vol. 23, no. 8, pp. 368–369, Apr. 1987.
- [7] K. M. Luk, C. L. Mak, Y. L. Chow, and K. F. Lee, "Broadband microstrip patch antenna," Electron. Lett., vol. 34, no. 15, pp. 1442–1443, Jul. 1998.
- [8] Y. X. Guo, C. L. Mak, K. M. Luk, and K. F. Lee, "Analysis and design of L-probe proximity fed-patch antennas," IEEE Trans. Antennas Propag., vol. 49, no. 2, pp. 145–149, Feb. 2001.
- [9] C. L. Mak, K. M. Luk, and K. F. Lee, "Proximity-coupled U-slot patch antenna," Electron. Lett., vol. 34, no. 8, pp. 715–716, Apr. 1998.
- [10] Madhusudhana K and S Jagadeesha "Rhombus Shaped Microstrip Antenna with Microstrip Line Feeding Technique for Wireless Application", International Journal for Research in Applied Science & Engineering Technology (IJRASET), Vol 4 Issue VII, pp. 424 – 429, July 2016.
- [11] C. Kidder, M. Y. Li, and K. Chang, "Broad-band U-slot patch antenna with a proximity-coupled double  $\square$ -shaped feed line for arrays," IEEE Antenna Wireless Propag. Lett., vol. 1, pp. 2–4, Jan. 2002.
- [12] B. L. Ooi, "A double- stub proximity feed U-slot patch antenna," IEEE Trans. Antennas Propag., vol. 52, no. 1, pp. 2491–2496, Sep. 2004.
- [13] S. Wei and Q. Xue, "A Y-shaped stub proximity coupled V-slot microstrip patch antenna," IEEE Antenna Wireless Propag. Lett., vol. 6, pp. 40–42, Jun. 2007.
- [14] H. Wang, X. B. Huang, D. G. Fang, and G. B. Han, "A microstrip antenna array formed by microstrip line fed tooth-like-slot patches," IEEE Trans. Antennas Propag., vol. 55, no. 4, pp. 1210–1214, Apr. 2007.
- [15] S. Y. Ke, "Broad proximity-coupled microstrip antennas with an H-shaped slot in the ground plane," in IEEE Antenna and Propagation Symp. Dig., 2002, pp. 530–533.
- [16] S. Gao and A. Sambell, "Broadband proximity-coupled microstrip antenna," in IEEE Antenna and Propagation Symp. Dig., 2004, pp. 759–762.
- [17] S. Gao and A. Sambell, "Dual-polarized broad-band microstrip antennnas fed by proximity coupling," IEEE Trans. Antennas Propag., vol. 53, no. 1, pp. 526–530, Jan. 2005.





10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)