



# **iJRASET**

International Journal For Research in  
Applied Science and Engineering Technology



---

# **INTERNATIONAL JOURNAL FOR RESEARCH**

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume: 5      Issue: III      Month of publication: March 2017**

**DOI: <http://doi.org/10.22214/ijraset.2017.3138>**

**[www.ijraset.com](http://www.ijraset.com)**

**Call: ☎ 08813907089**

**E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)**

# Operating Three Phase Induction Motor on Single Phase Supply (For Star Connection)

Sambhaji B. Mali<sup>1</sup>, Rohit Y. Hiware<sup>2</sup>, Dhairyasheel S. Patil<sup>3</sup>, Dhanaji Y. Shirke<sup>4</sup>, Prof. Y.N. Burali<sup>5</sup>  
<sup>1,2,3,4,5</sup>Electrical Engineering Department, NMCOE, Shivaji University Kolhapur, India.

**Abstract:** This research is purposed to established a new method is simple and good to operate the three phase induction motor on single phase power by using capacitor. The research was conducted at laboratory of “AG ELECTRO SERVICES, KARAD. This project is sponsored by AG ELECRO SERVICES, KARAD”. Also the electrical engineering department of NANASAHEB MAHADIK COLLEGE OF ENGINEERING, PETH. The object used in this research was three phase induction motor that has the standard of 2 HP, 440 volt, Wye connection, 2 Pole, 50 Hz, 3000 RPM, 3.08 Amp. The result of this research showed that the method could work well to control the motor to operate properly to load 85% of the full load. In general the motor has better performance when operating on single phase power system in all load cases (low at high load). The motor could operate with power factor close to unity, higher speed and better efficiency. The motor operated with higher current harmonic distortion with low loads but lower current harmonic distortion at high loads. There for it is very good to operate the motor at high load up to 85% of its full load.

**Keywords:** Designing of 2 HP, 3-phase induction motor, capacitor circuit, apparent power of motor, power factor.

## I. INTRODUCTION

The three phase induction motor has three coils identities are separated from each other across  $120^\circ$  electricity that powered by Three phase power system. They will produce resultant magnetic flux that rotates like poles actual magnets spinning mechanism. RMS voltage developed in coils of motor is shown in below fig-1.

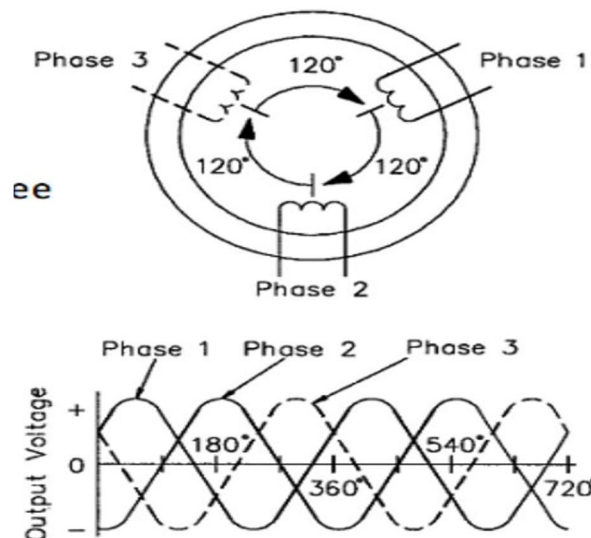


Fig-1.RMS voltage developed in coils of motor.

If the starting torque is not enough, it can be improved by adding a motor star capacitor with a capacitance value of approximately two times the pointed. This capacitor must be evaluated after having carried out test of real application test. The three phase motor can operate in single phase power supply with the help of permanent CAPACITOR. This small thing (capacitor) very helpful to make three phase motor running on single phase power supply.

Normally three phase induction motor operates on three phase power system, to improve the starting torque of the motors; they can operate on a single phase supply.

## International Journal for Research in Applied Science & Engineering Technology (IJRASET)

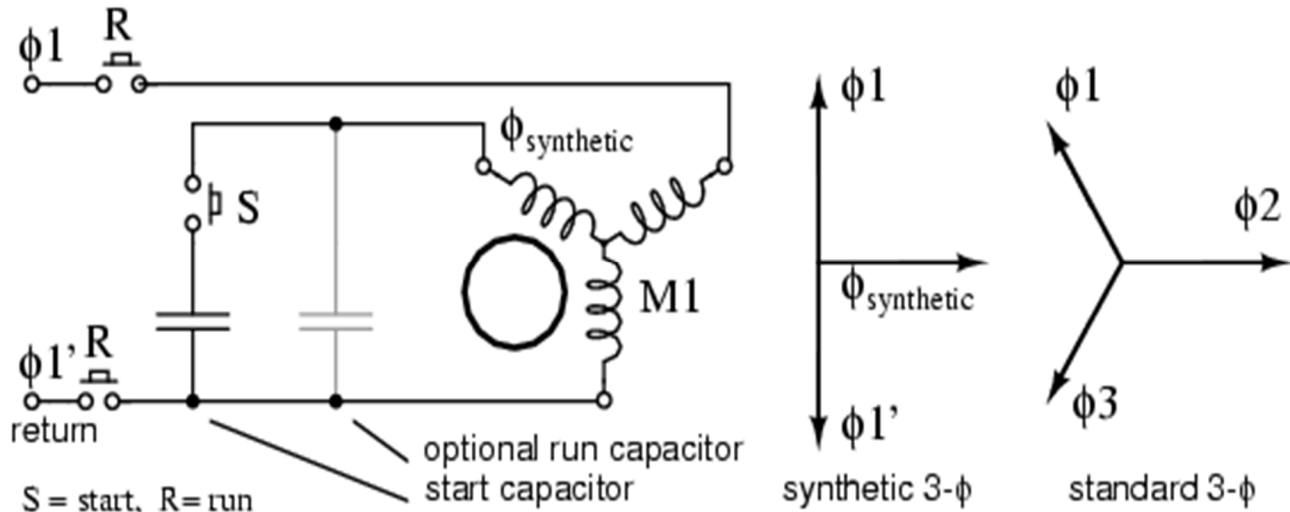


Fig-2 shows method of installation the capacitor circuit to the coil of motor to operate the motor on single phase power

We must consider the output of motor when we converted from the three phase to single phase power supply to match and suitable with our application. But we cannot get the actual value due to many aspects, we must calculate and it's so complicated. So we can estimate the approximate value of motor output as per percentage (%) below. Values that can be expected from a three phase connected to a single phase network are those following:

**Starting torque:** From the 25-30% of the rated one

**Maximum voltage:** from 70-80% of the rated power

### II. DESIGN OF INDUCTION MOTOR

For this research first we design 2 HP, 440 V, 2 Pole, 50 Hz, 3000 RPM, 3.08 A motor.

The main purpose of designing an induction motor is to obtain the complete physical dimensions of all the parts of the machine as mentioned below

**A. The Following Design Details are Required**

- 1) The main dimensions of the stator.
- 2) Details of stator windings.
- 3) Design details of rotor and its windings
- 4) Performance characteristics.

In order to get the above design details the Rated output power, rated voltage, number of phases, speed, frequency, connection of stator winding, type of rotor winding, working conditions, shaft extension details etc are needed.

In addition to the above, the details regarding design equations based on which the design procedure is initiated, information regarding the various choice of various parameters, information regarding the availability of different materials and the limiting values of various performance parameters such as iron and copper losses, no load current, power factor, temperature rise and efficiency are also needed.

**B. Design Parts of Motors are**

- 1) Stator
- 2) Rotor
- 3) Winding of stator and rotor
- 4) Yoke

To design the calculation manually for the induction motor is time consuming and very difficult to get the accurate value. For construction of induction motor the values must be accurate, so by using the MATLAB programming the calculation becomes very simple and the time taken will be less with accurate values.



## International Journal for Research in Applied Science & Engineering Technology (IJRASET)

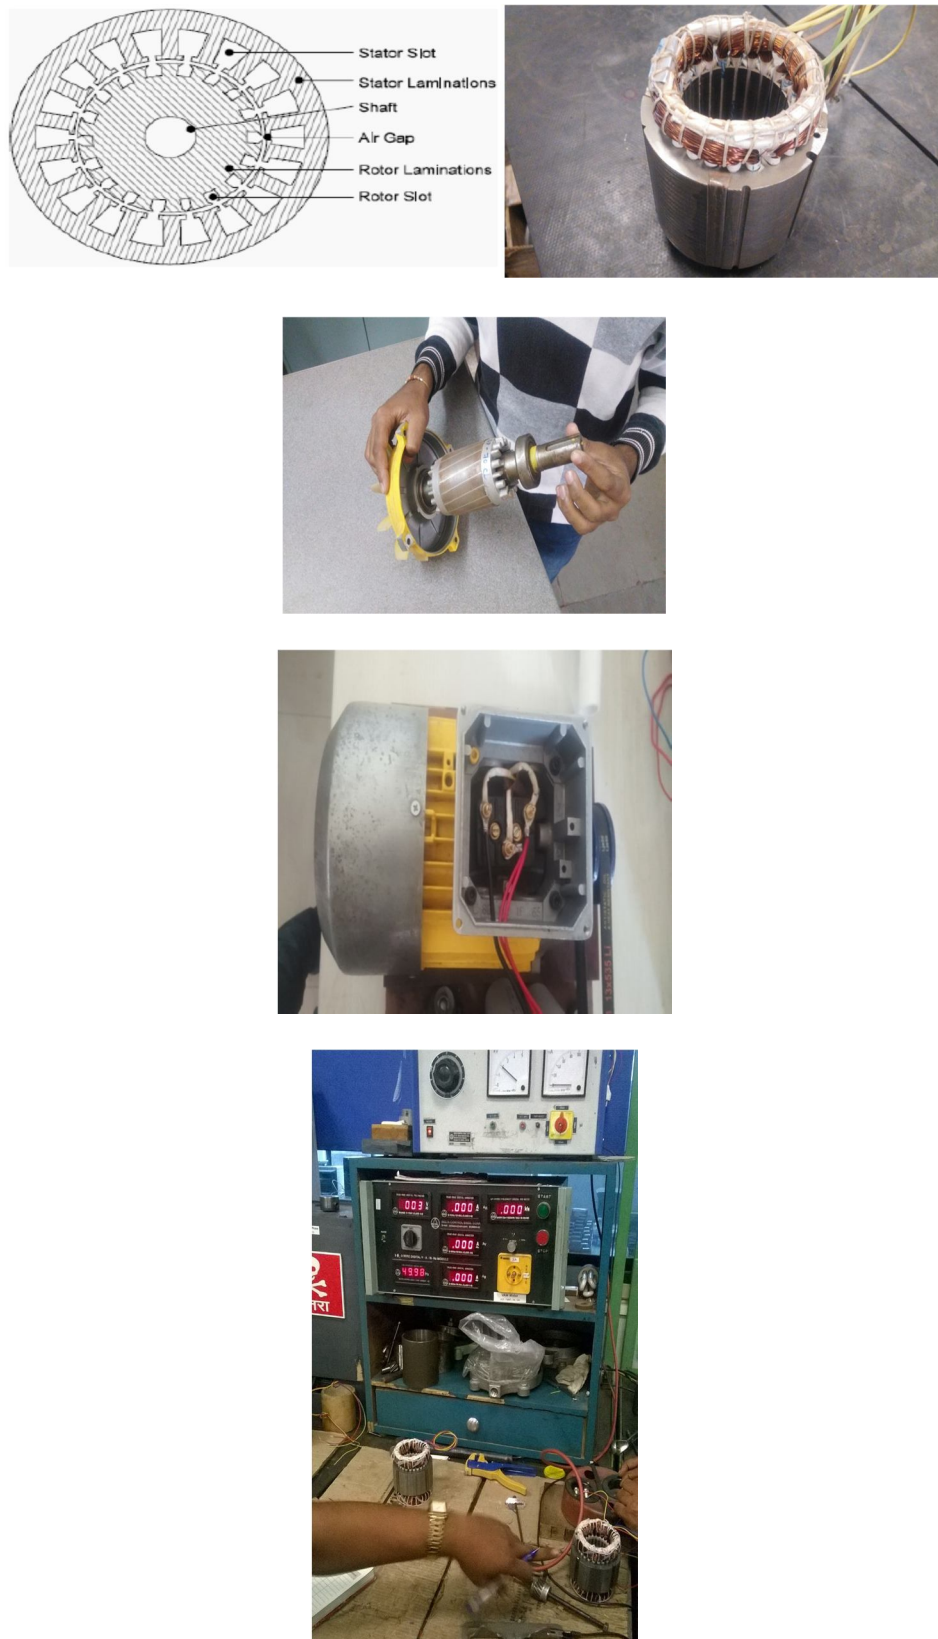


Fig.1 Motor assembly and testing

# International Journal for Research in Applied Science & Engineering Technology (IJRASET)

## III. SELECTION OF CAPACITOR

The first step is to select the capacitor sizes that will be needed. The capacitor sizes will depend on the motor. Keep in mind that you can make a capacitor smaller or larger by combining it with other capacitors. Two capacitors connected in parallel will add to each other, and two capacitors in series will “get smaller”.

The best solution for starting the three phase induction motor on a single phase supply. Capacitor must be at setting about 92% of the formula.

A. Apparent Power ( $S$ )

$$S = \sqrt{3}V_L I_L \quad KVA \quad (1)$$

Where,  $V_L$  is line voltage,  $I_L$  is line current.

B. Active Power ( $P$ )

$$P = \sqrt{3}V_L I_L \cos \phi \quad KW \quad \text{Or}$$

$$P = S \cos \phi \quad KW \quad (2)$$

Where,  $V_L$  is line voltage,  $I_L$  is line current,  $\cos \phi$  is power factor and  $S$  is apparent power.

C. Reactive Power ( $P$ )

$$Q = \sqrt{3}V_L I_L \sin \phi \quad KVAR \quad \text{Or}$$

$$Q = \sqrt{S^2 - P^2} \quad KVAR \quad (3)$$

D. Capacitive Current ( $I_C$ ) Per Phase

$$I_C = \frac{Q}{V_{ph}} \quad Amp \quad (4)$$

Where,  $V_{ph}$  is phase voltage,  $Q$  is reactive power.

E. Capacitive Reactance Per Phase ( $X_C$ )

$$X_C = \frac{V_{ph}}{I_C} \quad \Omega \quad (5)$$

F. Capacitor ( $C$ )

$$C = \frac{1}{2\pi f X_C} \quad \mu F \quad (6)$$

Where,  $f$  is supply frequency,  $X_C$  Capacitive Reactance per phase.

By above calculation we can find out the start capacitor and run capacitor is half of the start capacitor.

## IV. EXPERIMENTAL RESULT

The motor used in this research is the three phase induction motor of 2 HP, 440 V, 2 Pole, 50 Hz, 3000 RPM, 3.08 A, star connection, power factor 0.89 lagging. During operation as on single phase capacitors used are of 50  $\mu F$  as start capacitor and 25  $\mu F$  as run capacitor and centrifugal water pump used as a load with belt driven mechanism.

Table No. 1

Motor Operating on three phase supply				
Sr. No	Phase	Current	Phase	Voltage
1.	R	1.6 A	R-Y	417 V
2.	Y	1.6 A	R-B	416 V
3.	B	1.7 A	Y-B	416 V

## International Journal for Research in Applied Science & Engineering Technology (IJRASET)

Table No. 2

Motor Operating on single phase supply			
Sr. No.	Single phase voltage	Current before capacitor	Current after capacitor
1.	230 V	5.8 A	3.1 A
			3.0 A
			3.0 A

The motor operating on three phase supply, test results are shown in table no.1 and motor operating on single phase supply, test results are shown in table no. 2.



Fig.2 Picture of testing, final assembly and loaded with water pump.

### V. CONCLUSIONS

From this research that has been done can be summarised as follows.

- A. Operating three phase induction motor on single phase supply for star connection is to operate the motor by using the capacitors that are installed one in series with another as start and one in series with remaining phase as run capacitor, which is very simple and good method.
- B. This method can operate three phase induction motor on both power supply (3 phases & 1 phase) very efficiently with water pump as load up to 85%.
- C. This method could work well to operate the 2HP, 440 V, 2 Pole, 50 Hz, 3000 RPM, 3.08 A three phase induction motor at low

## International Journal for Research in Applied Science & Engineering Technology (IJRASET)

to high load up to 85% by using the run capacitor of 25  $\mu F$ .

### VI. ACKNOWLEDGEMENT

I extend a thank you to the team at the laboratory A.G. ELECTRO SERVICES, Karad. Who have helped this research run smoothly and sponsored. I would also like to thank you to the Principal of our college Mr. M. A. Joshi, Head of department Mr. V. V. Jadhav, And Guide of this research Mr. Y. N. Burali For cooperation.

### REFERENCES.

- [1] International Journal of Engineering Trends and Technology (IJETT) – Volume 5 number 1 – Nov. 2013 ISSN: 2231-5381 <http://www.ijettjournal.org> Page 13  
“A Simple Method For Operating The Three-Phase Induction Motor On Single Phase Supply (For Wye Connection Standard)” Zuriman Anthony#1  
#1Department of Electrical Engineering, Padang Institute of Technology (Institute Technology Padang) JL. Gajah Mada Kandise Nanggalo Padang, West Sumatra, Indonesia
- [2] Scheda, F. A, Operating 3-phase motors on 1-phase power, EC&M, January 1985, pp. 40-41.
- [3] Smith, O.J, “Large Low-Cost Single-phase Semiherm Motor “, IEEE Trans. on Energy Conversion, vol. 14 no. 4, pp. 1353-1358, 1999,.
- [4] Badr M.A, Alolah A.I and Halim Abdul M.A, “A capacitor start three phase induction motor”, IEEE transaction on energy conversion, vol. 10 no. 4, pp. 675-680, Dec. 1995.
- [5] Huang H, Fuchs EF and White J.C, “Optimal placement of the run capacitor in single phase induction motor designs”, IEEE transactions on energy conversion, Vol. 3, no. 3, pp. 647-652, Sep. 1988.
- [6] Course in *electrical machine design*. by A K Sawhney; A Chakrabarti. Print book. English. 2010. 6th ed.

# International Journal for Research in Applied Science & Engineering Technology (IJRASET)





10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)