



iJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 5 Issue: VII Month of publication: July 2017

DOI:

www.ijraset.com

Call: ☎ 08813907089

E-mail ID: ijraset@gmail.com

Compact UWB MIMO Antenna with Notched Band Characteristics

M.Lakshmi Thirupathamma¹, G. Padma Ratna²

¹M.Tech Student, ²Assistant Professor, Dept. of ECE

²University College of Engineering and Technology, Acharya Nagarjuna University, Guntur, AP, India

Abstract: The compact MIMO Antenna is used for Ultra Wide Band Applications with dual notched band Characteristics. The Proposed Antenna designing consist of two Square shaped Monopoles and T-shaped Depicted Ground Structure with two strips for better Isolation and to eliminated interference with W-LAN (5.15-5.85 GHz)band. The slot is arranged on both antenna elements for Eleminating the interference with Wi-MAX (3.3-3.7 GHz) Band. The Micro strip feeding is used at two ports with the impedance of 50 Ohms in antenna structure. To study the antenna parameters the simulation of antenna designing is done by using HFSS Software. Antenna parameters like return loss, Radiation characteristics, Impedance matching and Isolation and Gain are very important in UWB MIMO Antenna. Two application bands are notched by this proposed antenna in UWB range with better Isolation so this antenna is better model for desired applications.

Keywords: MIMO Antenna, notch band, HFSS software, Isolation, UWB (Ultra Wide Band).

I. INTRODUCTION

Multiple-input-multiple-output (MIMO) technology, with the potential of increasing channel capacity with-out requiring additional frequency spectrum or power, has been drawing much attention [1]. An MIMO communication system requires using multiple antennas installed in the transmitter and/or receiver with low coupling between them. However, for portable devices where the space is very limited, installing MIMO antennas with low coupling is always a great challenge for antenna designers. Various MIMO antennas have been studied for uses in portable devices in different wireless systems such as the LTE [2], UMTS [3], and WLAN [4]. In [5], studies showed that MIMO technology used in ultra wideband (UWB) system would provide superior channel capacity over that used in narrowband systems. Following this, studies were carried out to reduce coupling between antenna elements in MIMO UWB antennas [6]–[8].

The UWB from 3.1 to 10.6 GHz, assigned by the FCC for unlicensed use, overlaps with the WLAN frequency band from 5.15 to 5.85 GHz and Wi-Max band from 3.3 to 3.7 GHz; thus, the WLAN, Wi-Max systems are interfere with UWB System. One of the possible solutions to this problem is to design the UWB antenna with band-notched characteristic [9]–[11]. In [12]–[16], MIMO antennas with notched characteristics were studied to suppress interference from the WLAN systems. The UWB MIMO antenna in [12] was designed on a flexible film. Two heptagonal monopole elements were orthogonally and symmetrically placed on the substrate for good isolation between the two input ports. A slot was cut on each of the antenna elements to create a notch in the WLAN band. However, the two monopole elements did not have a common ground plane, making the MIMO antenna difficult to use in practice. The MIMO antenna in [13] employed two-folded monopole elements, each coupled with a parasitic inverted-L element, to achieve UWB operation. Two meander lines, a connection line and a short parasitic line, were used to enhance isolation between the two input ports. The band-notched characteristic was created using an open stub on the radiator. The antenna structure was a little complicated and required high fabrication accuracy. In [15] and [16], slot antennas were designed for UWB MIMO applications with a strip to ensure high isolation. The slots were etched on the feeding structure to create a band notch. However, this kind of structure had a relatively large size.

In this paper, we propose an UWB MIMO band notched antenna even smaller than the design in [14]. It has a compact size of only $22 \times 36 \text{ mm}^2$ (or $0.34 \lambda_g \times 0.56 \lambda_g$) = 792 mm^2 (or $0.19 \lambda_g^2$), which is 14% smaller in electric size than the design in [16]. A strip on the ground plane is used to create the band notch at WLAN band (5.15-5.85 GHz) with a total efficiency of only 7%, and a slot on the patch is used to create band notch at the Wi-MAX band (3.3-3.7 GHz) much smaller than all those in [12]–[16]. The simulated and measured results show that the proposed MIMO antenna has good impedance matching, high isolation, and good diversity performance throughout the UWB with band notched characteristics in 5.15–5.85 GHz and 3.3-3.7 GHz.

II. DESIGN OF THE ANTENNA

The Designing of the proposed MIMO Antenna as shown in fig.1. In fig.1 (a) shows the front view of antenna structure with dimensions. It has 2-square shaped Radiators with a very compact Area of $22 \times 36 \text{ mm}^2$. In this UWB antenna the Ultra Wide Bandwidth is obtained by etching ground slot is nothing but depicted ground structure (DGS) on ground. A T-shaped ground stub is placed as a ground between the square shaped radiators with adjusting the gap (1.6mm) between the ground and radiators to improve the Isolation between two input ports. To create a notch in the 5.5 GHz band to suppress interference in the WLAN band, two strips are added between the monopole elements and at the T-shaped ground stub, and to create a notch in the 3.5 GHz band to suppress interference in the Wi-MAX band, two slots are arranged in both square shaped radiators, the slot in patch element is shown in fig.1 (b) with dimensions. And the total structure of antenna dimensions with values are shown in fig.1. (c), and 3-D view is showed in fig.1. (d).

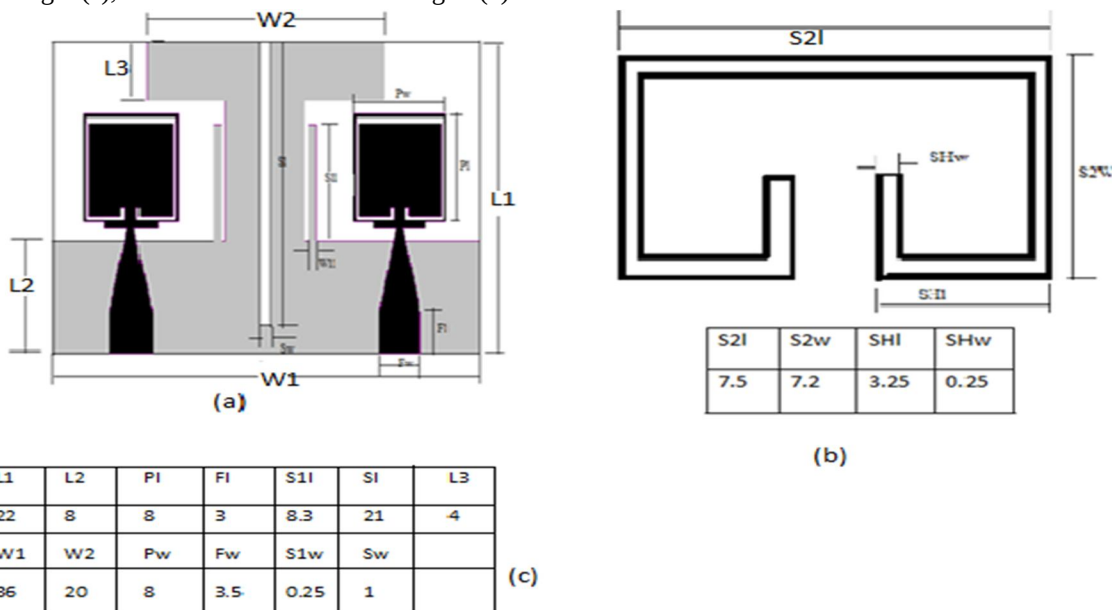


fig.1.(a)front view of the antenna with dimensions. (b).slot cut on the patch with dimensions (c).table of measurements of antenna structure

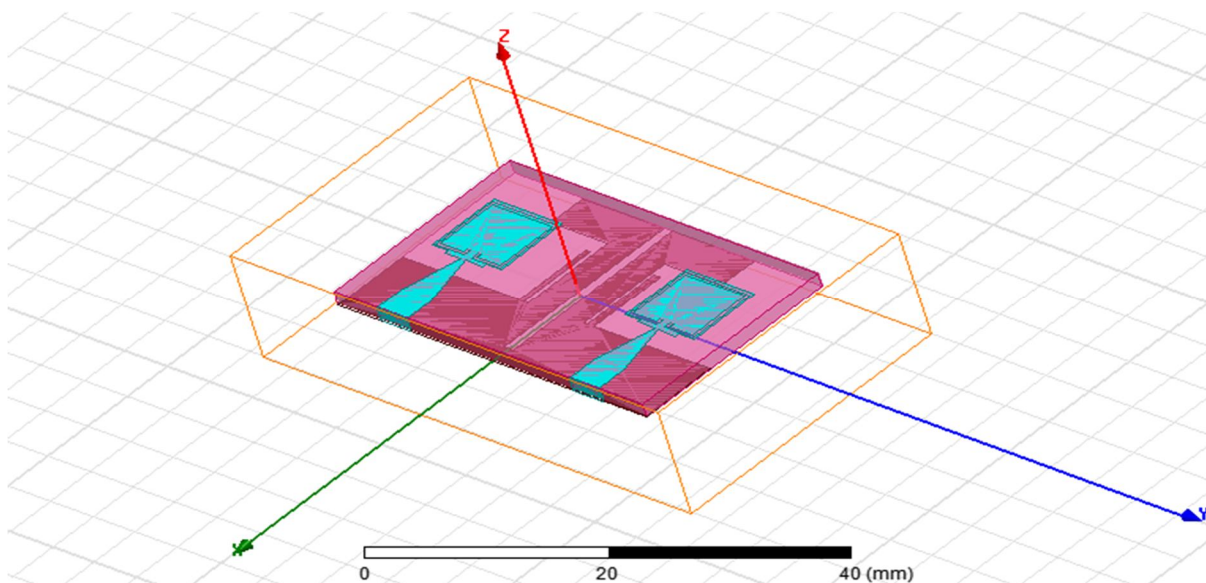


fig.1. (d) 3-D view of antenna design

III. SIMULATION AND RESULTS

The Antenna design and simulation is done by using HFSS Software. HFSS is commercial electromagnetic simulator produced by Ansys company. The Antenna parameters like return loss, VSWR, Radiation patterns and Gain patterns were plotted using this software.

A. Return Loss

Return loss (S11) is a parameter which represent how much power is reflected from the Antenna. Return loss is a measure of how well devices or lines are matched. The return loss for this UWB MIMO Antenna is shown in fig.2. The return loss is shown as less than -10dB for UWB range 3.1 to 10.6 GHz except notched bands 3.3-3.7 GHz and 5.15-5.85 GHz.

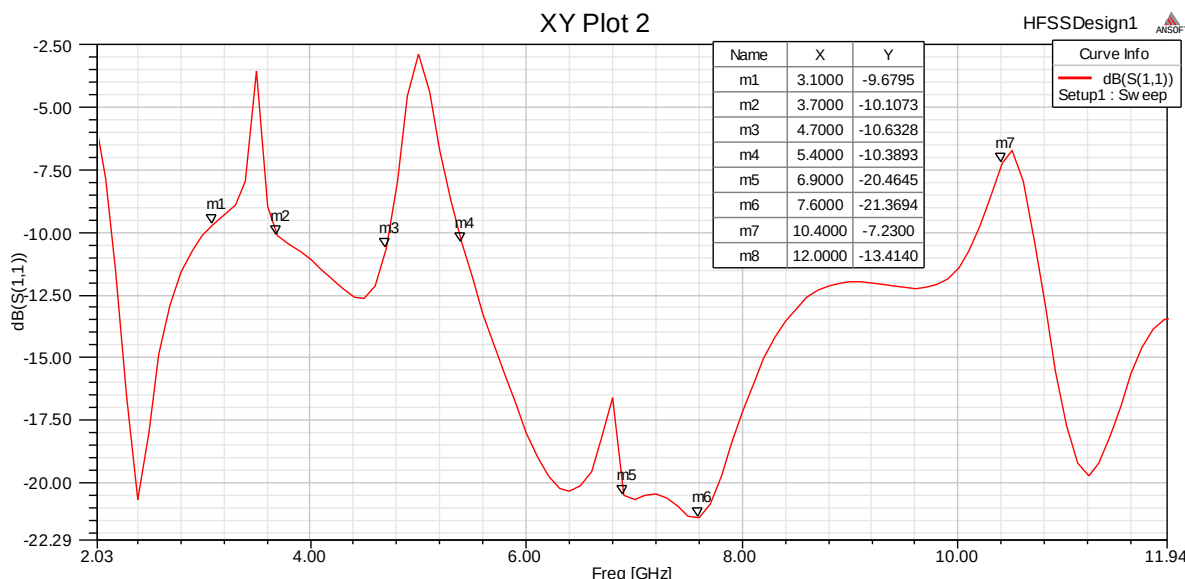


Fig.2.Return loss (S11) Vs. Frequency plot

B. Voltage Standing Wave Ratio (VSWR)

VSWR is a measure that numerically describes how the antenna impedance is matched with transmission line impedance. The VSWR of this antenna is below 2 in UWB operating band except notched bands. At notched bands the VSWR is above 2 is shown in fig.3.

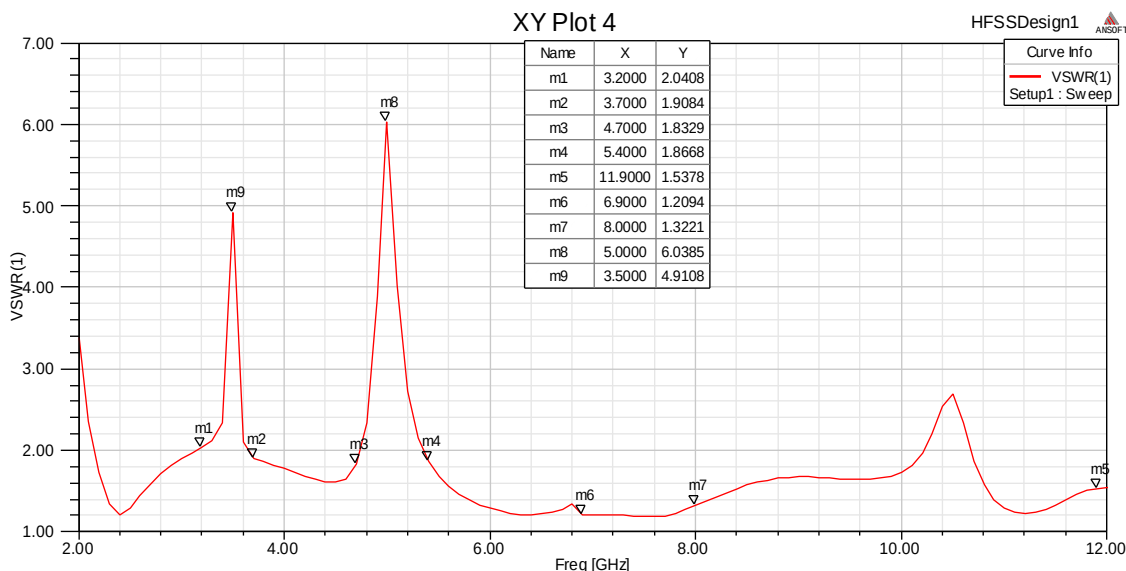


Fig.3.VSWR Vs. frequency plot

C. Gain

Antenna Gain describes how much power is transmitted in the direction of peak radiation of isotropic source. The gain is high at the operating band and very low at the notched bands. We plot gain at 7 GHz in operating band and notched bands. The gain at the 7 GHz is 4.5137dB is shown in fig.4. (c), and the notch bands at 3.5GHz gain is -3.2021dB is shown in fig.4. (a) and at 5GHz -1.5182dB is shown in fig.4. (b). The gain plot is shown in fig.4.


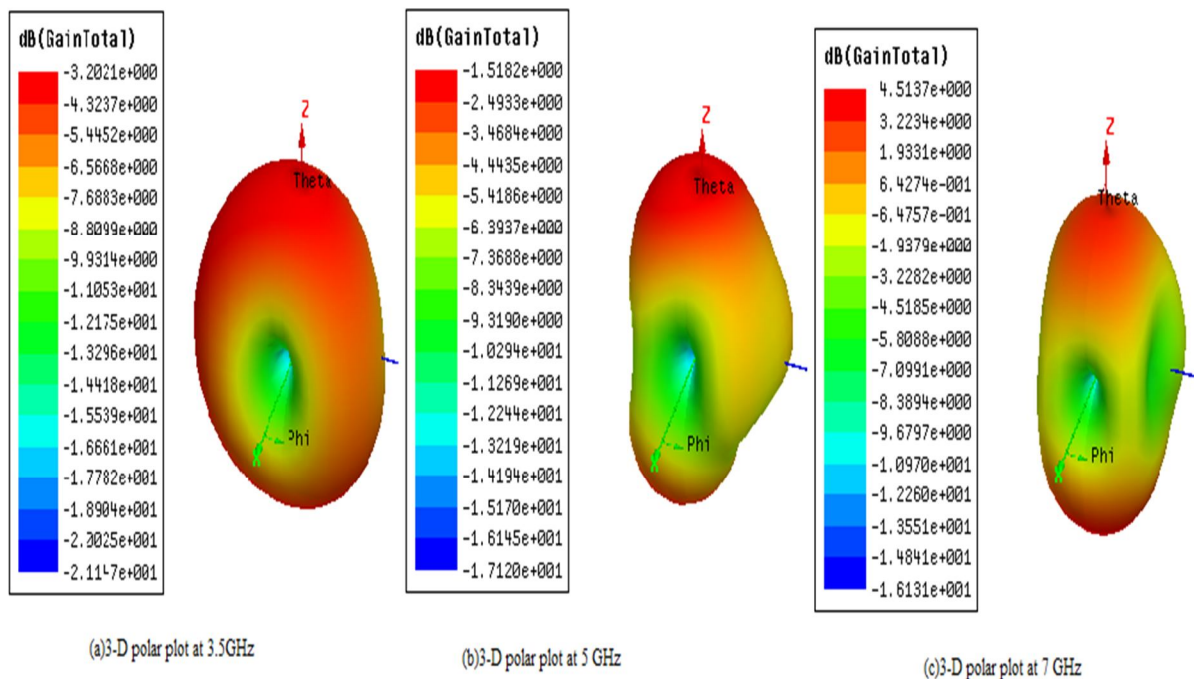


Fig.4. Gain plots at 3.5GHz, 5GHz, and 7GHz.


D. Radiation Pattern

Radiation pattern is a graphical representation of the radiation properties of antenna as a function of space coordinates. The radiation pattern for this antenna is shown in fig.5. When port 1 is excited, the radiation pattern and the current distribution of antenna are plotted in below figures.




1) At 3.5 GHz:

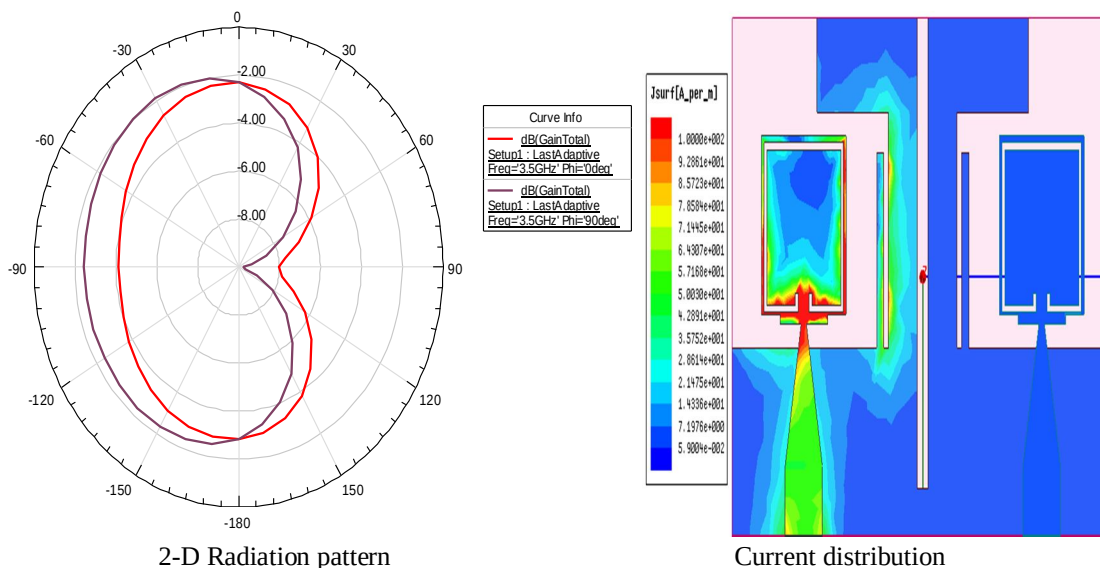

2) At 5.2 GHz:

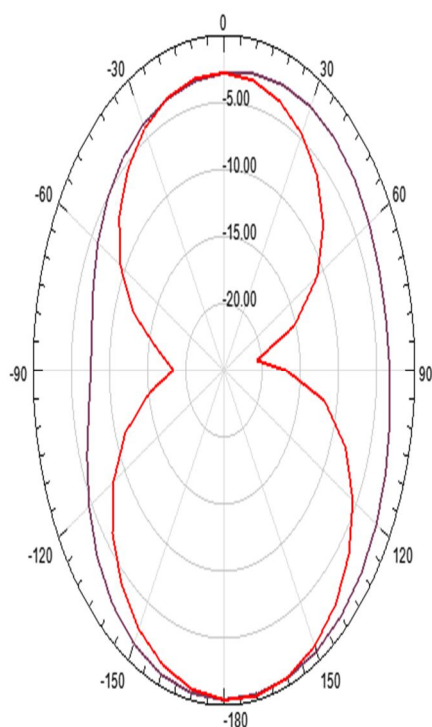


2-D radiation pattern

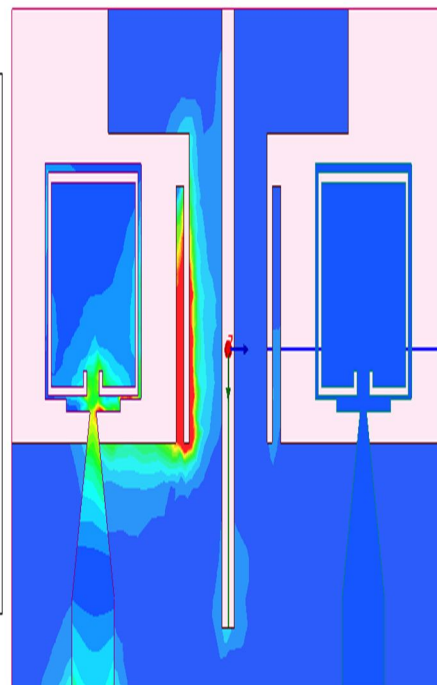




current distribution

3) At 7 GHz:

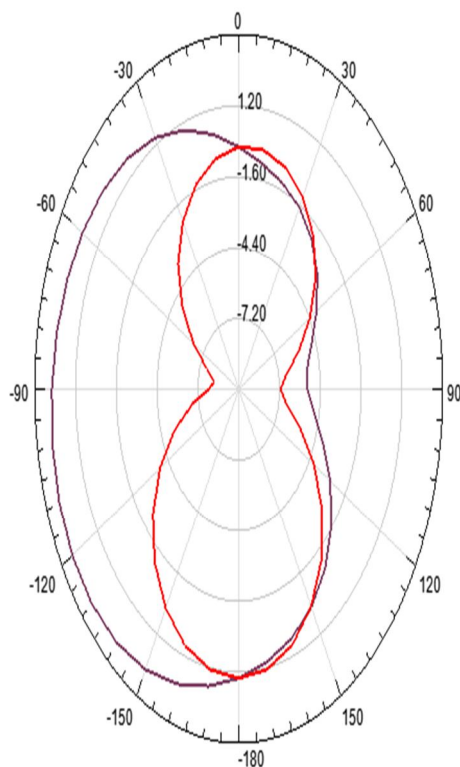

2-D radiation pattern

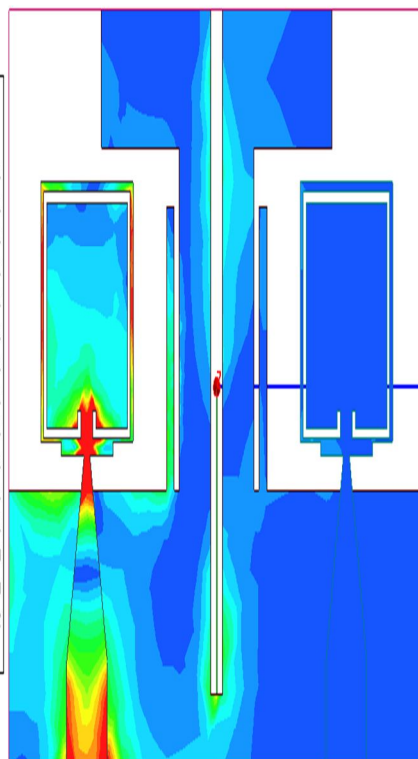

current distribution

Fig: 5. Radiation pattern (a) at 3.5GHz (b) at 5.0 GHz (c) at 7.0 GHz when port1 excited

IV. CONCLUSION

An Ultra Wide Band MIMO antenna is used for short range and speed communication system. And it contain wide band width so through this antenna large information is transmitted or received. and this antenna is designed to notch the Wi-MAX (3.3-3.7 GHz), W-LAN (5.15-5.85 GHz) frequency bands to suppress the interference with them. Proposed antenna is prototyped on Rogers RO4350(tm) substrate. Average gain of 4dB is attained in the operating band and at notch band antenna is showing poor gain. The proposed antenna can be used to notch the desired bands and applicable for wireless communication applications.

V. BIOGRAPHIES



M.Lakshmi thirupathamma is currently puruing M.Tech Degree in Communication Engineering and Signal processing (CESP) from University College of Engineering and Technology, Acharya Nagarjuna University , Guntur, India. She obtained B.Tech Degree in Electronics and Communication Engineering From Bapatla Women's Engineering College, Bapatla in 2015. Her Areas of interest are Antenna Designing and wireless communication systems.



Miss. G. Padma Ratna is currently working as Asst. Professor in the department of ECE at University College of Engineering and Technology, Acharya Nagarjuna University, Guntur, India. She obtained B.Tech Degree from M.S.V.Hindu college of Engineering Andhra Pradesh, 2006 and M.Tech Degree from Guru Nanak Engineering College, Hyderabad, 2010. She is currently doing Ph.D at Acharya Nagarjuna University, Guntur. Her Areas of interest are Antennas.

VI. ACKNOWLEDGEMENT


I extend my grateful thanks to my guide miss. G.Padma Ratna madam and to the authorities of satellite Data analysis and application centre at Acharya Nagarjuna University College of Engineering and Technology, Guntur for their support to utilize their facilities and encouragement to write this paper. And thanks to my friends.

REFERENCES

- [1] Foschini, G. J., "On limits of wireless communications in a fading environment when using multiple antennas," *Wireless Pers. Commun.*, Vol. 6, No. 3, 311-335, 1998.
- [2] Kaiser, T., Z. Feng, and E. Dimitrov, "An overview of ultra-wide-band systems with MIMO," *Proc. IEEE*, Vol. 97, No. 2, 285-312, Feb. 2009.
- [3] Chou, H.-T., H.-C. Cheng, H.-T. Hsu, and L.-R. Kuo, "Investigations of isolation improvement techniques for multiple input multiple output (MIMO) WLAN portable terminal applications," *Progress In Electromagnetics Research*, Vol. 85, 349-366, 2008.
- [4] Sharawi, M. S., A. B. Numan, and D. N. Alooi, "Isolation improvement in a dual-band dual-element MIMO antenna system using capacitively loaded loops," *Progress In Electromagnetics Research*, Vol. 134, 247-266, 2013.



- [5] Wi, H., B. Kim, W. Jung, and B. Lee, "Multiband handset antenna analysis including LTE band MIMO service," *Progress In Electromagnetics Research*, Vol. 138, 661{673, 2013.
- [6] Zhao, L., L. K. Yeung, and K.-L. Wu, "A coupled resonator decoupling network for two-element compact antenna arrays in mobile terminals," *IEEE Transactions on Antennas and Propagation*, Vol. 62, No. 5, 2767{2776, May 2014.
- [7] Li, W., W. Lin, and G. Yang, "A compact MIMO antenna system design with low correlation from 1710MHz to 2690 MHz," *Progress In Electromagnetics Research*, Vol. 144, 59{65, 2014.
- [8] Zhang, S., K. Zhao, B. Zhu, Z. Ying, and S. He, "MIMO reference antennas with controllable correlations and total efficiencies," *Progress In Electromagnetics Research*, Vol. 145, 115{121, 2014.
- [9] Coetzee, J. C. and Y. Yu, "Port decoupling for small arrays by means of an eigenmode feed network," *IEEE Transactions on Antennas and Propagation*, Vol. 56, No. 6, 1587{1593, Jun. 2008.
- [10] Zuo, S., Y.-Z. Yin, Z.-Y. Zhang, W.-J. Wu, and J.-J. Xie, "Eigenmode decoupling for MIMO loop- antenna based on 180° coupler," *Progress In Electromagnetics Research Letters*, Vol. 26, 11{ 20, 2011.
- [11] Andersen, J. B. and H. H. Rasmussen, "Decoupling and descattering networks for antennas," *IEEE Transactions on Antennas and Propagation*, Vol. 24, No. 6, 841{846, Nov. 1976.
- [12] Chang, S., Y.-S. Wang, and S.-J. Chung, "A decoupling technique for increasing the port isolation between strongly coupled antennas," *IEEE Transactions on Antennas and Propagation*, Vol. 56, No. 12, 3650{3658, Dec. 2008.
- [13] Lui, C.-Y., Y.-S. Wang, and S.-J. Chung, "Two nearby dual-band antennas with high port isolation," *IEEE International Symposium on Antennas and Propagation*, San Diego, USA, Jul. 5{ 11, 2008
- [14] Yang, F. and Y. R. Samii, "Microstrip antennas integrated with electromagnetic band-gap EBG structures: A low mutual coupling design for array applications," *IEEE Transactions on Antennas and Propagation*, Vol. 51, No. 10, 2936{2946, Oct. 2003.
- [15] Chiu, C. Y., C. H. Cheng, R. D. Murch, and C. R. Rowell, "Reduction of mutual coupling between closely-packed antenna element," *IEEE Transactions on Antennas and Propagation*, Vol. 55, No. 6, 1732{1738, Jun. 2007
- [16] Zhang, S., B. K. Lau, A. Sunesson, and S. He, "Closely-packed UWB MIMO/diversity antenna with different patterns and polarizations for USB dongle applications," *IEEE Transactions on Antennas and Propagation*, Vol. 60, No. 9, 4372{4380, Sep. 2012
- [17] Yoon, H. K., Y. J. Yoon, H. Kim, and C.-H. Lee, "Flexible ultra-wideband polarisation diversity antenna with band-notch function," *IET Microwaves, Antennas & Propagation*, Vol. 5, No. 12, 1463{1470, Sep. 2011
- [18] Mohammad, S., A. Nezhad, H. R. Hassani, and A. Foudazi, "A dual-band WLAN/UWB printed wide slot antenna for MIMO/diversity applications," *Microwave and Optical Technology Letters*, Vol. 55, No. 3, 461{465, 2013.
- [19] Li, L., S. W. Cheung, and T. I. Yuk, "Compact MIMO antenna for portable devices in UWB applications," *IEEE Transactions on Antennas and Propagation*, Vol. 61, No. 8, 4257{4264, Aug. 2013.
- [20] Zhang, S., Z. Ying, J. Xiong, and S. He, "Ultrawideband MIMO/diversity antennas with a tree- like structure to enhance wideband isolation," *IEEE Antennas and Wireless Propagation Letters*, Vol. 8, 1279{1282, 2009.
- [21] Gao, P., S. He, X. Wei, Z. Xu, N. Wang, and Y. Zheng, "Compact printed UWB diversity slot antenna with 5.5-GHz band-notched characteristics," *IEEE Antennas and Wireless Propagation Letters*, Vol. 13, 376{379, 2014.
- [22] Pilo, M., E. Antonino-Daviu, M. Ferrando-Bataller, M. Bozzetti, J. M. Molina-Garcia-Pardo, and L. Juan-Llaser, "A broadband pattern diversity annular slot antenna," *IEEE Transactions on Antennas and Propagation*, Vol. 60, No. 3, 1596{1600, Mar. 2012
- [23] Song, K., Y.-Z. Yin, X.-B. Wu, and L. Zhang, "Bandwidth enhancement of open slot antenna with a T-shaped stub," *Microwave and Optical Technology Letters*, Vol. 52, No. 2, 149{151, Feb. 2010.
- [24] Blanch, S., J. Romeu, and I. Corbella, "Exact representation of antenna system diversity performance from input parameter description," *Electronics Letters*, Vol. 39, No. 9, 705{707, May 2003.

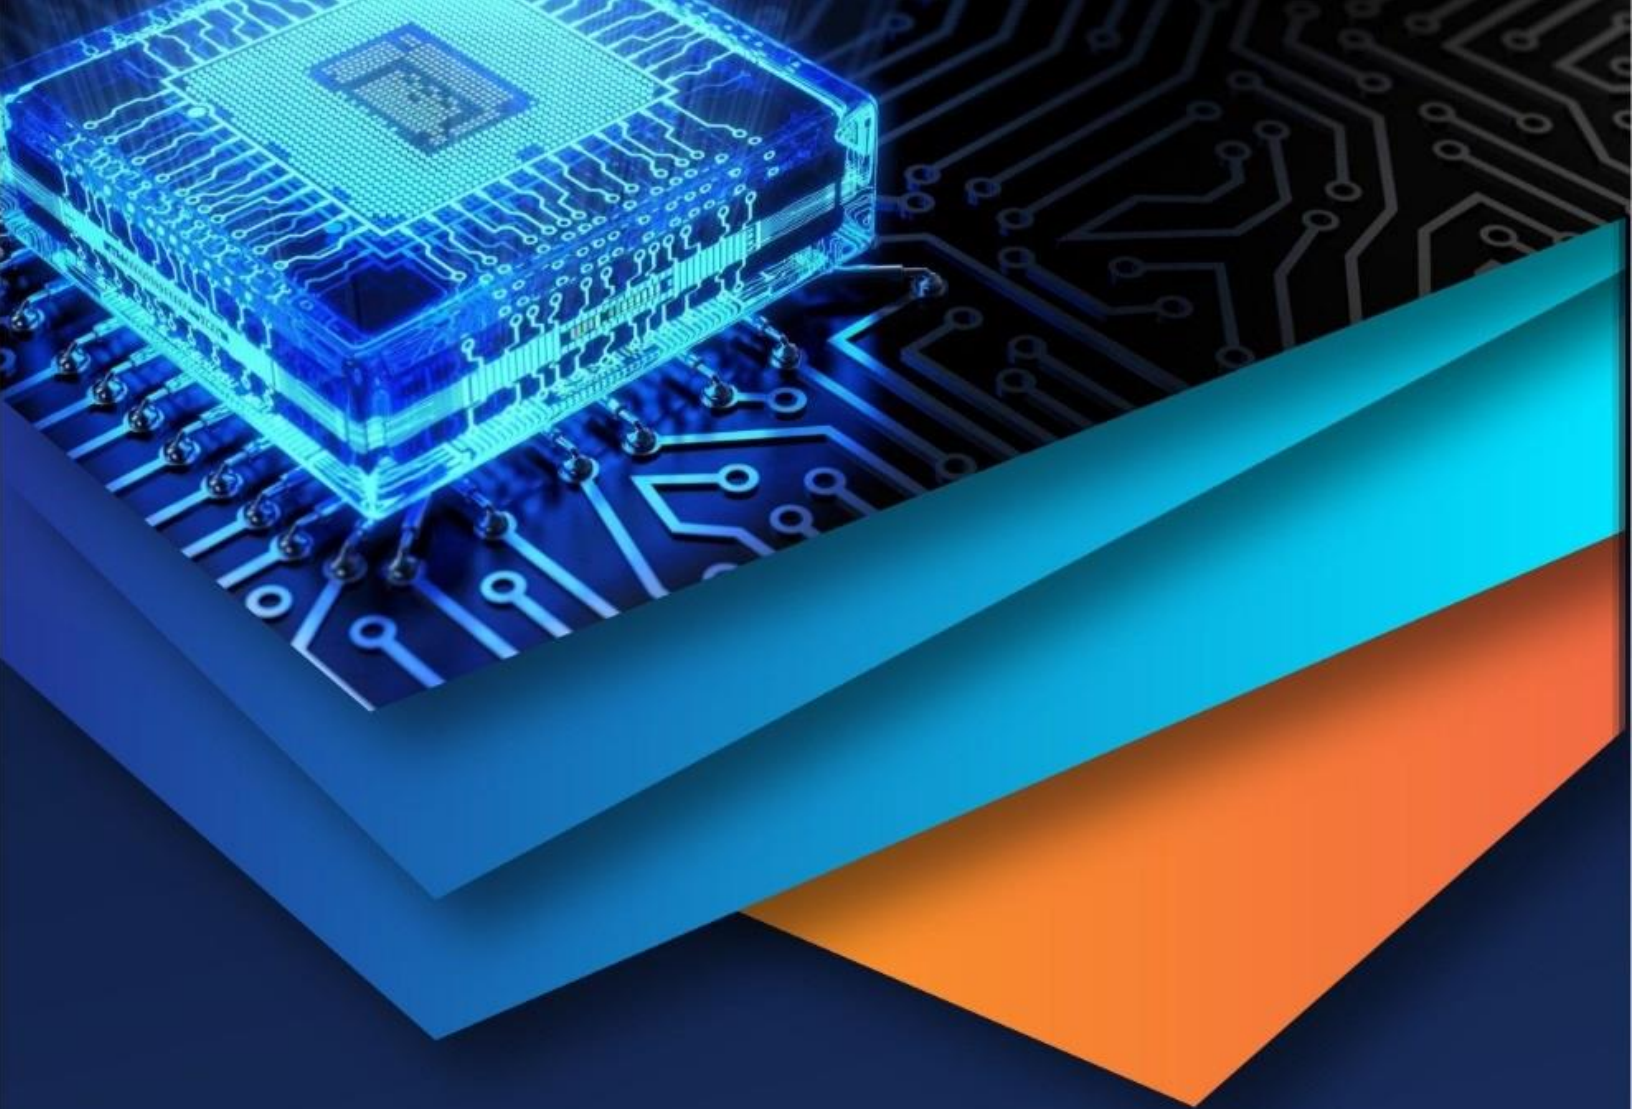

10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)