



IJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 6 Issue: IV Month of publication: April 2018

DOI: <http://doi.org/10.22214/ijraset.2018.4444>

www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com

Hemispherical Tank Liquid Level Process Control

Parthasarathy, R¹, Balaji, P²

¹ Student, Dept. of EIE, St. Peter's Institute of Higher Education and Research, Chennai.

² Professor and Head, Dept. of E&I, St. Peter's Institute of Higher Education and Research, Chennai.

Abstract: An intelligent optimization method for designing PID controllers based on particle swarm optimization (PSO) is presented in this paper. The conventional gain tuning of PID controller (such as Ziegler-Nichols (ZN) method) usually produces a big overshoot, and therefore modern heuristics approach such as genetic algorithm (GA) and particle swarm optimization (PSO) are employed to enhance the capability of traditional techniques. However, due to the computational efficiency, only PSO will be used in this paper. The performance comparison of the ZNPI and PSO based PI controllers are compared based on performance indices like maximum peak overshoot, settling time, Integral Square Error (ISE) and integral absolute error (IAE). The proposed PSO based PI controller is tested on the chosen hemispherical Tank level system and better controller performance can be envisaged by in the proposed methods than that of the ZNPI controller.

Keywords: Hemispherical Tank, Optimization, Particle Swarm Optimization, PI Controller,

I. INTRODUCTION

Particle swarm optimization (PSO) is a population based stochastic optimization technique developed by Dr. Eberhart and Dr. Kennedy in 1995, inspired by social behaviour of bird flocking or fish schooling's shares many similarities with evolutionary computation techniques such as Genetic Algorithms (GA). The system is initialized with a population of random solutions and searches for optima by updating generations. However, unlike GA, PSO has no evolution operators such as crossover and mutation. In PSO, the potential solutions, called particles, fly through the problem space by following the current optimum particles. PSO algorithm in finding optimal values follows the work of this animal society. Particle swarm optimization consists of a swarm of particles, where particle represent a potential solution. [1-4] In past several years, PSO has been successfully used across a wide range of application fields as well as in specific applications focused on a specific requirement for the two reason following. First it is demonstrated that PSO gets better results in a faster, cheaper way compared with other methods and second reason that PSO is attractive is that there are few parameters to adjust. One version, with slight variations, works well in a wide variety of applications [5-7]. The present work deals with the design of controller for hemispherical tank system. The contribution of this work consists mainly in the design of K_p , K_i , and K_d , values are found using three types of Particle swarm optimization techniques to design the PID controller and compared with conventional one. The development and implementation of the proposed system and controllers was done using MATLAB/Simulink.

II. HEMISPHERICAL TANK LEVEL PROCESS

First a hemispherical tank laboratory level process whose parameters vary with respect to process variable is considered for simulation and real time implementation. Even though the selected process is simple, it has high nonlinearity. The state variables of the system considered for study can be measured easily and the system is pure single input single output system. A shift in the operating point towards top of the tank will increase the time constant and static gain. Similarly a shift in the operating point towards the bottom of the tank will decrease in time constant and static gain. Thus, the hemispherical tank level process whose time constant and gain are functions of the process variable becomes suitable for the present work.

A. Mathematical Modelling Of Hemispherical Tank Level Process

The hemispherical tank level process shown in Fig.1 is considered for study.

Height of the liquid level in this tank is h meter. Volume of liquid in the hemispherical tank is given by

$$V = \frac{\pi h(3r^2 + h^2)}{6} \quad (1)$$

Where r is the radius of the liquid top surface. r may be eliminated by using the Pythagorean relation

$$R^2 = r^2 + (R - h)^2 \quad (2)$$

Where R is the total height as well as radius of the tank

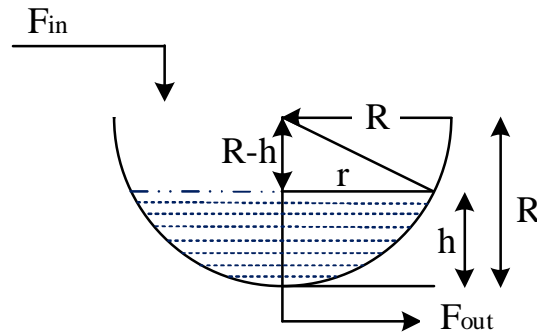


Fig. 1 Hemispherical tank level process

Further elementary algebraic manipulation yields

$$V = \pi \left(Rh^2 - \frac{1}{3}h^3 \right) \quad (3)$$

Where V is the volume of the liquid in the tank

Differentiating the above equation with respect to t we have

$$\frac{dV}{dt} = \pi \left(2Rh - 3\frac{h^2}{3} \right) \frac{dh}{dt}$$

$$\frac{dV}{dt} = \pi (2Rh - h^2) \frac{dh}{dt} \quad (4)$$

The mass balance equation governing the system by assuming constant density of the liquid is

$$\frac{dV}{dt} = F_{in} - F_{out} \quad (5)$$

Where F_{in} and F_{out} are the inflow and out flow rates of the process respectively. F_{out} is assumed to be proportional to \sqrt{h} and is given by

$$F_{out} = c\sqrt{h} \quad (6)$$

Where c is the constant of proportionality. A delay time (T_d) is introduced in the in flow F_{in} to incorporate a dead time in the process and u is linear function. The equation becomes

$$\frac{dV}{dt} = u(t - T_d) - c\sqrt{h} \quad (7)$$

Substitute Eq. (4) in (7), we have

$$\frac{dh}{dt} = \frac{u(t - T_d) - c\sqrt{h}}{\pi(2Rh - h^2)} \quad (8)$$

This is the mathematical model of the hemispherical tank level process

III. TUNING OF PI CONTROLLER

The goal of PI controller tuning is to determine parameters that meet closed loop system performance specifications, and to ensure the robust performance of the control loop over a wide range of operating conditions. Practically, it is often difficult to simultaneously achieve all of these desirable qualities. For example, if the PI controller is adjusted to provide better transient response to set point change, it usually results in a sluggish response when under disturbance conditions. On the other hand, if the control system is made robust to disturbance by choosing conservative values for the PI controller, it may result in a slow closed loop response to a set point change. A number of tuning techniques that take into consideration the nature of the dynamics present within a process control loop have been proposed (Ziegler and Nichols, 1942; Cohen and Coon, 1953; Åström and Hägglund, 1984; and Atherton, 1993).[13-15] All these methods are based upon the dynamical behavior of the system under either open-loop or

closed-loop conditions The Simulink model of the hemispherical tank level process is shown in figure 2. The height and top radius of the hemispherical tank are assumed as 30 cm and 15 cm respectively. A dead time (T_d) of 30 seconds is introduced in the process through software. The time constant and the gain of the process increase as the level increases.. To obtain the transfer function model, reaction curves for various magnitudes of input at 50% percentage of nominal operating point are obtained by MATLAB Simulink software as shown in the figures 3. Different step changes in input (say) 10%, 20 %, and 30% are given to obtain reaction curves. The corresponding process gain and time constant are tabulated in the Tables 1.

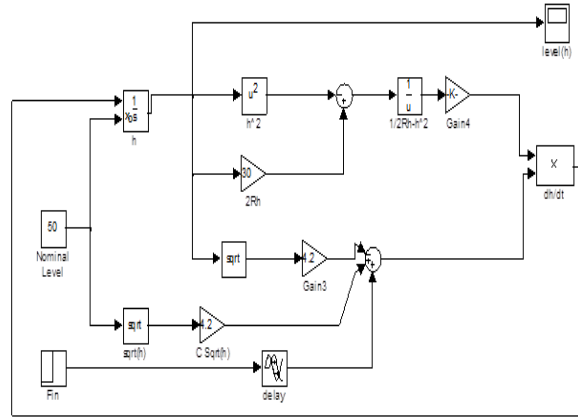


Fig. 2 Simulink model of hemispherical tank level process

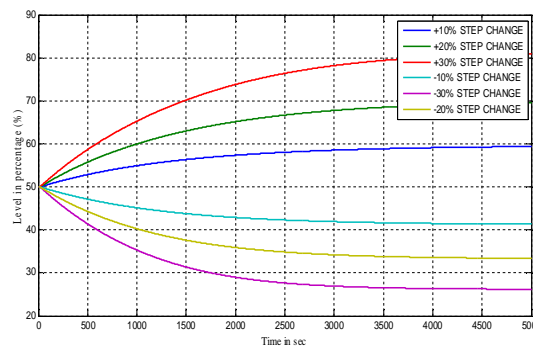


Fig. 3 Reaction curve for different set values

Table 1 Model parameters obtained from simulated reaction curves for hemispherical tank

Step change	Process gain K_p	Time constant τ_p	Dead Time T_D
30%	2.09	1424.58	41.72
20%	2.011	1422	22.35
10%	1.926	1383.75	8.75
-10%	1.76	1206.8	28
-20%	1.674	1098.96	40.18
-30%	1.589	989.55	52.45

The gain of the system varies from 1.589 to 2.09 and the time constant varies from 989.55 to 1424.58 sec as the level varies from 25% to 80%. For the simulation study, the reaction curve for +10% change at 50% nominal operating point is considered to tune the PI controller. The tuning parameters obtained are $K_c=9.123$ and $T_i=0.136$

IV. PARTICLE SWARM OPTIMIZATION

PSO is an evolutionary computational technique based on the movement and intelligence of swarms looking for the most fertile feeding location. A “swarm” is an apparently disorganized collection (population) of moving individuals that tend to cluster

together, while each individual seems to be moving in a random direction. PSO uses a number of agents (particles) that constitute a swarm moving around in the search space looking for the best solution [2,8,9]. Each particle is treated as a point in an n-dimensional space and adjusts its “flying” according to its own flying experience, as well as the flying experience of other particles. Each particle keeps track of its coordinates in the problem space, which are associated with the best solution (fitness) that has been achieved so far. This value is called p_{best} . Another best value called g_{best} is that obtained so far by any particle in the neighbours of the particle. The PSO concept consists of changing the velocity (or acceleration) of each particle toward its p_{best} and the g_{best} position at each time step. Each particle tries to modify its current position and velocity according to the distance between its current position and p_{best} , and the distance between its current position and the g_{best} . At each step n, by using the individual best position, p_{best} , and global best position, g_{best} , a new velocity for the i^{th} particle is updated by,

$$v_i^{k+1} = wv_i^k + c_1r_1 \times (pbest_i - x_i^k) + c_2r_2 \times (gbest - x_i^k) \tag{9}$$

$$X_{t+1} = X_t + X_{t+1} \tag{10}$$

With regards to (9):

- w = Inertial Weight
- v_i^k = current velocity of agent i at iteration k
- v_i^{k+1} = new velocity of agent i at iteration k+1
- c_1, c_2 = adjustable social acceleration constant (swarm confidence),
- r_1, r_2 = random number between 0 and 1,
- x_i^k = current position of agent i at iteration k,
- $pbest_i$ = personal best of agent i ,
- $gbest$ = global best of the population.

For (10):

$$x_i^{k+1} = \text{position of agent i at the next iteration k+1,}$$

The parameter ‘W’ in Equation (2) is inertia weight that increases the overall performance of PSO. It is reported that a larger value of ‘W’ can favour higher ability for global search while lower value of W implies a higher ability for local re-search. To achieve a higher performance, we linearly decrease the value of inertia weight W over the generations to favour global re-search in initial generations and local re-search in the later generations. The linearly decreasing value of inertia is expressed in Equation (11).

$$w = w_{max} - \text{iter} * \frac{w_{max} - w_{min}}{\text{iter}_{max}} \tag{11}$$

Where iter_{max} is the maximum of iteration in evolution process, w_{max} is maximum value of inertia weight, w_{min} is the minimum value of inertia weight, and iter is current value of iteration.

Once the particle computes the new x_i it then evaluates its new location. If fitness (x_i) is better than fitness (p_{best}), then $p_{best} = x_i$ and fitness (p_{best}) = fitness (x_i), in the end of iteration the fitness (g_{best}) = the better fitness (p_{best}), and $g_{best} = p_{best}$.

The PSO algorithm method has been implemented as M file by MATLAB which is interconnected to the Simulink model , where the PID controller parameters are computed and fed to the GUI of the controller. The optimization performed with this initial parameter, number of particles 30, number of dimensions 3, maximum iteration 50, $C_1=1$, $C_2=3$, with the objective function ITAE or ISE. The initial values of three parameters K_p , K_i and K_d , of the PID controller will be generated in PSO program and submitted and running the simulation automatically then compute the objective function ITAE and go back with value of ITAE to PSO program to improve the value of K_p , K_i and K_d , , and go on. In the end of iteration the parameters of the PID controller K_p , K_i , K_d has been obtained directly according to the minimum value of objective function ITAE. Fig. 4, shows the flowchart of PSO based PID tuning algorithm

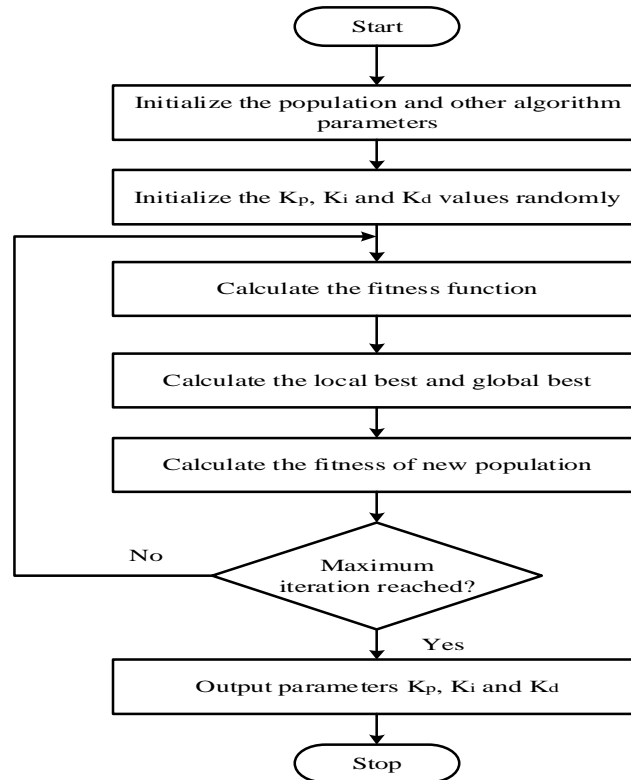



Fig. 4 flow chart of PSO based PID tuning

A. The design steps of PSO based PID controller

- 1) Initialize the algorithm parameters like a number of generations, population, inertia weight, cognitive and social coefficients.
- 2) Initialize the values of the parameters K_p , K_i and K_d randomly.
- 3) Calculate the fitness function of each particle in each generation.
- 4) Calculate the local best of each particle and the global best of the particles.
- 5) Update the position, velocity, local best and global best in each generation.
- 6) Repeat the steps 3 to 5 until the maximum iteration reached or the best solution is found.

V. PERFORMANCE OF HEMISPHERICAL TANK WITH PSO BASED PI CONTROLLER

The performance of Particle Swarm Optimization based PI controller for hemispherical tank level process is compared with conventional ZN PI.

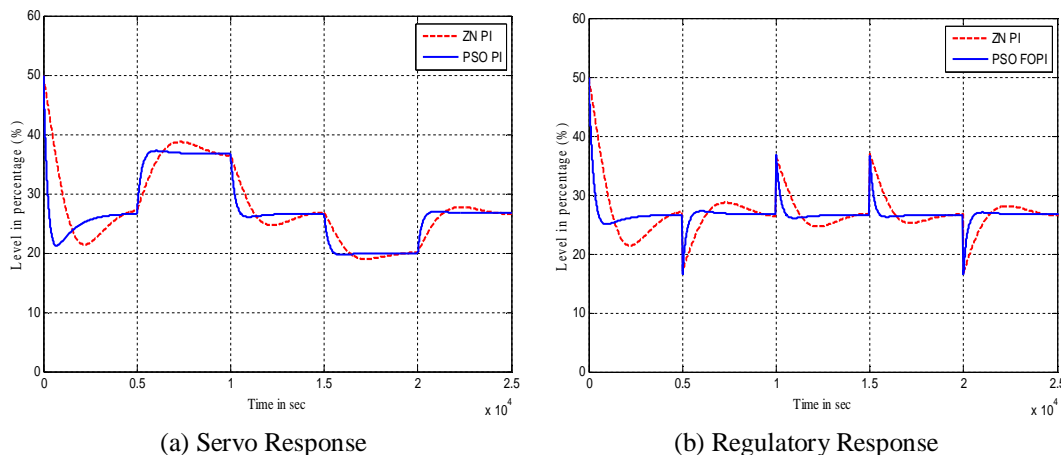

(a) Servo Response

(b) Regulatory Response

Fig. 5 Hemispherical tank level for 10% increment and decrement in load from nominal operating load of 25% using PSO tuned PI controller

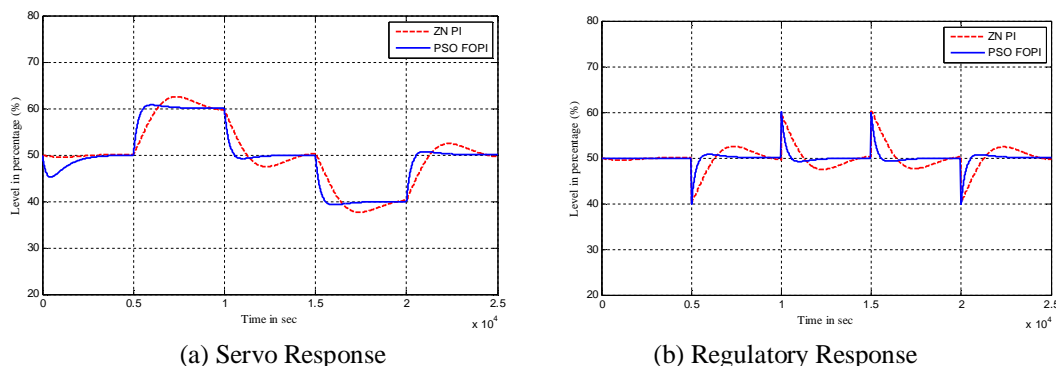


Fig. 6 Hemispherical tank level for 10% increment and decrement in load from nominal operating load of 50% using PSO tuned PI controller

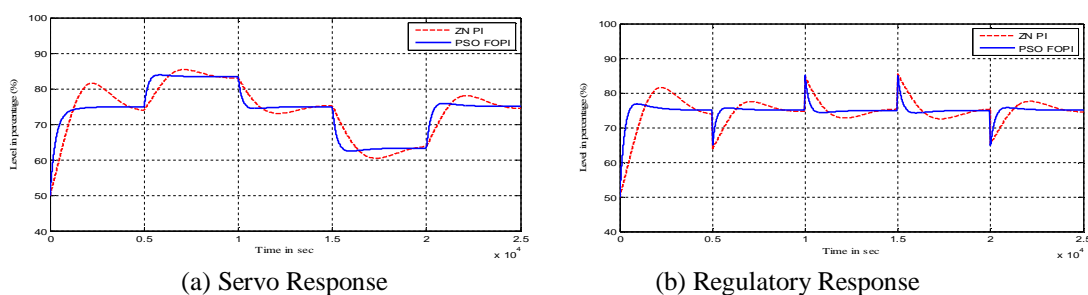


Fig. 7 Hemispherical tank level for 10% increment and decrement in load from nominal operating load of 75% using PSO tuned PI controller

The performance of Particle Swarm Optimization based PI controller for hemispherical tank level process is compared with conventional ZN PI. Fig. 5(a) shows the servo response of 10% increase in set point from nominal operating point and 10% decrement in setpoint from the nominal operating point of 25%. Fig. 5(b) shows the regulatory response of both positive and negative load change of 10% at a nominal operating load of 25%.

Fig. 6(a) shows the servo response of 10% increment in set point from nominal operating point and 10% decrement in set point from the nominal operating point of 50%. Fig. 6(b) shows the regulatory response of both positive and negative load change of 10% at a nominal operating load of 50%.

Fig. 7(a) shows the servo response of 10% increment in set point from nominal operating point and 10% decrement in set point from the nominal operating point of 75%. Fig. 7(b) shows the regulatory response of both positive and negative load change of 10% at a nominal operating load of 75%. PSO based PI controllers give responses with no oscillations, smaller ISE and IAE. In the case of all PSO PI, it is settling time better than ZN PI controller as given in Tables. 2.

Table 2 (a) Performance index for Hemispherical Tank at various nominal operating points for Servo Response

Nominal operating point	Controller	Servo Response							
		10% increment in SP				10% decrement in SP			
		over shoot (%)	Settling time (s)	ISE	IAE	under shoot (%)	Settling time (s)	ISE	IAE
25%	ZNPI	58	2479	1352	1076	59	2360	1257	1043
	PSO PI	18.4	920	564	389	18	889	534	328
50%	ZNPI	66.2	4415	2068	1656	75.3	2998	1898	1363
	PSO PI	24.2	1380	787	573	24.4	990	737	509
75%	ZNPI	70.5	4052	2559	1983	74	3847	2403	1843
	PSO PI	27	1163	923	681	27.1	1080	896	644

Table 2 (b) Performance index for Hemispherical Tank at various nominal operating points for Regulatory response

Nominal operating point	Controller	Regulatory Response							
		10% increment in load				10% decrement in load			
		under shoot (%)	Settling time (s)	ISE	IAE	over shoot (%)	Settling time (s)	ISE	IAE
25%	ZNPI	93.8	2570	1169	626	58.2	2674	1352	1076
	PSO PI	33.4	1076	518	322	18.3	956	562	389
50%	ZNPI	74.7	2686	1868	1393	66.3	3385	2068	1655
	PSO PI	24.2	1530	735	508	24.1	994	786	572
75%	ZNPI	102.6	3390	2403	1834	77	4053	2499	1988
	PSO PI	27.4	1281	894	643	27.1	1706	920	681

VI. CONCLUSION

PSO based PI controller are used to control the level in the hemispherical tank. It has been shown that the speed of responses of the level control system with and without load interrupt in the tank are fast. In order to appraise the performance of the controller, the proposed controller was done with MATLAB/Simulink. The PSO tuned PI controller offers enhanced process characteristics such as better time domain specifications, smooth reference tracking, supply disturbance rejection, and error minimization compared with ZN PI. In addition, the PSO - PI controller enhanced the flexibility and stability of the hemispherical tank level process.

REFERENCES

- [1] Kennedy, J. and Eberhart, R. C. Particle swarm optimization. Proc. IEEE int'l conf. on neural networks Vol. IV, pp. 1942-1948. IEEE service center, Piscataway, NJ, 1995.
- [2] Eberhart, R. C. and Kennedy, J. A new optimizer using particle swarm theory. Proceedings of the sixth international symposium on micro machine and human science pp. 39-43. IEEE service center, Piscataway, NJ, Nagoya, Japan, 1995.
- [3] Eberhart, R. C. and Shi, Y. Particle swarm optimization: developments, applications and resources. Proc. congress on evolutionary computation 2001 IEEE service center, Piscataway, NJ., Seoul, Korea., 2001.
- [4] M. B. Ghaliya, "Particle Swarm Optimization with an Improved Exploration-Exploitation Balance," iEEE, vol. 978-14244-2167-1/08/\$25.00 ©2008 IEEE, 2008
- [5] R. C. Eberhart, Y. Shi, "Comparing inertia weights and constriction factors in particle swarm optimization," Proceedings of the 2000 Congress on Evolutionary Computation. IEEE Service Center: Piscataway, NJ, pp. 8488, 2000.
- [6] P.Pomeroy, "An Introduction to Particle Swarm Optimization," <http://www.adaptiveview.com/articles/ipsop1.html>, 2003.
- [7] J. F. Schutte, J. A. Reinbolt, B. J. Fregly et al., "Parallel global optimization with the particle swarm algorithm," Int. J. Numer. Meth. Engng., vol. 61, pp. 2296-2315, 2004.
- [8] F.L. Lewis, D.M. Dawson, C.T. Abdallah, Control of Robot Manipulators, New York, Macmillan, 1993.
- [9] J. Kennedy, R.C. Eberhart, Y. Shi, Swarm Intelligence, New York, Morgan Kaufmann, 2001.
- [10] Ho, S. L., S. Yang, G. Ni, et al., "A particle swarm optimization method with enhanced global search ability for design optimizations of electromagnetic devices," IEEE Trans. Magnetics, Vol. 42, 1107-1110, 2006.
- [11] Schutte, J. F. and A. A. Groenword, "A study of global optimization using particle swarms," Journal of Global Optimiz., Vol. 31, 93-108, 2005.
- [12] Zhi-hui Zhan and Jun Zhang Adaptive Particle Swarm Optimization _Springer-Verlag Berlin Heidelberg 2008 M. Dorigo et al. (Eds.): ANTS 2008, LNCS 5217, pp. 227-234, 2008.
- [13] Zeigler, J. and Nichols, N. "Optimum Settings for Automatic Controllers", Transactions of ASME, Vol. 64, pp. 759-768, 1942.
- [14] Cohen, G.H. & Coon, G.A., 1953. Theoretical Consideration of Retargeted Control. Transaction ASME, 75, pp.827-34.
- [15] Astrom, K. J., & Hagglund, T. (1984). Automatic tuning of simple regulators with specifications on phase and amplitude margins. Automatica, 20(5), 645-651.



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)