



iJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 4 Issue: IV Month of publication: April 2016

DOI:

www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com

Designing Parameters and Study of 8 KW Solar PV Grid Connected System (A Case Study)

Nikhil Kumar Yadav¹, Dr. Dharmendra Kumar Singh², Amit Agrawal³

¹M.Tech (Power System Engineering Scholar), Department of Electrical and Electronics Engineering

²Head & Associate Professor, Department of Electrical and Electronics Engineering

³Assistant Professor, Department of Electrical and Electronics Engineering

DR. C.V. Raman University Bilaspur Kargi Road Kota, Chhattisgarh India

Abstract: - The purpose of this paper is to provide the real information about 8KW Solar Photo Voltaic System. The conventional energy sources like coal, petroleum and fossil fuels are limited in nature. About 55% of energy is produced by fossil fuels in India. And fossil fuels are limited in nature and are not long lasting. With the increase in demand of electrical energy, the alternative non- conventional energy generation technique is required. The generation of electrical energy through Sun is the best option. The day and night is periodic in nature. So, one can extract unlimited amount of energy from sun. The energy generated from the sun is called solar energy. The solar energy is generated with the help of photovoltaic cell which is also called PV Cells. The photovoltaic cell converts the light into electrical energy directly without any intermediate conversion step. Now days the solar energy is preferred over conventional fossil fuels generators. The solar energy is considered as green energy as it doesn't create pollution and no mechanical parts are used in solar photovoltaic system. The solar photovoltaic system is 90% efficient for the first ten years and 80% efficient for the coming five years. The solar systems are equipped with battery sources to supply the load in night. In this way, if there is sunshine for seven to eight hours, the load can be supplied for complete 24 hours. To promote power system security or to avoid outage the solar systems are used. The Grid Tied solar system can also be designed, where in absence of sun; the power can be taken from grid.

Keywords: - Grid, PV (Photo Voltaic), Power System Security, Outage and Green Energy.

I. INTRODUCTION

The solar energy is the energy produced by sun. The earth surface receives this energy in the form of electromagnetic radiation; this radiation can be easily converted to some other form of energy, such as heat and electricity which can be easily utilized by human beings. It is expected that sun is radiating as solar energy is renewable in nature, and abundantly available in nature. It is eco-friendly in nature and doesn't create pollution, so it can be the good alternative for fossil fuels. Solar radiation includes visible, infrared and ultraviolet rays, which are radiated throughout the space in all directions and these all rays are filtered through atmosphere. Ozone layers present in stratosphere blocks the ultraviolet radiation and allow only visible and infrared rays to enter in earth surface. Earth receives 8 percent of ultraviolet radiation, 46 percent visible light and 46percent infrared radiation [1].

The major limitations of solar energy are that is considered as a dilute form of energy, uncertain availability of solar energy is a major problem and solar rays are not fixed and continuously varies. The fair sunshine is experienced when these rays are not blocked by clouds or some objects in between. These objects causes reflection and diffused light is obtained. As per World Meteorological Organization sunshine duration is about 120Watts per square meter [2].

The energy is created in sun through a thermonuclear process and there 650,000,000^[3] tons of hydrogen is converted into helium every second. This creates enormous amount of heat and electromagnetic waves and the heats produced plays a vital role in maintaining the thermonuclear reaction. Earth surface receives very small quantity of this radiation and heat. In short all the energy sources are interlinked directly or indirectly with sun, the fossil fuels like coal, petroleum, gas etc. are dead remains of animal or plant which were sun dependent millions of year ago. In 2009-2010 Jawaharlal Nehru National Solar Mission launched in India with the target of 20,000 MW of solar energy installation by end of the year 2022 through solar photovoltaic systems. This scheme launched by Central government; provides incentives as well as subsidies that promote installation of the solar autonomous as well as solar grid connected systems. This increases the demand of solar panel and price of solar panel is also decreasing day by day. [4]

II. SOLAR PHOTOVOLTAIC SYSTEM

A solar cell belongs to semiconductor family, which converts the light into electrical energy without any intermediate conversion

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

steps. PV modules are formed by the connection of solar cell in series, & parallel. In the same way, no. of modules are combined together to form “**PV Arrays**” and these solar arrays are used for small as well as for large power applications.

The electricity is generated by the application of Fossil fuels, Hydel Energy, Wind Energy or Nuclear Energy. About 55% of country’s total electrification is fulfilled by the coal. The process starts with the coal pulverization; then fed to boilers where these powdered coals of fixed sized are brunt at high temperature and pressure, to produce steam which is rich in potential energy able to rotate the blades of turbines. The efficiency of steam power plant is not 100%. So, it creates huge amount of pollution (in the form of particulate matters, ejection of carbon dioxide from chimneys and produces several green house gases.).The stocks of coals are limited in nature, So, One have to go for some other renewable alternative source of energy generation. In recent times, the solar or photovoltaic technology has been popular and cost per watt associated with solar power generation has also reduced [5].

The conversion of light directly into electricity is only possible through photovoltaic effect; hence the solar cell is also referred as photovoltaic cell. When sunlight is incident on the solar panel, the current and voltage is generated in the terminals of solar cell. Sunlight intensity decides the amount of electricity to be generated from solar cell and other factors on which electricity generation depends are “Area of solar Cell, angle of incidence of light on the panel & intensity of light. [5]

By increase in solar cell area, the current generated from it can be increased [5]. The best result is obtained when the sun is exactly 90° to the solar cell or when sunlight is perpendicular to the cell. [5]

Finally, the output of solar cell in a panel has only two terminals (i.e. positive terminal and negative terminal). Usually the upper layers of solar cell have front contact in top portion which receives radiation; p-n junction is present in the intermediate layer and there is end contact at the lowest layer. The negative and positive charges are separated at the Emitter-Base junction, and load is connected to the positive and negative output terminals if load is dc and if the load is ac it is fed through inverters [4] .

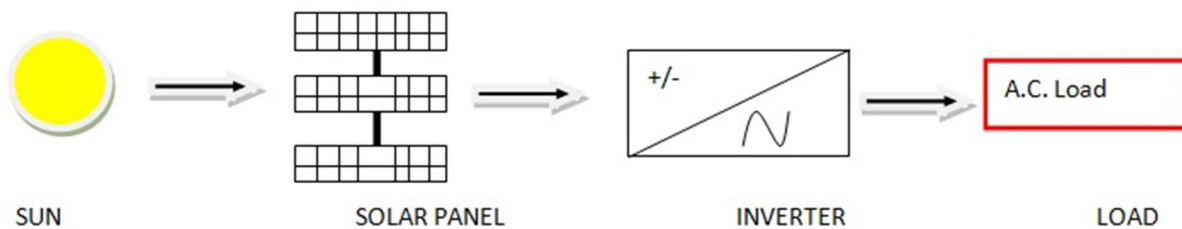


Fig.1:- A.C. Load Feeding Through Solar Panel

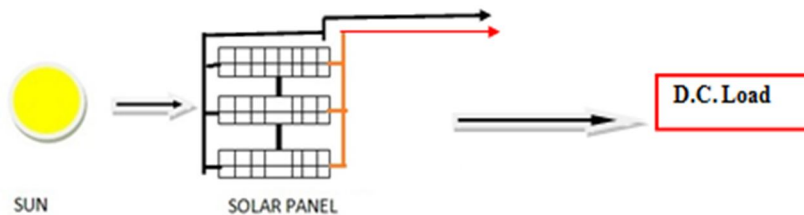


Fig.2:- D.C. Load Feeding Through Solar Panel

III. WORKING PRINCIPLE

The sunlight encompasses accumulation of small energy packets; these packets of energy are called photons. Each packet has fixed amount of energy. For electricity generation, the absorption of this photon is required by the solar cell. Photons energy and band energy gap in “**eV (electron Volts)**” of semiconducting material decides the amount of photons to be absorbed by the solar cell [8].For electricity generation through solar panel following steps are required:-

- A. The semiconducting material of solar panel absorbs the photon present in the sunlight.
- B. This generates electron-hole pairs. Electrons are regarded as negatively charged while holes are regarded as positively charged. The separation of electron and holes takes place near the junction, when we connect the load to solar cell. The electrons are accumulated at cathode while the hole gets collected at anode.

Whenever very high energy contained photon puts its impacts on electron, electron gets separated from atom and that vacant

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

position can be taken up by high energy electron and produces enormous amount of energy. This effect is called photovoltaic effect and the best result of photovoltaic effect is obtained from semiconducting materials. Once the photons gets absorbed by this material. The electron gains higher level of energy than electron in base. Then the electric field becomes necessary for induction of this higher energy electron to out from semiconductor to perform some useful work. And material junction having different electrical characteristics provides these electric field [1]. There are two types of semiconducting materials. In an intrinsic semiconductor all the four valence electrons are strongly attached in chemical bonding and there is no availability of free electrons at absolute zero temperature. If the doping of these semiconductors are done by penta-valent element then it provides an excess electron, thus n-type semiconductor is formed. This free electron is mobile throughout the semiconductor lattice. Whenever the intrinsic semiconductor is doped by trivalent impurity; it creates excess amount of holes able to move throughout lattice structure, in turn causes the shortage of electrons and this creates p-type semiconductor. The semiconductor formed by one side with p-type and other side with n-type is called p-n junction. Once, the photons are absorbed in this junction. The mobile electrons of n-type semiconductor will move towards p-side and in order to balance the shortage of charge carriers the holes of p-type semiconductor will move towards the n-region. This creates the diffusion effect which further causes electric field from n to p region. Until equilibrium is reached this field keeps on increasing. If the external load is connected through contacts of p- type and n type semiconductors, there is movement of electrons from n-region to p-region. And, then there is formation of bounded electron when electron get into the hole and ultimately the removal of both holes and electron takes place. Electrical current in the external circuit is caused by the movement of free electrons and continues to flow till electrons and holes are produced by absorption of solar radiation in the solar panel. The current produced is direct in nature and can be converted into alternating form by the means of inverter [1][6].

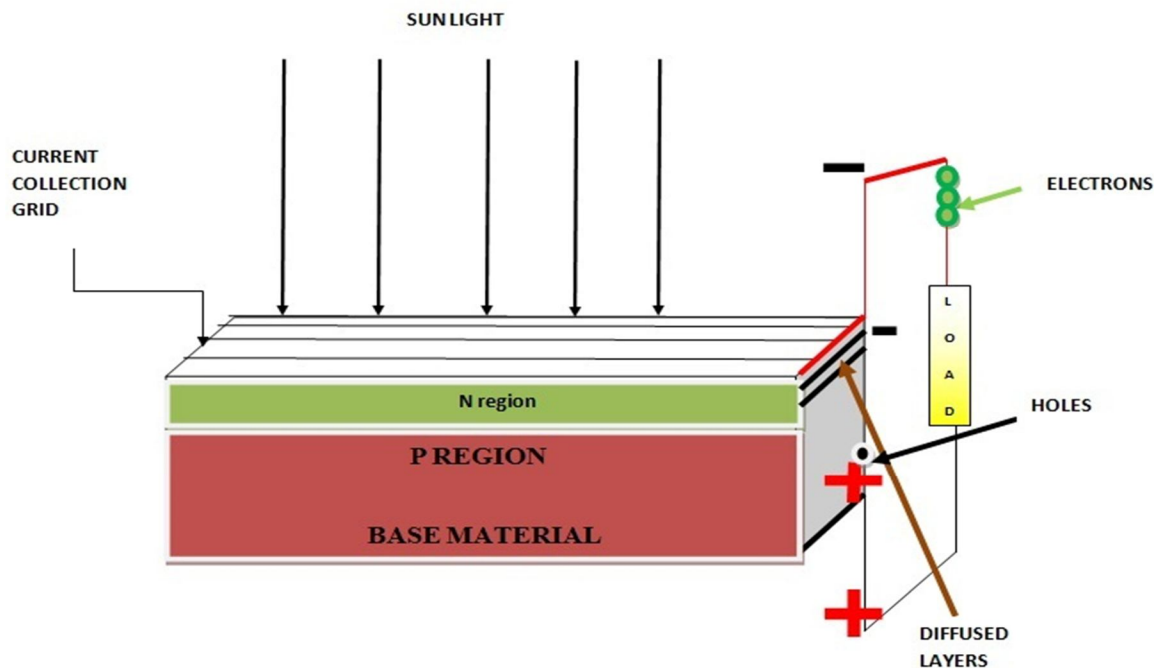


Fig.:-3 A Typical Schematic Diagram of Solar Cell

IV. GRID CONNECTED PHOTOVOLTAIC SYSTEM WITH BATTERY BACK-UP

These types of systems are used for small applications and the components of the systems are PV modules, inverter, and battery bank and charge controllers. The battery charging level is controlled with the help of charge controller. The excess energy from the PV module is fed to inverter in order to convert it in alternating form. When grid fails, the battery backup is utilized to supply the load [4][5][7].

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

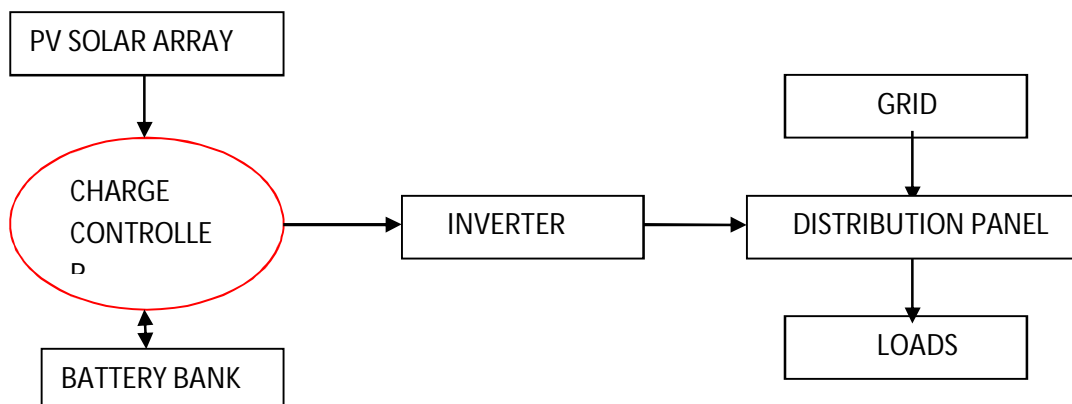


Fig. 4 A Grid Connected Solar PV System

A grid connected solar Photo Voltaic system consists of the following components:

- Solar Photo Voltaic array (Formed With PV Modules P1,P2,P3.....Pn)
- Array combining box
- DC Cabling
- DCDB
- Inverter
- AC Cabling
- ACDB

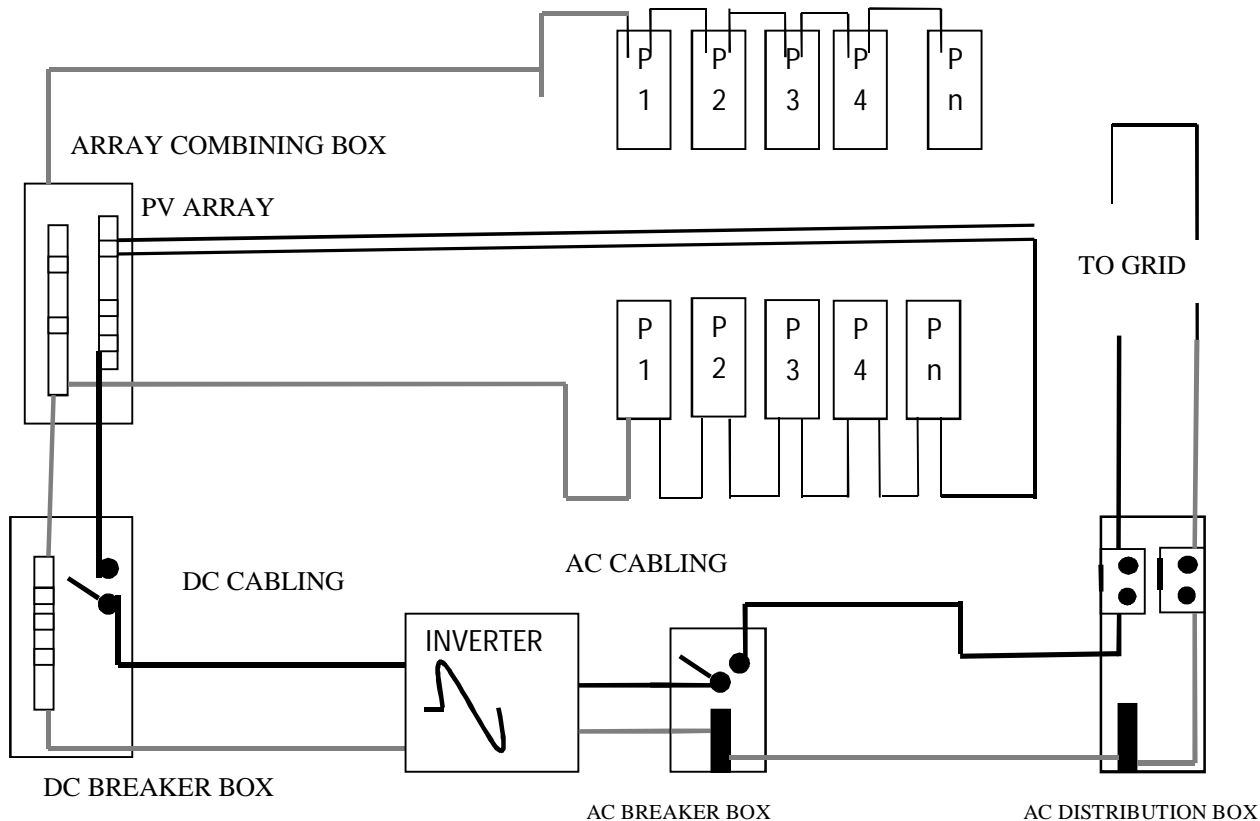


Fig. 5 a Grid Connected Solar PV System

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

A. Solar Photo Voltaic Array

The solar photo voltaic array is the combination of solar modules in series and parallel. It converts the photons ejected by sun into electricity. The voltage level can be increased by series connection and the current level can be increased by parallel connection of modules. The modules are connected in series or parallel to form string. The series string offer voltage range of 120V-1000V DC and current output varies between 5-10 A [4].

B. Array Combining Box

To make electrical interconnections of solar Photo Voltaic strings in an array combiner box is used. It has the DC protecting equipments used in a solar PV array. MC4 connectors are used to connect the string to the box and by the use of short terminal switches + ve and -ve string connection can be broken and combined inside the box [5].

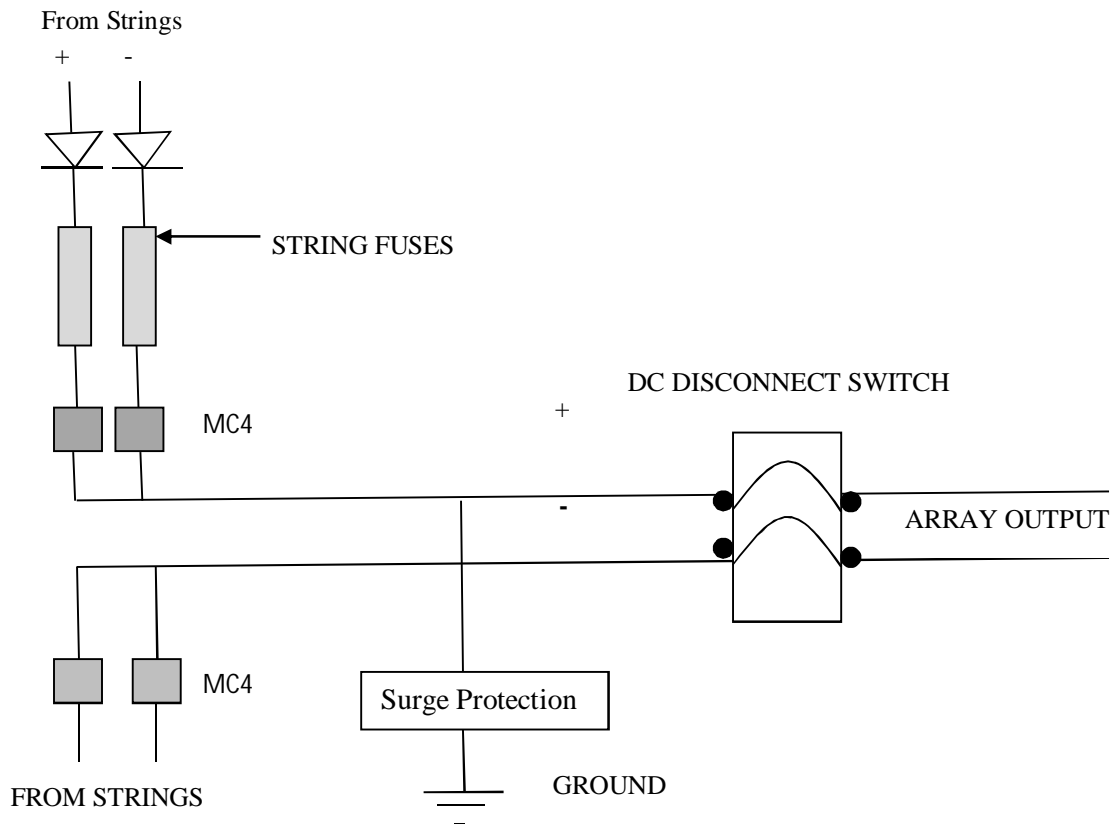


Fig. 6 Arrangement of AC Combining Box

Inside the box, the dc surge arrester is placed. The combiner box is doubly insulated at belongs to class II protection ranking against electric shock. The ground fault detector interrupter is used for grounded PV arrays and arrays are also protected and under IP65 protection scheme the solar PV module is protected against dust and low pressure rain [5].

C. DC Cabling

The modules are series combined with the help of DC cables and strings are also interconnected through these cables to form array. The cables used for the connection of string are rated for 1.25-1.5 times the value of short circuit current. For less than 4 strings by pass diode is not necessary.

D. DCDB (DC Distribution Box)

DC distribution box performs the distribution of dc cables to inverter. Photo Voltaic arrays are isolated from the inverter with the

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

help of 2-pole DC disconnect switch. The output of this equipment is connected to the inverter.

V. SITE LOCATION

A. Location site of installed Photovoltaic system

The Korba is known as the industrial hub of Chhattisgarh. It is surrounded by thermal power plants from all the direction. Its elevation is 316 meter from sea level and located at 22.3595° N latitude, 82.7501° E longitude. The 8Kilo Watt grid connected solar photovoltaic system is installed on the roof of Korba district collectorate office and magnified satellite location of installed site is as follows:-

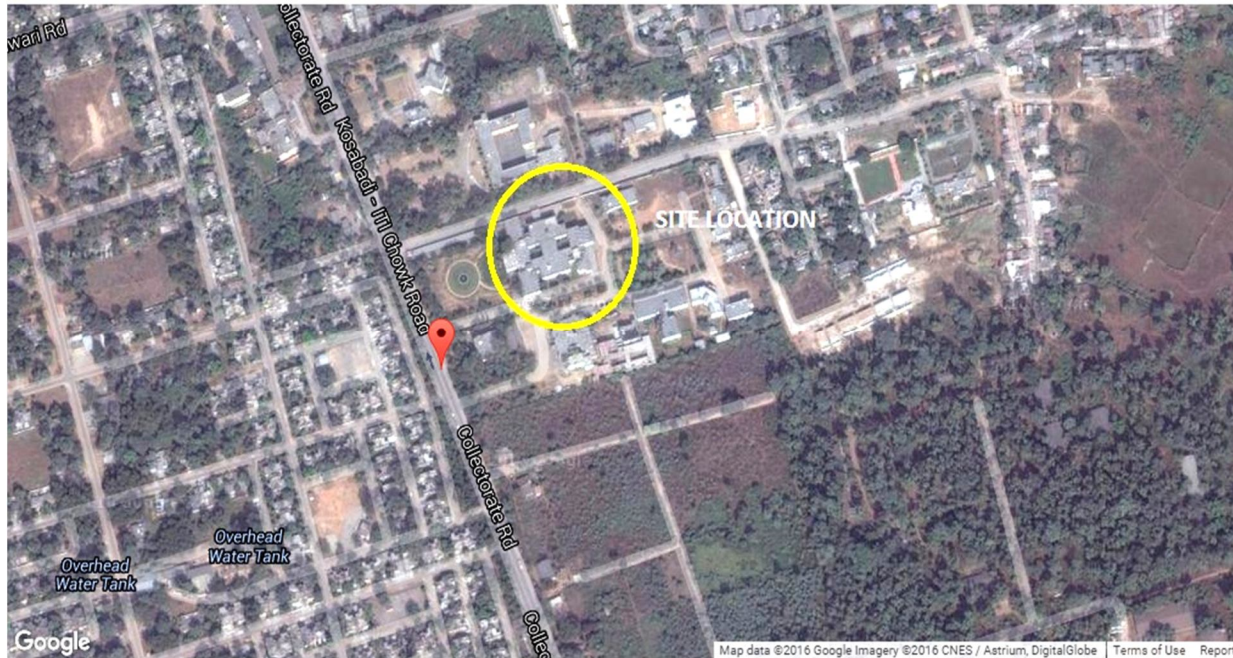


Fig.7 PV system installed site on Google Map (Source Google Map)



Fig.8 Magnified view of site on Google Map (Source Google Map)


VI. RESULTS AND DISCUSSIONS

A. Wind Speed of the location

The wind speed does not cause any major impact on the photovoltaic system but wind speed decides the temperature and weather of the environment which plays a key role in solar generation.

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

Graph no. 1. Monthly Wind Speed in kmph

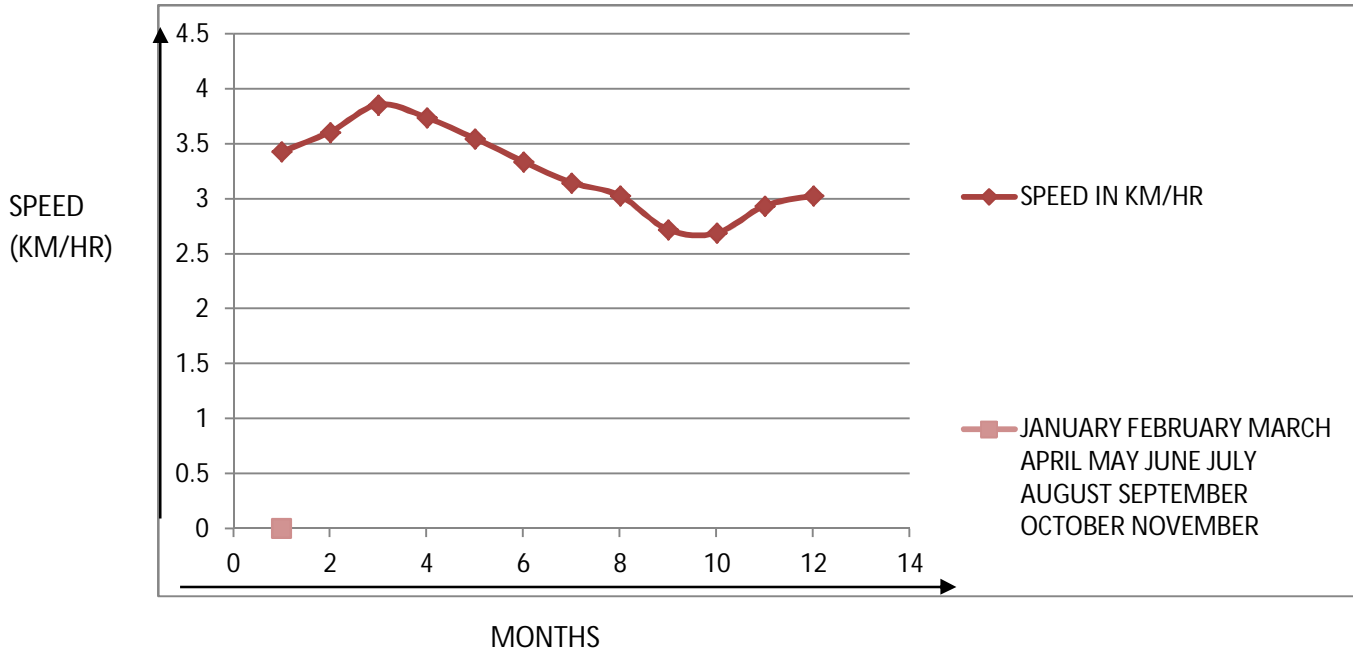

SOURCE: - MNRE

Table no. 1. Monthly Wind Speed in kmph

MONTHS	SPEED IN Km/hr
JANUARY	3.43
FEBRUARY	3.61
MARCH	3.86
APRIL	3.74
MAY	3.55
JUNE	3.34
JULY	3.15
AUGUST	3.03
SEPTEMBER	2.72
OCTOBER	2.69
NOVEMBER	2.94
DECEMBER	3.03
Average Monthly Wind Speed is 3.2575Km/hr.	

B. Monthly average solar radiation of the location

Intensity of sunlight plays a vital role in electricity production. The voltage and current output is directly dependent on the solar radiation incident on the panel. There is increase in sunlight radiation from morning to afternoon then from afternoon to evening there is decrease in radiation. The average monthly radiation falling on korba is as follows:-

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

Graph no. 2 Monthly Solar Radiation in KWh/m²/Month

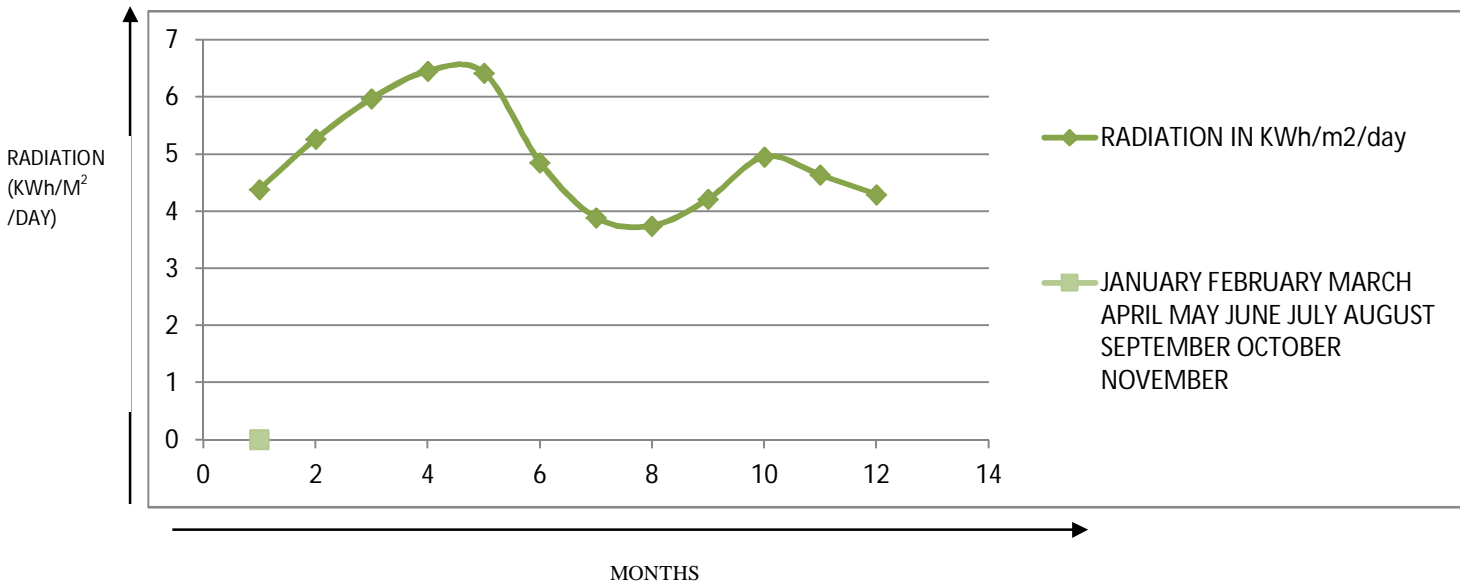


Table no.2 Monthly Solar Radiation in KWh/m²/Month [Source: - CREDA KORBA CHHATTISGARH]

MONTHS	RADIATION IN KWh/m ² /Month
JANUARY	4.39
FEBRUARY	5.27
MARCH	5.98
APRIL	6.46
MAY	6.43
JUNE	4.86
JULY	3.89
AUGUST	3.75
SEPTEMBER	4.22
OCTOBER	4.96
NOVEMBER	4.64
DECEMBER	4.3
Average Monthly Solar Radiation is 4.9291KWh/Month	

C. Module Connection

The solar photovoltaic module is a packed interconnected combination of solar photo voltaic cells. This module has capability to convert sunlight into electricity without any other intermediate steps. Here, monocrystalline solar panel is used which offers highest efficiency among all types of panels and It has wattage of 275 Wp. Each module has 72 solar cells. All module offers positive wattage. No modules rating are below 275Watt. 90% performance efficiency is provided for first 10 year and 85% efficiency is provided for the remaining 15 years [CREDA KORBA].

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

The connection diagram of module is as follows:-

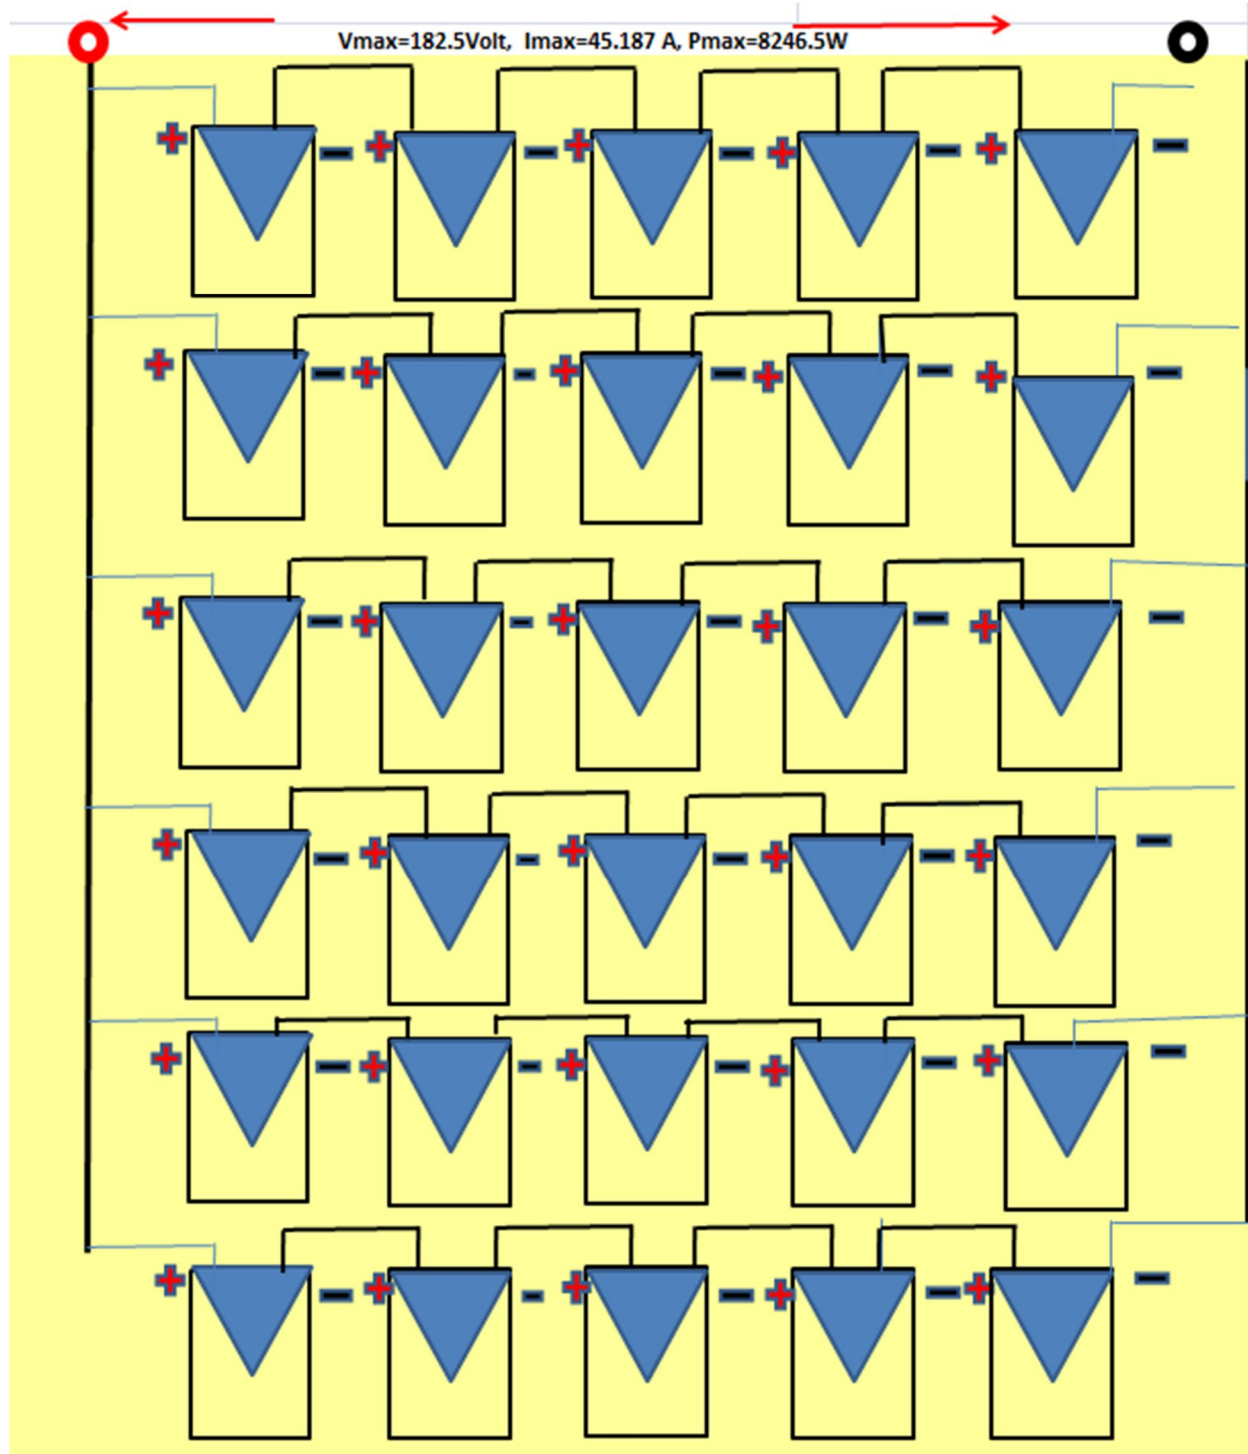


Fig. no. 9 Connection of solar module in a String (Source:-CREDA)

The 8 KW solar photovoltaic system is designed. For this, the solar module of nominal voltage 24 volt is used. So, 5 solar panels are required in series to attain the voltage of 120V. Hence, the series string offers nominal voltage of 120 Volts. To be in a safer side the system designing is done for 8246.5 Watt.

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

Table no. 3 Solar Module Calculation

Power	8 KW=8000 KW		
Voltage at Peak Power	120 Volt		
Current	66.7 A		
PV Module Specification			
P _m (Max Power)	275 W		
V _{o.c.}	44.3		
I _{s.c.}	8.21		
V _m	36.5		
I _m	7.53		
Max. Power Of PV Module(P _m =V _m xI _m)	36.5x7.53=274.875Watt		
PV Module Parameter	Symbol	Value	Unit
PV Array power requirement (Peak Power or Max. Power Point)	P _{max}	8,004	Watt
PV Module Array Open Circuit Voltage at Peak Power	V _{max}	120	Volt
PV Module Array Current at Peak Power	I _{max}	66.7	Ampere
No. Of PV Modules to be connected in Series and Parallel			
No. Of PV Modules to be connected in Series	N _{series} =V _{max} /V _m =180/36.5=5		
No. of PV Modules to be connected in Parallel	N _{parallel} =I _{max} /I _m =45.187/7.53=6		
No. of PV Modules in Series	N _s	5	In Number
No. Of Modules in Parallel	N _p	6	In Number
New Value of PV Array Voltage At Maximum Power Point	V _{max new} =V _m N _s =36.5x5=182.5 Volt		
New Value of PV Array Current At Maximum Power Point	I _{max new} =I _m N _p =7.53x6=45.18		
Maximum Power of Single PV Module	V _m xI _m =274.875 W		
Maximum Power of PV Module Array	P _{max} =P _m xN _s xN _p =274.875x5x6=8246.25 =V _{max new} xI _{max new}		

Fig. no. 10 8 KW Solar Practical Values Calculation Chart

D. Monthly Energy Production

The Monthly energy production is given by:-


PV plant capacity x Average sunshine hours x Number of Days in month		
Total energy production in the month of January	8000 x 7.2 x 31	= 1785.6 KWh
Total energy production in the month of February	8000 x 7.7x 29	= 1786.4 KWh
Total energy production in the month of March	8000 x 7.1 x 31	= 1760.8 KWh
Total energy production in the month of April	8000 x 8.8 x 30	= 2112 KWh
Total energy production in the month of May	8000 x 12.5 x 31	= 3100 KWh
Total energy production in the month of June	8000 x 2.7 x 30	= 648 KWh
Total energy production in the month of July	8000 x 2.8 x 31	= 694.4 KWh
Total energy production in the month of August	8000 x 2.8 x 31	= 694.4KWh
Total energy production in the month of September	8000 x 5.9 x 30	= 1416 KWh
Total energy production in the month of October	8000 x 4.1 x 31	= 1016.8 KWh
Total energy production in the month of November	8000 x 6.8 x 30	= 1632 KWh
Total energy production in the month of December	8000x7.0x 31	= 1736 KWh

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

Table no.4 Monthly power generation parameters

MONTHS	RADIATION IN KWh/m2/Month	SYSTEM CAPACITY	Average Sunshine(In Hours/day)	Monthly Power Generated (KWh)
JANUARY	4.39	8000W	7.2	1785.6
FEBRUARY	5.27	8000W	7.7	1786.4
MARCH	5.98	8000W	7.1	1760.8
APRIL	6.46	8000W	8.8	2112
MAY	6.43	8000W	12.5	3100
JUNE	4.86	8000W	2.7	648
JULY	3.89	8000W	2.8	694.4
AUGUST	3.75	8000W	2.8	694.4
SEPTEMBER	4.22	8000W	5.9	1416
OCTOBER	4.96	8000W	4.1	1016.8
NOVEMBER	4.64	8000W	6.8	1632
DECEMBER	4.3	8000W	7	1736
Average	4.93	8000W	6.28	1531.86

Graph no. 3 for monthly energy produced in months

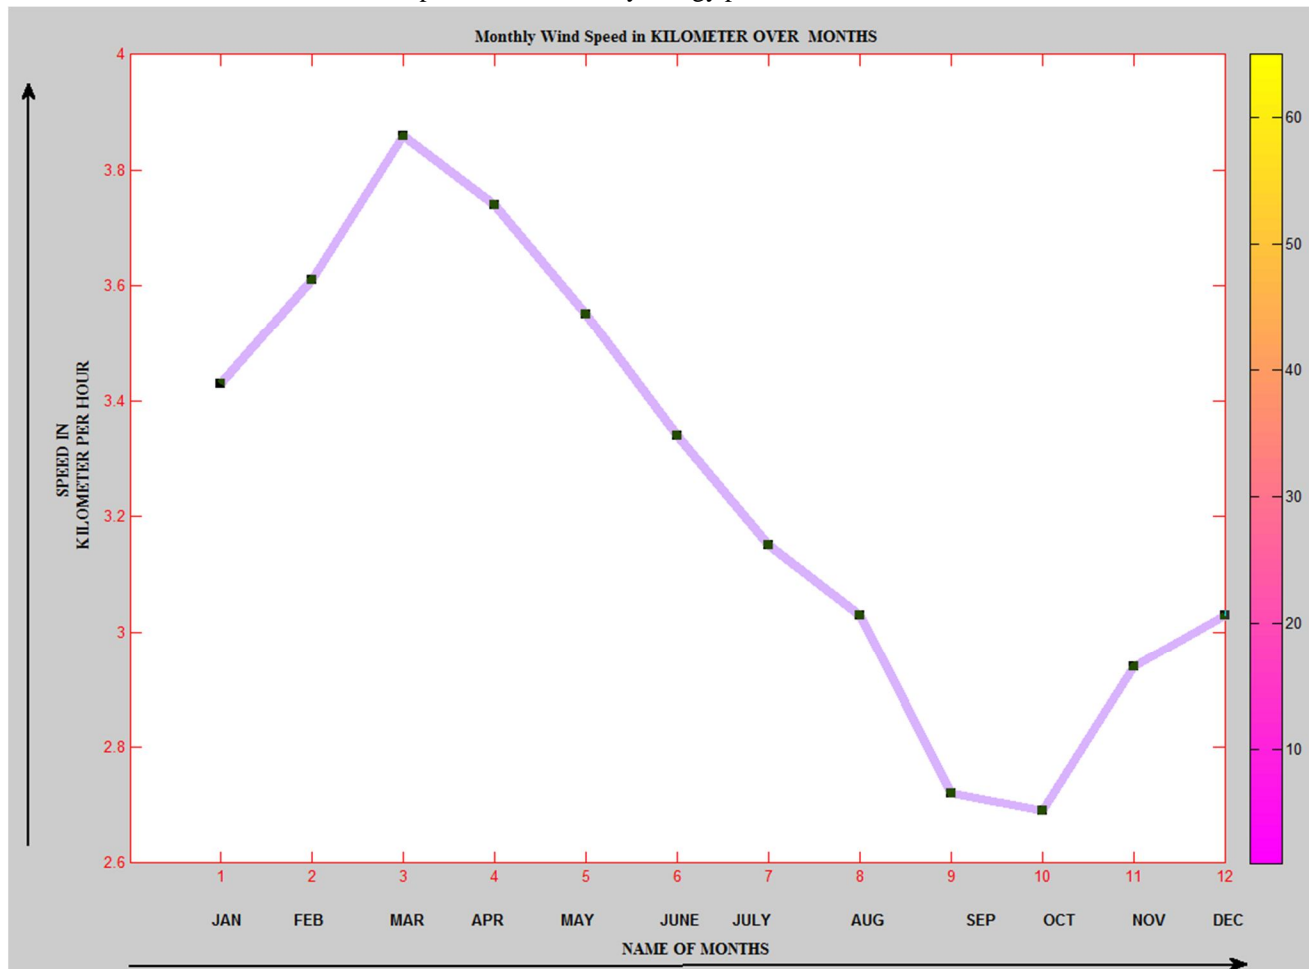

SOURCE:-CREDA

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

E. Final Module Testing Result Panel Wise

The testing is performed at Standard Test Condition as per recommendation of MNRE and CREDA.

Table no. 5 30 Panel STANDARD TEST CONDITION Testing Results

SOLAR PANEL ID	INTENSITY VOLTAGE	LOAD VOLTAGE	Irr	TESTING TEMP.	CORRECTED TEMP.	Voc	Isc	Rs	Rsh	Pmax (Watt)	Vpm	Ipm(A)	FILL FACTOR	Efficiency, mentioned	Efficiency, Calculated
1	5.261 Volts	6.7 Volts	100mV/sq.cm	24.1°C	25°C	44.341V	8.249A	0.607Ω	143.386Ω	271.7	35.03V	7.76	0.743	14.07%	15.77%
2	5.261 Volts	6.5 Volts	100mV/sq.cm	24.6°C	25°C	44.263V	8.263A	0.646Ω	99.353Ω	273.29	35.07V	7.79	0.747	14.15%	15.86%
3	5.261 Volts	6.5 Volts	100mV/sq.cm	24.5°C	25°C	44.116V	8.200A	0.632Ω	106.268Ω	273.96	35.13V	7.8	0.757	14.18%	15.90%
4	5.261 Volts	6.5 Volts	100mV/sq.cm	24.8°C	25°C	44.185V	8.155A	0.606Ω	115.392Ω	272.22	35.39V	7.78	0.764	14.25%	15.98%
5	5.261 Volts	6.5 Volts	100mV/sq.cm	24.6°C	25°C	44.184V	8.181A	0.654Ω	87.226Ω	264.37	35.68V	7.41	0.731	13.67%	15.35%
6	5.261 Volts	6.5 Volts	100mV/sq.cm	24.6°C	25°C	44.144V	8.174A	0.679Ω	110.726Ω	271.08	34.76V	7.8	0.751	14.03%	15.74%
7	5.261 Volts	5.3 Volts	100mV/sq.cm	26.6°C	25°C	43.453V	7.987A	0.568Ω	376.012Ω	263.05	34.858V	7.55	0.758	13.62%	15.27%
8	5.261 Volts	6.7 Volts	100mV/sq.cm	23.8°C	25°C	44.278V	8.283A	0.618Ω	91.694Ω	265.84	36.027V	7.37	0.724	13.75%	15.42%
9	5.261 Volts	6.7 Volts	100mV/sq.cm	25.4°C	25°C	44.200V	8.213A	0.622Ω	72.371Ω	275.24	35.205V	7.82	0.758	14.25%	15.98%
10	5.261 Volts	5.3 Volts	100mV/sq.cm	25.3°C	25°C	44.307V	8.207A	0.639Ω	127.744Ω	275.97	35.363V	7.81	0.759	14.27%	16.02%
11	5.261 Volts	6.7 Volts	100mV/sq.cm	25.1°C	25°C	44.162V	8.817A	0.670Ω	118.983Ω	272.44	35.004V	7.78	0.753	14.11%	15.82%
12	5.261 Volts	5.3 Volts	100mV/sq.cm	25.7°C	25°C	44.483V	8.220A	0.667Ω	104.781Ω	276.14	35.193V	7.85	0.755	14.30%	16.03%
13	5.261 Volts	6.7 Volts	100mV/sq.cm	25.2°C	25°C	44.266V	8.222A	0.647Ω	71.943Ω	273.85	35.23V	7.77	0.752	14.18%	15.90%
14	5.261 Volts	6.7 Volts	100mV/sq.cm	24.9°C	25°C	44.159V	8.221A	0.662Ω	75.854Ω	271.11	35.05V	7.73	0.747	14.04%	15.74%
15	5.261 Volts	6.7 Volts	100mV/sq.cm	24.4°C	25°C	44.481V	8.243A	0.641Ω	88.898Ω	279.31	35.58V	7.64	0.762	14.45%	16.21%
16	5.261 Volts	6.7 Volts	100mV/sq.cm	25.2°C	25°C	44.257V	8.212A	0.631Ω	150.519Ω	276.51	35.33V	7.83	0.761	14.32%	16.05%
17	5.261 Volts	6.7 Volts	100mV/sq.cm	25.3°C	25°C	44.405V	8.225A	0.626Ω	97.575Ω	276.5	44.41V	8.22	0.757	14.31%	16.06%
18	5.261 Volts	6.7 Volts	100mV/sq.cm	25.2°C	25°C	44.270V	8.238A	0.675Ω	63.350Ω	272.57	35.12V	7.76	0.747	14.11%	15.82%
19	5.261 Volts	6.7 Volts	100mV/sq.cm	25.2°C	25°C	44.515V	8.230A	0.682Ω	96.645Ω	276.08	35.31V	7.82	0.754	14.30%	16.03%
20	5.261 Volts	6.7 Volts	100mV/sq.cm	24.3°C	25°C	44.327V	8.218A	0.655Ω	76.71Ω	276.38	35.24V	7.84	0.759	14.31%	16.05%
21	5.261 Volts	6.7 Volts	100mV/sq.cm	24.3°C	25°C	44.368V	8.258A	0.649Ω	85.47Ω	275.4	35.12V	7.85	0.752	14.26%	15.98%
22	5.261 Volts	6.7 Volts	100mV/sq.cm	24.2°C	25°C	44.491V	8.262A	0.664Ω	154.674Ω	273.23	35.13V	7.79	0.743	14.15%	15.86%
23	5.261 Volts	6.7 Volts	100mV/sq.cm	24.0°C	25°C	44.323V	8.259A	0.684Ω	106.989Ω	275.49	35.07V	7.85	0.752	14.26%	15.99%
24	5.261 Volts	6.7 Volts	100mV/sq.cm	24.1°C	25°C	44.382V	8.232A	0.666Ω	134.173Ω	277.57	35.30V	7.86	0.76	14.37%	16.11%
25	5.261 Volts	5.9 Volts	100mV/sq.cm	26.8°C	25°C	44.264V	8.193A	0.562Ω	290.08Ω	267.75	36.35V	7.37	0.74	13.86%	15.54%
26	5.261 Volts	6.7 Volts	100mV/sq.cm	25.2°C	25°C	44.270V	8.238A	0.675Ω	63.350Ω	272.57	35.12V	7.76	0.747	14.11%	15.85%
27	5.261 Volts	6.7 Volts	100mV/sq.cm	25.2°C	25°C	44.515V	8.230A	0.682Ω	96.645Ω	276.08	35.31V	7.82	0.754	14.30%	16.05%
28	5.261 Volts	6.7 Volts	100mV/sq.cm	24.3°C	25°C	44.327V	8.218A	0.655Ω	76.71Ω	276.38	35.24V	7.84	0.759	14.31%	16.04%
29	5.261 Volts	6.7 Volts	100mV/sq.cm	24.3°C	25°C	44.368V	8.258A	0.649Ω	85.47Ω	275.4	35.12V	7.85	0.752	14.26%	15.97%
30	5.261 Volts	6.7 Volts	100mV/sq.cm	24.1°C	25°C	44.382V	8.232A	0.666Ω	134.173Ω	277.57	35.30V	7.86	0.76	14.38%	16.14%

SOURCE:-CREDA

VII. CONCLUSION

In this way designing aspects of solar photo voltaic system is studied with the help of all important parameters. Solar PV system promotes power system security and hence, outage can be avoided. Although, solar system are costly, but no extra cost is required after installation and one can get complete amount back within 5 years. As conservation of fossil fuels are required. So, solar power generation is the best choice. If the concept of wireless power transfer comes in practical usage. Then, we can get energy 24 hour by installing solar panels in space.

REFERENCES

- [1] Non Conventional Energy Sources by G.D. Rai.
- [2] Data from World weather Information Service Website and Solar Radiation Data from Non Conventional Energy Sources by G.D. Rai.
- [3] www.ccs.neu.edu/home/feneric/solar.html, Eric W Brown, "An Introduction to Solar Energy"(accessed in April, 2016).
- [4] www.mnre.gov.in/file-manger/annual-report/20142015/EN/Chapter%204/Chapter_4.html(accessed in April, 2016).
- [5] "Solar PV Manual" by Chetan Singh Solanki.
- [6] www.thegreeneage.co.uk/tech/types-of-solar-panel/ (accessed on April, 2016) .
- [7] Ioannis-Thomas K. Theologitis, "Comparison of existing PV models and Possible integration under EU grid specifications".
- [8] CREDA (Chhattisgarh Renewable Energy Development Agency) is a only agency which performs renewable energy installation and maintenance tasks as per MNRE.



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)