



iJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 6 Issue: V Month of publication: May 2018

DOI: <http://doi.org/10.22214/ijraset.2018.5261>

www.ijraset.com

Call: ☎ 08813907089

E-mail ID: ijraset@gmail.com

Enhancing the Strength of Porous Concrete by using the Polyvinyl Acetate

Mr. Hemant V. Meshram¹, Miss Neha A. Arukia², Mr. Sharad R. Warghane³, Mr. Akshay B. Bhise⁴, Mr. Ajinkya A. Parthkar⁵

² Department of civil engineering, DBACER, Nagpur, Maharashtra, India.

^{1, 3, 4, 5} U.G. students of civil engineering, DBACER, Nagpur, Maharashtra, India.

Abstract: In India water irrigation is very important for the growing crops, the main source of water is from rain, but preferment of village into city heavy amount of cementation is carried out that's the reason the water may not be infiltrated hence resulting shortage of surface water as well as groundwater. The overland flow occurred with the runoff coefficient 0.6 - 0.8. Porous concrete has large voids which is 15-35%, and it will be used for the recharging the groundwater but here porous concrete has low strength as compared to normal concrete.

This project has seen whether the mixture of polyvinyl acetate is strengthening or not. The result (compressive strength) is getting almost the same as normal concrete. The purpose of this project is to recharge the water under the earth and to remove the possibility of flood.

Keywords: Strength of concrete, polyvinyl acetate.

I. INTRODUCTION

The porous concrete is also known as pervious concrete is a special type of concrete which has the property of porosity and used for concrete flooring to recharge the groundwater table. Porous concrete mainly consists of ordinary Portland cement, coarse aggregate, and water. There are no fine aggregates, therefore, it is also called as no fine concrete. It is such a concrete that water can be passed which can prove to be very beneficial to recharge groundwater. It does not heat more as compare to normal conventional concrete. It cleans the dirty water and removes harmful pollutants and it's like ponds and rivers are not easily spoiled. The main advantage of concrete is its porosity and high runoff coefficient and the main disadvantages of this concrete is a low compressive strength. Conventional concrete can water flows on the surface of the concrete, but the porous concrete passes water from top to bottom surface through its pores. Porous concrete is used in light traffic areas, parking areas, and pedestrians etc. also where excessive water is maintained. Most people floor concrete to the area outside the house to avoid dust clogging to the house, if concrete is heated, then water is excuse on top to keep it cool but that water gets evaporated, but the porous concrete is such a concrete which is not too hot and does not even allow water to flow.

Polyvinyl acetate is the synthetic glue used as carpenters glue, wood glue or as consolidate for porous building stone when it dried it make solid rubber. This rubber is fully waterproof, which is very beneficial and it may help to enhance the strength of concrete.

II. EXPERIMENTAL WORK

In this experimental project work, mix proportion was taken of 1:2:4 which is cement: fine aggregate: coarse aggregate. The water-cement ratio for proper mixing 0.4%.

In this project, 7 cubes were cast of size 15×15×15cm. Each proportion 0%, 0.25%, 0.5%, 0.75% and 1% are casted and also one reference cube casted for compare the strength.

A. Cement

This is an Ordinary Portland Cement which surpasses the requirements of IS: 12269-53 Grade. It is produced from high-quality clinker ground with high purity gypsum. ACC 53 Grade OPC provides high strength and durability to structures because of its optimum particle size distribution, superior crystalline structure, and balanced phase composition. It is available in specially designed 50-kg bags.

B. Coarse aggregate

Locally available crushed stones conforming to the graded aggregate of nominal size range from 4.75mm to 20mm with a specific gravity of 2.77.

C. Fine aggregate

Crushed stone with sizes ranges from 2.75mm to 4.75mm especially known as churri/gravels.

D. Water

The quantity of *water* in the mix plays a vital role in the strength of the *concrete*.

| Sr. No. | Components | Quantity (in Kg) |
|---------|------------------|------------------|
| I. | Cement | 7.5 |
| II. | Fine aggregate | 15 |
| III. | Coarse aggregate | 30 |
| IV. | Water | 3.5 lit. |

E. Polyvinyl acetate

Poly(vinyl acetate), PVA, Polyvinyl acetate is a colorless, non-toxic thermoplastic resin, used as carpenters glue, wood glue, paints water-based emulsion or as consolidate for porous building stone when it dried it make solid rubber. It was discovered in 1912 by Dr. Fritz Klatte in Germany. It is insoluble in water that's a way for the preparation of polyvinyl acetate for making the gel formation acetone were added and kept it for 24 hrs. Acetone is flammable liquid and easily get evaporated. The polyvinyl acetate was taken proportions 0%, 0.25%, 0.5%, 0.75% and 1%.

| Sr. No. | Particulars | Description |
|---------|------------------|--|
| I. | Density | 1.17-1.20 gm/cm ³ |
| II. | Soluble in | Acetone, Ethanol |
| III. | Chemical formula | (C ₄ H ₆ O ₂) _n |
| IV. | Boiling point | 112 ⁰ C |
| V. | Melting point | 60 ⁰ C |
| VI. | Nature | Crystalline |
| VII. | Color | It is colorless but when it dried gets white milky in color |
| VIII. | pH | 5.0-6.5 |

F. Acetone

It is the organic compound. It is a colorless, volatile, flammable liquid and used as a solvent (good solvent) for many plastic and synthetic fibers.

| Sr. No. | Particulars | Description |
|---------|------------------|---------------------------------|
| I. | Chemical formula | C ₃ H ₆ O |
| II. | Appearance | Colorless liquid |
| III. | Density | 0.7845 gm/cm ³ |
| IV. | pH | Neutral |
| V. | Boiling point | 56 ⁰ C |
| VI. | Melting point | -95 ⁰ C |

III. ADVANTAGES OF POROUS CONCRETE

- A. It is lighter than normal concrete.
- B. It is high voids 18%-20%.
- C. It is the low cost of paver as comparing effective tiles.

IV. USES OF POROUS


A. Concrete

- 1) Low light traffic pavements.
- 2) Parking areas
- 3) Pedestrians.
- 4) Flooring on the ground surface.
- 5) Boundaries of the wells, ponds, rivers, bore wells.

V. RESULTS AND GRAPHS

As shown below the results were recorded after 7 days and 28 days curing. The maximum strength of porous concrete by using polyvinyl acetate was found to be 11.46 N/mm^2 and without using polyvinyl acetate was found to be 8.36 N/mm^2 .

| Sr no. | Poly Acetate (%) | Compressive Strengths N/mm^2 | |
|--------|------------------|---------------------------------------|---------|
| | | 7 Days | 28 Days |
| I. | 0 | 6.25 | 8.36 |
| II. | 0.25 | 4.98 | 7.62 |
| III. | 0.5 | 4.98 | 7.62 |
| IV. | 0.75 | 4.78 | 11.46 |
| V. | 1 | 4.94 | 7.377 |

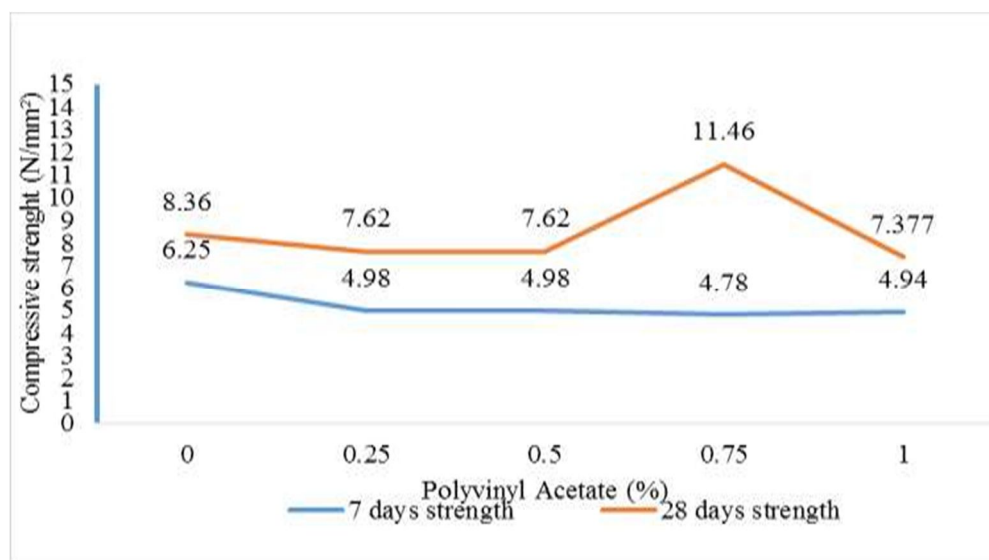

VI. CONCLUSION

- A. From this project the acetate proportion 0.75% gives the 11.46 N/mm^2 strength which is beneficial to the pervious concrete.
- B. This concrete protects the river and the pond from being dirty by cleaning storm water.
- C. This concrete will be used on the side of the road when the water at the time of the rain, which will save the water from the flow of the camber.
- D. The Increased compressive strength of a certain level by polyvinyl acetate.

E. Compressive Strength is nearer to normal concrete.

VII. FUTURE SCOPE

Later, we seen the drinking straw to increase the void ratio and its porosity.

VIII. ACKNOWLEDGEMENT

I would like to thanks to miss prof. Neha Arukia mam, and thankful to all my friends for their guidance.

REFERENCE

- [1] Prof.Neha.S.Arukia, Prof. Rahul.R.Jichkar, Dr. Heena V Sanghani, Prof.Vaishali.P.Kesalkar "Effect of Poly Vinyl Acetate and Poly Vinyl Alcohol as Cement Admixture on strength of concrete", IJRASET, ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor:6.887 Volume 5 Issue VIII, July 2017.
- [2] M. HarshavarthanaBalaji, M.R.Amarnaath, R.A.Kavin, S. Jaya Pradeep "DESIGN OF ECO FRIENDLY PERVIOUS CONCRETE", IJCIET, ISSN 0976 – 6316;Volume 6, Issue 2, February (2015), pp. 22-29.
- [3] M. Uma Magesvari, V.L. Narasimha , "STUDY OF PERVIOUS CONCRETE WITH VARIOUS CEMENT CONTENT", IJATES, Vol. No. 02, Issue No. 08 August 2014.
- [4] S.S. Waghmare Dr. D.P. Singh, "EXPERIMENTAL INVESTIGATION OF PERVIOUS CONCRETE BY USING TITANIUM DIOXIDE", IJARIE, Vol-1,Issue-1 2015.
- [5] Sindhu P.K., Deepthy Raja Gopal, "EXPERIMENTAL INVESTIGATION ON MAXIMUM STRENGTH OF PERVIOUS CONCRETE USING DIFFERENT SIZE OF AGGREGATE", IJSET, ISSN2348-7968, PP 706-708.
- [6] K.B. Parikh and M.A. Shaikh," INVESTIGATION OF MINERAL ADMIXTURE IN PERVIOUS CONCRETE, IJSRP Vol.6, Issue 3, March 2016, ISSN 2250-3153.
- [7] T. Divya Bhavna, S. Kaushik - "Pervious Concrete Pavment", IJCIET Vol. 8 Issue April 2017 P.P 413-421.
- [8] Al. Menhosh, Yan Wang and Yu Wang "Experimental Study Of Concrete Using Polymer And Additives", School of Civil Engineering, Chongqing Jiaotong University, Chongqing, P.R. China.
- [9] Sukamal Kanta Ghosh and Ananya Chaudhary " Pervious Concrete Using Waste Materials", KIIT University Bhubaneswar, IJRET ISSN 2319-1163 P.P 105-115.
- [10] S.O. Ajamu, A.A. Jimoh, J.R. Oluremi-Evaluation of Structural Performance of Pervious Concrete in Construction, International Journal of Engineering and Technology. Volume 2 No. 5, May, 2012.
- [11] M. Harshavarthana Balaji, M.R. Amarnaath, R.A.Kavin, S. Jaya Pradeep-Design of Eco friendly Pervious Concrete. IJCIET Volume 6, Issue 2, February (2015), pp. 22-29.
- [12] Darshan S. Shah, Prof. Jayeshkumar Pitroda, Prof. J.J. Bhavsar-Pervious Concrete: New Era For Rural Road Pavement, International Journal of Engineering Trends and Technology (IJETT) – Volume 4 Issue 8- August 2013.
- [13] Praveenkumar Patil, Santosh M Murnal-Study on the Properties of Pervious Concrete, International Journal of Engineering Research & Technology (IJERT) ISSN: 22780181 Vol. 3 Issue 5, May – 201.
- [14] A. Allahverdi, K. Kianpur and M. R. Moghbeli-Effect of polyvinyl alcohol on flexural strength and some important physical properties of Portland cement paste, Iranian Journal of Materials Science & Engineering Vol. 7, Number 1, Winter 2010
- [15] Sirile Eathakoti1, Navya Gundu, Markandeya Raju Ponnada-An Innovative No-Fines Concrete Pavement Model (IOSR-JMCE) e-ISSN: 22781684,p-ISSN: 2320-334X, Volume 12, Issue 5 Ver. III (Sep. - Oct. 2015), PP 34-44.



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)