



IJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 4 Issue: VI Month of publication: June 2016

DOI:

www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com

A Hybrid System of 7 Level Inverter Based Novel ZVT-ZCT-PWM Boost Converter System

Mr.P.Jeyakumar¹, Mrs. B.Gowdhami²
^{1,2}PRIST University, Chennai, India

Abstract- We propose here a new boost converter with an active snubber cell is proposed. The active snubber cell provides main switch to turn ON with zero-voltage transition (ZVT) and to turn OFF with zero-current transition (ZCT). The proposed converter incorporating this snubber cell can operate with soft switching at high frequencies. Also, in this converter all semiconductor devices operate with soft switching. There is no additional voltage stress across the main and auxiliary components. The converter has a simple structure, minimum number of components, and ease of control as well. The operation principle and detailed steady-state analysis of the novel ZVT-ZCT-PWM boost converter are given. The presented theoretical analysis is verified exactly by a prototype of 100 kHz and 1 kW converter. Also, the overall efficiency of the new converter has reached a value of 97.8% at nominal output power.

Index Terms— Snubber Cell, ZCT,ZVT, PWM.

I. INTRODUCTION

The ever-increasing energy consumption, fossil fuels' soaring costs and exhaustible nature, and worsening global environment have created a booming interest in renewable energy generation systems, one of which is photovoltaic. Such a system generates electricity by converting the Sun's energy directly into electricity. Photovoltaic-generated energy can be delivered to power system networks through grid-connected inverters. A single-phase grid-connected inverter is usually used for residential or low-power applications of power ranges that are less than 10 kW [1]. Types of single-phase grid-connected inverters have been investigated [2]. A common topology of this inverter is full-bridge three-level.

The three-level inverter can satisfy specifications through its very high switching, but it could also unfortunately increase switching losses, acoustic noise, and level of interference to other equipment. Improving its output waveform reduces its harmonic content and, hence, also the size of the filter used and the level of electromagnetic interference (EMI) generated by the inverter's switching operation [3]. Multilevel inverters are promising; they have nearly sinusoidal output-voltage waveforms, output current with better harmonic profile, less stressing of electronic components owing to decreased voltages, switching losses that are lower than those of conventional two-level inverters, a smaller filter size, and lower EMI, all of which make them cheaper, lighter, and more compact [3], [4]. Various topologies for multilevel inverters have been proposed over the years. Common ones are diode-clamped [5]– [10], flying capacitor or multi cell [11]–[17], cascaded H-bridge [18]–[24], and modified H-bridge multilevel [25]–[29]. This paper recounts the development of a novel modified H-bridge single-phase multilevel inverter that has two diode embedded bidirectional switches and a novel pulse width modulated (PWM) technique. The topology was applied to a grid-connected photovoltaic system with considerations for a maximum-power-point tracker MPPT) and a current-control algorithm.

II. PWM MODULATION

A. Introduction about PWM Modulation Techniques

A novel PWM modulation technique was introduced to generate the PWM switching signals. Three reference signals (V_{ref1} , V_{ref2} , and V_{ref3}) were compared with a carrier signal ($V_{carrier}$). The reference signals had the same frequency and amplitude and were in phase with an offset value that was equivalent to the amplitude of the carrier signal. The reference signals were each compared with the carrier signal. If V_{ref1} had exceeded the peak amplitude of $V_{carrier}$, V_{ref2} was compared with $V_{carrier}$ until it had exceeded the peak amplitude of $V_{carrier}$. Then, onward, V_{ref3} would take charge and would be compared with $V_{carrier}$ until it reached zero. Once V_{ref3} had reached zero, V_{ref2} would be compared until it reached zero. Then, onward, V_{ref1} would be compared with $V_{carrier}$.

B. Control System

The control system comprises a MPPT algorithm, a dc-bus voltage controller, reference-current generation, and a current controller.

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

The two main tasks of the control system are maximization of the energy transferred from the PV arrays to the grid, and generation of a sinusoidal current with minimum harmonic distortion, also under the presence of grid voltage harmonics. The proposed inverter utilizes the perturb-and-observe (P&O) algorithm for its wide usage in MPPT owing to its simple structure and requirement of only a few measured parameters. It periodically perturbs (i.e., increment or decrement) the array terminal voltage and compares the PV output power with that of the previous perturbation cycle. If the power was increasing, the perturbation would continue in the same direction in the next cycle; otherwise, the direction would be reversed. This means that the array terminal voltage is perturbed every MPPT cycle; therefore, when the MPP is reached, the P&O algorithm will oscillate around it.

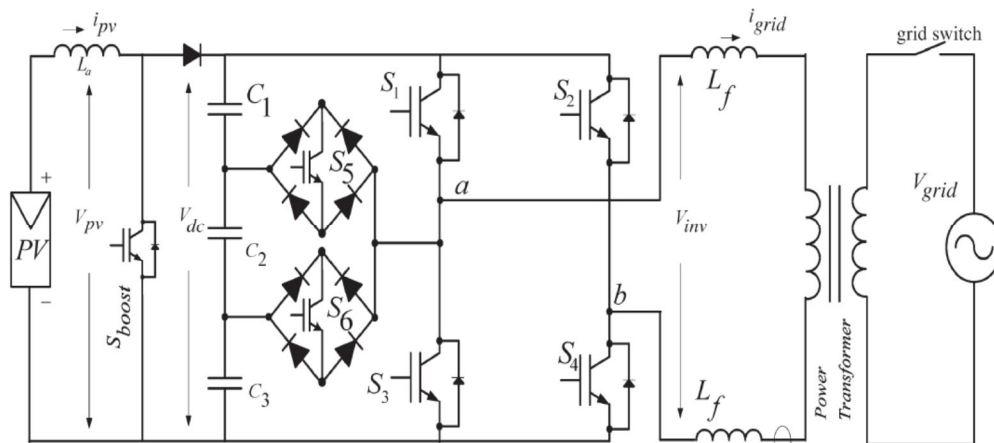


Fig.2.1.
 Boost Power Factor Corrector

III. WORKING OPERATION

A. Introduction about Design Procedure

In order to design the proposed ZVT-ZCT-PWM boost converter, the characteristic curves are obtained by simulations and given in Figs. 4–7. The component values used in snubber cell can be determined from these curves

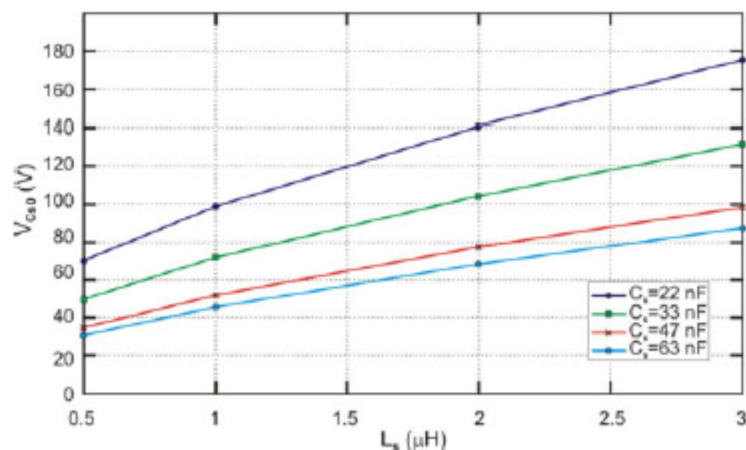


Fig 3.1 Variation of V_{C_s0} with L_s for different C_s values.

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

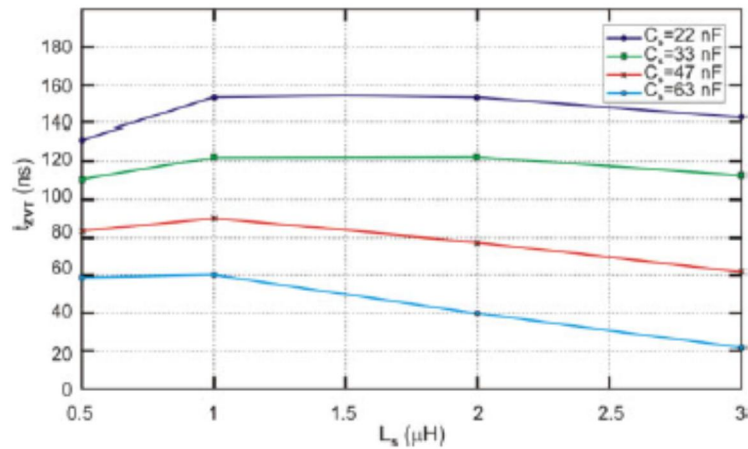


Fig.3.2 Variation of the t_{ZVT} with L_s for different C_s values.

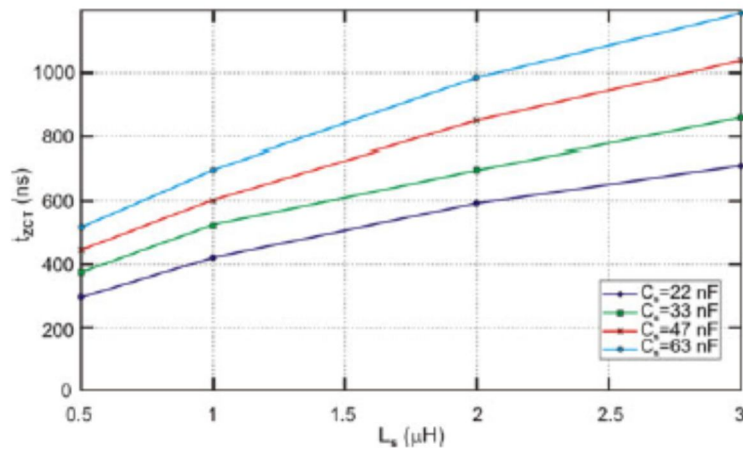



Fig.3.3 Variation of t_{ZCT} with L_s for different C_s values.

The characteristic curves are obtained depending on L_s and C_s at nominal output power. From Fig. 4, it is seen that the maximum value of the main switch current $IS1_{max}$ decreases when the value of L_s snubber inductance increases. It decreases slightly when the value of C_s snubber capacitance increases. In Fig. 5, the initial voltage of the snubber capacitor decreases with increasing C_s , and increases with increasing L_s . In Fig. 6, the ZVT duration of the main switch is shown depending on L_s and C_s . From the figure, it is seen that the ZVT interval decreases when L_s and C_s increases. In Fig. 7, the variation of the ZCT duration of the main switch is given. The ZCT duration increases when C_s and L_s increases. The ZCT duration strongly depends on the resonance between L_s and C_s . The smallest values of L_s and C_s components are preferred from the characteristic curves. If the selected component values are high, the sum of the transient intervals and conduction losses increase. We have to take into account that current stress of the main switch should remain at reasonable level.

IV. OUTPUT

A. Simulation Diagram

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

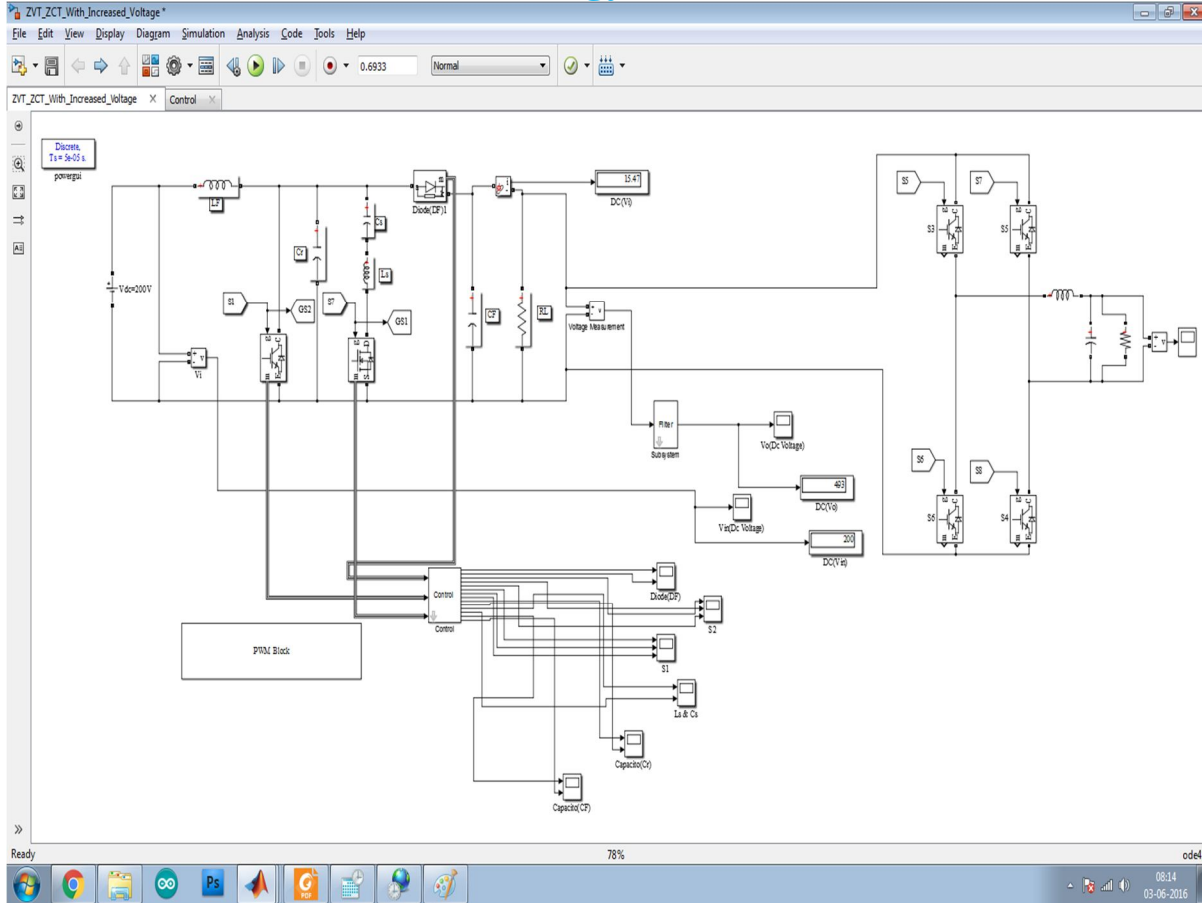

B. Input Waveforms

Input Voltage

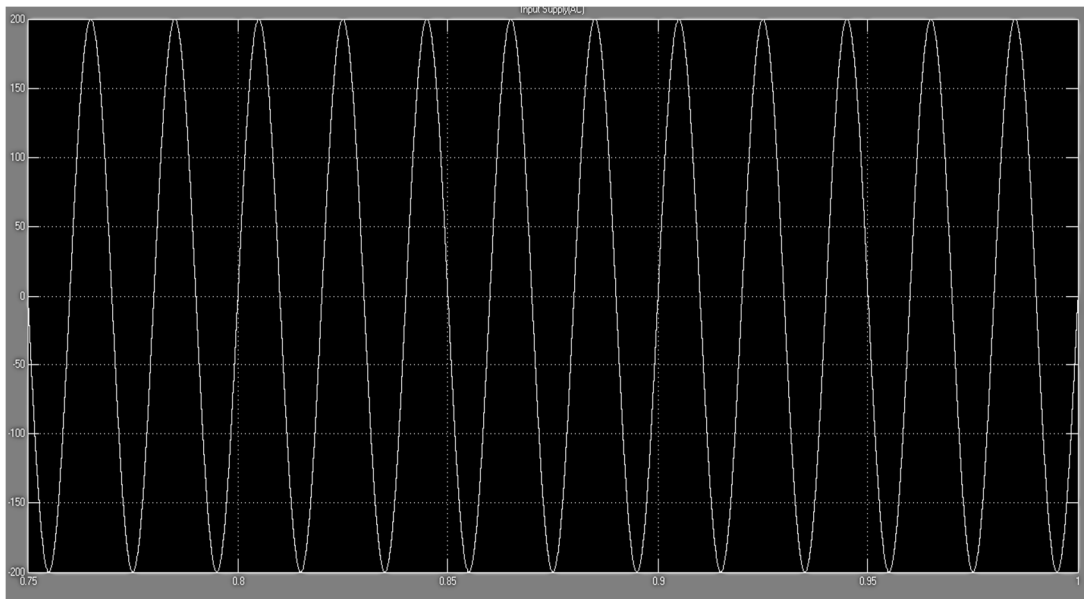


Fig.4.1.Input AC Voltage- 200Vac

C. Corresponding Improvement In Voltage And Current

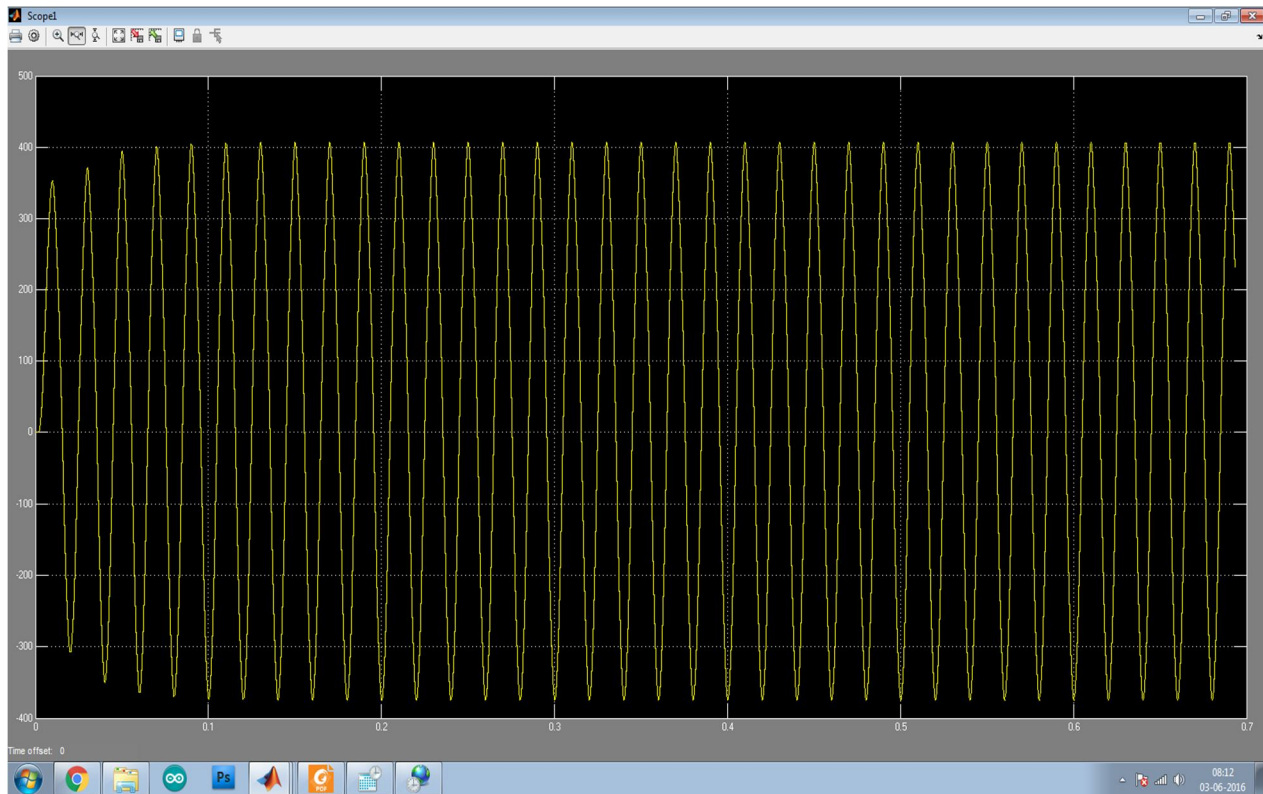


Fig.4.2.Output AC Voltage- 400Vac

V. CONCLUSION

The proposed converter, all semiconductor devices are switched under soft switching. In the ZVT and ZCT processes, the auxiliary switch is turned ON under ZCS and is turned OFF with ZCT and near ZCS, respectively. There is no additional voltage stress across the main and auxiliary switches. The main diode is not subjected to any additional voltage and current stresses. The operation principles and steady-state analysis of the proposed converter are presented. In order to verify the theoretical analysis, a prototype of the proposed circuit is realized in the laboratory. The novel ZVT-ZCT-PWM boost converter using the proposed snubber cell has desired features of the ZVT and ZCT converters. At nominal output power, the converter efficiency reaches approximately to 97.8%. The modifications done from the phase 1 is the ripples from the Converter Outputs is reduced by using filter circuit. The corresponding Voltage is increased by 493V dc output from the converter. The Diode ripple voltage is reduced and the Output from the inverter is increased by 30% up to 400V ac. The Harmonics is maintained at 10%.

VI. ACKNOWLEDGEMENT

We thank **Mrs. B.Gowdhami M.E, HOD (Department of Electrical and Electronics Engineering)** to help us for creating this paper with her sincere guidance and Technical Expertise in the field of communication. The help of our HOD **Mrs. B.Gowdhami M.E, Department of EEE, PRIST University**, is really immense and once again we thank her for her great motivation. We thank PRIST University Thanjavur, Chennai Campus to provide us such a standard educational environment so that we are able to understand the minute concepts in the field of Engineering.

REFERENCES

- [1] M. Calais and V. G. Agelidis, "Multilevel converters for single-phase grid connected photovoltaic systems—An overview," in Proc. IEEE Int. Symp.
- [2] S. B. Kjaer, J. K. Pedersen, and F. Blaabjerg, "A review of single-phase grid connected inverters for photovoltaic modules," IEEE Trans. Ind. Appl., vol. 41, no. 5, pp. 1292–1306, Sep./Oct. 2005.
- [3] P. K. Hinga, T. Ohnishi, and T. Suzuki, "A new PWM inverter for photovoltaic power generation system," in Conf. Rec. IEEE Power Electron. Spec. Conf., 1994, pp. 391–395.

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

- [4] Y. Cheng, C. Qian, M. L. Crow, S. Pekarek, and S. Atcitty, "A comparison of diode-clamped and cascaded multilevel converters for a STATCOM with energy storage," *IEEE Trans. Ind. Electron.*, vol. 53, no. 5, pp. 1512–1521, Oct. 2006.
- [5] M. Saeedifard, R. Iravani, and J. Pou, "A space vector modulation strategy for a back-to-back five-level HVDC converter system," *IEEE Trans. Ind. Electron.*, vol. 56, no. 2, pp. 452–466, Feb. 2009.
- [6] S. Alepuz, S. Busquets-Monge, J. Bordonau, J. A. M. Velasco, C. A. Silva, J. Pontt, and J. Rodríguez, "Control strategies based on symmetrical components for grid-connected converters under voltage dips," *IEEE Trans. Ind. Electron.*, vol. 56, no. 6, pp. 2162–2173, Jun. 2009.
- [7] J. Rodríguez, J. S. Lai, and F. Z. Peng, "Multilevel inverters: A survey of topologies, controls, and applications," *IEEE Trans. Ind. Electron.*, vol. 49, no. 4, pp. 724–738, Aug. 2002.
- [8] J. Rodríguez, S. Bernet, B. Wu, J. O. Pontt, and S. Kouro, "Multilevel voltage-source-converter topologies for industrial medium-voltage drives," *IEEE Trans. Ind. Electron.*, vol. 54, no. 6, pp. 2930–2945, Dec. 2007.
- [9] M. M. Renge and H. M. Suryawanshi, "Five-level diode clamped inverter to eliminate common mode voltage and reduce dv/dt in medium voltage rating induction motor drives," *IEEE Trans. Power Electron.*, vol. 23, no. 4, pp. 1598–1160, Jul. 2008.
- [10] E. Ozdemir, S. Ozdemir, and L. M. Tolbert, "Fundamental-frequency modulated six-level diode-clamped multilevel inverter for three-phase stand-alone photovoltaic system," *IEEE Trans. Ind. Electron.*, vol. 56, no. 11, pp. 4407–4415, Nov. 2009.
- [11] T. W. Kim, H. S. Kim, and H. W. Ahn, "An improved ZVT PWM boost converter," in *Proc. 31th Power Electron. Spec. Conf.*, vol. 2, Galway, Ireland, 2000, pp. 615–619.
- [12] H. Bodur and A. F. Bakan, "A new ZVT-PWM DC-DC converter," *IEEE Trans. Power Electron.*, vol. 17, no. 1, pp. 40–47, Jan. 2002.
- [13] H. Yu, B. M. Song, and J. S. Lai, "Design of a novel ZVT soft-switching chopper," *IEEE Trans. Power Electron.*, vol. 17, no. 1, pp. 101–108, Jan. 2002.
- [14] D. Y. Lee, M. K. Lee, D. S. Hyun, and I. Choy, "New zero-current transition PWM DC/DC converters without current stress," *IEEE Trans. Power Electron.*, vol. 18, no. 1, pp. 95–104, Jan. 2003.
- [15] H. Bodur and A. F. Bakan, "A new ZVT-ZCT-PWM DC-DC converter," *IEEE Trans. Power Electron.*, vol. 19, no. 3, pp. 676–684, May 2004.
- [16] A. F. Bakan, H. Bodur, and I. Aksoy, "A novel ZVT-ZCT PWM DC-DC converter," in *Proc. 11th Eur. Conf. Power Electron. Appl.*, Sep. 2005, pp. 1–8.
- [17] C. M. Wang, "Novel zero-voltage-transition PWM DC-DC converters," *IEEE Trans. Ind. Electron.*, vol. 53, no. 1, pp. 254–262, Feb. 2006.
- [18] W. Huang and G. Moschopoulos, "A new family of zero-voltage-transition PWM converters with dual active auxiliary circuits," *IEEE Trans. Power Electron.*, vol. 21, no. 2, pp. 370–379, Mar. 2006.
- [19] P. Das and G. Moschopoulos, "A comparative study of zero-current transition PWM converters," *IEEE Trans. Ind. Electron.*, vol. 54, no. 3, pp. 1319–1328, Jun. 2007.
- [20] H. Wannian, G. Xing, S. Bassan, and G. Moschopoulos, "Novel dual auxiliary circuits for ZVT-PWM converters," *Can. J. Electr. Comput. Eng.*, vol. 33, pp. 153–160, Summer-Fall 2008.
- [21] I. Aksoy, H. Bodur, and A. F. Bakan, "A new ZVT-ZCT-PWM DC-DC converter," *IEEE Trans. Power Electron.*, vol. 25, no. 8, pp. 2093–2105, Aug. 2010.
- [22] E. Adib and H. Farzanehfard, "Family of zero-voltage transition pulse width modulation converters with low auxiliary switch voltage stress," *IET Power Electron.*, vol. 4, pp. 447–453, Apr. 2011.
- [23] W. Li, Y. Zhao, Y. Deng, and X. He, "Interleaved converter with voltage multiplier cell for high step-up and high-efficiency conversion," *IEEE Trans. Power Electron.*, vol. 25, no. 9, pp. 2397–2408, Sep. 2010.
- [24] Y. Zhao, W. Li, Y. Deng, and X. He, "Analysis, design, and experimentation of an isolated ZVT boost converter with coupled inductors," *IEEE Trans. Power Electron.*, vol. 26, no. 2, pp. 541–550, Feb. 2011.
- [25] W. Li, W. Li, and X. He, "Zero-voltage transition interleaved high step-up converter with built-in transformer," *IET Power Electron.*, vol. 4, pp. 523–531, May 2011.

Mrs. B.Gowdhami M.E, HOD Department of Electrical and Electronics Engineering, PRIST University, Chennai. She has several years of experience. She published many papers in international journals and conference. Her area of interest is Power Electronics and Drives.



Mr. P. Jeyakumar currently pursues his M.Tech from PRIST University, Chennai from the stream of Power Electronics and Drives. His area of interest is Converters, Boosters latest Power Electronic Innovations.



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)