



IJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 5 Issue: VI Month of publication: June 2017

DOI:

www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com

Image Compression using Variable Size 2D DCT with FPGA platform

Monika Rani Jha¹, Mr. Neeraj Gupta², *Ms. Shruti Karkra²

¹Student, Amity University Gurgaon, Haryana, ²Asst. Prof., Amity University Gurgaon, Haryana

* Corresponding Author

Abstract- The discrete cosine transform (DCT) is basically known as compressing mpeg and jpeg images. The basic reason why it is widely used all over is because of its simplicity and easily computed for faster execution. A lot of research is in progress for faster execution of DCT mean while many of algorithms are also developed for compression of video and images. The ancient technique which is being used for limited sizes of images whether it is Chen's technique or Row column decomposition technique. Hardware implementations are difficult and complicated using these codes, have to go through a lengthy and time taking coding scheme. In this work a new and efficient method is proposed using Simulink system generator due to which codes are automatically generated and hardware implementation has become easy. This architecture is also useful for different size of images. It supports variable size image. The performance analysis of hardware utilization is effectively carried out. The generated codes are generated in Verilog and hardware utilization is carried out by FPGA Virtex 5 xc5v1x110t.

Keywords- DCT, Simulink System Generator, FPGA, Verilog.

I. INTRODUCTION

The discrete cosine transform (DCT) introduced in 1974 by Ahmed *et al.* It has become an intensively useful concept for image, audio filters and video signal processing due to its uses and being adopted in standards like Moving Picture Experts Group (MPEG), Joint Photographic Experts Group (JPEG) [21]. DCT is also playing an important role in digital watermarking [3]. In addition to transforms, the working of the DCT is exactly same to the optimal Karhunen–Loeve Transform (KLT) [11]. For the real-time audio, image and video processing requirement, DCT and inverse DCT (IDCT) are needed [6]. Different algorithms are developed for computation of Discrete cosine Transforms [8]-[9]. The 2D DCT is used for achieving high speed, high throughput and very less latency computing architectures [18]. An effective number of compression methods are present, that are being took to a many applications, as: videophones, compact disc and videoconference, multimedia systems. Such applications calculate the bandwidth of transmission line through the compression applied on such application for use [10]. DCT and IDCT combines a particular sort of attribute that allows essential image compression. Compression for video audio, pictures are applied in both hardware and software utilizations [2].

In any case, the equipment executions are particularly significant for the finish of enormously calculations and may gain a dreadful parcel preferable throughput over programming. Digitalizing the world, a lot of research is going to advance as well save the memory. Image compression has played an important role in commercial photography, industrial imaging & video processing.

Image can contain a large data which can further cause complexity in various applications in image processing. Image compression allows mapping of data from a high space to low space. The objective of image compression is to represent an image with few numbers of bits without losing of any bits containing useful information. Image compression transforms the image from time domain into frequency domain which further helps in saving the memory. The most common technique used for transforming is DCT (discrete cosine transforms). It is a kind of lossy transform where transform is done losing of some extravagant information which has no use & occupying large area of memory. As DCT only contains real part where imaginary part is ignored. This dissertation unfolds an efficient way of 2D-DCT with FPGA implementation.

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

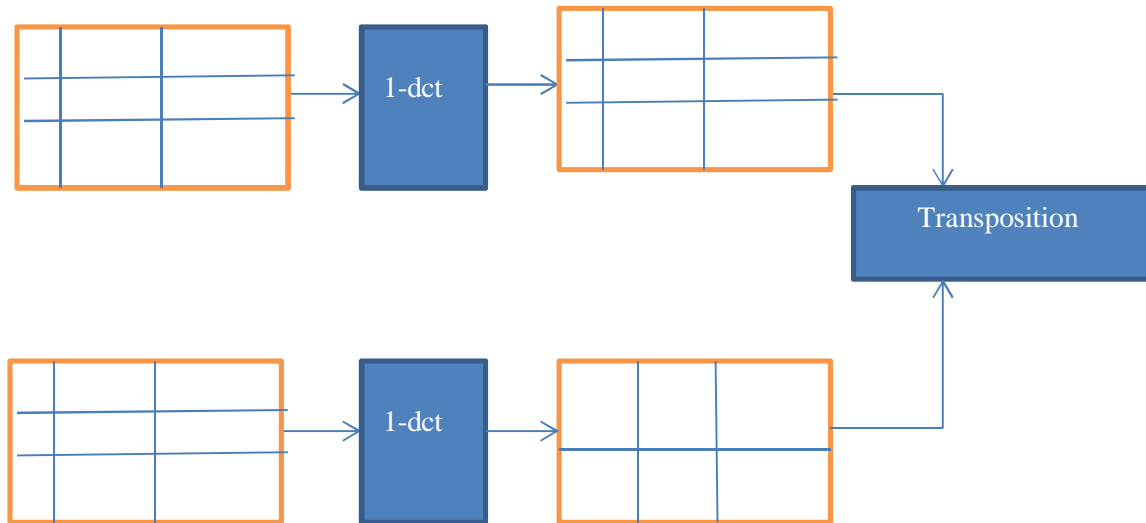


Fig-1 2D DCT

$$A(u) = \sqrt{2}/nc(u) \sum_{x=0}^{n-1} A(x) \cos \frac{(2x+1)u\pi}{2n} \quad u=0, \dots, n$$

$$\text{Where } c(u) = 2^{-\frac{1}{2}} \text{ for } u=0 \\ = 1 \text{ otherwise}$$

Equation-1(1D DCT)³

For calculating 2-DCT

$$A(u,v) = \frac{\sqrt{2}}{n} * \sqrt{2}/m \sum_{i=0}^{n-1} a(i) \sum_{j=0}^{m-1} a(j) \cdot \cos \frac{(2x+1)u\pi}{2n} \cdot \cos \frac{(2x+1)v\pi}{2m} \text{ for } 0 < n < N-1 \\ = 0, \text{ otherwise}$$

Equation-2(2D DCT)⁴

A. Hardware design

- 1) *Xilinx system generator*: Xilinx System Generator (XSG) is an Integrated Design Environment (IDE) for FPGAs within the ISE design suite, which enables using SIMULINK, for a model based design. In real time implementation 2D DCT image processing algorithm can be carried with FPGA boards. Here implementation of 2D DCT is done with Virtex 5 xc5vlx110t device and least resources are used. Once the design is modeled in XSG, Verilog or VHDL code can be generated automatically.
- 2) *Core Generator*: For hardware simulation, the architecture has to be converted to synthesizable code. The entire model is converted to HDL code and then bit file is generated from it. For this model had to be converted to JTAG hardware and software co- simulation. The block shown below in Fig shows the parameters for target device and generate (*.bit) file is generated.

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

II. DESIGN FLOW FOR 2D DCT-

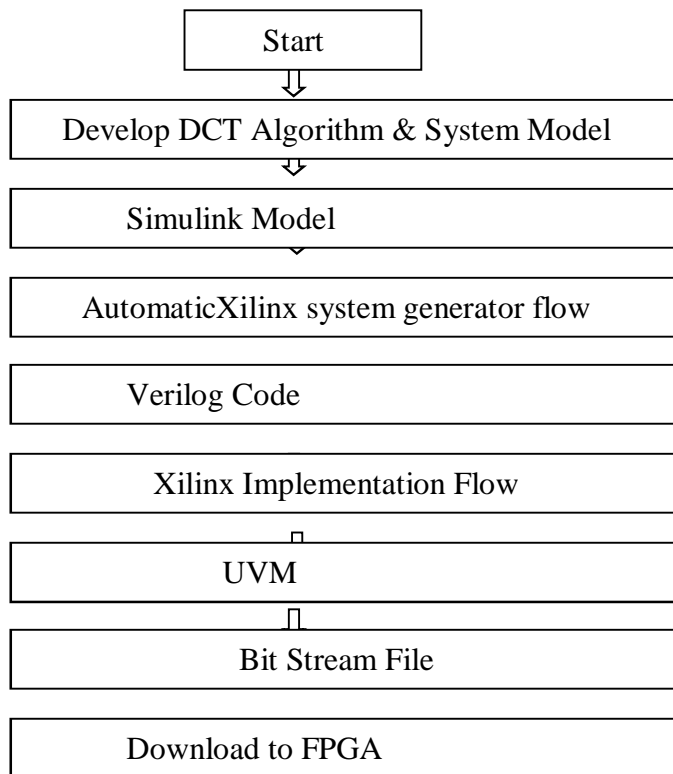


Fig-4 Flow chart for co-simulation

A. Image processing algorithm for compression

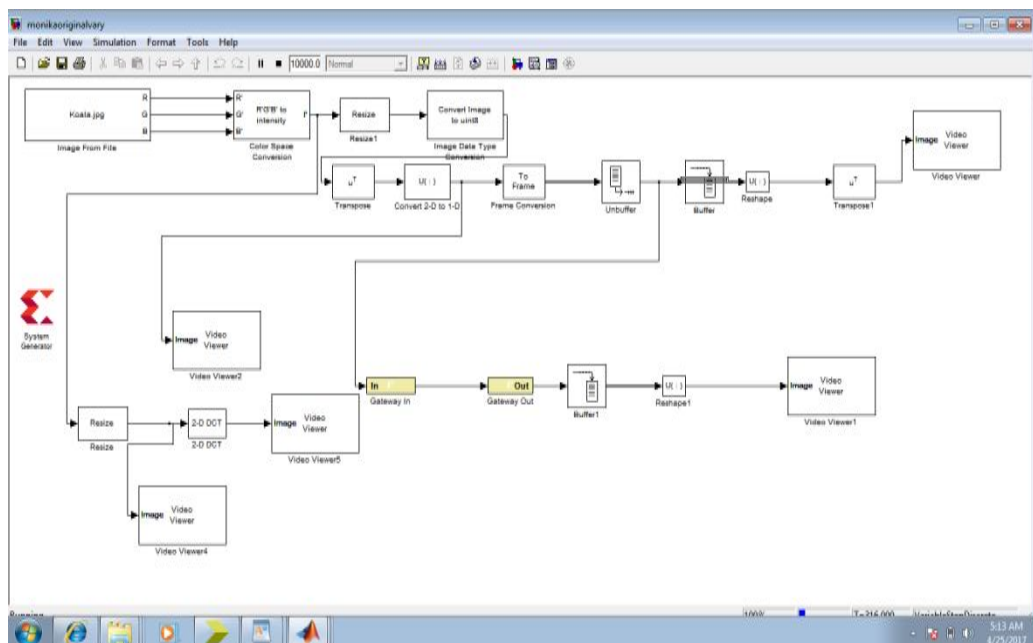


Fig-5 Simulink model for image compression

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

III. RESULT



Image-1

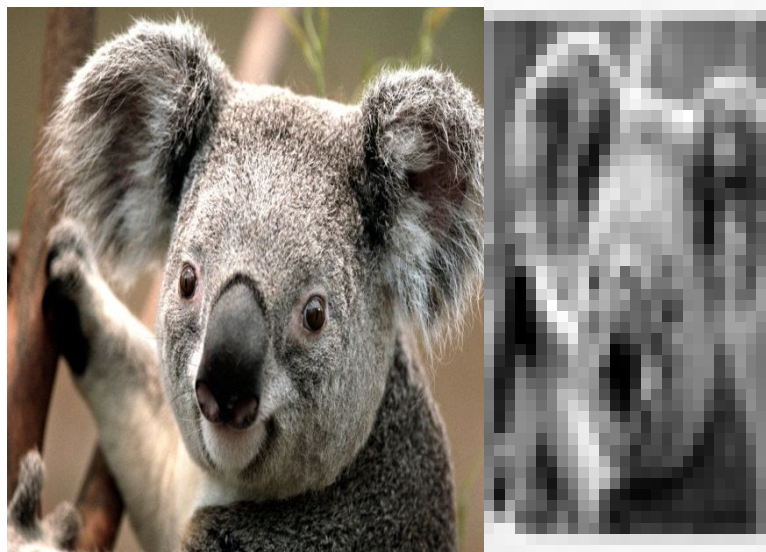


Image-2


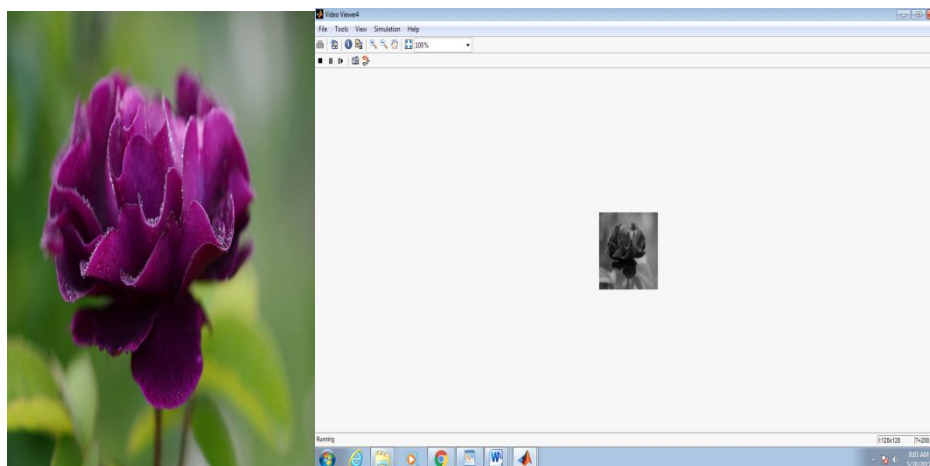


Image-3


International Journal for Research in Applied Science & Engineering Technology (IJRASET)

IV. DISPLAYING THE IMAGE

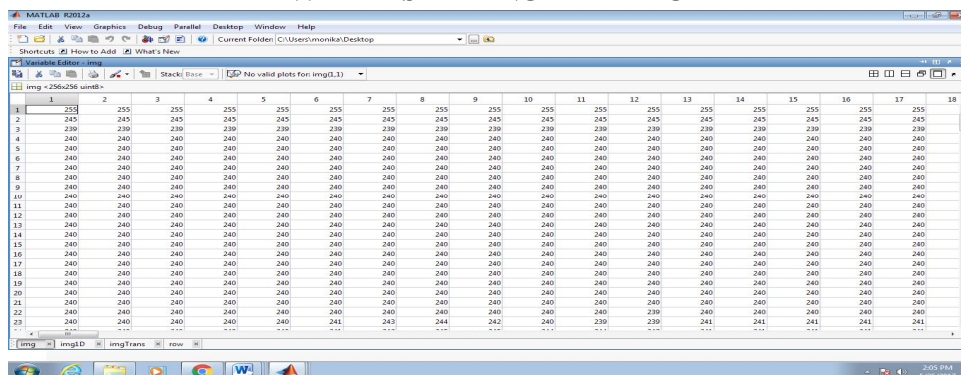


Original image pixel

Convert the pixel into hex file.

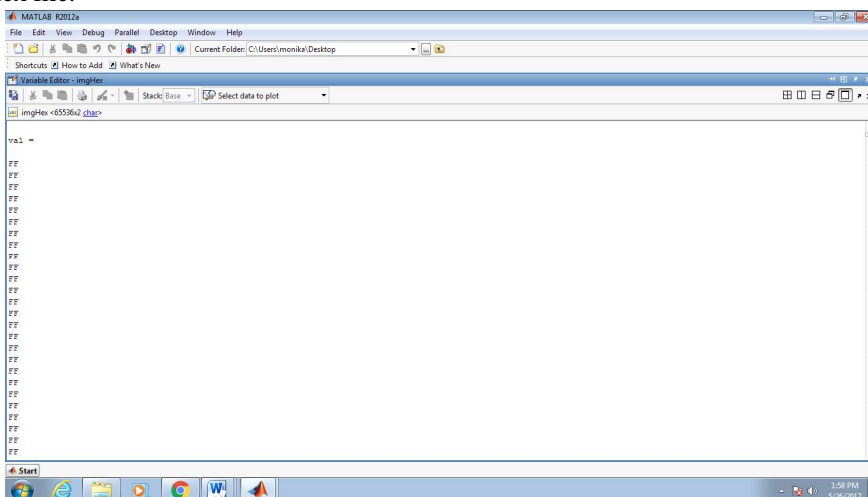


Hex file with extension coe

Read the coe file by setting the write depth.

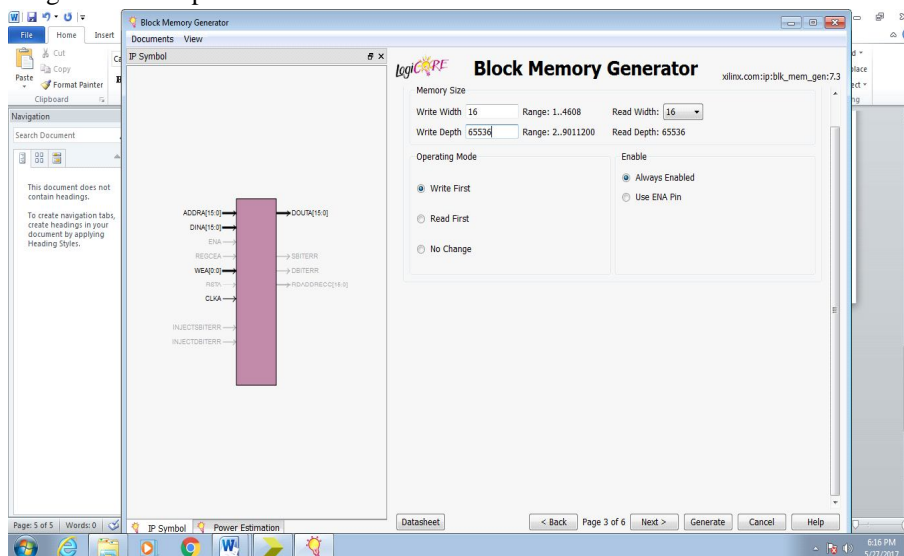


International Journal for Research in Applied Science & Engineering Technology (IJRASET)

Width and Depth specification

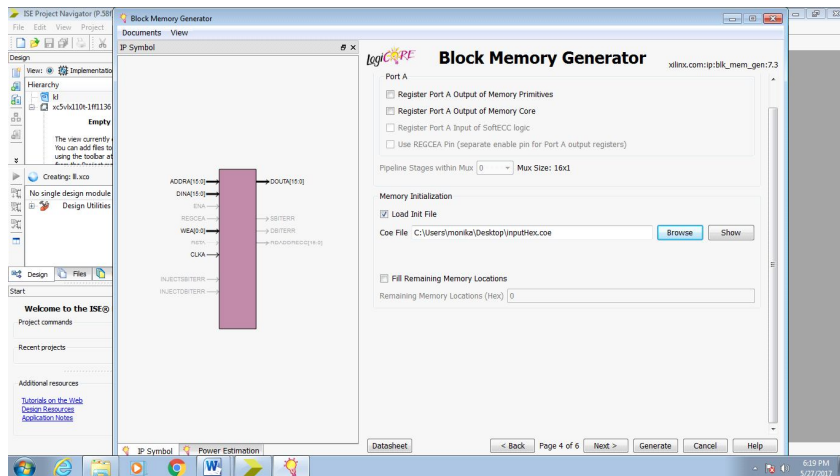

Then click on generate. Xcw and .v file are created, synthesizing .v file we've ngc file. Copy these file to the main module. Generate DCM clock.

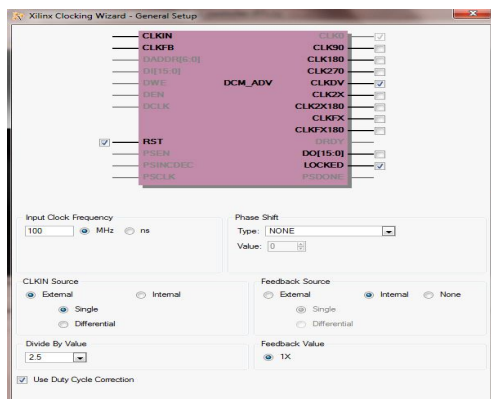

A. DCM clock

The DCM block (Digital clock manager) can be made using IP core and the clocking frequency can also be setup. The other ports can be easily be enabled by just checking it. As shown above the DCM block is designed at 100/2.5 MHz. The phase shift value is given none and clkdv is selected in the block.

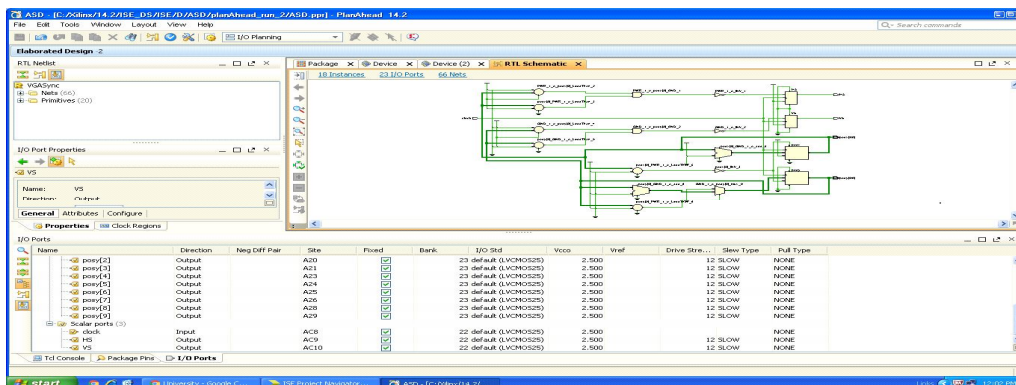


Fig-6. RTL Schematic

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

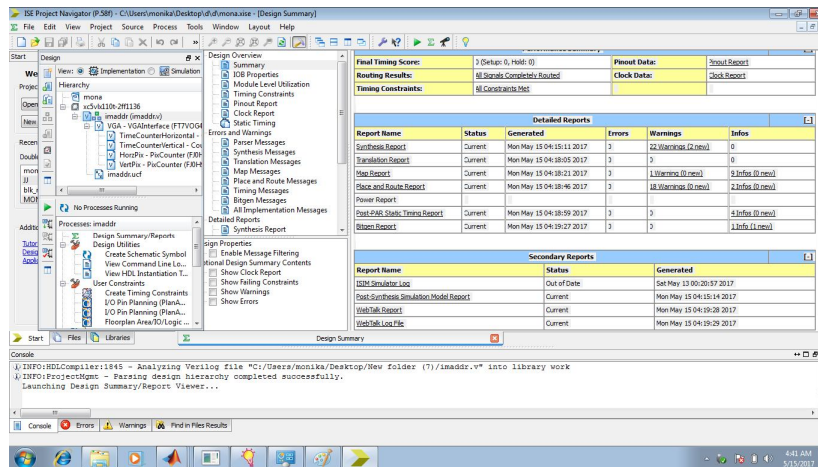
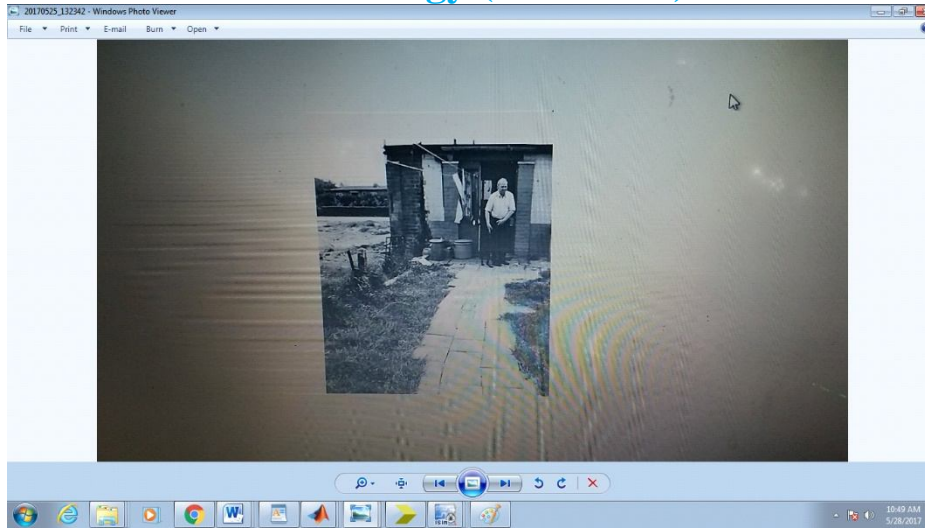


Fig-8 synthesis report


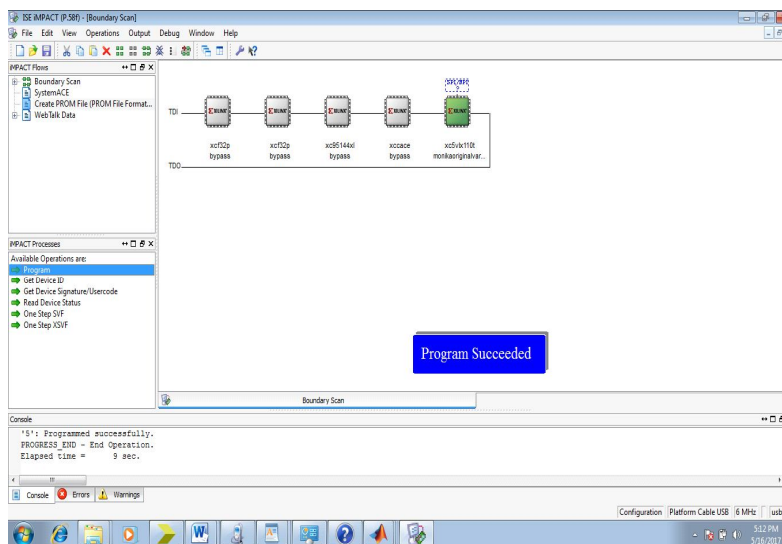


Fig-9 FPGA simulation

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

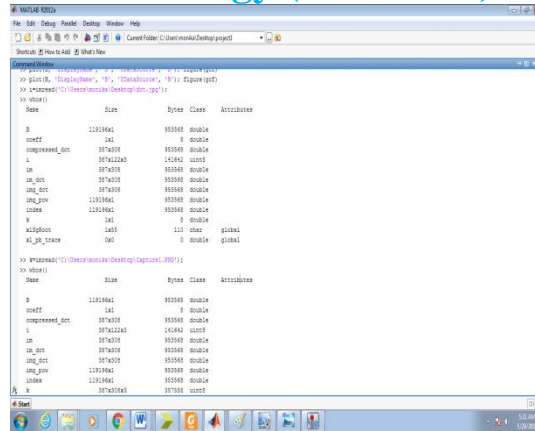

Param	Value
size	1191964
coeff	141
compressed_data	3874030
im	38741243
im_det	3874030
img_det	3874030
img_gov	1191964
index	1191964
k	141
k_size	2483
k_size	2483

Compressed image detail

V. CONCLUSION

The DCT is widely used for compression system. In comparison with different transform which uses lots of multipliers and adder, It needs less multiplier and adders. The total power used in this project is 1.042 w. no. of slices used 1out of 69120. Only 1% is utilized here. This is comparatively low to the previous technique of implementing 2D DCT. 8 luts are used out of 69,120. The utilization is 1%. Which is very less than popular algorithm of chen's of implementing 2D DCT and other algorithm. Total fan out is 1.39 and 34.5% compression is done using this technique.

REFERENCES

- [1] Kathoriya, S. Patel and M. Goyani, "Comparative analysis of DCT and DWT Techniques of image compression," Journal of Information Engineering and Applications, P.P-1-5, VOL. 1, NO. 2 ISSN: 2030-4100, 2011.
- [2] H. L. P. A. Madanayake, R. J. Cintra, D. Onen, V. S. Dimitrov and T. Bruton, "Algebraic integer based 88 2-d DCT architecture for digital video processing," in IEEE International Symposium on Circuits and System, ISSN:20041-20043, 2012.
- [3] M. El Aakif, A. Belkouch, N. Chabini, and M. Hassani, "Low power and fast DCT architecture using Multiplier-less method," in Faible Tension Faible Consommation (FTFC), 2013, P.P- 63–66.
- [4] T. Pradeepthi and P. Ramesh, "Pipelined architecture of 2d-dct, quantization and zigzag process for JPEG image compression using vhdl," International Journal of VLSI design & communication systems (vlsics), VOL. 2, NO. 3, P.P- 99–110, September 2014.
- [5] H.V., Jeyakumar, A. Kasat, P.S., Warty, C., "VLSI design of fast DCTQ-IQIDCT processor for real time image compression," Tenth International Conference on Wireless and Optical Communications Networks (WOCN), VOL.1, NO. 5, P.P-26-28 July 2015. G. Ravi kumar, G. Sateesh Kumar" Implementation of 2-D DCT Architecture for Optimized Area And Power Utilization IOSR Journal of VLSI and Signal Processing (IOSR-JVSP) Volume 5, Issue 4, Ver. I, P.P-11-16, ISSN: 2319 – 4200, Jul - Aug. 2015
- [6] R. Uma, "FPGA implementation of 2D-DCT for JPEG image compression," International Journal of Advanced Engineering Sciences and Technologies (IJAEST), P.P-21-26, VOL. 7, NO.1, 2015.
- [7] R.R.A.S. Narasimha Reddy, T.Madhu "Image Compression Using 1-D, 2-D DCT And 3-D Discrete Cosine Transform" IOSR Journal of Electronics and Communication Engineering (IOSR-JECE) ISSN: 2278-8735. Volume 9, Issue 2, Ver. III (. 2015), P.P-07-1, Mar – Apr, 2015
- [8] P. Kasat, D. Bilaye, H. V. Dixit, R. Balwaik and A. Jeyakumar, "Multiplication Algorithms for VLSI-a review," International Journal on Computer Science and Engineering (IJCSE), VOL. 4, NO. 11, P.P-1761– 1765, Nov., 2015.
- [9] M. Nisha Monnappa & Sonia Kuwelkar" Implementation of Image Compression Using CL-DCT on FPGA" International Journal of Innovative Research in Science, Engineering and Technology Vol. 5, Special Issue 9, May 2016.
- [10] Reem T. Haweel "Fast Approximate DCT with GPU Implementation for Image Compression" Journal Visual Communication, P.P-1414-1415, ISSN- 2100-2125, 7 July 2016.
- [11] Min. Chen" Efficient architecture of variable size HEVC 2D-DCT for FPGA platform" International Journal Electronics and Communication, P.P-1-4, ISSN-2121-2123, 2 Jan 2017
- [12] Text book of "Advance image processing" by Manoj K. Arora.



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)