



IJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 5 Issue: VII Month of publication: July 2017

DOI:

www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com

Implementation of Full Adder using Cmos Logic

Ravika Gupta¹

¹Undergraduate Student, Dept of ECE, G B Pant Government Engineering College, New Delhi 110020, India

Abstract: this paper gives an insight into the use of Complementary Metal Oxide Semiconductor (CMOS) logic which can be made use of to implement various circuits, both combinational and sequential. In this paper, full adder, having three inputs is simulated with the help of P Spice software, and the output waveforms are recorded. CMOS ICs have gained recognition all over the world, due to its power handling capacity, small size and increased speed.

Keywords: CMOS, Full Adder, MOSFET, Net-list, P Spice

I. INTRODUCTION

Very Large Scale Integration (VLSI) Technology has significantly reduced the size of the circuits and now, billions of transistors can be fabricated onto a single chip or an IC. This has in turn, been very advantageous to the industry in terms of increased speed and greater reliability. Logic circuits, both combinational and sequential can be simulated with the help of Personal Simulation Program with Integrated Circuit Emphasis, more commonly abbreviated as P Spice. The waveforms are obtained with the help of probes as per the three inputs given to the circuit in the form of AC voltages.

CMOS logic basically encompass of p-MOS and n-MOS logic, which are complementary to each other. A basic CMOS inverter, which consists of two MOSFETs, is shown in Fig 1. N-MOS is build with n-type source and drain and p-type substrate and p-MOS is build with p-type source and drain and n-type substrate. The majority charge carriers in n-MOS in electrons and that in p-MOS is holes. Due to this, the n-type MOSFETs are usually faster than p-type MOSFETs, since electrons are twice as fast as holes. This also makes n-MOS IC's smaller in size and less immune to noise than p-MOS IC's. While simulating any circuit design, MbreakP and MbreakN models are used for n-MOS and p-MOS respectively.

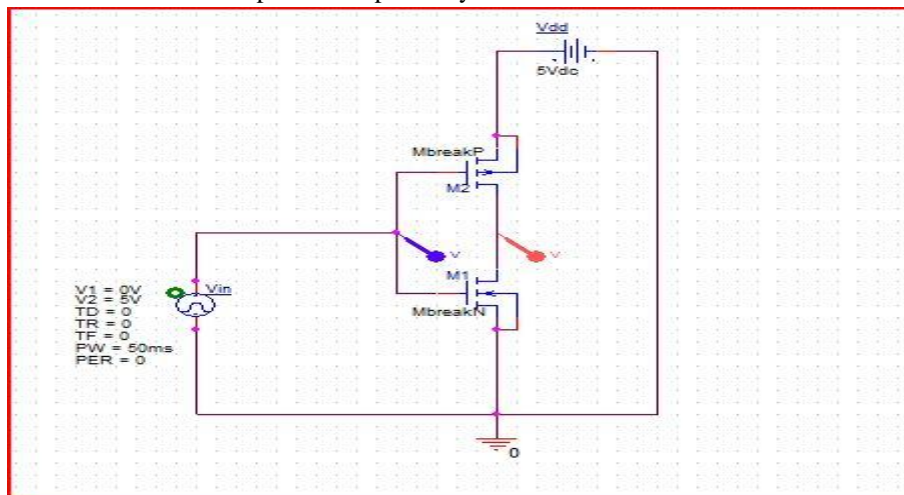


Fig. 1 Circuit diagram of CMOS Inverter

Drain to Source current equation in n-MOS is given by:

$$I_{DS} = \beta V_{DS} (V_{GS} - V_T - V_{DS}/2)$$

II. WORKING AND FUNCTIONALITY

The p-MOS circuit is also known as 'pull-up' network and the n-MOS circuit is called 'pull-down' network. When the input is high, i.e. when $V_{in} = 1$, p-MOS acts as an open circuit and when $V_{in} = 0$, n-MOS acts as an open circuit. This is the reason why p-MOS is efficient to transfer strong logic-1 and n-MOS is efficient to transfer strong logic-0. Also, since no static current flows and there is no such static power dissipation, CMOS can be efficiently used for higher density packages.

III. P SPICE SOFTWARE

Cadence P Spice simulation technology offers its users a single, unified design environment for both, simulation and PCB Design. It offers a vast variety of models that are available for simulation purpose. It is quiet efficient software as it is easy to debug and identify the errors in the model. The components can be dragged and dropped to the design or can be added via the Net-list or the library. This property of rectifying the errors is useful to the designers as it saves a lot of their precious time as well as is cost effective.

A. Pseudo n-MOS Logic

In high density circuits, complex CMOS gates may face a problem due to the large area requirements. To reduce the number of transistors, a single p-MOS transistor with its gate terminal connected to the ground, is used as the load device. The gate terminal of the p-MOS is grounded in order to keep it permanently in ON state. Hence, with a simple pull up arrangement, the complex circuit can be implemented with much fewer transistors. Therefore, in comparison with the CMOS Logic, which consisted of 2N transistors, only N+ 1 transistor are required in Pseudo n-MOS Logic.

Although it reduces the number of transistors, the primary disadvantage of using pseudo n-MOS is the non zero static power dissipation, due to the always ON p-MOS load device conducts a steady state current when the output voltage is less than V_{DD} .

B. Full Adder

Full adder is a combination circuit that adds three 1-bit binary numbers, and outputs two 1-bit binary numbers, representing sum and carry respectively. All the desired components are selected from the library and three AC inputs (0-5V) are provided in terms of AC voltages, all components are wired and the simulation results are compared to the truth table of Full Adder to verify.

INPUTS			OUTPUTS	
A	B	C	SUM	CARRY
0	0	0	0	0
0	0	1	1	0
0	1	0	1	0
0	1	1	0	1
1	0	0	0	0
1	0	1	1	1
1	1	0	1	1
1	1	1	0	1

Fig. 2 Truth Table of Full Adder

The Boolean equation for full adder is given as:

$$\begin{aligned}
 \text{Sum} &= \bar{A}BC + A\bar{B}C + AB\bar{C} + ABC \\
 &= A(\bar{B}C + B\bar{C}) + C(\bar{A}B + AB) \\
 &= A(B \text{ xor } C) + C(A \text{ xnor } B) \\
 &= A \text{ xor } B \text{ xor } C
 \end{aligned}$$

$$\text{Carry} = AB + BC + CA$$

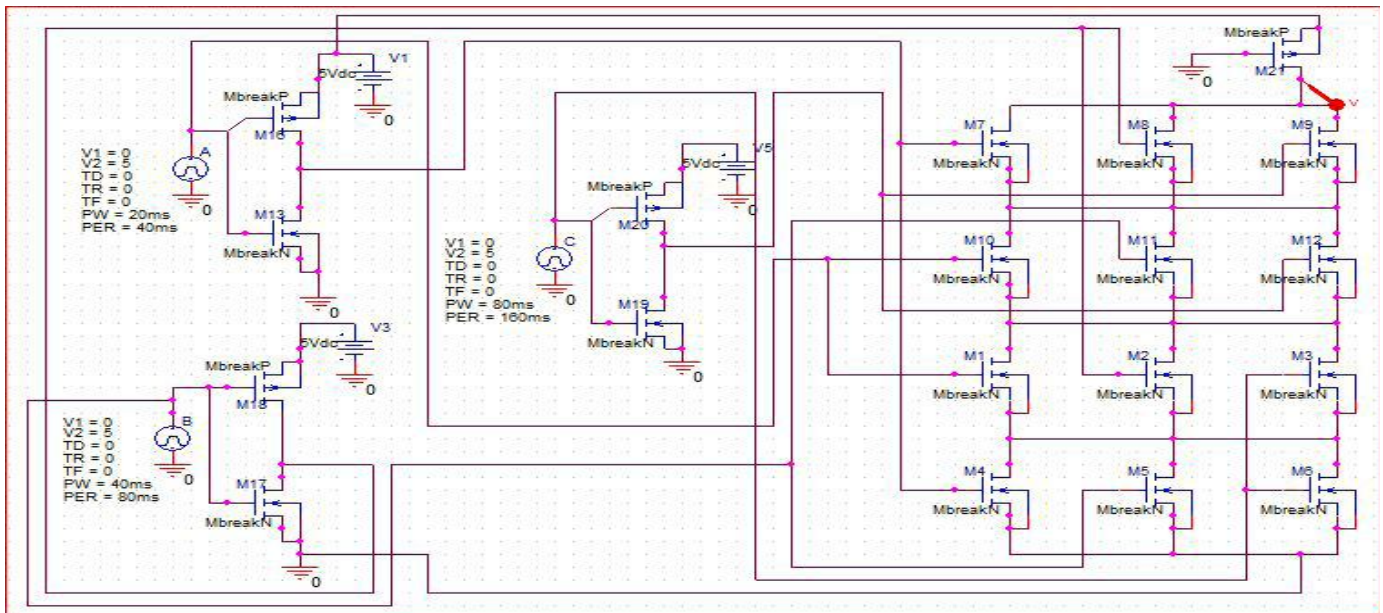


Fig. 3 Design of Full Adder on P Spice (SUM)

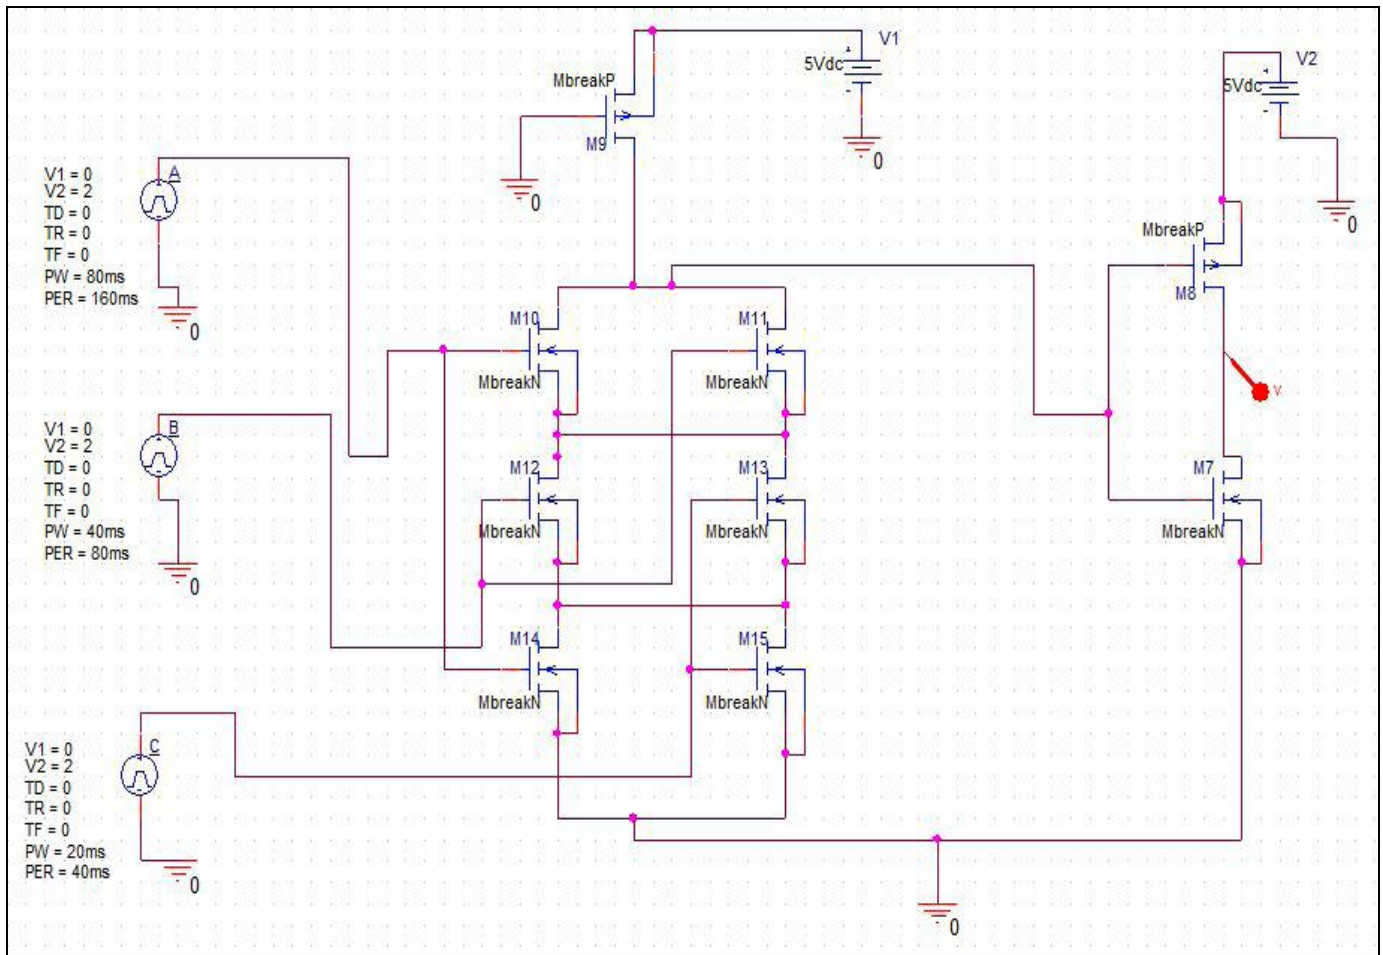


Fig. 3 Design of Full Adder on P Spice (CARRY)

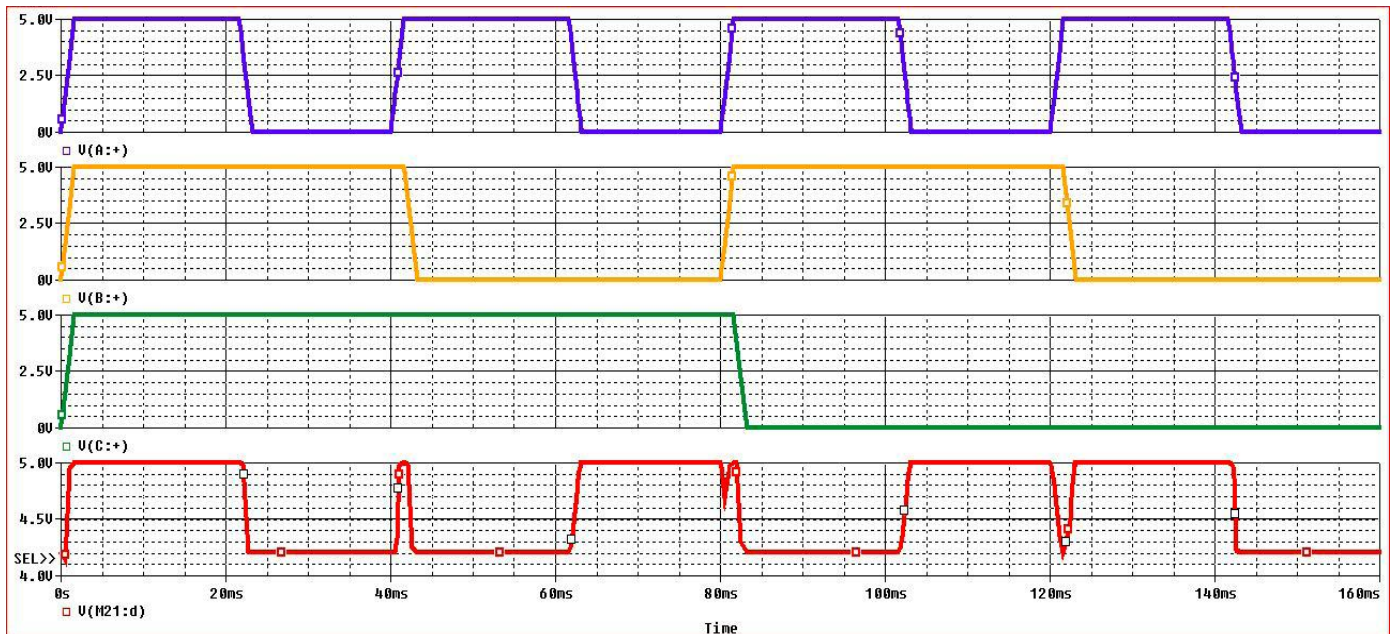


Fig. 4 Output waveform (SUM)

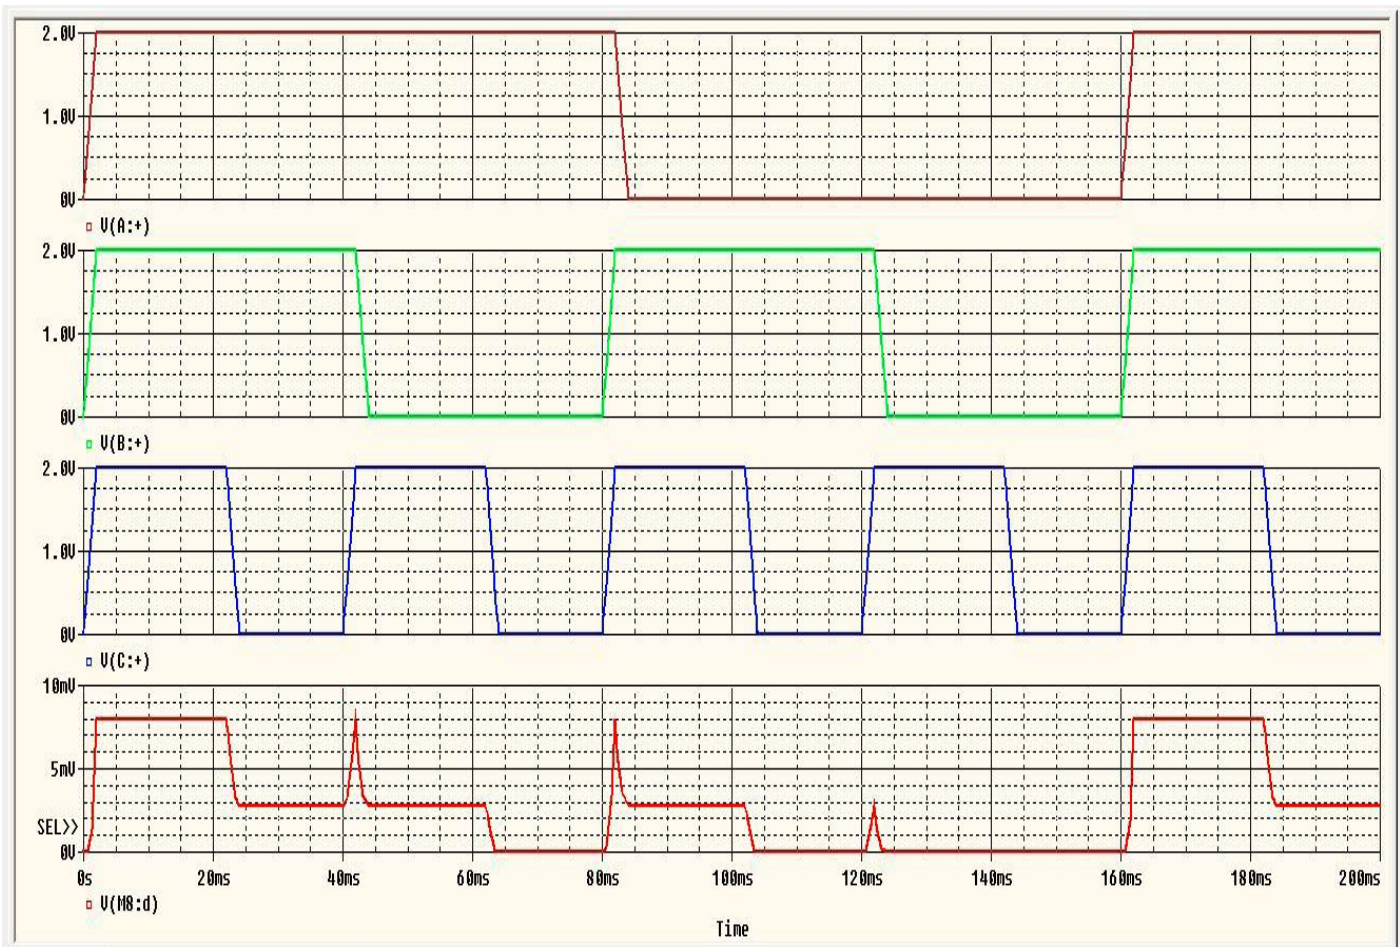


Fig. 4 Output waveform (CARRY)

<pre> 1: * source FULLADDER1 2: M_M12 N30668 N31362 N30672 N30672 MbreakN 3: V_A N31042 0 4: +PULSE 0 5 0 0 0 20ms 40ms 5: M_M8 N30718 N31218 N30668 N30668 MbreakN 6: V_C N31402 0 7: +PULSE 0 5 0 0 0 80ms 160ms 8: M_M5 N30680 N31316 0 0 MbreakN 9: M_M2 N30672 N31218 N30680 N30680 MbreakN 10: V_V5 N31358 0 5Vdc 11: V_B N31316 0 12: +PULSE 0 5 0 0 0 40ms 80ms 13: V_V1 N31030 0 5Vdc 14: M_M18 N31218 N31316 N31184 N31184 MbreakP 15: M_M9 N30718 N31362 N30668 N30668 MbreakN 16: M_M7 N30718 N31034 N30668 N30668 MbreakN 17: M_M3 N30672 N31402 N30680 N30680 MbreakN 18: M_M16 N31034 N31042 N31030 N31030 MbreakP 19: M_M21 N30718 0 N31030 N31030 MbreakP 20: M_M17 N31218 N31316 0 0 MbreakN 21: M_M11 N30668 N31316 N30672 N30672 MbreakN 22: V_V3 N31184 0 5Vdc 23: M_M4 N30680 N31034 0 0 MbreakN 24: M_M10 N30668 N31042 N30672 N30672 MbreakN 25: M_M13 N31034 N31042 0 0 MbreakN 26: M_M19 N31362 N31402 0 0 MbreakN 27: M_M6 N30680 N31402 0 0 MbreakN 28: M_M1 N30672 N31042 N30680 N30680 MbreakN 29: M_M20 N31362 N31402 N31358 N31358 MbreakP </pre>	<pre> 1: * source CARRY 2: M_M7 N00417 N00509 0 0 MbreakN 3: M_M8 N00417 N00509 N00567 N00567 MbreakP 4: M_M9 N00509 0 N00396 N00396 MbreakP 5: V_V1 N00396 0 5Vdc 6: V_A N00930 0 7: +PULSE 0 2 0 0 0 80ms 160ms 8: V_B N00968 0 9: +PULSE 0 2 0 0 0 40ms 80ms 10: V_C N05164 0 11: +PULSE 0 2 0 0 0 20ms 40ms 12: V_V2 N00567 0 5Vdc 13: M_M10 N00509 N00930 N04958 N04958 MbreakN 14: M_M11 N00509 N00968 N04958 N04958 MbreakN 15: M_M12 N04958 N00968 N04927 N04927 MbreakN 16: M_M13 N04958 N05164 N04927 N04927 MbreakN 17: M_M14 N04927 N00930 0 0 MbreakN 18: M_M15 N04927 N05164 0 0 MbreakN </pre>
--	--

(a)

(b)

Fig. 5 Net-list (a) Sum (b) Carry

IV. CONCLUSIONS

Full adder circuit was implemented with the help of P Spice, by using the pseudo n-MOS logic design. Output waveforms, were recorded and the Netlist was obtained which depicts the connection between any two nodes in the circuit. Further it was observed that the circuit worked more efficiently as less number of transistors needed was less as compared to the CMOS logic design. In order to further improve the performance of the circuit, domino and dynamic logic can be used.

V. ACKNOWLEDGMENT

The author wishes to acknowledge the faculty at the institution and her friends and family, without whose support and guidance, it was not possible to complete this paper.

REFERENCES

- [1] Pucknell, 1995, "Basic VLSI Design", 2nd Edition, Prentice Hall of India Publication, New Delhi. 10.
- [2] Wayne Wolf, 2002, "Modern VLSI Design System on chip", 5th Edition, Pearson Education, New Delhi
- [3] Eugene D.Fabricius, 1990, Introduction to VLSI Design, 2nd Edition, McGraw Hill International Editions, New York.
- [4] OrCAD P Spice Software, Cadence Design Systems.
- [5] Zhuang, N. and H. Wu, 1992, —A new design of the CMOS full adderl, IEEE Journal of Solid-State Circuits, 27, 840–844.
- [6] Weste, N. and K. Eshragian, 1993, —Principles of CMOS VLSI Design: A System Perspective, PP: 531



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)