



iJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 6 Issue: V Month of publication: May 2018

DOI: <http://doi.org/10.22214/ijraset.2018.5363>

www.ijraset.com

Call: ☎ 08813907089

E-mail ID: ijraset@gmail.com

Review on Design and Development of Combustion Chamber of Boiler

Akshay Rajendra Bhagat¹, Ganesh Babasaheb Bhagat², Vinod Somnath Bhande³ and Gaurav Suhas Pawar⁴

^{1,2,3,4}Mechanical Engineering Department, GHRCOE, Ahmednagar, Maharashtra, India

Abstract: Boiler is most widely used in industries and power plant for generation of steam .a some portion of world energy consumption is being used in boiler .A small improvement or some small changes in boiler or in combustion chamber we improve the efficiency of the boiler, will help to save the large amount of fuel and also reduce carbon dioxide emission. This efficiency of boiler can be improved by doing some changes in the combustion chamber of the boiler. By using tornado effect.e. most effective method of producing acute turbulence by impingement of one flame on the other flame. By doing the arrangement of burner located in four corner of the furnace, tornado effect is created in the boiler. Due to the arrangement the intensive mixing of fuel and oxygen occurs at the centre, this promoting rapid combustion and reduces carbon loss. By using this arrangement we can increase the boiler efficiency.

Key-Words: Boiler efficiency, Boiler losses, combustion, heat transfer, and tornado effect.

I. INTRODUCTION

This Paper Discusses the design of combustion chamber of boiler by using tornado effect .tornado effect is most effective method of producing acute turbulence by impingement of one flame on other flame .by using the secured arrangement of burner located in four corner of the furnace .the burner located such a way that the streams of air are projected along a tangent to each other .due to this a small fire circle is form at the centre of the furnace. Intensive mixing occurs at thecentre. Due to the scrubbing action is present which assure contact between fuel and oxygen, this promoting rapid combustion and reducing carbon loss.The largeamount of heat produce in the combustion chamber is moves upward direction and uses the heat the water inside the tube. Maximum amount of heat is used to produce the steam.By using this effect we increase combustion rate similarly the maximum heat is used and water is heated in less time. Due to this the frequency of boiler increases.

II. LITERATURE REVIEW

Ronald Hannesen, et.al (1998) ^[1] the data shows cyclonic rotation in the tornado parent cloud. This point preferred area of tornadic activity. Due to the small distance between the tornado and the radar, detailed analysis of the tornadic storm.

Willy Vandermeer (1998) ^[2] this paper provides the basic principles of operation and application of Flame Detectors in multi-burner environment. It guided through the principles of burner and safety systems, the combustion process and burner configuration, flame Detection.

Steve Londerville et.al (2012) ^[3] thispaper describes conversion of Oil to Gas in tangential Fired Utility Furnaces. It included modelling to optimize air flow distribution and predict flame Pattern in the Furnace. Coen equipment includes gas burner, local burner, boiler header, local control panels for the burners.

Joon Ahn¹ and Jong Jin Kim² (2013) ^[4]this paper describes the combustion and heat characteristics inside the combustion chamber of a wood pellet boiler. A firing boiler was developed for wood pellet fuel and its combustion characteristics were tested. Woody biomass is widely available renewable fuel.

Acharya Chirag et.al (2014) ^[5] in this paper boiler losses are studied to improve the efficiency of power plant. Calculating the boiler efficiency is the most important type of performance measurement in any stream of power plant. This paper is determining operating efficiency of boiler and calculates major losses.

M.C.Barma, et.al (2017) ^[6] in this paper boiler energy used, energy saving and emission reduction are explained. Boiler is widely used steam generation system in industries and power plant. A small improvement on the boiler efficiency helps to save large amount of fuel and reduced CO₂ emission.

III. EQUATIONS

$$\text{Boiler Efficiency} = Q^*(H-h)*100/ (q^*GCV)$$

Q = Quantity of Steam Generated per hour (kg/hr.)

q = Quantity of fuel per hour (kg/hr.)

GCV = Gross Calorific value of fuel (kcal/kg)

H = Enthalpy of steam (kcal/kg)

h = Enthalpy of Feed Water (kcal/kg)

IV. CONSTRUCTION OF BOILER

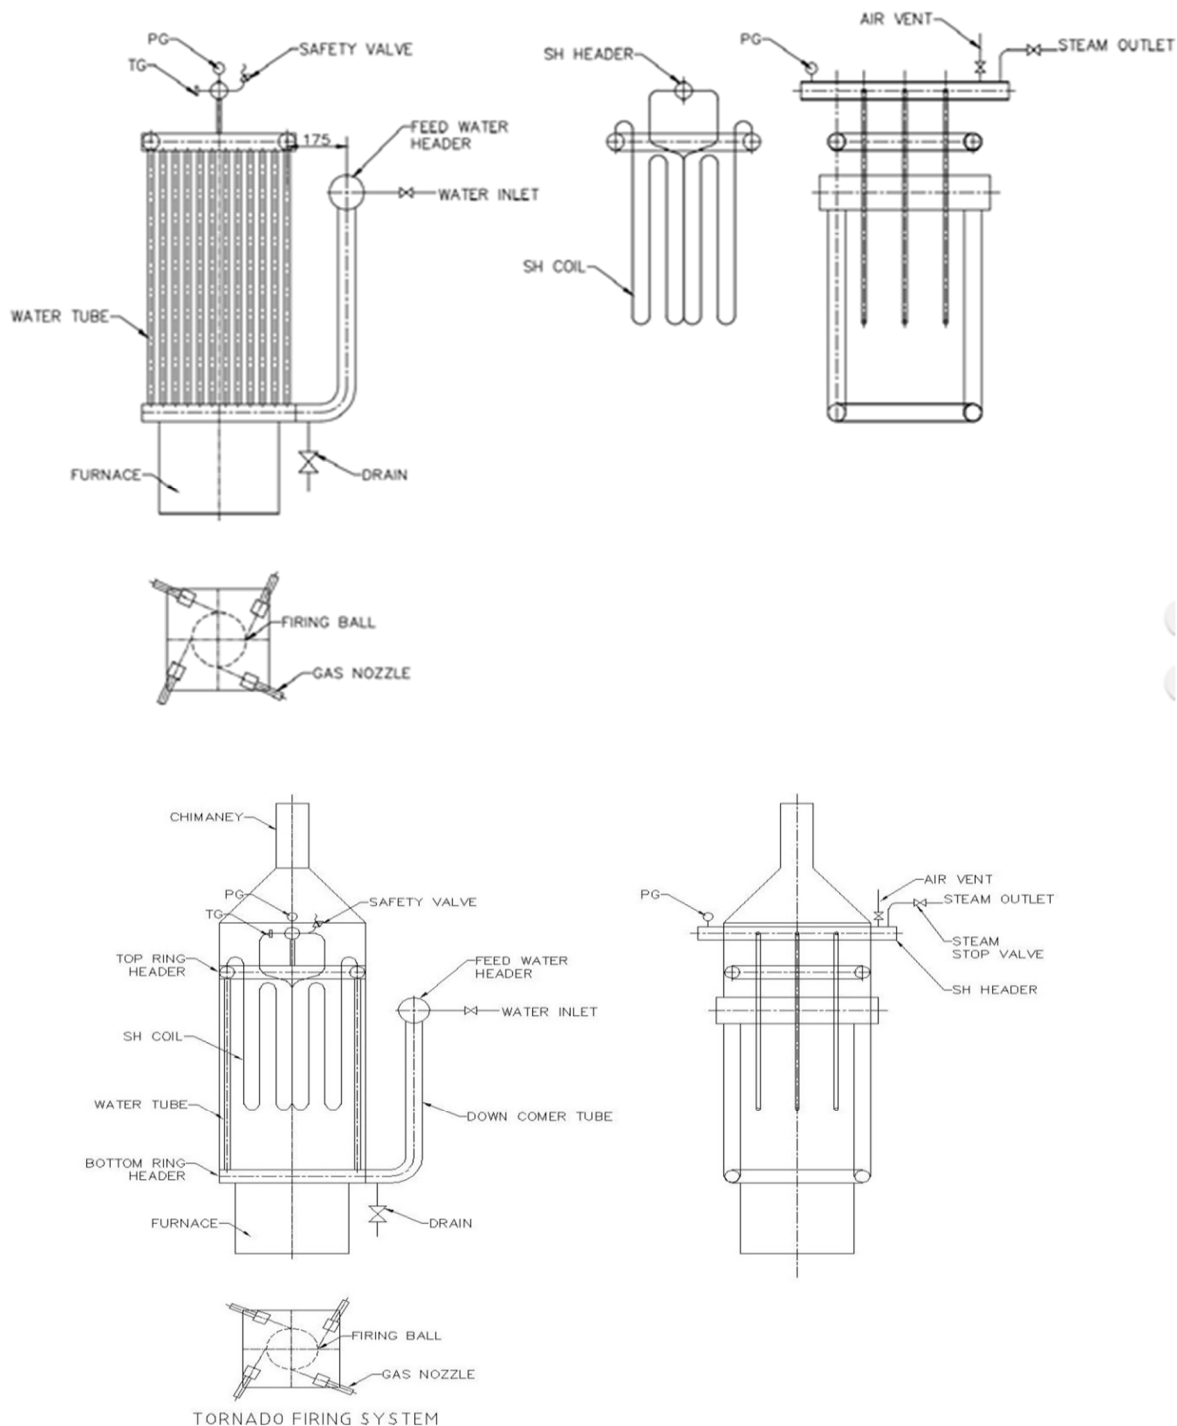


Fig. Shows Construction of Boiler



V. FUTURE SCOPE

In order to achieve the above stated objectives we need to make modern combustion chamber for increasing efficiency of steam power plant by modifying the combustion chamber as per modern industry required.

- A. It is used as boiler in domestic purposes
- B. It is used in industries as boiler
- C. The steam generated by boiler is used to rotate the turbine
- D. It is used in food processing unit
- E. It is used in Milk processing unit.

VI. CONCLUSIONS

Generally in other boilers heat supplied is not totally converted into output. There are many losses occurs in it. In this boiler system maximum heat is utilized due to tornado firing system hence losses reduced at minimum level. Therefore, minimum losses give more output hence efficiency increases orderly. In this way, model design of combustion chamber of boiler is very effective and very efficiently used in various applications.

REFERENCES

- [1] Ronald Hannesen, Nikolai Dotzek, Hermann Gysi, and Klaus D. BehengFZK-InstitutfürMeteorologie und Klimaforschung,Postfach 3640, D-76021 Karlsruhe, Germany
- [2] Willy Vandermeer Flame Safeguard controls in Multi-Burner Environments, WV-96, April-1998
- [3] Steve Londerville and Mike McElroy Coen Company, Inc. Conversion of Tangential Fired Utility Furnaces from Oil to Gas sept 5-7 2012, pp1-2
- [4] Joon Ahn¹, and Jong Jin Kim² Combustion And heat transfer characteristics inside the combustion chamber of wood pellet boiler, ¹School of Mechanical Systems Engineering, Kookmin University, Seoul, 136-702, Korea. ²Korea Institute of Energy Research Daejeon, 305-343, Korea. Received January 16, 201
- [5] Acharya Chirag¹, Prof. Nirvesh Mehta², Prof. Jaspal Dabhi³ Research paper on Analysis of Boiler losses to improve Unit heat rate of coal fired thermal power plant, International Journal of Advance Engineer ing and Research Development (IJAERD) Volume 1, Issue 5, May 2014, e-ISSN: 2348 - 4470 , print-ISSN: 2348-6406.
- A. M.E Student, Dept. Thermal in Mechanical Engineering, LDRP – ITR, Gandhi Nagar.
- B. Dept. of Mechanical Engineering, LDRP-ITR, Gandhi Nagar
- C. Dept. of Mechanical Engineering, LDRP – ITR, Gandhi Nagar
- [6] M.C. Barma^a, R. Saidur^{b,c}, S.M.A. Rahman^d, A. Allouhi^e, B.A. Akash^f, Sadiq M. Sait^g, A review on boilers energy use, energy savings, and emissions reductions,
- A. Department of Mechanical Engineering, University of Malaya, 50603 Kuala Lumpur, Malaysia
- B. Research Centre for Nano-Materials and Energy Technology (RCNMET), School of Science and Technology, Sunway University, No. 5, Jalan Universiti, Bandar Sunway, 47500, Petaling Jaya, Malaysia



- C. Center of Research Excellence in Renewable Energy (CoRE-RE), Research Institute, King Fahd University of Petroleum and Minerals (KFUPM), Saudi Arabia
 - D. Sustainable and Renewable Energy Engineering, University of Sharjah, University City, 27272, Sharjah, United Arab Emirates
 - E. École Supérieure de Technologie de Fès, USMBA, Fès, Morocco
 - F. Department of Mechanical Engineering, American University of Ras Al Khaimah, United Arab Emirates
 - G. Center for Communications and IT Research, Research Institute, King Fahd University of Petroleum and Minerals (KFUPM), Saudi Arabia
- Renewable and Sustainable Energy Reviews 79 (2017) 970–983



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)