



iJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 6 Issue: III Month of publication: March 2018

DOI: <http://doi.org/10.22214/ijraset.2018.3150>

www.ijraset.com

Call: ☎ 08813907089

E-mail ID: ijraset@gmail.com

Analysis of the changes in the performance of Solar Module with the Increase in the Temperature

Usha Mandadapu¹, S. Victor Vedanayakam², K.Thyagarajan³,

¹Research scholar, Department of Physics, Jawaharlal Nehru Technological University, Anantapuramu, Andhrapradesh, India,

² Assistant professor, Department of Physics, Madanapalle Institute of Technology and Science, Madanapalle, A.P, India,

³ Associate professor, Department of Physics, JNTUCEP. Pulivendula, A.P, India.

Abstract: Photovoltaic's are the devices can produce electricity. To study the real behaviour of these devices, an authentication model is required. In this article, MATLAB double diode model is developed using the device physics of solar cell. The Simulink model is analysed at different operation conditions. For this analysis Kyocera data sheet is taken having two modules KD330GX-LFB and KD25GX-LFB contains 80 cells. The above two modules are studied at the temperatures 10⁰C, 20⁰C and 30⁰C. The results are illustrating that as the temperature increases the performance of the model decreases.

Keywords: Data sheet, temperature, MATLAB, simulation, efficiency.

I. INTRODUCTION

Solar energy is the wide range of renewable energy resource. A huge amount of energy is reaching to the earth every day, but a very little amount of energy is utilizing for the mankind. In olden days. Solar energy is utilized for domestic purpose after industrial revolution solar energy is using to produce power. The photovoltaic effect is the phenomena used to produce electrical energy from the solar energy(1). An amount of solar energy i.e. 0.8% of the total energy is using for the power production(2-3). In solar power generation, high cost of solar modules and instability are the limiting factors to use solar power widely. To clear understand the system, numerical modelling of the photovoltaic is becoming a major valuable tool to study the outdoor behaviour of solar cells. Many scientists have been developed the MATLAB models which is an authenticate the real system.

From literature, Longatt. Et. Al(4) developed the circuit based simulation work using the MATLAB, Later Tsai et al developed various MATLAB models(5). Kumari and Babu also developed a MATLAB model to extract the parameters using the I-V equation. In this work a double diode MATLAB model is developed using fundamental equations.

The required resistance parameters are extracted using the newton-rapshon method. To validate the developed Simulink model MATLAB results are compared with an experimental data sheet. Got good coincidence with the practical values. This work mainly focussed on the influence of operating temperature on the performance of the model.

A. Working of a Photovoltaic Cell

Solar cell works on the principal of photovoltaic effect. Most of the solar cells are made with silicon. There are various types of silicon materials are available in the market those are mono crystalline silicon, poly crystalline materials, amorphous silicon.

When sunlight falls on the semi conducting material, The photons from the incident radiation pulls out the electrons from their respective places, leaving a vacant place called as holes. The produced electrons and holes will move toward opposite contacts.

The photovoltaic effect is the combination of four steps those are carrier generation, carrier dissociation, carrier transport, collection. In some photo voltaic materials in place of electrons and holes, excitons will produce and later separates into electrons and holes. Below diagram explains the movement of electrons and holes from the conduction and valence band.

Solar cell – Working Principle

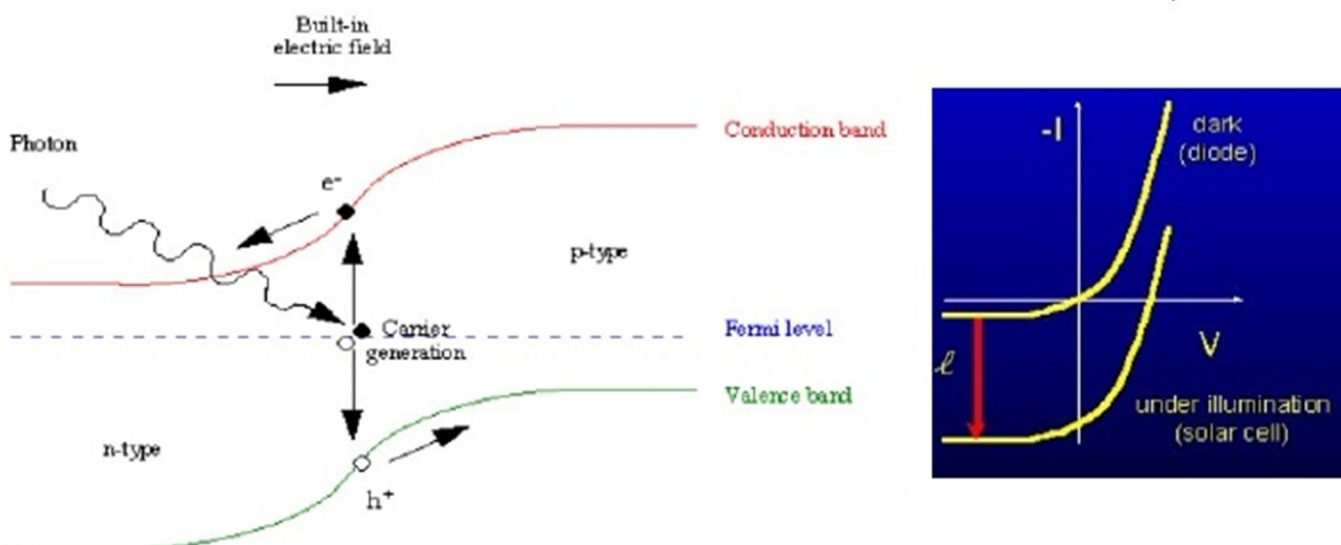


Fig:1 Representation of photovoltaic effect

B. Mathematical Modelling of a Solar Cell

Modelling is the understanding of the real system using simulation tool. In this work MATLAB/Simulink is used for the simulation of photovoltaic module. Mathematical model is developed using the equations of solar cell, which are convertible into the codes for the process of simulation. This type of mathematical models are using from the long back. The commonly used model to predict the performance of the solar cell are the single diode and double diode models having the special features individually(6-13).

The equivalent circuit of double diode solar cell is having a current source, two P-N Junction diodes, series resistance and the parallel resistance(14). In single diode model one diode is present to represent the recombination of charges, but the recombination at the depletion region is also considerable this can be identified using a second diode. Previous investigations are proving that the Double diode model is accurate at the low operating conditions. The series resistance and parallel resistances are added in the circuit. To get best performance series resistance should low and the parallel resistance should high.

C. The Characteristic I-V equation of a PV Cell

To describe the parameters of a solar cell, the equation used is as follows. Simulink model of double diode particularly values of the input parameters are taken from the KYOCERA KD 330 GX-LFB, data sheet(15). The series and shunt resistances are approximated using the newton-rapshon method.

$$I = I_{PV} - I_{O1} \left[\exp\left(\frac{V+IR_S}{a}\right) - 1 \right] - I_{O2} \left[\exp\left(\frac{V+IR_S}{a}\right) - 1 \right] - \frac{V+IR_S}{R_P}$$

I_{PV} = Photo current

I_o = Saturation current

R_S = Series resistance

R_P = Parallel resistance

A = Ideality factor

I = Current

D. Influence of Temperature on KD 330GX-LFB SOLAR Module

Kyocera, KD330GX-LFB is analysed at the constant irradiation and varying temperature. Below graphs are indicating the changes in the photovoltaic parameters of the solar module at fixed 1000W/m^2 , and at the varying temperatures 10°C , 20°C , 30°C . The changes are indicating that as the temperature changes the performance of the device decreases. Increase in the temperature leads to the increase in the band gap of the material. So, requires more energy to cross the barrier. Hence the efficiency of the device decreases(16). When we observe the photovoltaic parameters. Short circuit current(I_{SC}) is almost constant. The major changes are observed in the V_{OC} , P_{MAX} as those are decreasing, proving the non-linear nature of solar module.

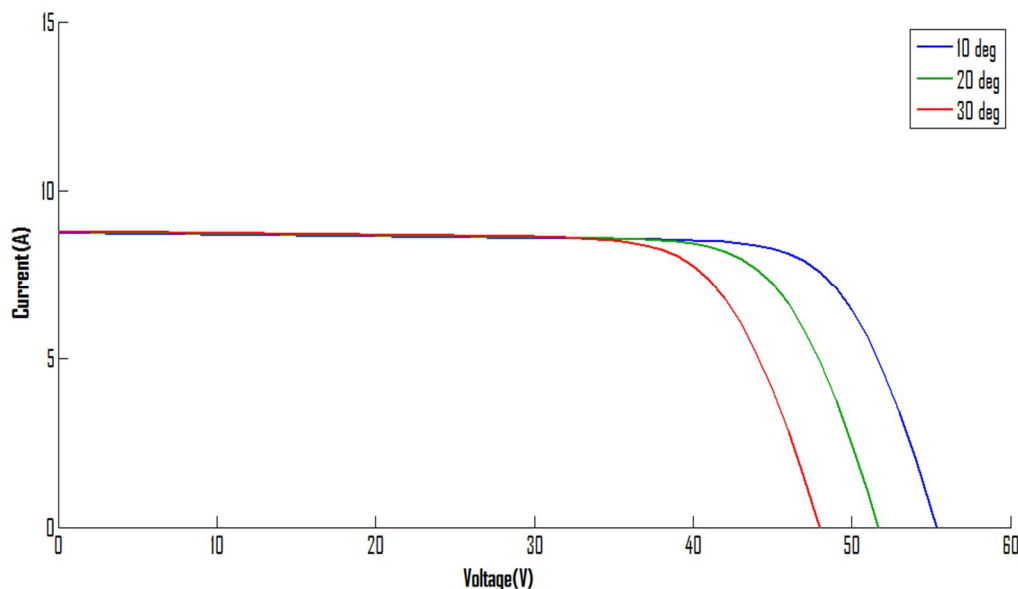


Fig-2: I-V Curve for KD330GX-LFB at different temperatures(10°C , 20°C , 30°C).

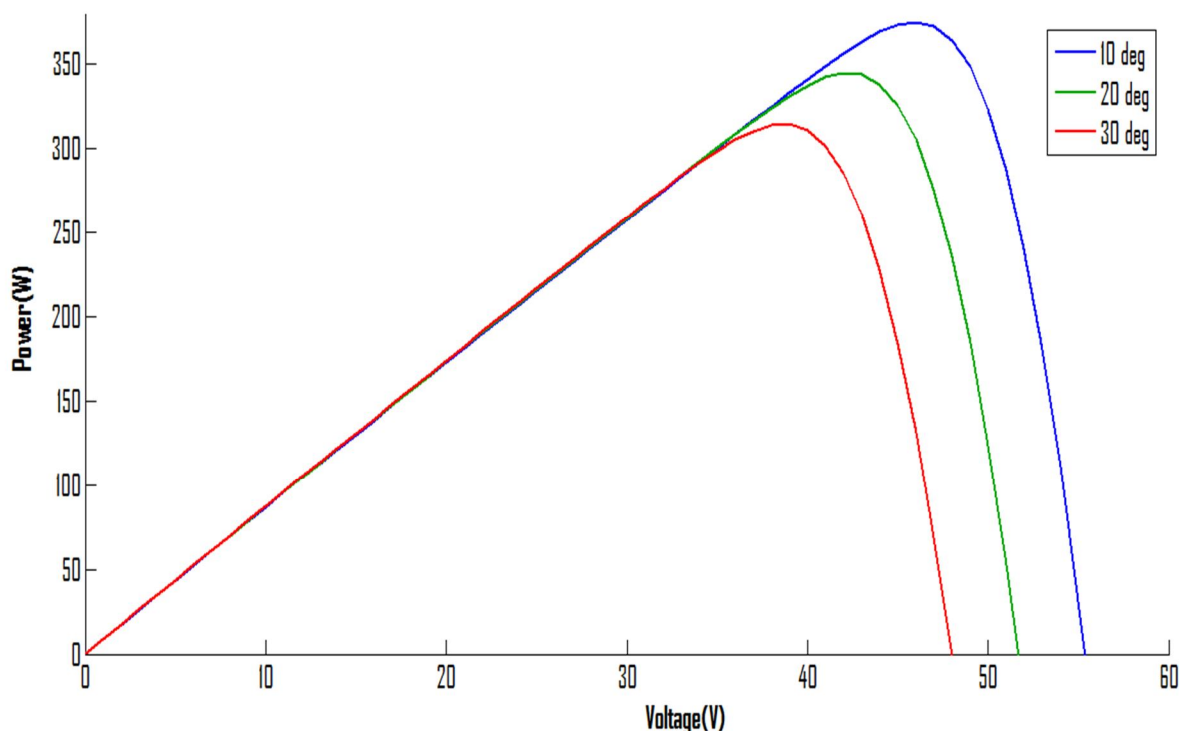


Fig-3: P-V Curve for KD330GX-LFB at different temperatures 10°C , 20°C , 30°C .

E. Influence Of Temperature On Kd 325gx-Lfb Solar Module

The developed mathematical model can be used for any type of solar module. Similarly, here the MATLAB/Simulink model is applied for the KYOCERA KD325GX-LFB solar module to analyse the changes in the performance at different temperatures.

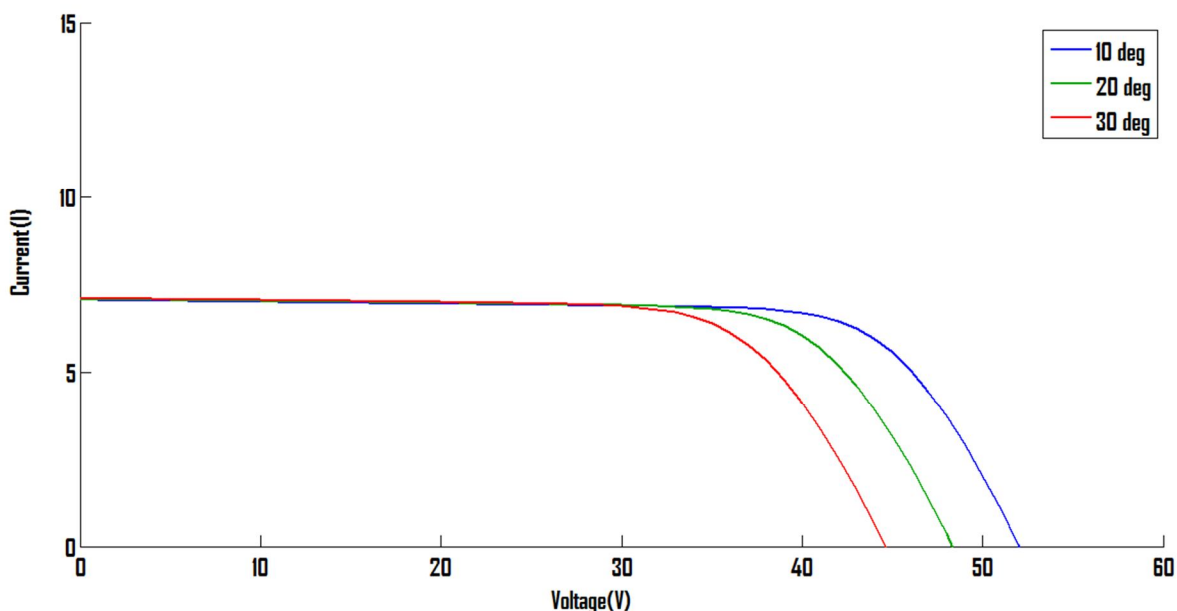


Fig-4: I-V curve for KD325GX-LFB at different temperature(10⁰ C, 20⁰ C, 30⁰ C)

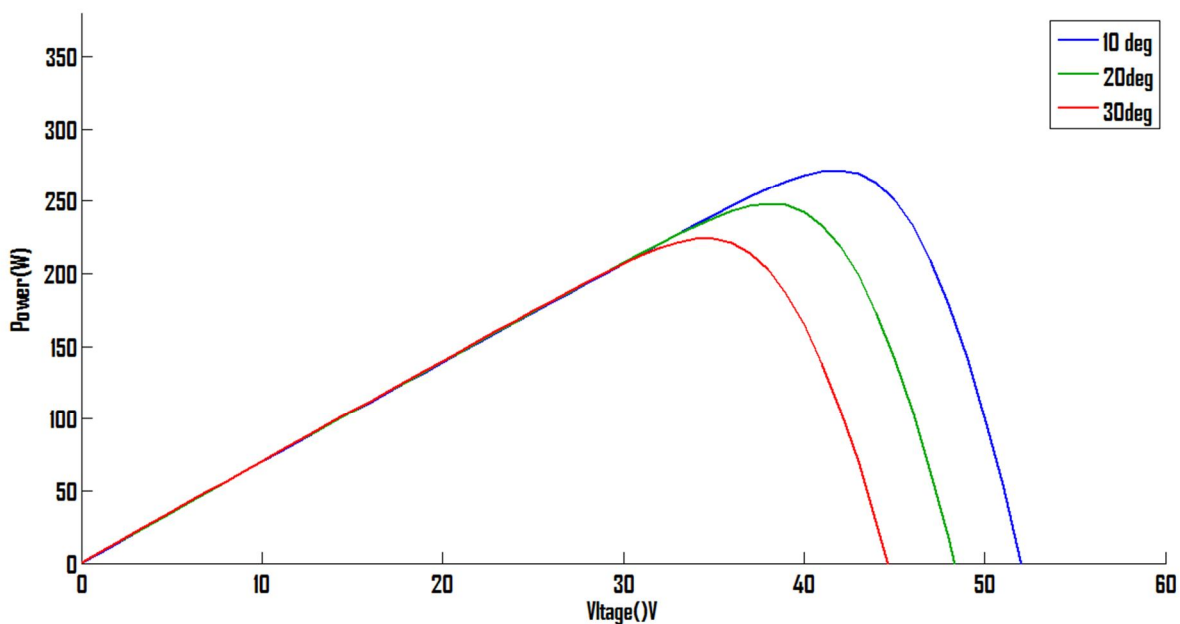


FIG-5: P-V CURVE FOR KD325GX-LFB AT DIFFERENT TEMPERATURES 10⁰ C, 20⁰ C, 30⁰ C.

Same as in the previous case the results are illustrating that as the temperature increases the performance drops. The increase in the temperature is showing the negative impact on the efficiency of the model. Particularly the open circuit voltage is more decreased than the short circuit current because the open circuit voltage is the function of band gap of the material. Temperature increase varies the band gap of material. With the decrease in the open circuit voltage maximum power also decreases, representing the drop

in the performance. Hence at low temperatures the performance is good than at high temperatures. Below graphs clearly illustrating the changes in I-V and P-V curves of Kyocera KD325GX-LFB solar module.

II. CONCLUSION

The developed, Simulink model is applied for the KYOCERA practical solar modules to analyze the changes in the performance of the models. To understand the effect of temperature on the performance of the model, temperature is varied from 10⁰ C, 20⁰ C, 30⁰ C at the fixed irradiance of 1000W/m² for both modules. Following conclusions have been taken out from the above analysis.

A. As the temperature increases open circuit voltage decreases and short circuit current(I_{SC}) remains constant.

B. Maximum output power drops at higher temperature because less number of charges are present.

Hence the temperature increase is showing the negative impact on the performance of both the module.

REFERENCES

- [1] Rai, G.D., Non-Conventional energy sources, Khanna Publishers, New Delhi, 2nd Edition, 2002
- [2] Status of Solar Energy in INDIA – 2010". Retrieved 2011-03-01.
- [3] Physical Progress (Achievements)". Ministry of New and Renewable Energy, Govt. of India. 31 January 2014.
- [4] Longatt, F.M.G, "Model of Photovoltaic Module in Matlab", 2nd International Conference on Ibero american Congress to Electrica
- [5] Tsai, H.L, Tu, C.S and Su, Y.J, "Development of Generalized Photovoltaic Model Using MATLAB/Simulink", Proceedings of the World Congress on Engineering and Computer Science (WCECS '08) San Francisco (USA). 2008 Available at : <http://www.iaeng.org/publication/WCECS2008/WCECS2008>
- [6] Engineering Students, Electronics and Computing (II CIBELEC: 2005), , pp. 1-5, 2005.
- [6] Moreira Soares, AC, Vieira, E., Casaro, M.M. „Simulation of a photovoltaic model using bisection method", pp. 807-811, IEEE Conference on Power Electronics Conference Praiamar Brazilian, 2011.
- [7] Liu, G., Nguang, S.K. Partridge, A. "A general modelling method for I-V characteristics of geometrically and electrically configured photovoltaic arrays". Energy Conversion and Management. Vol. 52, 3439-3445, 2011.
- [8] Yahya, AM., Youm, I. and Kader, A. "Behaviour and performance of a photovoltaic generator in real time". International Journal of Physical Sciences. Vol. 6, 4361-4367, 2011.
- [9] Ishaque, K., Salam, Z. and Taheri, H., "Simple, fast and accurate two-diode model for photovoltaic modules", Energy Materials and Solar Cells. Vol. 95, pp. 586-594, 2011.
- [10] Ransome, S. „Comparing PV simulation models and methods with outdoor measurements", Solar, pp. 2306-2311, 2010.
- [11] Villalva, M.G., Gazoli, J.R. Filho, E.R. "Modelling and circuit-based simulation of photovoltaic arrays", Brazilian Journal of Power Electronics, Vol. 14, Issue 1, 35-45, 2009.
- [12] Villalva, MG, Gazoli, JR., Filho, ER., Comprehensive Approach to Modeling and Simulation of Photovoltaic Arrays. IEEE Transaction on Power Electronics. Vol. 24 No. 5, pp.1198-1208, 2009.
- [13] Gil-Arias, O., and Ortiz-Rivera, EI., "A general purpose tool for simulating the behaviour of PV solar cells, modules and arrays", IEEE Conference on Control and Modeling for Power Electronics, Zurich PP.1 – 5, 2008
- [14] (45) Bonkougou, D., Koalaga, Z. and Njomo, D. „Modelling and simulation of photovoltaic module considering single-diode equivalent circuit model in MATLAB" International Journal of Emerging Technology and Advanced Engineering (IJETAE) Vol. 3, No. 3, pp. 493-502, 2013.
- [15] KD 300-80 F Series KD325GX-LFB KD330GX-LFB KYOCERA.
- [16] Bikaneria, J., Joshi, S.P and Joshi, A.R, "Modelling and simulation of PV cell using one diode model" International Journal of Scientific and research publications, Vol.3, pp. 1-4, 2013



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)