



iJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 6 Issue: VI Month of publication: June 2018

DOI: <http://doi.org/10.22214/ijraset.2018.6221>

www.ijraset.com

Call: ☎ 08813907089

E-mail ID: ijraset@gmail.com

Implementation of a Vending machine using Programmable Logic Controller

Parepalli Ramanamma¹, Nayana G H²

^{1,2}Assistant Professor, ECE department, New Horizon College of Engineering, Bangalore

Abstract: Automation has changed all our day-to-day activities. It has impacted all walks of life. Probably there is no domain left which has been untouched by automation from agricultural to space technology. As the technology is changing day in and day out and there is a competition in manufacturing industry to reduce the time to market of all the products, so that they remain upfront in their sectors. This paper describes about PLC (Programmable Logic Controller) and how to develop an automated coffee/tea vending machine using PLC programming languages. It is implemented using Schneider Electric M340 PLC which is one of the most famous PLC in the world. Launched as one of the most innovative Programmable Logic Controllers developed to date, Modicon M340 continues to be perceived as a model basis of a modern-day automation platform, garnering recognition for its robust quality and high-end capabilities, including improved performance, compliance with the latest networking standards, and operational cost-efficiency. Designed for a wide range of process and machine management, it finds perfectly his place in numerous segments such as the Food & Beverage etc.

Keywords: Automation, PLC, ladder diagram, SFC

I. INTRODUCTION

A. Automation

The word 'Automation' is derived from Greek words "Auto" (self) and "Matos" (moving). Automation therefore is the mechanism for systems that "move by itself". The dictionary defines automation as "The technique of making an apparatus, a process, or a system operate automatically." Automation helps in reducing the human involvement to operate tasks in hazardous environment and that requires hard physical and mental ability. Automation also increases productivity, Quality, performance and helps on emphasising safety in working conditions and also reduces the cost .

B. PLC

PLCs were designed and developed by Modicon. A programmable logic controller (PLC) is a specialized computer used to control machines and processes. It therefore shares common terms with typical PCs like central processing unit (CPU), memory, software and communications. Unlike a personal computer, the PLC is designed to survive in a rugged industrial atmosphere and to be very flexible in how it interfaces with inputs and outputs of the real world. Programmable Logic Controller, or PLC for short, is simply a special computer control system that continuously monitors the state of input devices and make decisions based upon the custom program to control the state of output devices. PLC implements logic control functions by means of a program. PLC'S were designed to replace relay logic system. They are used in many industries such as oil refineries, manufacturing lines, conveyor systems and so on.

The components that make a PLC work can be divided into three core areas:


- 1) The rack and the power supply
- 2) The central processing unit (CPU)
- 3) The input/output

PLCs come in many shapes and sizes. They can be so small as to fit in your shirt pocket while more involved controls systems require large PLC racks. The below figure shows the M340 PLC.



Figure1: M340 PLC

C. PLC Architecture

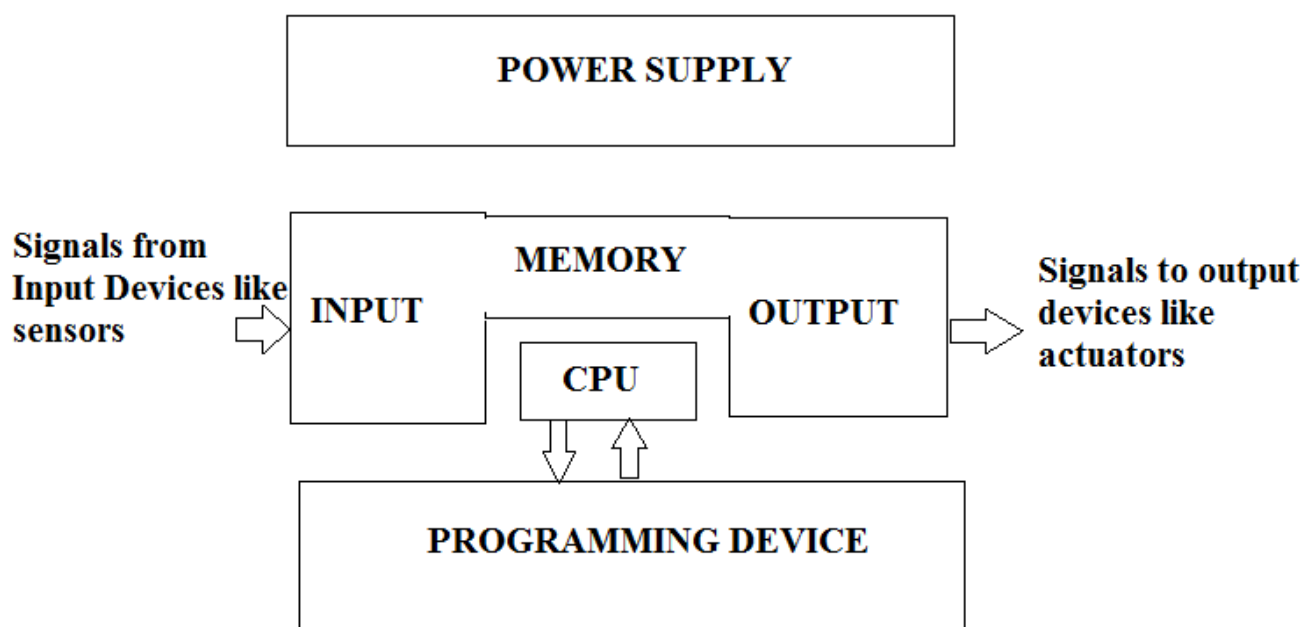

The components of PLC are

- 1) Inputs Circuits
- 2) Outputs Circuits
- 3) CPU
- 4) Memory for program and data storage
- 5) Programming device
- 6) Communication Device
- 7) Power Supply

PLC I/O modules: Provides signal conversion and isolation between the internal logic level signals inside the PLC and the field's high level signal

Input modules : accepts and converts signals from sensors into a logic signal Ex. : Switches, Pushbuttons.

Output modules : that convert control instructions to a signal that can be used by actuators. Ex. : lamps, alarm.

Programming device: Used to enter the desired program that will determine the sequence of operation and control of process equipment or driven machine.


II. PROGRAMMING PLC

A. Programming PLC

The programming technique for the first PLCs were based on relay logic wiring schematics. This eliminated the need to teach the technicians, electricians and engineers how to program a computer today. According to IEC 61131-3 five programming languages is defined for programmable control systems: LD (Ladder diagram), ST (Structured text), SFC (Sequential function chart), FBD (Function block diagram), and IL (Instruction list, similar to assembly language).

Ladder Diagram: A very commonly used method of programming PLCs is based on the use of ladder diagram. Typically, a computer called a programmable logic controller (PLC) is used to implement the algorithm required to control this machinery. Usually, this algorithm is digital logic and has historically been achieved using a programming language called ladder logic. Ladder logic is a graphical language, and a method of expressing the “if ... then” construct used extensively in structured programming methods in mainstream programming of information systems. The advantage of well-structured ladder logic is that programs are easy to debug. A maintenance technician can look at a ladder program and immediately identify whether the status of an individual input or output bit is correct.

Symbols for Ladder diagram: Standard IEC 1131-3 defines the symbols that are used for input and output devices. Note that inputs are represented by different symbols representing normally open or normally closed contacts. The action of the input is equivalent to opening or closing a switch. Output coils are represented by just one form of symbol.

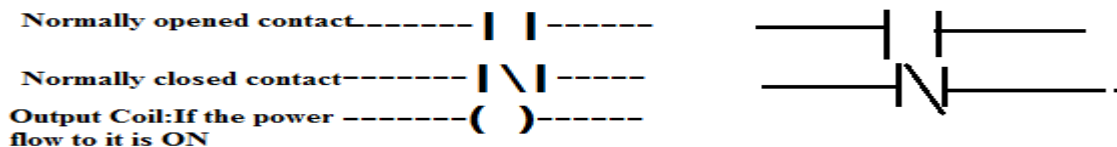

Ladder diagram is based on logic operation between inputs to define the logic level of outputs.

Sequential Function Chart (SFC) language: Sequential function chart (SFC) is one of the PLC programming languages defined by the IEC 61131-3 standard. SFC is a graphical programming language, not text-based. Being a visual programming language means that it's well suited to the task of breaking down a large and complex process into smaller pieces that are easier to see and understand than with solely text-based programming environments.

The elements of SFC language are

- 1) steps
- 2) transitions and transition conditions
- 3) actions
- 4) links
- 5) branches

Step: A step is an element of SFC programs, and represents a single process within the overall process flow. For example: start a motor. A step can be active or inactive. When a step becomes active, action blocks assigned to that step are executed. The first step of a program is referred to as the initial step. It is unconditionally activated at the start of the program and is represented by a double sidelines step.

Action block: Action block contains the action (an event) which is triggered by the activation of a step. It can be:

- 6) One or several address of output or variable; for example %Q0.2.3 or var:=8,
- 7) Section of one of the IEC 61131-3 programming languages.

The symbol of an action block is as follows.

Transition: A transition is a special link that provides the ways through which the the chart can evolves between 2 or several steps. A transition is always associated with a transition condition, called sometimes receptivity. This transition condition can be a variable, an address, a literal or a transition section (ladder diagram) if the condition is more complex.

Link: Links are the elements that are connecting step to transition and transition to step. They are consisting in vertical and horizontal links. Standard signal flow in a sequence string is from top to bottom. To create a loop however, links can be made from below to a step above. In these cases, the direction of the link is indicated with an arrow symbol.

Branches: Branches are used to create alternative or parallel structures. There are 2 types of branches :

The alternative branch offers the possibility to program branches conditionally in the control flow of the SFC structure. With alternative branches, as many transitions follow a step under the horizontal line as there are different processes. Alternative branches are connected by alternative junctions.

The parallel branches offers the possibility to switch a single transition leads to a parallel activation of more than one step. After this common activation, the individual branches are processed independently from one another. Parallel branches are connected by parallel junctions.

B. Creation of SFC diagram

3 steps to create a SFC diagram using specifications of a system are

- 1) Design of the functional specification SFC Diagram,
- 2) Design of the functional solution SFC Diagram,
- 3) Design of the control unit part SFC Diagram.


III.AUTOMATED COFFEE/TEA VENDING MACHINE USING SFC



Automated coffee/tea vending machine is implemented using one of the programmable logic controller language called Sequential Functional Chart. It is developed using Unity PRO Software.


A. The Specifications for dEsigning this Automated Machine is as Follows

- 1) The user has to select any beverages either coffee or tea which he/she prefers by pressing the respective pushbutton.
- 2) Then user has to insert a coin.
- 3) Then based on the pusbutton pressed by the user, the machine has to dispense either coffee or tea .
- 4) Later the machine delivers the preffered beverage
- 5) Then it exits for its next delivery.

Step1:Initial state in SFC, machine waiting for any input from the user i.e, whether any push button is pressed or not.

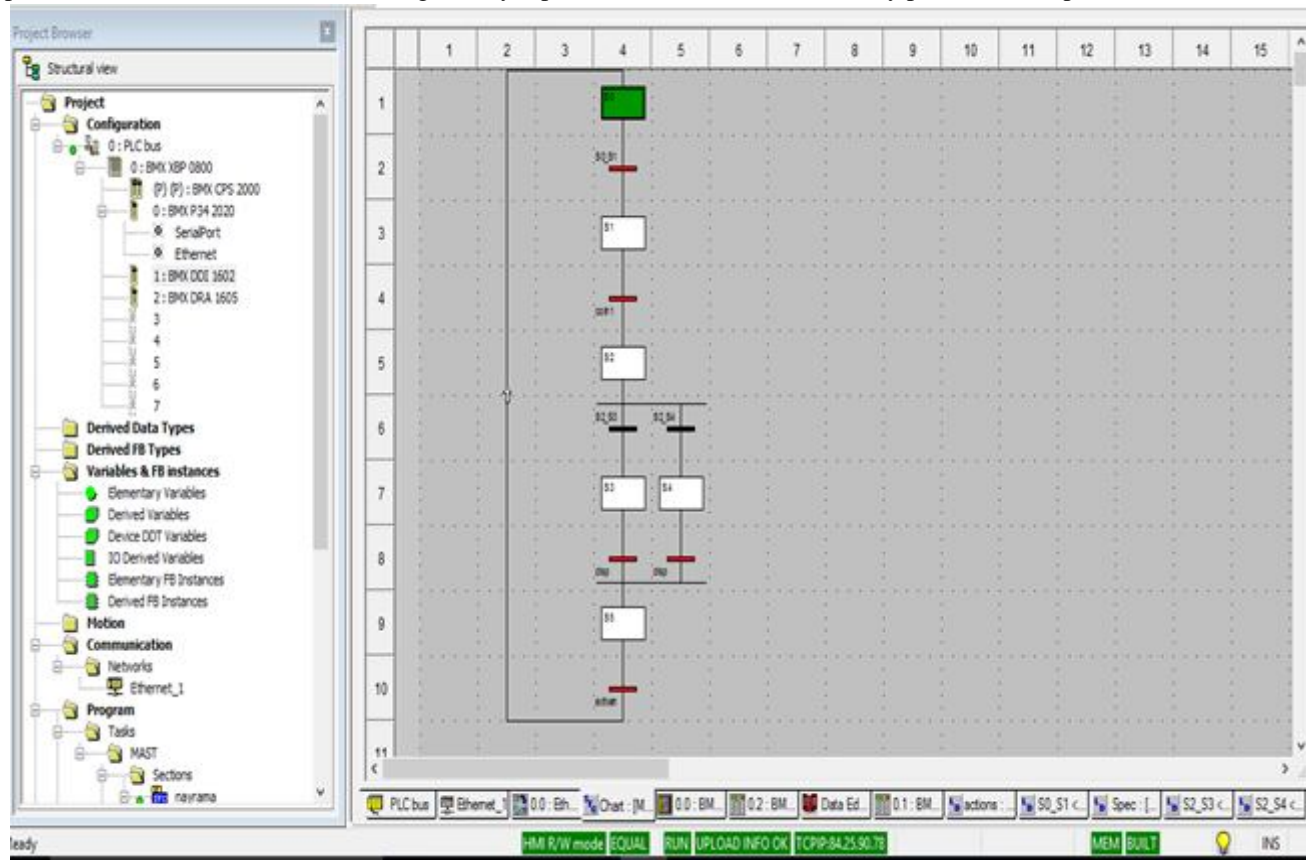

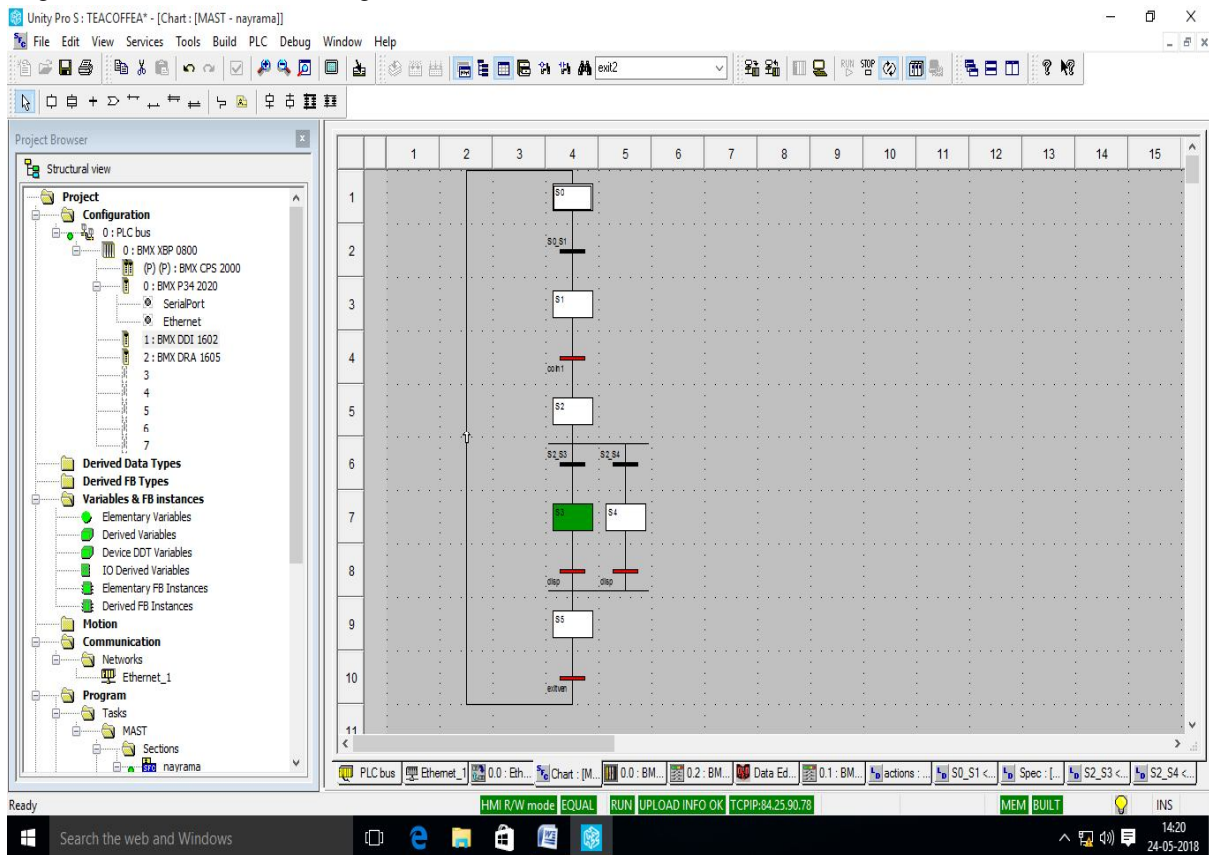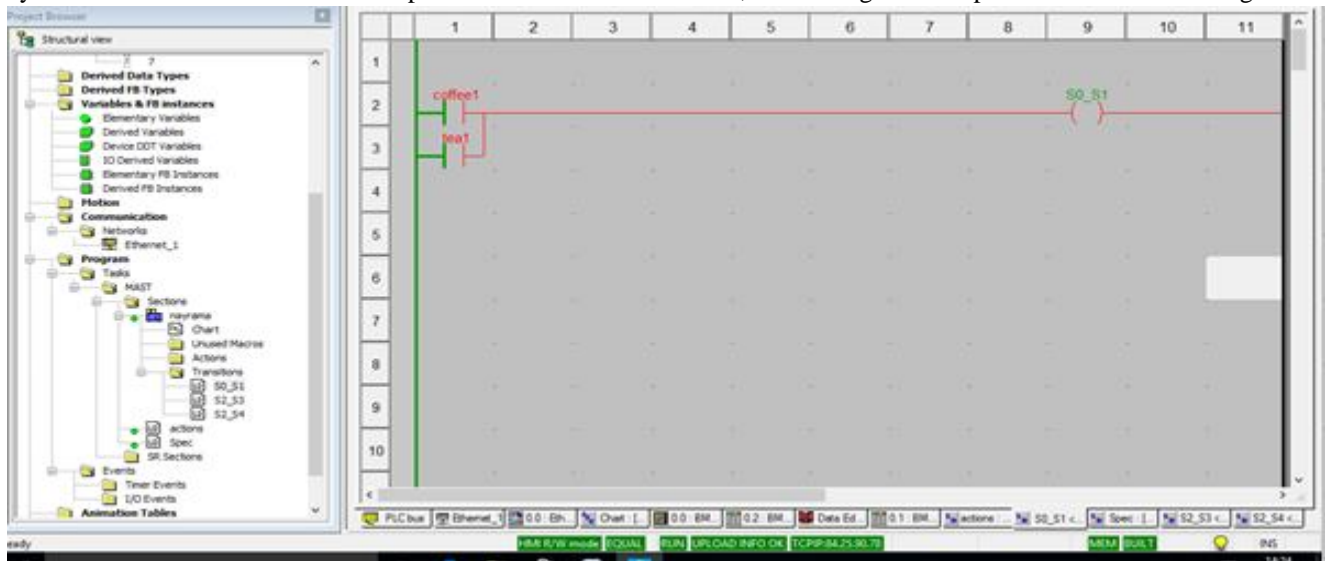

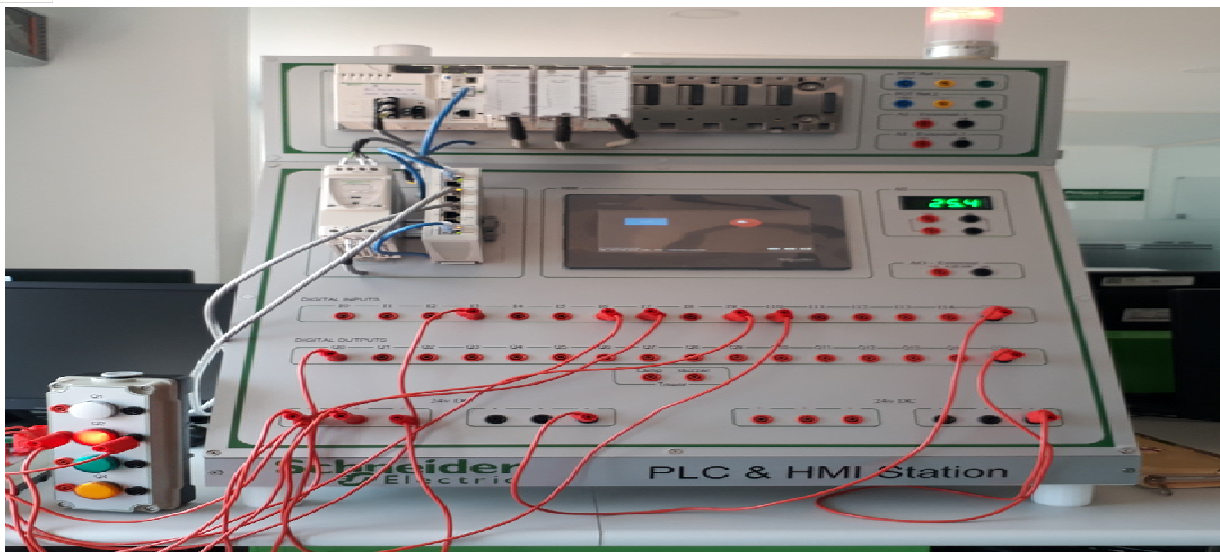

Step6: Once the beverage is delivered, it is ready to accept the new request.

IV. CONCLUSIONS

Automated Coffee Tea Vending machine is successfully implemented on Programmable Logic Controller M340 by Schneider Electric. Sequential Functional Chart used for PLC is a graphical language which is easier to understand and implement. The main drawback of having any automated machine is that it will ultimately lead to decrease in manpower which leads to unemployment issues in populated countries. Another drawback is the difficulty in adapting to a new situation that may arise when dealing with users.

V. ACKNOWLEDGMENT

The work presented in this paper has been supported by Dr. Philippe Colonec and Dr. Mahesh of New Horizon College of Engineering, Bengaluru. We would like to thank them for their valuable support and encouragement.

REFERENCES

- [1] K. Thramboulidis, "Using UML in Control and Automation: A Model Driven Approach", Proc. IEEE Int. Conference on Industrial informatics (INDIN'04), 2004.
- [2] Maria G. Ioannides, "Design and Implementation of PLC-Based Monitoring Control System for Induction Motor", IEEE transactions on energy conversion, pp. 469-476, ISSN 0885-8969, Vol. 19, No. 3, Sept. 2004.
- [3] V. Vikash and H.J. Amarendra, PLC Based Sensor Operated Obstacle Detection Carriage Vehicle, International Journal of Applied Engineering Research ISSN 0973-4562 Volume 9, Issue 7 (2014) pp. 847-851.
- [4] S. Peng, M. Zhou, "Sensor-based stage Petri net modelling of PLC logic programs for discrete-event control design", Int. J. Prod. Res., vol. 41, no. 3, pp. 629-644, 2003.
- [5] Rinchin G. Dorjee, "PLC and Fuzzy Logic Control of a Variable Frequency Drive," International journal of engineering trends and technology, Vol. 16, No. 4, Oct 2014, 2231-5381.
- [6] Sadeghvosough, Amir vosough, "PLC and its Applications," International journal of Multidisciplinary sciences and engineering, Vol. 2, No. 8, Nov. 2011, 2045-7057.
- [7] A. Zoitl, T. Strasser, C. Sunder, T. Baier, "Is IEC 61499 in harmony with IEC 61131-3", IEEE Ind. Electronics Mag., vol. 3, no. 4, pp. 49-55, Dec. 2009.
- [8] "IEC, Int. Standard IEC 61131-3", Programmable Controllers—Part 3: Programming Languages International Electrotechnical Commission, 2003.
- [9] S. Das, S. Dutta, A. Sarkar, S. Kar, "Recognition and Disposal of Faulty Bottles in a Bottle Filling Industry Using PLC and Producing Human Machine Interface by SCADA", International Refereed Journal of Engineering and Science (IRJES), pp. 18-23, ISSN 2319-183X, Volume 3, Issue 5, May 2014.
- [10] K. Ali, R. Ghoni, A. N. Abdalla, "Advanced Control of Hybrid-PLC System", International conference on modelling optimization and computing, pp. 218-225, ISSN 1877-7058, June 2012.
- [11] E. Estévez, M. Marcos, D. Orive, "Automatic generation of PLC automation projects from component-based models", The Int. Journal of Advanced Manufacturing Technology, Springer London, Vol. 35, No. 5-6, pp. 527-540, December.



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)