



# IJRASET

International Journal For Research in  
Applied Science and Engineering Technology



---

# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume:** 12    **Issue:** IV    **Month of publication:** April 2024

**DOI:** <https://doi.org/10.22214/ijraset.2024.60585>

[www.ijraset.com](http://www.ijraset.com)

Call:  08813907089

E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)

# ASIC Design and Implementation of Automated Coffee and Tea Brewing System with FPGA Validation

Prof. Manjula B B<sup>1</sup>, Agniva Ghosh<sup>2</sup>, Gowtham S<sup>3</sup>, Manoj K S<sup>4</sup>, Pushkar D<sup>5</sup>

<sup>1</sup>Associate Professor, Electronics and Communication, East West Institute of Technology, Bengaluru, India<sup>1</sup>

<sup>2,3,4,5</sup>Student, Electronics and Communication, East West Institute of Technology, Bengaluru, India<sup>2-5</sup>

**Abstract:** *This paper presents a pioneering approach to enhance the efficiency of automated coffee and tea brewing systems through the integration of an ASIC-GDSII and FPGA validation. Leveraging the power of 45nm CMOS Technology, the design achieves substantial reductions in area, power consumption, and delay. The Verilog HDL code undergoes meticulous verification using Cadence tools like Genus and Innovus, ensuring optimal design performance. Innovus validates timing constraints, ensuring adherence to acceptable delay parameters. The resulting compact design not only minimizes power consumption but also effectively addresses leakage issues. These comprehensive optimizations meet stringent performance, area, and power requirements, elevating the operational efficiency of automated brewing systems. Furthermore, the control algorithm is synthesized and implemented using Xilinx's ISE Design Suite, followed by validation on SPARTAN 6 FPGA, providing invaluable insights for future synthesis and implementation endeavors.*

**Keywords:** ASIC, FPGA, CMOS Technology, GDS II, Verilog HDL.

## I. INTRODUCTION

The passage provided outlines the significance of automated machines, particularly focusing on coffee machines, in revolutionizing daily life through time-saving, convenience-enhancing, and quality-improving features. It highlights the necessity for coffee machines to adapt to evolving preferences, necessitating upgrades in their functionality and capabilities.

Recent advancements in programmable logic, specifically FPGA (Field-Programmable Gate Array) and CPLD (Complex Programmable Logic Device), are acknowledged for their role in streamlining device development processes. These programmable matrices offer rapid customization options, optimizing both the development and implementation phases. They allow for flexibility in design and troubleshooting while reducing complexity and time requirements[I][III].

Moreover, the introduction of ASIC (Application-Specific Integrated Circuit) level chips is noted for their contribution to enhancing efficiency in automated machines. ASICs have significantly reduced area, power consumption, and delay parameters, thereby improving overall system performance.

The paper proposes the development of a control algorithm for automated coffee machines, utilizing Verilog HDL (Hardware Description Language) within CADENCE Tool Suite and Xilinx's ISE Design Suite. This approach is chosen for its simplicity, cost-effectiveness, and effectiveness in managing synthesis processes. By implementing the control algorithm in Verilog HDL, the coffee machine's functionality can be seamlessly upgraded to meet changing customer demands [III][IV].

The current development plan suggests the incorporation of six modes for each beverage using parallel control. This strategy ensures enhanced functionality and versatility in the automated coffee machine, allowing users to select from a variety of options to suit their preferences[V][VI][X].

The aims of this paper are as follows: designing the operational features of an Automatic Coffee machine utilizing Verilog HDL programming language, validating its functionality via NC Launch ISIM Simulator with the Cadence tool, assessing the Pre-Synthesis and Post-Synthesis stages of the design using the Genus Tool within Cadence, transforming the RTL (Register Transfer Level) code into GDS (Graphic Data System) format through the INNOVUS Tool within Cadence, optimizing the design's Area, Power, and Delay, and finally, validating the design on Spartan 6 FPGA.

Thus, the paper's main goal is to introduce a strong control method for automatic coffee machines. It uses new technology in computer chips to make a coffee machine that's both affordable and can adapt to what customers want.

## II. METHODOLOGY

The block diagram illustrates the menu selection of an automated coffee and Tea Brewing system, as depicted in Figure 1. This system offers six modes of operation, each catering to different preferences:

- Milk.
- Espresso.
- Cappuccino.
- Americano.
- Tea.
- Lemon Tea.

Each mode triggers a specific sequence of processes based on the selected program. These operation involved in preparing the various menu options in the automated coffee dispenser:

### 1) *Milk:*

- Cup: Place a Cup.
- Milk: Dispenses Milk into the cup.
- Sugar: Adds sugar.
- Stirrer: Mixes the contents thoroughly.
- Finish: Ready to serve.

### 2) *Espresso:*

- Cup: Place a Cup.
- Coffee: Dispenses Coffee Powder.
- Water: Adds water.
- Sugar: Adds sugar.
- Stirrer: Mixes the contents thoroughly.
- Finish: Ready to serve.

### 3) *Cappuccino:*

- Cup: Place a Cup
- Coffee: Dispense Coffee Powder into the cup.
- Milk: Adds milk.
- Sugar: Adds Sugar.
- Stir: Mixes the ingredients.
- Finish: Ready to serve.

### 4) *Americano:*

- Cup: Place a cup.
- Coffee: Dispense coffee into the cup.
- Water: Dispense hot water twice.
- Sugar: Adds sugar.
- Stirrer: Mixes the contents thoroughly.
- Finish: Ready to serve.

### 5) *Tea:*

- Cup: Place a cup.
- Tea Leaves & Spices: Dispense tea ingredients.
- Water: Adds water.
- Sugar: Adds sugar.
- Stirrer: Mixes the contents thoroughly.
- Finish: Ready to serve.

6) *Lemon Tea:*

- Cup: Place a cup.
- Tea Leaves: Dispense tea leaves.
- Lemon Syrup: Add lemon syrup.
- Water: Add water.
- Sugar: Add sugar.
- Stir: Mixes the contents thoroughly.
- Finish: Ready to serve.

Each operation is essential in preparing the desired beverage, ensuring accurate ingredient dispensing, mixing, and customization according to user preference

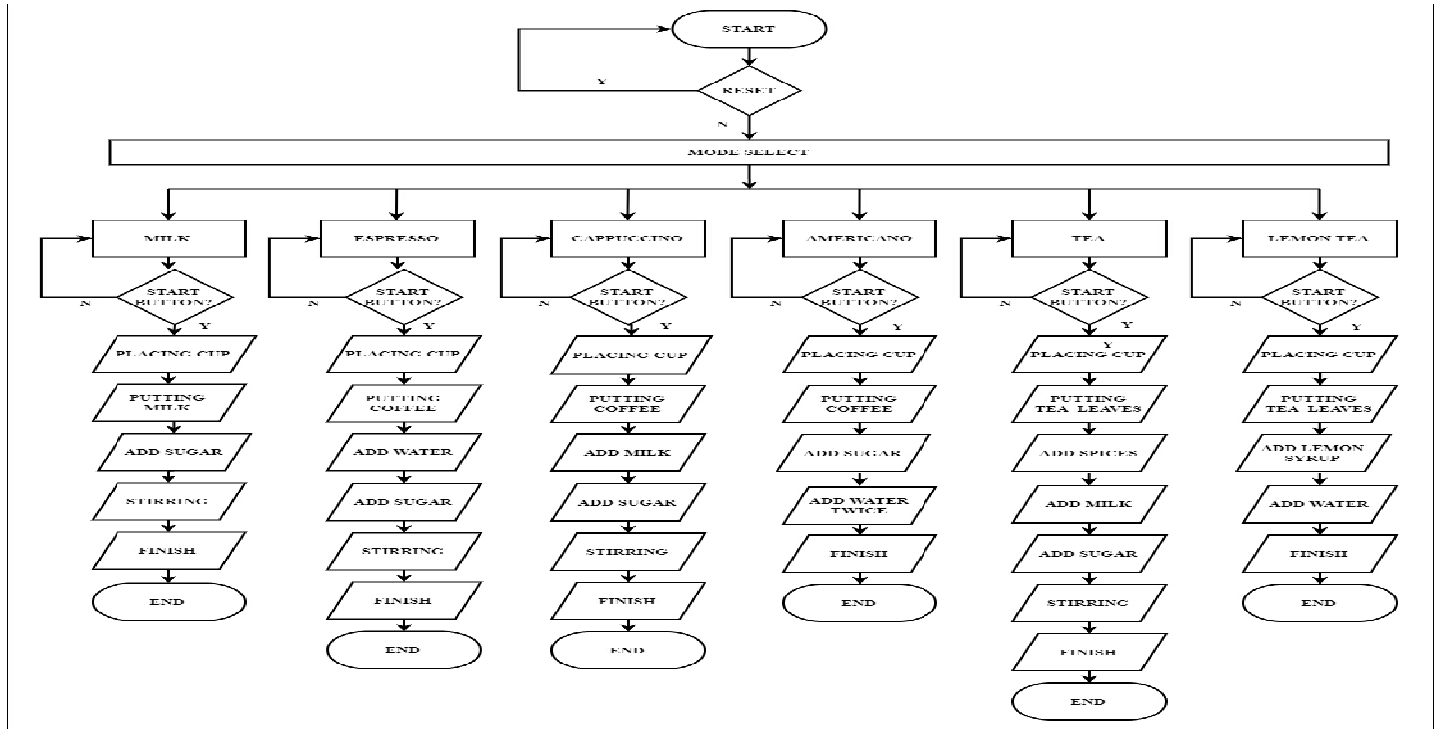


Fig. 1. Block Diagram of the Automated Coffee and Tea Brewing system.

### III. IMPLEMENTATION

Each individual process activates a corresponding timer, which is considered in the development of the control program. Importantly, each program operates independently from others, and if a program is not needed, it can be removed from the selection. In this paper, we have several parameters to consider. The Input Parameters are: rst, clk and mode select. The Output Parameters are: Milk, Espresso, Cappuccino, Americano, Tea and Lemon Tea.

The implementation of an automated coffee and tea brewing system using FPGA involves a meticulous series of steps. First, we use Verilog HDL to encode the core functionality of the coffee machine. Through comprehensive simulation using the NC Launch ISIM Simulator with the Cadence tool, we rigorously validate the behavior of the system.

Moving forward, the design undergoes scrutiny in both the Pre-Synthesis and Post-Synthesis stages using the Genus Tool within Cadence. This ensures that the RTL code is refined and optimized for subsequent stages. The transformation of the RTL code into GDS format is achieved through the INNOVUS Tool, ensuring compatibility and readiness for FPGA deployment.

During this transformation, we focus on optimizing key metrics such as Area, Power, and Delay to enhance overall efficiency and performance. Finally, we port the design onto a Spartan 6 FPGA for real-world validation, ensuring seamless integration and functionality within the physical hardware environment. Through this comprehensive process, the automated coffee and tea brewing system is meticulously crafted and validated for optimal performance and reliability.

For example, for "cappuccino" there are 6 states:

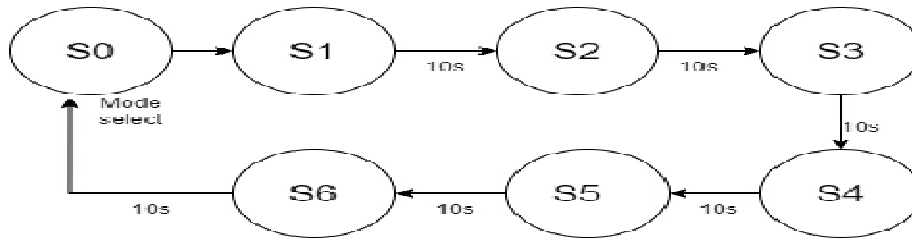


Fig. 2. FSM of the Cappuccino Menu.

S0 - Initial State

S1 - Placing cup

S2 - Adding coffee powder

S3 - Adding milk

S4 - Adding sugar

S5 - Stirring

S6 - Finish

The paper work incorporates a Finite State Machine (FSM) for one menu i.e., Cappuccino Menu where 'S0' serves as the initial state, common to all other states. This state acts as the starting point for all modes of flavors. As the system progresses through different states based on user selections, it ultimately reaches a final state. Upon reaching this final state, the system transitions back to the initial state ('S0'), where it awaits the next user selection. This cyclic behavior ensures the readiness of the system to accept and process subsequent requests, maintaining a seamless and efficient operation of the automated coffee and tea brewing system.

After selecting the menu option 'S0,' which is the same for all menu options, the FSM will first place the cup, then pour milk. Since it is cappuccino with sugar, sugar is also added. After that, in state 4, stirring happens. Finally, in state 5, the process is finished, and the FSM returns to the initial state.

#### IV. RESULTS

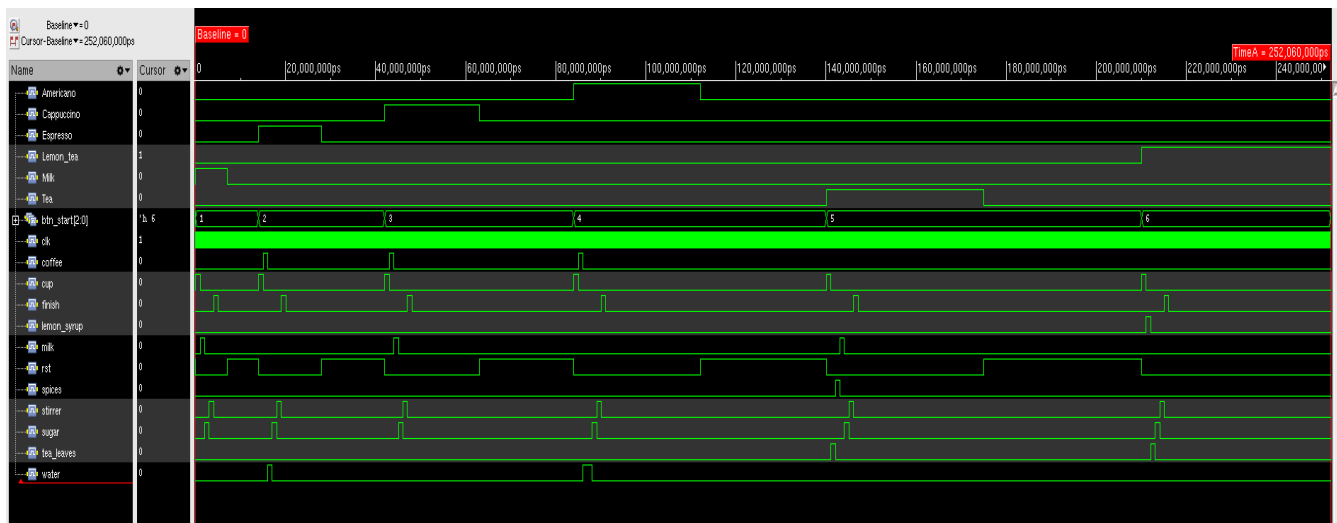


Fig.3. Simulation Waveform on Cadence NC Launch Sim Tool.

The Automated Coffee and Tea Brewing System was created using Verilog. This design code was subsequently synthesized and simulated using NC Launch Simulator Tool in Cadence to generate waveforms, as shown in Fig. 3. The waveforms clearly demonstrate that each state transitions in accordance with the designed Finite State Machine (FSM) and adheres to precise timing definition.

```

=====
Generated by:      Genus(TM) Synthesis Solution 17.22-s017_1
Generated on:     Mar 22 2024 03:27:14 pm
Module:          coffee_making
Technology libraries: slow
                  slow
Operating conditions: slow (balanced_tree)
Wireload mode:   enclosed
Area mode:       timing library
=====

Instance  Module  Cell Count  Cell Area  Net Area  Total Area  Wireload
-----
coffee_making  370  2826.265  0.000  2826.265  <none> (D)

(D) = wireload is default in technology library

```

Fig. 4. Genus Tool Area Report Analysis.

The coffee\_making module, generated by Genus Synthesis Solution in Fig. 4., has a total area of 2826.265 square units.

```

=====
Generated by:      Genus(TM) Synthesis Solution 17.22-s017_1
Generated on:     Mar 22 2024 03:27:14 pm
Module:          coffee_making
Technology libraries: slow
                  slow
Operating conditions: slow (balanced_tree)
Wireload mode:   enclosed
Area mode:       timing library
=====

Instance  Cells  Leakage Power(nW)  Dynamic Power(nW)  Total Power(nW)
-----
coffee_making  370  17036.668  2074833.040  2091869.708

```

Fig. 5. Genus Tool Power Report Analysis.

The coffee\_making module, generated by Genus Synthesis Solution in Fig. 5., has a total Power of 2.09mW.

```

=====
Generated by:      Genus(TM) Synthesis Solution 17.22-s017_1
Generated on:     Mar 22 2024 03:27:14 pm
Module:          coffee_making
Operating conditions: slow (balanced_tree)
Wireload mode:   enclosed
Area mode:       timing library
=====

Path 1: VIOLATED (-453 ps) Setup Check with Pin timer_reg[29]/CK->D
Group: clk
Startpoint: (R) btn_start[0]
Clock: (R) clk
Endpoint: (R) timer_reg[29]/D
Clock: (R) clk

Capture      Launch
Clock Edge:+ 1000      0
Src Latency:+ 0        0
Net Latency:+ 0 (I)   0 (I)
Arrival:=    1000     0

Setup:-      140
Required Time:- 860
Launch Clock:- 0
Input Delay:- 700
Data Path:-  613
Slack:-      -453

Exceptions/Constraints:
input_delay 700 constraints.sdc_line_5_2_1

#-----
# Timing Point  Flags  Arc  Edge  Cell  Fanout  Load  Trans  Delay  Arrival  Instance
# (ff) (ps) (ps) (ps) (ps) Location
#-----
btn_start[0] - - R (arrival) 10 84.1 0 0 700 (-)
g12041_4547/Y - B->Y F NAND2X8 1 11.0 41 37 737 (-)
g11994_8780/Y - B->Y F NAND2X4 1 10.9 40 44 781 (-)
g11962_9906/Y - A0->Y F AOI21X4 1 16.5 98 87 868 (-)
g11943_2900/Y - B->Y R NOR2X6 1 16.5 78 82 950 (-)
g11930_1857/Y - B->Y F NAND2X6 2 27.1 88 84 1034 (-)
g11878_2900/Y - A->Y R NOR2X6 1 20.8 84 93 1127 (-)
g11873/Y - A->Y F CLKINVX8 32 86.6 86 85 1212 (-)
g11863_3772/Y - A0->Y R OAI22X1 1 1.7 102 101 1313 (-)
timer_reg[29]/D - - R DFFR2 1 - - 0 1313 (-)
#-----

```

Fig6. Genus Tool Timing REport Analysis.

The coffee\_making module, generated by Genus Synthesis Solution in Fig. 5., has a slack of -453ns, input delay of 700ns, data path of 613ns and required time of 860ns.

```

Applications  Places  Text Editor
-----
Open [icon]

Depth  Name  #Inst  Area (um^2)
-----
0  coffee_making  347  1013.57685

```

Fig. 6. INNOVUS Tool Area Report Analysis.

The coffee\_making module, generated by Innovus Tool in Fig. 6., has a total area of 1013.57 square units.

```

-----
Total Power
-----
Total Internal Power:      0.60552531      83.4120%
Total Switching Power:    0.12037416      16.5817%
Total Leakage Power:      0.00004550       0.0063%
Total Power:              0.72594496
-----

Group                Internal Power  Switching Power  Leakage Power    Total Power  Percentage (%)
-----
Sequential          0.4714         0.03203         1.613e-05        0.5034         69.35
Macro                0              0              0                0              0
IO                   0              0              0                0              0
Combinational        0.1341         0.08835         2.937e-05        0.2225         30.65
Clock (Combinational) 0              0              0                0              0
Clock (Sequential)   0              0              0                0              0
-----
Total                0.6055         0.1204         4.55e-05         0.7259         100
-----

Rail                Voltage  Internal Power  Switching Power  Leakage Power    Total Power  Percentage (%)
-----
VDD                  1.08    0.6055         0.1204         4.55e-05         0.7259         100
-----

```

Fig. 7. INNOVUS Tool Area Report Analysis.

The coffee\_making module, generated by Innovus Tool in Fig. 7., has a Total Power of 0.729W, Leakage Power of  $4.55 \times 10^{-5}$  W.

```

#####
# Generated by: Cadence Innovus 17.12-s095_1
# OS: Linux x86_64(Host ID cad08)
# Generated on: Fri Mar 22 15:48:19 2024
# Design: coffee_making
# Command: report_timing > inn_timing.repo
#####
Path 1: VIOLATED Recovery Check with Pin coffee_reg/CK
Endpoint: coffee_reg/RN (^) checked with leading edge of 'clk'
Beginpoint: rst (v) triggered by leading edge of 'clk'
Path Groups: {async_default}
Analysis View: BC
Other End Arrival Time 0.000
- Recovery 0.671
+ Phase Shift 1.000
= Required Time 0.329
- Arrival Time 1.773
= Slack Time -1.443
Clock Rise Edge 0.000
+ Input Delay 0.700
= Beginpoint Arrival Time 0.700
-----
+-----+-----+-----+-----+-----+-----+
| Instance | Arc | Cell | Delay | Arrival | Required |
|-----|-----|-----|-----|-----|-----|
| g7656 | rst v | INVXL | 1.063 | 0.700 | -0.743 |
| coffee_reg | RN ^ | DFFRX2 | 0.010 | 1.763 | 0.319 |
+-----+-----+-----+-----+-----+-----+

```

Fig. 8. INNOVUS Tool Timing Report Analysis.

The coffee\_making module, generated by Innovus Tool in Fig. 8., has a slack of -1.433ns and required time of 0.329ns.

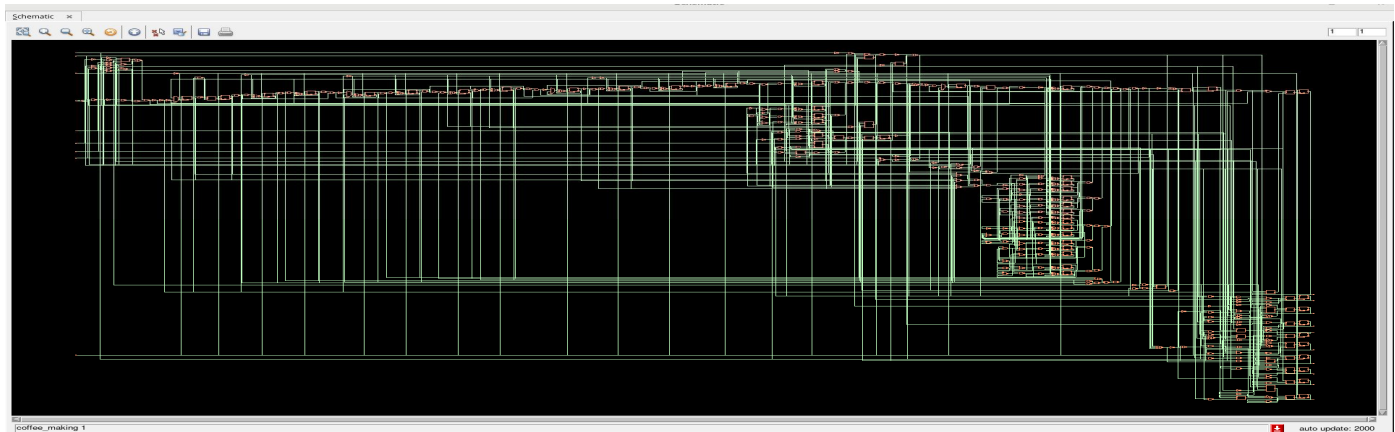


Fig. 9. RTL Schematic of the Automated Coffee and Tea Brewing system.

From Fig.9. The RTL schematic we've obtained from the Cadence Genus tool for our automated coffee and tea brewing system is a critical component of our project's development. This schematic serves as the blueprint for the system's digital logic, outlining the sequence of operations and control flow required to automate the brewing process. Through the Genus tool, we've meticulously designed and optimized the RTL (Register Transfer Level) representation, ensuring that it accurately captures the functionality and behavior of our brewing system. This RTL schematic lays the foundation for further design and implementation stages, guiding the development of our system towards efficient and reliable operation. Overall, it represents a significant milestone in our journey towards realizing a fully automated and efficient coffee and tea brewing solution



Fig. 10. GDS II File of the Automated Coffee and Tea Brewing system.

From Fig. 10. The ASIC design layout we've obtained from the Cadence Innovus tool for our automated coffee and tea brewing system marks a crucial milestone in our project. This layout essentially represents the physical blueprint of our system's integrated circuits, meticulously crafted to ensure efficiency, performance, and reliability. Through careful optimization processes, we've managed to condense the layout while maximizing its functionality, allowing us to meet stringent requirements within limited space. Extensive testing and validation have been conducted to ensure that the layout aligns with our system's functional needs and industry standards, guaranteeing its reliability during operation. Overall, this ASIC design layout signifies a significant step forward in bringing our vision of an advanced and efficient brewing system to life.

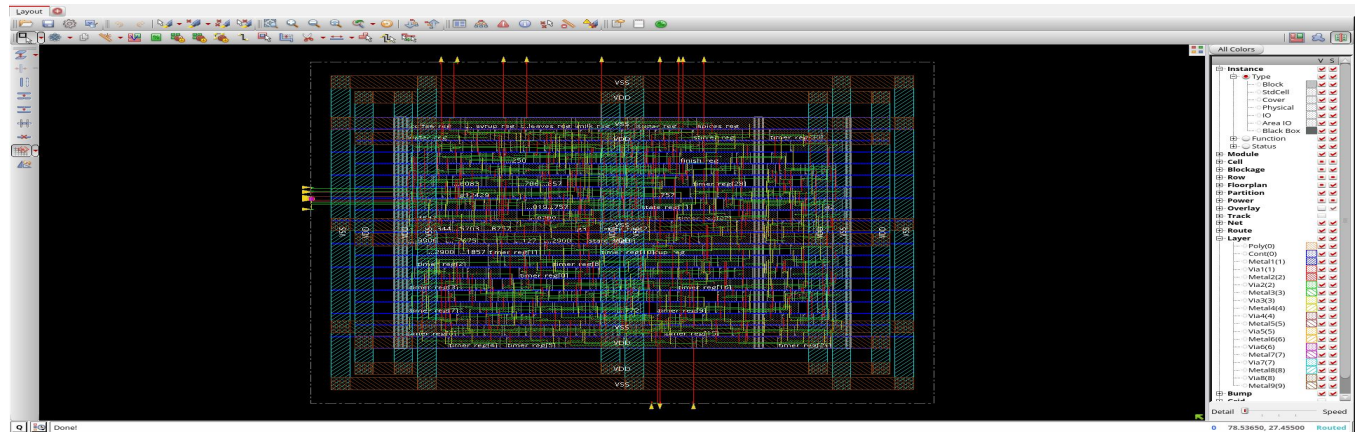


Fig. 11. Physical Design of the Automated Coffee and Tea Brewing system.

From Fig. 11. The GDS II file we've obtained from the Cadence Innovus tool for our automated coffee and tea brewing system is a crucial step forward in our project's progress. This file represents the final layout of our system's integrated circuits, translated into a format compatible with manufacturing processes. Through meticulous design and optimization within Innovus, we've ensured that the layout meets stringent requirements for efficiency, performance, and reliability. The GDS II file encapsulates the intricate placement and routing of transistors, capacitors, and other components, optimizing their arrangement to maximize functionality within limited space. This milestone signifies a significant achievement in our journey towards realizing a fully functional and efficient brewing system, bringing us one step closer to delivering an innovative solution for automated coffee and tea preparation.



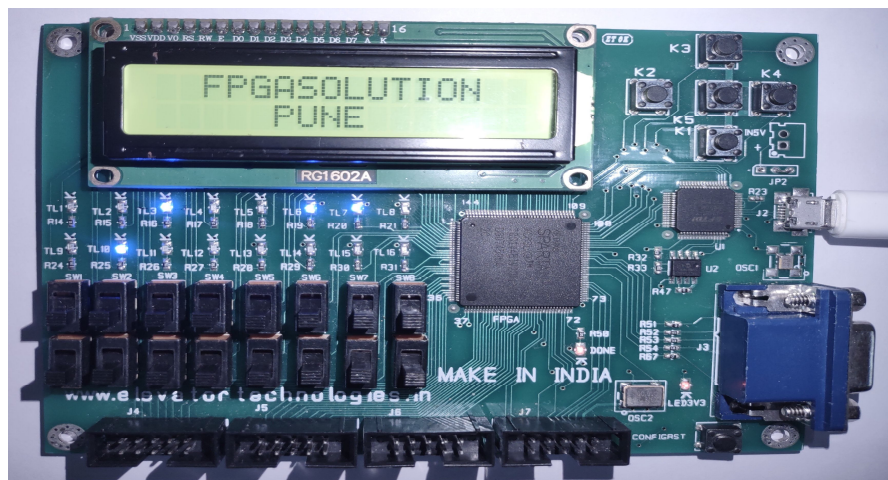


Fig. 12. Validation Using Spartan-6 FPGA Board.

## V. CONCLUSION AND FUTURE SCOPE.

The Coffee and Tea Brewing System has been effectively crafted, synthesized, and realized using CADENCE Tool, marking a significant achievement in its development. Validation of this system has been successfully conducted using XILINX ISE 14.7 on a SPARTAN-6 FPGA kit, allowing for comprehensive observation of parameters from both technologies. The ASIC design showcases remarkable efficiency, boasting minimal power consumption of 0.7259mW Watts and impressively low delay time of 1.733us and Area of 1013.57um<sup>2</sup>.

Consequently, this solution presents the opportunity for integration with Embedded Systems, paving the way for the creation of a marketable smart Maker with enhanced capabilities.

## REFERENCES

- [1] Mustakim, A., & Daiyan, K. M. (2023, December). Register Transfer Level Implementation of FSM Based Automated Vending Machine with User Account Feature Using 45nm CMOS Technology. In 2023 6th International Conference on Electrical Information and Communication Technology (EICT) (pp. 1-6). IEEE.
- [2] Shivanand, N., Rathod, M. L., & Chetan, S. (2023, March). FPGA based Vending Machine For Logical Gates. In 2023 3rd International Conference on Smart Data Intelligence (ICSMDI) (pp. 282-293). IEEE.
- [3] Hristov, V., Zhilevski, M., & Slavov, D. (2022, October). Design of Automated Coffee Machine through Verilog HDL. In 2022 International Symposium on Multidisciplinary Studies and Innovative Technologies (ISMSIT) (pp. 757-760). IEEE.
- [4] Anuradha, P., Rajkumar, K., Navitha, C., & Jithender Reddy, M. (2022, December). Implementation of Automatic Vending Machine Using FPGA. In International Conference on Information and Management Engineering (pp. 63-70). Singapore: Springer Nature Singapore.
- [5] Suthar, M. (2021, December). 5A novel implementation of FPGA based smart vending machine. In 2021 IEEE International Conference on Technology, Research, and Innovation for Betterment of Society (TRIBES) (pp. 1-6). IEEE.
- [6] Kho, E., & Kumar, M. (2020, July). Design and Implementation of FPGA based Vending Machine for Integrated Circuit (IC). In 2020 International Conference on Communication and Signal Processing (ICCSP) (pp. 0246-0251). IEEE.
- [7] Murena, E., Sibanda, V., Sibanda, S., & Mpofu, K. (2020). Design of a control system for a vending machine. *Procedia CIRP*, 91, 758-763.
- [8] Mustafa, M. S., Al-Mayyahi, M. H. N., & Barnouti, N. H. (2019, April). Design and implementation of vending machine embedded control system using FPGA. In Proceedings of the international conference on information and communication technology (pp. 25-30).
- [9] Jyothi, B., & Isarah, A. S. (2015). 8Implementation of FPGA based smart vending machine. In international journal of engineering research and application (IJERA) 2248-9622. National conference on development advances and trend in engineering science (NCDATES).
- [10] Alrehily, A., Fallatah, R., & Thayananthan, V. (2015). Design of vending machine using finite state machine and visual automata simulator. *International Journal of Computer Applications*, 115(18). Design Systems, Inc.



10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)