



IJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 5 Issue: X Month of publication: October 2017

DOI: <http://doi.org/10.22214/ijraset.2017.10049>

www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com

A Performance Optimization and Analysis of Torque Transmissibility by Using Experimental Techniques

Krunal C. Chaudhari¹, Shantanu J. Chaudhari²

¹Research Scholar, Mechanical Engineer, NMU Jalgaon, Maharashtra

²Associate Professor, Automobile Engineering Dept., SGDCOE Jalgaon, Maharashtra

Abstract : *In many vibration problems, the primary excitation force typically has a repetitive periodic nature, and in some cases this periodic forcing function may be even purely sinusoidal. Examples are excitations due to mass eccentricity and misalignments in rotational components. In basic terms, the frequency response of a dynamic system is the response to a pure sinusoidal excitation. As the amplitude and the frequency of the excitation are changed, the response also changes. A typical problem is a rotating machine (such as a pump, AC compressor, blower, engine, etc) mounted on a roof, or on a floor above the ground floor. The problem is usually most apparent in the immediate vicinity of the vibration source. However, mechanical vibrations can transmit for long distances, and by very circuitous routes through the structure of a building, sometimes resurfacing hundreds of feet from the source. A related problem is the isolation of vibration-sensitive machines from the normally occurring disturbances in a building (car or bus traffic, slamming doors, foot traffic, elevators...) Using Spring, Rubber and Wood isolator, various frequencies, various eccentric masses, various eccentricity measuring the torque transmissibility and graphs are analyzed.*

I. INTRODUCTION

Vibration can be defined as simply the cyclic or oscillating motion of a machine or machine component from its positions of rest. When motorized equipment, such as electric motors, fans or pumps, is mounted to a solid structure, energy can be transferred from the equipment to the structure in the form of vibration. This vibration often radiates from the structure as audible noise and potentially reduces performance or damages equipment. Most portable electronics, CD drives and vehicle-mounted electronics are especially sensitive to vibration and shock and must be isolated from that energy to ensure proper performance.

Forces generated within the machine cause vibration. These forces may: (i) Change in direction with time, such as the force generated by a rotating unbalance. (ii) Change in amplitude or intensity with time, such as the unbalanced magnetic forces generated in an induction motor due to unequal air gap between the motor armature and stator (field). (iii) Result in friction between rotating and stationary machine components in much the same way that friction from a rosined bow causes a violin string to vibrate. (iv) Cause impacts, such as gear tooth contacts or the impacts generated by the rolling elements of a bearing passing over flaws in the bearing raceways. (v) Cause randomly generated forces such as flow turbulence in fluid-handling devices such as fans, blowers and pumps; or combustion turbulence in gas turbines or boilers.

A. Characteristics of Vibration

Vibration is simply defined as "the cyclic or oscillating motion of a machine or machine component from its position of rest or its 'neutral' position." Whenever vibration occurs, there are actually four forces involved that determine the characteristics of the vibration. These forces are: 1. The exciting force, such as unbalance or misalignment. 2. The mass of the vibrating system, denoted by the symbol (M). 3. The stiffness of the vibrating system, denoted by the symbol (K). 4. The damping characteristics of the vibrating system, denoted by the symbol (C). The exciting force is trying to cause vibration, whereas the stiffness, mass and damping forces are trying to oppose the exciting force and control or minimize the vibration. Perhaps the simplest and easiest way to demonstrate and explain vibration and its measurable characteristics is to follow the motion of a weight suspended by a spring. This is a valid analogy since all machines and their components have weight (mass), spring-like properties (stiffness) and damping. The motion of the mass from top to bottom range and back to the initial starting position in the vertical direction is referred to as one cycle, and it has all the characteristics needed to define the vibration. Continued motion of the spring-mass system will simply be repeating these measurable characteristics.

The characteristics needed to define the vibration include:

- 1) Frequency
- 2) Displacement
- 3) Velocity
- 4) Acceleration
- 5) Phase
- 6) Vibration Frequency

(t)= vertical displacement, f(t)= excitation force

If we neglect damping, the vertical motion of the system, x(t) can be shown to be: $x(t) = \frac{F_0/k}{1-r^2} \sin \omega t$

Where $r = \omega/\omega_n, \omega_n = \sqrt{\frac{k}{m}}$

The system has a natural, or resonant frequency, at which it will exhibit a large amplitude of motion, for a small input force. In

units of Hz (cycles per second), this frequency, f_n is: $f_n = \frac{\omega_n}{2\pi} = \frac{1}{2\pi} \sqrt{\frac{k}{m}}$

The ratio of transmitted force to the input force is called transmissibility, $T = \frac{f_t}{f_0}$

The transmissibility including the effect of damping is: $T = \frac{\sqrt{1+2\xi r^2}}{\sqrt{(1-r^2)^2+(2\xi r)^2}}$ Where $\xi = \frac{c}{2m\omega_n}$

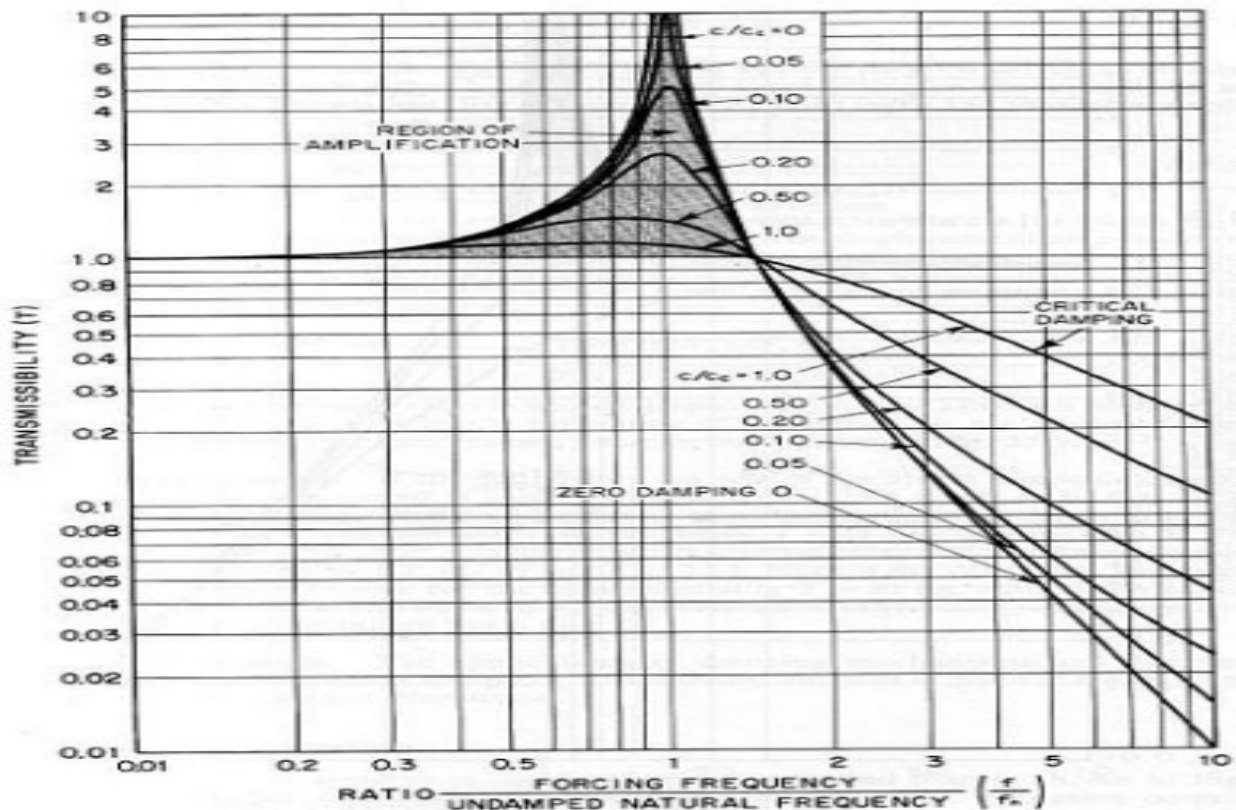


Fig no. 1 Transmissibility Vs Frequency Ratio

II. TEST RIG AND COMPONENT SPECIFICATION

The whole assembly is supported on metallic stand above which clips are welded.

The use of this clips is to provide support to the load cell assembly (weighing machine).

The base plate is fitted over top surface (measuring probe) of load cell by means of nut & bolt.

Isolators are fixed between two two metallic plates which have holes drilled at its four corners for fitting purpose.

The isolator is fitted over the base plate by means of nut & bolt to bottom plate of isolator.

The motor is placed over the upper plate of isolator & they are bolted together to provide the frequent engagement & disengagement of various types of isolators sets.

On the motor shaft the disk is fitted which rotate with the speed of motor.

The rotating disc is fixed to shaft of motor with the help of pulley which is rigidly connected to motor shaft.

The holes are provided on plate various distances to provide provision for installation of eccentric masses.

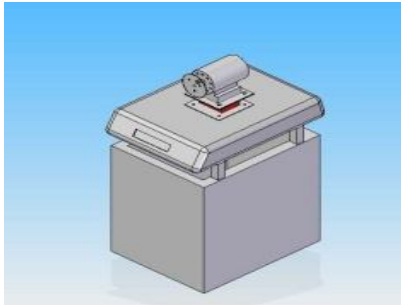


Fig no. 2 Assembly of test rig

The Test Rig Consist Of Following Component

A. motor: single phase ac supply

- 1) HP=1/12
- 2) Volt=220/230
- 3) Watt=50
- 4) Amp=0.75
- 5) RPM=9000
- 6) Cycle= 50

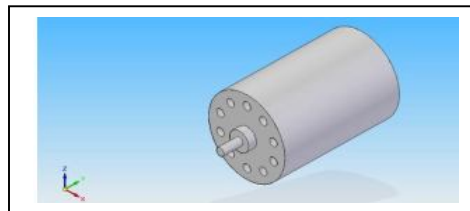


Fig no. 3 Motor

B. Rotating disc

- 1) Radius=0.04mm
- 2) Material- Steel Plate
- 3) Thickness= Appro. 1mm

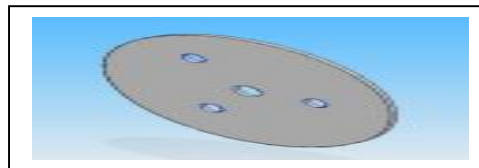


Fig no. 4 Rotating disc

C. Eccentric masses

- a. 10gm (0.01kg)
- b. 15gm(0.015kg)
- c. 20gm(0.020kg)
- d.
- e.

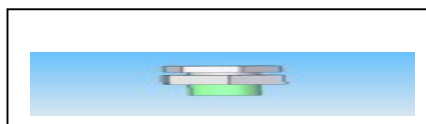


Fig no. 5 Essentric mass

D. Isolator : spring

Number of spring: 4 Stiffness k=27552 N/mm

$$\text{Stiffness } K_e = 4k = 4 \times 27552 = 110208 \text{ N/mm}$$

$$\omega_n = 178 \text{ Rad/Sec}$$

- 1) Spring Diameter=35mm
- 2) Coil Diameter=45mm
- 3) Spring Length=68mm

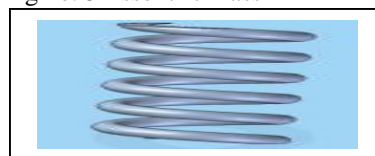


Fig no. 6 Spring

E. Isolator : rubber (ams 3205) neoprene

Stiffness=0.01

(Assumed)

$\omega_n = 0.053$ Rad/Sec

- 1) Length=125mm
- 2) Breadth=70mm
- 3) Thickness=50mm

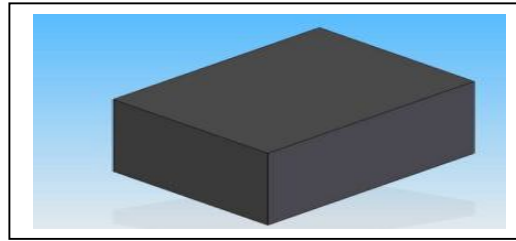


Fig no. 7 Rubber

F. Isolator : wood

Stiffness=0.02(Assumed)

$\omega_n = 0.076$ Rad/Sec

Dimension

Length=122mm

Breadth=67mm

Thickness=45mm

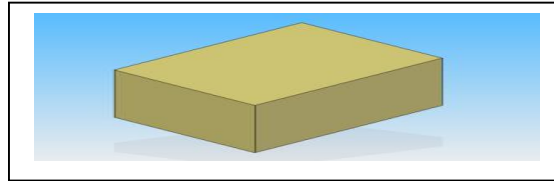


Fig no. 8 Wood block

G. Each isolator is fixed between two steel plate.

Steel Plate Length $L_1 = 150$ mm $L_2 = 150$ mm Area= $L_1 * L_2 = 150 * 150 = 22500$ mm²

Number of plates used for each isolator =2

Total no of plates used for isolator =2*3(Isolator) =6

H. Base plate for assembly (motor+ isolator)

Material :- Cast Iron

Area =150*150=22500mm²

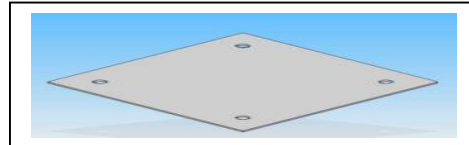


Fig no .9 Base plate

I. weighing machine :is used as loadcell.

Capacity: 30 kg

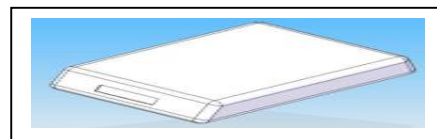


Fig no. 10 Weighing Machine


J. Stand- square bars

Length= 445mm

Breadth=250mm

Thickness=245mm

Fig no. 11 Stand

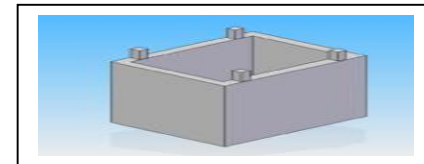

III. ANALYSIS OF ISOLATORS

In order to go for analysis it is necessary to give proper notations. Following are the notations used to deal with test rig

Let, Eccentric mass= m_0 , Kg, Combined weight of motor and isolator = $W(N)$, Natural frequency for isolator= ω_n , Eccentricity= e (m),

Revolution of motor= n (rpm), Angular velocity of eccentric mass $\omega = (2\pi n)/60$, Centrifugal force due to eccentric mass $CF = m_0 e \omega^2$,

Applied force= $F_i = W + CF$, Transmitted force= F_t , Transmissibility = $Tr = F_t / F_i$

A. Analysis of spring

Table No.1 Spring Transmissibility for eccentricity 0.032m


| Reading No. | m0 (kg) | wt W(N) | ω_n | e (m) | n (RPM) | $\omega=(2\pi n)/60$ | ω/ω_n | C.F (N)=m0 *e* ω^2 | Fi(N)= W+CF | Ft(kg) | Ft(N) | Tr=Ft /Fi |
|-------------|---------|---------|------------|-------|---------|----------------------|-------------------|---------------------------|-------------|--------|-------|-----------|
| 1 | 0.0100 | 34.11 | 178.00 | 0.032 | 460 | 48.15 | 0.27 | 0.74 | 34.85 | 3.50 | 34.34 | 0.99 |
| 2 | 0.0100 | 34.11 | 178.00 | 0.032 | 670 | 70.13 | 0.39 | 1.57 | 35.68 | 3.46 | 33.94 | 0.95 |
| 3 | 0.0100 | 34.11 | 178.00 | 0.032 | 939 | 98.28 | 0.55 | 3.09 | 37.20 | 3.49 | 34.24 | 0.92 |
| 4 | 0.0100 | 34.11 | 178.00 | 0.032 | 1000 | 104.67 | 0.59 | 3.51 | 37.62 | 3.45 | 33.86 | 0.90 |
| 5 | 0.0100 | 34.11 | 178.00 | 0.032 | 1150 | 120.37 | 0.68 | 4.64 | 38.75 | 3.44 | 33.75 | 0.87 |
| 6 | 0.0100 | 34.11 | 178.00 | 0.032 | 1300 | 136.07 | 0.76 | 5.92 | 40.03 | 3.47 | 34.02 | 0.85 |
| 1 | 0.0150 | 34.11 | 178.00 | 0.032 | 600 | 62.80 | 0.35 | 1.89 | 36.00 | 3.41 | 33.47 | 0.93 |
| 2 | 0.0150 | 34.11 | 178.00 | 0.032 | 820 | 85.83 | 0.48 | 3.54 | 37.65 | 3.50 | 34.35 | 0.91 |
| 3 | 0.0150 | 34.11 | 178.00 | 0.032 | 853 | 89.28 | 0.50 | 3.83 | 37.94 | 3.43 | 33.67 | 0.89 |
| 4 | 0.0150 | 34.11 | 178.00 | 0.032 | 1000 | 104.67 | 0.59 | 5.26 | 39.37 | 3.55 | 34.85 | 0.89 |
| 5 | 0.0150 | 34.11 | 178.00 | 0.032 | 1167 | 122.15 | 0.69 | 7.16 | 41.27 | 3.51 | 34.47 | 0.84 |
| 6 | 0.0150 | 34.11 | 178.00 | 0.032 | 1349 | 141.20 | 0.79 | 9.57 | 43.68 | 3.48 | 34.12 | 0.78 |
| 1 | 0.0200 | 34.11 | 178.00 | 0.032 | 770 | 80.59 | 0.45 | 4.16 | 38.27 | 3.55 | 34.83 | 0.91 |
| 2 | 0.0200 | 34.11 | 178.00 | 0.032 | 980 | 102.57 | 0.58 | 6.73 | 40.84 | 3.85 | 37.74 | 0.92 |
| 3 | 0.0200 | 34.11 | 178.00 | 0.032 | 1271 | 133.03 | 0.75 | 11.33 | 45.44 | 3.48 | 34.10 | 0.75 |
| 4 | 0.0200 | 34.11 | 178.00 | 0.032 | 1800 | 188.40 | 1.06 | 22.72 | 56.83 | 4.87 | 47.78 | 0.84 |
| 5 | 0.0200 | 34.11 | 178.00 | 0.032 | 2500 | 261.67 | 1.47 | 43.82 | 77.93 | 6.53 | 64.07 | 0.82 |
| 6 | 0.0200 | 34.11 | 178.00 | 0.032 | 2856 | 298.93 | 1.68 | 57.19 | 91.30 | 6.51 | 63.88 | 0.70 |

Table No 2 Spring Transmissibility for eccentricity 0.035m


| Reading No. | m0 (kg) | wt W(N) | ω_n | e (m) | n (RPM) | $\omega=(2\pi n)/60$ | ω/ω_n | C.F (N)=m0 *e* ω^2 | Fi(N)= W+CF | Ft(kg) | Ft(N) | Tr=Ft /Fi |
|-------------|---------|---------|------------|-------|---------|----------------------|-------------------|---------------------------|-------------|--------|-------|-----------|
| 1 | 0.0100 | 34.11 | 178 | 0.035 | 460 | 48.15 | 0.27 | 0.81 | 34.92 | 3.10 | 30.41 | 0.87 |
| 2 | 0.0100 | 34.11 | 178 | 0.035 | 670 | 70.13 | 0.39 | 1.72 | 35.83 | 3.46 | 33.94 | 0.95 |
| 3 | 0.0100 | 34.11 | 178 | 0.035 | 939 | 98.28 | 0.55 | 3.38 | 37.49 | 3.49 | 34.24 | 0.91 |
| 4 | 0.0100 | 34.11 | 178 | 0.035 | 1000 | 104.67 | 0.59 | 3.83 | 37.94 | 3.45 | 33.86 | 0.89 |
| 5 | 0.0100 | 34.11 | 178 | 0.035 | 1150 | 120.37 | 0.68 | 5.07 | 39.18 | 3.44 | 33.75 | 0.86 |
| 6 | 0.0100 | 34.11 | 178 | 0.035 | 1300 | 136.07 | 0.76 | 6.48 | 40.59 | 3.47 | 34.02 | 0.84 |
| 1 | 0.0150 | 34.11 | 178 | 0.035 | 600 | 62.80 | 0.35 | 2.07 | 36.18 | 3.41 | 33.47 | 0.93 |
| 2 | 0.0150 | 34.11 | 178 | 0.035 | 820 | 85.83 | 0.48 | 3.87 | 37.98 | 3.50 | 34.35 | 0.90 |
| 3 | 0.0150 | 34.11 | 178 | 0.035 | 853 | 89.28 | 0.50 | 4.18 | 38.29 | 3.43 | 33.67 | 0.88 |
| 4 | 0.0150 | 34.11 | 178 | 0.035 | 1000 | 104.67 | 0.59 | 5.75 | 39.86 | 3.55 | 34.85 | 0.87 |
| 5 | 0.0150 | 34.11 | 178 | 0.035 | 1167 | 122.15 | 0.69 | 7.83 | 41.94 | 3.51 | 34.47 | 0.82 |
| 6 | 0.0150 | 34.11 | 178 | 0.035 | 1349 | 141.20 | 0.79 | 10.47 | 44.58 | 3.48 | 34.12 | 0.77 |
| 1 | 0.0200 | 34.11 | 178 | 0.035 | 770 | 80.59 | 0.45 | 4.55 | 38.66 | 3.55 | 34.83 | 0.90 |
| 2 | 0.0200 | 34.11 | 178 | 0.035 | 980 | 102.57 | 0.58 | 7.36 | 41.47 | 3.85 | 37.74 | 0.91 |
| 3 | 0.0200 | 34.11 | 178 | 0.035 | 1271 | 133.03 | 0.75 | 12.39 | 46.50 | 3.48 | 38.45 | 0.83 |
| 4 | 0.0200 | 34.11 | 178 | 0.035 | 1800 | 188.40 | 1.06 | 24.85 | 58.96 | 4.87 | 40.02 | 0.68 |
| 5 | 0.0200 | 34.11 | 178 | 0.035 | 2500 | 261.67 | 1.47 | 47.93 | 82.04 | 6.53 | 42.39 | 0.52 |
| 6 | 0.0200 | 34.11 | 178 | 0.035 | 2856 | 298.93 | 1.68 | 62.55 | 96.66 | 6.51 | 44.52 | 0.46 |

Table No 3 Spring Transmissibility for eccentricity 0.037m


| Reading No. | m0 (kg) | wt W(N) | ω_n | e (m) | n (RPM) | $\omega=(2\pi n)/60$ | ω/ω_n | C.F (N)=m0 *e* ω^2 | Fi(N)= W+CF | Ft(kg) | Ft(N) | Tr=Ft/Fi |
|-------------|---------|---------|------------|-------|---------|----------------------|-------------------|---------------------------|-------------|--------|-------|----------|
| 1 | 0.0100 | 34.11 | 178.00 | 0.037 | 460.00 | 48.15 | 0.27 | 0.86 | 34.97 | 3.50 | 34.34 | 0.98 |
| 2 | 0.0100 | 34.11 | 178.00 | 0.037 | 670.00 | 70.13 | 0.39 | 1.82 | 35.93 | 3.46 | 33.94 | 0.94 |
| 3 | 0.0100 | 34.11 | 178.00 | 0.037 | 939.00 | 98.28 | 0.55 | 3.57 | 37.68 | 3.49 | 34.24 | 0.91 |
| 4 | 0.0100 | 34.11 | 178.00 | 0.037 | 1000.00 | 104.67 | 0.59 | 4.05 | 38.16 | 3.45 | 33.86 | 0.89 |
| 5 | 0.0100 | 34.11 | 178.00 | 0.037 | 1150.00 | 120.37 | 0.68 | 5.36 | 39.47 | 3.44 | 33.75 | 0.85 |
| 6 | 0.0100 | 34.11 | 178.00 | 0.037 | 1300.00 | 136.07 | 0.76 | 6.85 | 40.96 | 3.47 | 34.02 | 0.83 |
| 1 | 0.0150 | 34.11 | 178.00 | 0.037 | 600.00 | 62.80 | 0.35 | 2.19 | 36.30 | 3.41 | 33.47 | 0.92 |
| 2 | 0.0150 | 34.11 | 178.00 | 0.037 | 820.00 | 85.83 | 0.48 | 4.09 | 38.20 | 3.50 | 34.35 | 0.90 |
| 3 | 0.0150 | 34.11 | 178.00 | 0.037 | 853.00 | 89.28 | 0.50 | 4.42 | 38.53 | 3.43 | 33.67 | 0.87 |
| 4 | 0.0150 | 34.11 | 178.00 | 0.037 | 1000.00 | 104.67 | 0.59 | 6.08 | 40.19 | 3.55 | 34.85 | 0.87 |
| 5 | 0.0150 | 34.11 | 178.00 | 0.037 | 1167.00 | 122.15 | 0.69 | 8.28 | 42.39 | 3.51 | 34.47 | 0.81 |
| 6 | 0.0150 | 34.11 | 178.00 | 0.037 | 1349.00 | 141.20 | 0.79 | 11.06 | 45.17 | 3.48 | 34.12 | 0.76 |
| 1 | 0.0200 | 34.11 | 178.00 | 0.037 | 770.00 | 80.59 | 0.45 | 4.81 | 38.92 | 3.55 | 34.83 | 0.89 |
| 2 | 0.0200 | 34.11 | 178.00 | 0.037 | 980.00 | 102.57 | 0.58 | 7.79 | 41.90 | 3.85 | 37.74 | 0.90 |
| 3 | 0.0200 | 34.11 | 178.00 | 0.037 | 1271.00 | 133.03 | 0.75 | 13.10 | 47.21 | 3.48 | 34.10 | 0.72 |
| 4 | 0.0200 | 34.11 | 178.00 | 0.037 | 1800.00 | 188.40 | 1.06 | 26.27 | 60.38 | 4.87 | 47.78 | 0.79 |
| 5 | 0.0200 | 34.11 | 178.00 | 0.037 | 2500.00 | 261.67 | 1.47 | 50.67 | 84.78 | 6.53 | 64.07 | 0.76 |
| 6 | 0.0200 | 34.11 | 178.00 | 0.037 | 2856.00 | 298.93 | 1.68 | 66.12 | 100.23 | 6.51 | 63.88 | 0.64 |

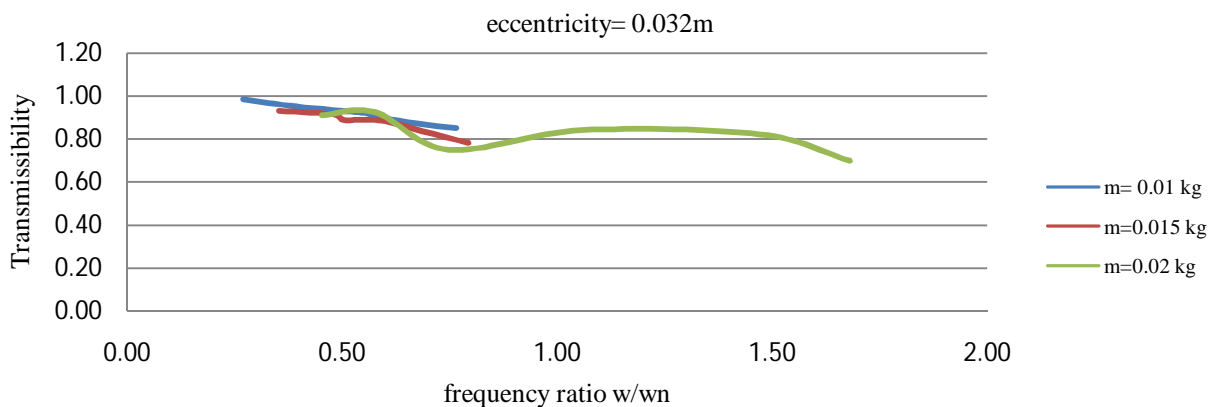

Graph 1 Spring Transmissibility for eccentricity 0.032m

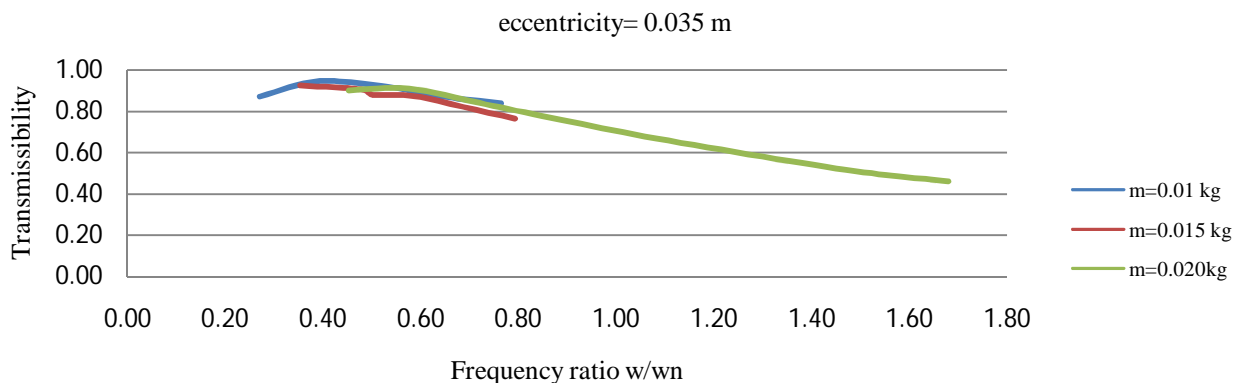

Graph 2 Spring Transmissibility for eccentricity 0.035m

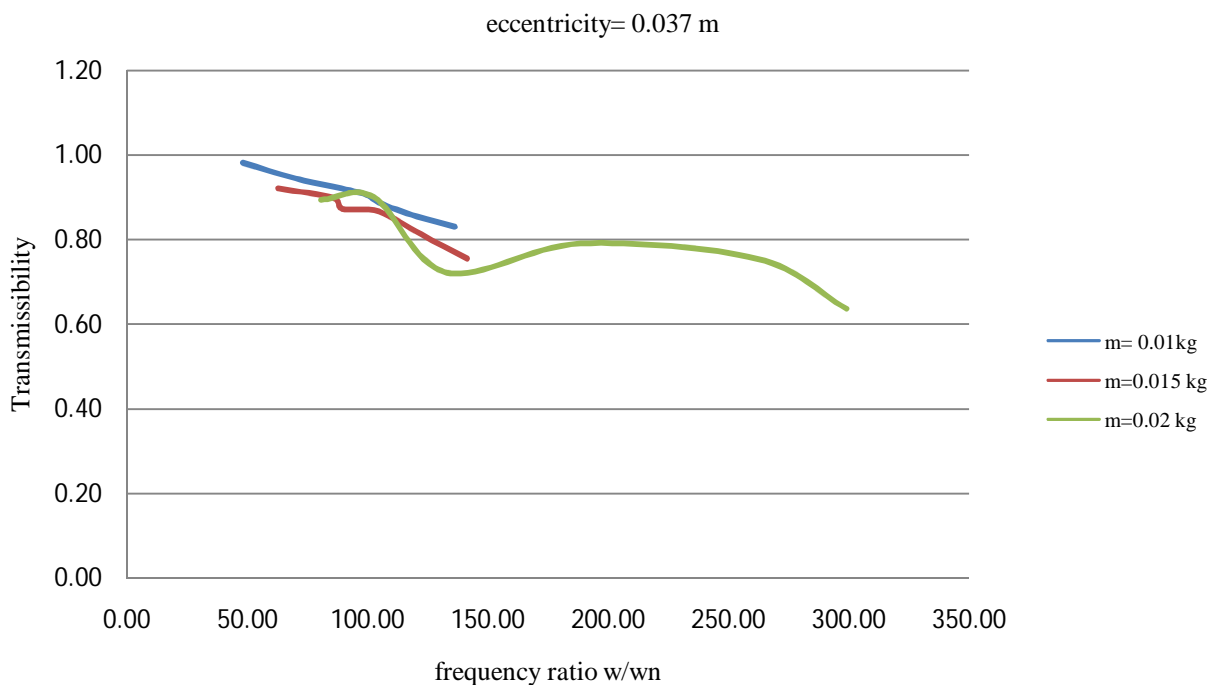

Graph 3 Spring Transmissibility for eccentricity 0.037m

B. Analysis of rubber

Table No.4 Rubber Transmissibility for eccentricity 0.032m


| Reading No. | m0 (kg) | wt W(N) | ω_n | e (m) | n (RP M) | $\omega=(2\pi n)/60$ | ω/ω_n | C.F (N)=m0 *e* ω^2 | Fi(N)= W+CF | Ft(kg) | Ft(N) | Tr=Ft/Fi |
|-------------|---------|---------|------------|-------|----------|----------------------|-------------------|---------------------------|-------------|--------|-------|----------|
| 1 | 0.0100 | 34.82 | 0.053 | 0.032 | 850 | 88.97 | 1678.62 | 2.53 | 37.35 | 3.50 | 34.34 | 0.92 |
| 2 | 0.0100 | 34.82 | 0.053 | 0.032 | 987 | 103.31 | 1949.17 | 3.42 | 38.24 | 3.46 | 33.94 | 0.89 |
| 3 | 0.0100 | 34.82 | 0.053 | 0.032 | 1051 | 110.00 | 2075.56 | 3.87 | 38.69 | 3.49 | 34.24 | 0.88 |
| 4 | 0.0100 | 34.82 | 0.053 | 0.032 | 1260 | 131.88 | 2488.30 | 5.57 | 40.39 | 3.45 | 33.86 | 0.84 |
| 5 | 0.0100 | 34.82 | 0.053 | 0.032 | 1843 | 192.90 | 3639.64 | 11.91 | 46.73 | 3.44 | 33.75 | 0.72 |
| 6 | 0.0100 | 34.82 | 0.053 | 0.032 | 2252 | 235.71 | 4447.35 | 17.78 | 52.60 | 3.47 | 34.02 | 0.65 |
| 1 | 0.0150 | 34.82 | 0.053 | 0.032 | 874 | 91.48 | 1726.01 | 4.02 | 38.84 | 3.41 | 33.47 | 0.86 |
| 2 | 0.0150 | 34.82 | 0.053 | 0.032 | 945 | 98.91 | 1866.23 | 4.70 | 39.52 | 3.50 | 34.35 | 0.87 |
| 3 | 0.0150 | 34.82 | 0.053 | 0.032 | 995 | 104.14 | 1964.97 | 5.21 | 40.03 | 3.43 | 33.67 | 0.84 |
| 4 | 0.0150 | 34.82 | 0.053 | 0.032 | 1086 | 113.67 | 2144.68 | 6.20 | 41.02 | 3.55 | 34.85 | 0.85 |
| 5 | 0.0150 | 34.82 | 0.053 | 0.032 | 1370 | 143.39 | 2705.53 | 9.87 | 44.69 | 3.51 | 34.47 | 0.77 |
| 6 | 0.0150 | 34.82 | 0.053 | 0.032 | 1681 | 175.94 | 3319.71 | 14.86 | 49.68 | 3.48 | 34.12 | 0.69 |
| 1 | 0.0200 | 34.82 | 0.053 | 0.032 | 743 | 77.77 | 1467.31 | 3.87 | 38.69 | 3.92 | 38.46 | 0.99 |
| 2 | 0.0200 | 34.82 | 0.053 | 0.032 | 835 | 87.40 | 1648.99 | 4.89 | 39.71 | 3.85 | 37.74 | 0.95 |
| 3 | 0.0200 | 34.82 | 0.053 | 0.032 | 943 | 98.70 | 1862.28 | 6.23 | 41.05 | 3.48 | 38.45 | 0.94 |
| 4 | 0.0200 | 34.82 | 0.053 | 0.032 | 1050 | 109.90 | 2073.58 | 7.73 | 42.55 | 4.87 | 40.02 | 0.94 |
| 5 | 0.0200 | 34.82 | 0.053 | 0.032 | 1345 | 140.78 | 2656.16 | 12.68 | 47.50 | 6.53 | 42.39 | 0.89 |
| 6 | 0.0200 | 34.82 | 0.053 | 0.032 | 1590 | 166.42 | 3140.00 | 17.73 | 52.55 | 6.51 | 44.52 | 0.85 |

Table No.5 Rubber Transmissibility for eccentricity 0.035m


| Reading No. | m0 (kg) | wt W(N) | ω_n | e (m) | n (RPM) | $\omega=(2\pi n)/60$ | ω/ω_n | C.F (N)=m0 *e* ω^2 | Fi(N)= W+CF | Ft(kg) | Ft(N) | Tr=Ft/Fi |
|-------------|---------|---------|------------|-------|---------|----------------------|-------------------|---------------------------|-------------|--------|-------|----------|
| 1 | 0.0100 | 34.82 | 0.053 | 0.035 | 850 | 88.97 | 1678.62 | 2.77 | 37.59 | 3.50 | 34.34 | 0.91 |
| 2 | 0.0100 | 34.82 | 0.053 | 0.035 | 987 | 103.31 | 1949.17 | 3.74 | 38.56 | 3.46 | 33.94 | 0.88 |
| 3 | 0.0100 | 34.82 | 0.053 | 0.035 | 1051 | 110.00 | 2075.56 | 4.24 | 39.06 | 3.49 | 34.24 | 0.88 |
| 4 | 0.0100 | 34.82 | 0.053 | 0.035 | 1260 | 131.88 | 2488.30 | 6.09 | 40.91 | 3.45 | 33.86 | 0.83 |
| 5 | 0.0100 | 34.82 | 0.053 | 0.035 | 1843 | 192.90 | 3639.64 | 13.02 | 47.84 | 3.44 | 33.75 | 0.71 |
| 6 | 0.0100 | 34.82 | 0.053 | 0.035 | 2252 | 235.71 | 4447.35 | 19.45 | 54.27 | 3.47 | 34.02 | 0.63 |
| 1 | 0.0150 | 34.82 | 0.053 | 0.035 | 874 | 91.48 | 1726.01 | 4.39 | 39.21 | 3.41 | 33.47 | 0.85 |
| 2 | 0.0150 | 34.82 | 0.053 | 0.035 | 945 | 98.91 | 1866.23 | 5.14 | 39.96 | 3.50 | 34.35 | 0.86 |
| 3 | 0.0150 | 34.82 | 0.053 | 0.035 | 995 | 104.14 | 1964.97 | 5.69 | 40.51 | 3.43 | 33.67 | 0.83 |
| 4 | 0.0150 | 34.82 | 0.053 | 0.035 | 1086 | 113.67 | 2144.68 | 6.78 | 41.60 | 3.55 | 34.85 | 0.84 |
| 5 | 0.0150 | 34.82 | 0.053 | 0.035 | 1370 | 143.39 | 2705.53 | 10.79 | 45.61 | 3.51 | 34.47 | 0.76 |
| 6 | 0.0150 | 34.82 | 0.053 | 0.035 | 1681 | 175.94 | 3319.71 | 16.25 | 51.07 | 3.48 | 34.12 | 0.67 |
| 1 | 0.0200 | 34.82 | 0.053 | 0.035 | 743 | 77.77 | 1467.31 | 4.23 | 39.05 | 3.92 | 38.46 | 0.98 |
| 2 | 0.0200 | 34.82 | 0.053 | 0.035 | 835 | 87.40 | 1648.99 | 5.35 | 40.17 | 3.85 | 37.74 | 0.94 |
| 3 | 0.0200 | 34.82 | 0.053 | 0.035 | 943 | 98.70 | 1862.28 | 6.82 | 41.64 | 3.48 | 38.45 | 0.92 |
| 4 | 0.0200 | 34.82 | 0.053 | 0.035 | 1050 | 109.90 | 2073.58 | 8.45 | 43.27 | 4.87 | 40.02 | 0.92 |
| 5 | 0.0200 | 34.82 | 0.053 | 0.035 | 1345 | 140.78 | 2656.16 | 13.87 | 48.69 | 6.53 | 42.39 | 0.87 |
| 6 | 0.0200 | 34.82 | 0.053 | 0.035 | 1590 | 166.42 | 3140.00 | 19.39 | 54.21 | 6.51 | 44.52 | 0.82 |

Table No.6 Rubber Transmissibility for eccentricity 0.037m


| Reading No. | m0 (kg) | wt W(N) | ω_n | e (m) | n (RPM) | $\omega=(2\pi n)/60$ | ω/ω_n | C.F (N)=m0 *e* ω^2 | Fi(N)= W+CF | Ft(kg) | Ft(N) | Tr=Ft/Fi |
|-------------|---------|---------|------------|-------|---------|----------------------|-------------------|---------------------------|-------------|--------|-------|----------|
| 1 | 0.0100 | 34.82 | 0.053 | 0.037 | 850 | 88.97 | 1678.62 | 2.93 | 37.75 | 3.50 | 34.34 | 0.91 |
| 2 | 0.0100 | 34.82 | 0.053 | 0.037 | 987 | 103.31 | 1949.17 | 3.95 | 38.77 | 3.46 | 33.94 | 0.88 |
| 3 | 0.0100 | 34.82 | 0.053 | 0.037 | 1051 | 110.00 | 2075.56 | 4.48 | 39.30 | 3.49 | 34.24 | 0.87 |
| 4 | 0.0100 | 34.82 | 0.053 | 0.037 | 1260 | 131.88 | 2488.30 | 6.44 | 41.26 | 3.45 | 33.86 | 0.82 |
| 5 | 0.0100 | 34.82 | 0.053 | 0.037 | 1843 | 192.90 | 3639.64 | 13.77 | 48.59 | 3.44 | 33.75 | 0.69 |
| 6 | 0.0100 | 34.82 | 0.053 | 0.037 | 2252 | 235.71 | 4447.35 | 20.56 | 55.38 | 3.47 | 34.02 | 0.61 |
| 1 | 0.0150 | 34.82 | 0.053 | 0.037 | 874 | 91.48 | 1726.01 | 4.64 | 39.46 | 3.41 | 33.47 | 0.85 |
| 2 | 0.0150 | 34.82 | 0.053 | 0.037 | 945 | 98.91 | 1866.23 | 5.43 | 40.25 | 3.50 | 34.35 | 0.85 |
| 3 | 0.0150 | 34.82 | 0.053 | 0.037 | 995 | 104.14 | 1964.97 | 6.02 | 40.84 | 3.43 | 33.67 | 0.82 |
| 4 | 0.0150 | 34.82 | 0.053 | 0.037 | 1086 | 113.67 | 2144.68 | 7.17 | 41.99 | 3.55 | 34.85 | 0.83 |
| 5 | 0.0150 | 34.82 | 0.053 | 0.037 | 1370 | 143.39 | 2705.53 | 11.41 | 46.23 | 3.51 | 34.47 | 0.75 |
| 6 | 0.0150 | 34.82 | 0.053 | 0.037 | 1681 | 175.94 | 3319.71 | 17.18 | 52.00 | 3.48 | 34.12 | 0.66 |
| 1 | 0.0200 | 34.82 | 0.053 | 0.037 | 743 | 77.77 | 1467.31 | 4.48 | 39.30 | 3.92 | 38.46 | 0.98 |
| 2 | 0.0200 | 34.82 | 0.053 | 0.037 | 835 | 87.40 | 1648.99 | 5.65 | 40.47 | 3.85 | 37.74 | 0.93 |
| 3 | 0.0200 | 34.82 | 0.053 | 0.037 | 943 | 98.70 | 1862.28 | 7.21 | 42.03 | 3.48 | 38.45 | 0.91 |
| 4 | 0.0200 | 34.82 | 0.053 | 0.037 | 1050 | 109.90 | 2073.58 | 8.94 | 43.76 | 4.87 | 40.02 | 0.91 |
| 5 | 0.0200 | 34.82 | 0.053 | 0.037 | 1345 | 140.78 | 2656.16 | 14.67 | 49.49 | 6.53 | 42.39 | 0.86 |
| 6 | 0.0200 | 34.82 | 0.053 | 0.037 | 1590 | 166.42 | 3140.00 | 20.49 | 55.31 | 6.51 | 44.52 | 0.80 |

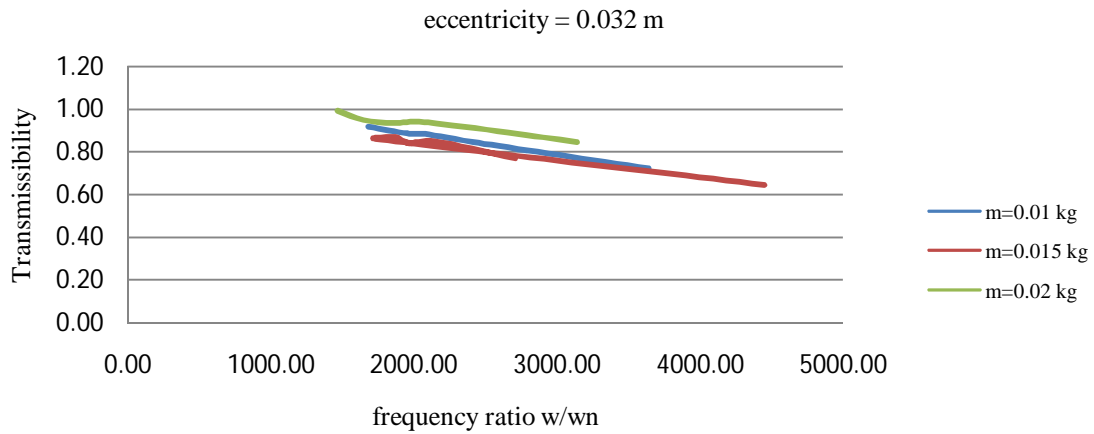

Graph 4 Rubber Transmissibility for eccentricity 0.032m

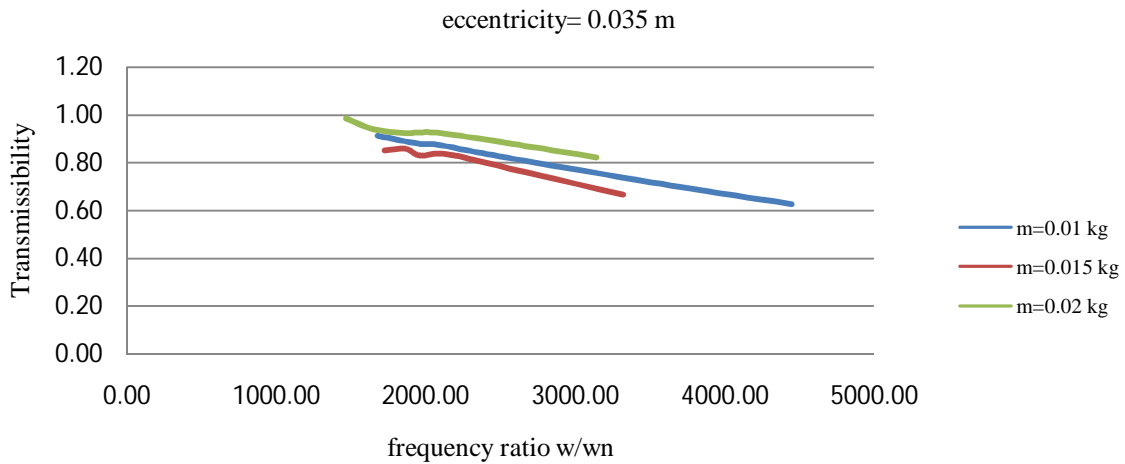

Graph.5 Rubber Transmissibility for eccentricity 0.035m

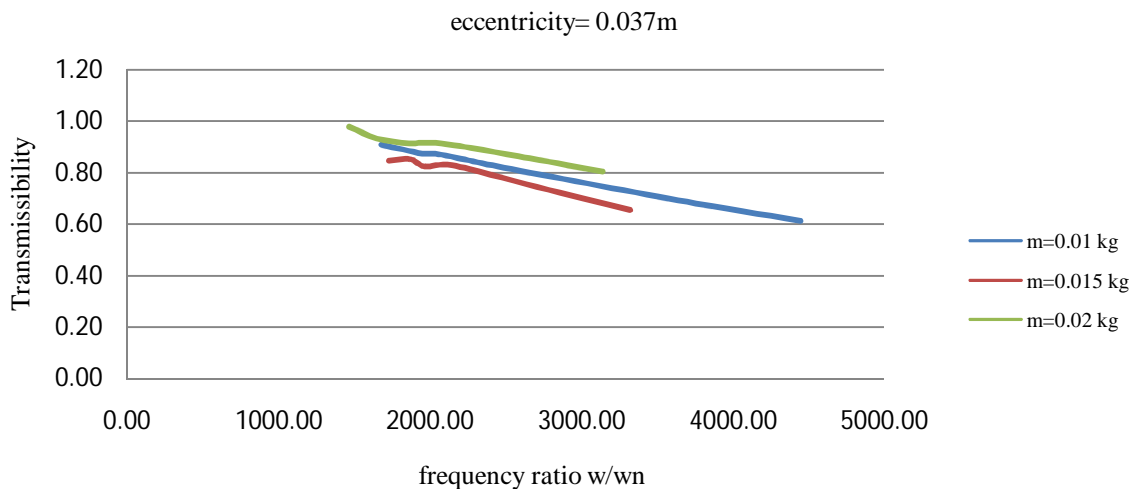

Graph 6 Rubber Transmissibility for eccentricity 0.037m

C. Analysis of wood

Table No.7 Wood Transmissibility for eccentricity 0.032m

| Reading No. | m0 (kg) | wt W(N) | ωn | e (m) | n (RP M) | $\omega=(2\pi n)/60$ | $\omega/\omega n$ | C.F (N)=m0 *e* ω^2 | Fi(N)=W+CF | Ft(kg) | Ft(N) | Tr=Ft/Fi |
|-------------|---------|---------|------------|-------|----------|----------------------|-------------------|---------------------------|------------|--------|-------|----------|
| 1 | 0.0100 | 33.29 | 0.076 | 0.032 | 952 | 99.64 | 1311.09 | 3.18 | 36.47 | 3.50 | 34.34 | 0.94 |
| 2 | 0.0100 | 33.29 | 0.076 | 0.032 | 1000 | 104.67 | 1377.19 | 3.51 | 36.80 | 3.46 | 33.94 | 0.92 |
| 3 | 0.0100 | 33.29 | 0.076 | 0.032 | 1265 | 132.40 | 1742.15 | 5.61 | 38.90 | 3.49 | 34.24 | 0.88 |
| 4 | 0.0100 | 33.29 | 0.076 | 0.032 | 1320 | 138.16 | 1817.89 | 6.11 | 39.40 | 3.45 | 33.86 | 0.86 |
| 5 | 0.0100 | 33.29 | 0.076 | 0.032 | 1518 | 158.88 | 2090.58 | 8.08 | 41.37 | 3.44 | 33.75 | 0.82 |
| 6 | 0.0100 | 33.29 | 0.076 | 0.032 | 1729 | 180.97 | 2381.17 | 10.48 | 43.77 | 3.47 | 34.02 | 0.78 |
| 1 | 0.0150 | 33.29 | 0.076 | 0.032 | 833 | 87.19 | 1147.20 | 3.65 | 36.94 | 3.41 | 33.47 | 0.91 |
| 2 | 0.0150 | 33.29 | 0.076 | 0.032 | 996 | 104.25 | 1371.68 | 5.22 | 38.51 | 3.50 | 34.35 | 0.89 |
| 3 | 0.0150 | 33.29 | 0.076 | 0.032 | 1100 | 115.13 | 1514.91 | 6.36 | 39.65 | 3.43 | 33.67 | 0.85 |
| 4 | 0.0150 | 33.29 | 0.076 | 0.032 | 1380 | 144.44 | 1900.53 | 10.01 | 43.30 | 3.55 | 34.85 | 0.80 |
| 5 | 0.0150 | 33.29 | 0.076 | 0.032 | 1600 | 167.47 | 2203.51 | 13.46 | 46.75 | 3.51 | 34.47 | 0.74 |
| 6 | 0.0150 | 33.29 | 0.076 | 0.032 | 1724 | 180.45 | 2374.28 | 15.63 | 48.92 | 3.48 | 34.12 | 0.70 |
| 1 | 0.0200 | 33.29 | 0.076 | 0.032 | 887 | 92.84 | 1221.57 | 5.52 | 38.81 | 3.92 | 38.46 | 0.99 |
| 2 | 0.0200 | 33.29 | 0.076 | 0.032 | 923 | 96.61 | 1271.15 | 5.97 | 39.26 | 3.85 | 37.74 | 0.96 |
| 3 | 0.0200 | 33.29 | 0.076 | 0.032 | 1040 | 108.85 | 1432.28 | 7.58 | 40.87 | 3.48 | 38.45 | 0.94 |
| 4 | 0.0200 | 33.29 | 0.076 | 0.032 | 1230 | 128.74 | 1693.95 | 10.61 | 43.90 | 4.87 | 40.02 | 0.91 |
| 5 | 0.0200 | 33.29 | 0.076 | 0.032 | 1416 | 148.21 | 1950.11 | 14.06 | 47.35 | 6.53 | 42.39 | 0.90 |
| 6 | 0.0200 | 33.29 | 0.076 | 0.032 | 1500 | 157.00 | 2065.79 | 15.78 | 49.07 | 6.51 | 44.52 | 0.91 |


Table No.8 Wood Transmissibility for eccentricity 0.035m

| Reading No. | m0 (kg) | wt W(N) | ωn | e (m) | n (RP M) | $\omega=(2\pi n)/60$ | $\omega/\omega n$ | C.F (N)=m0 *e* ω^2 | Fi(N)=W+CF | Ft(kg) | Ft(N) | Tr=Ft/Fi |
|-------------|---------|---------|------------|-------|----------|----------------------|-------------------|---------------------------|------------|--------|-------|----------|
| 1 | 0.0100 | 33.29 | 0.076 | 0.035 | 952 | 99.64 | 1311.09 | 3.48 | 36.77 | 3.50 | 34.34 | 0.93 |
| 2 | 0.0100 | 33.29 | 0.076 | 0.035 | 1000 | 104.67 | 1377.19 | 3.83 | 37.12 | 3.46 | 33.94 | 0.91 |
| 3 | 0.0100 | 33.29 | 0.076 | 0.035 | 1265 | 132.40 | 1742.15 | 6.14 | 39.43 | 3.49 | 34.24 | 0.87 |
| 4 | 0.0100 | 33.29 | 0.076 | 0.035 | 1320 | 138.16 | 1817.89 | 6.68 | 39.97 | 3.45 | 33.86 | 0.85 |
| 5 | 0.0100 | 33.29 | 0.076 | 0.035 | 1518 | 158.88 | 2090.58 | 8.84 | 42.13 | 3.44 | 33.75 | 0.80 |
| 6 | 0.0100 | 33.29 | 0.076 | 0.035 | 1729 | 180.97 | 2381.17 | 11.46 | 44.75 | 3.47 | 34.02 | 0.76 |
| 1 | 0.0150 | 33.29 | 0.076 | 0.035 | 833 | 87.19 | 1147.20 | 3.99 | 37.28 | 3.41 | 33.47 | 0.90 |
| 2 | 0.0150 | 33.29 | 0.076 | 0.035 | 996 | 104.25 | 1371.68 | 5.71 | 39.00 | 3.50 | 34.35 | 0.88 |
| 3 | 0.0150 | 33.29 | 0.076 | 0.035 | 1100 | 115.13 | 1514.91 | 6.96 | 40.25 | 3.43 | 33.67 | 0.84 |
| 4 | 0.0150 | 33.29 | 0.076 | 0.035 | 1380 | 144.44 | 1900.53 | 10.95 | 44.24 | 3.55 | 34.85 | 0.79 |
| 5 | 0.0150 | 33.29 | 0.076 | 0.035 | 1600 | 167.47 | 2203.51 | 14.72 | 48.01 | 3.51 | 34.47 | 0.72 |
| 6 | 0.0150 | 33.29 | 0.076 | 0.035 | 1724 | 180.45 | 2374.28 | 17.09 | 50.38 | 3.48 | 34.12 | 0.68 |
| 1 | 0.0200 | 33.29 | 0.076 | 0.035 | 887 | 92.84 | 1221.57 | 6.03 | 39.32 | 3.92 | 38.46 | 0.98 |
| 2 | 0.0200 | 33.29 | 0.076 | 0.035 | 923 | 96.61 | 1271.15 | 6.53 | 39.82 | 3.85 | 37.74 | 0.95 |
| 3 | 0.0200 | 33.29 | 0.076 | 0.035 | 1040 | 108.85 | 1432.28 | 8.29 | 41.58 | 3.48 | 38.45 | 0.92 |
| 4 | 0.0200 | 33.29 | 0.076 | 0.035 | 1230 | 128.74 | 1693.95 | 11.60 | 44.89 | 4.87 | 40.02 | 0.89 |
| 5 | 0.0200 | 33.29 | 0.076 | 0.035 | 1416 | 148.21 | 1950.11 | 15.38 | 48.67 | 6.53 | 42.39 | 0.87 |
| 6 | 0.0200 | 33.29 | 0.076 | 0.035 | 1500 | 157.00 | 2065.79 | 17.25 | 50.54 | 6.51 | 44.52 | 0.88 |


Table No.9 Wood Transmissibility for eccentricity 0.037m

| Reading No. | m0 (kg) | wt W(N) | ω_n | e (m) | n (RPM) | $\omega=(2\pi n)/60$ | ω/ω_n | C.F (N)= $m_0 * e * \omega^2$ | $F_i(N)=W+CF$ | Ft(kg) | Ft(N) | Tr=Ft/Fi |
|-------------|---------|---------|------------|-------|---------|----------------------|-------------------|-------------------------------|---------------|--------|-------|----------|
| 1 | 0.0100 | 33.29 | 0.076 | 0.037 | 952 | 99.64 | 1311.09 | 3.67 | 36.96 | 3.50 | 34.34 | 0.93 |
| 2 | 0.0100 | 33.29 | 0.076 | 0.037 | 1000 | 104.67 | 1377.19 | 4.05 | 37.34 | 3.46 | 33.94 | 0.91 |
| 3 | 0.0100 | 33.29 | 0.076 | 0.037 | 1265 | 132.40 | 1742.15 | 6.49 | 39.78 | 3.49 | 34.24 | 0.86 |
| 4 | 0.0100 | 33.29 | 0.076 | 0.037 | 1320 | 138.16 | 1817.89 | 7.06 | 40.35 | 3.45 | 33.86 | 0.84 |
| 5 | 0.0100 | 33.29 | 0.076 | 0.037 | 1518 | 158.88 | 2090.58 | 9.34 | 42.63 | 3.44 | 33.75 | 0.79 |
| 6 | 0.0100 | 33.29 | 0.076 | 0.037 | 1729 | 180.97 | 2381.17 | 12.12 | 45.41 | 3.47 | 34.02 | 0.75 |
| 1 | 0.0150 | 33.29 | 0.076 | 0.037 | 833 | 87.19 | 1147.20 | 4.22 | 37.51 | 3.41 | 33.47 | 0.89 |
| 2 | 0.0150 | 33.29 | 0.076 | 0.037 | 996 | 104.25 | 1371.68 | 6.03 | 39.32 | 3.50 | 34.35 | 0.87 |
| 3 | 0.0150 | 33.29 | 0.076 | 0.037 | 1100 | 115.13 | 1514.91 | 7.36 | 40.65 | 3.43 | 33.67 | 0.83 |
| 4 | 0.0150 | 33.29 | 0.076 | 0.037 | 1380 | 144.44 | 1900.53 | 11.58 | 44.87 | 3.55 | 34.85 | 0.78 |
| 5 | 0.0150 | 33.29 | 0.076 | 0.037 | 1600 | 167.47 | 2203.51 | 15.57 | 48.86 | 3.51 | 34.47 | 0.71 |
| 6 | 0.0150 | 33.29 | 0.076 | 0.037 | 1724 | 180.45 | 2374.28 | 18.07 | 51.36 | 3.48 | 34.12 | 0.66 |
| 1 | 0.0200 | 33.29 | 0.076 | 0.037 | 887 | 92.84 | 1221.57 | 6.38 | 39.67 | 3.92 | 38.46 | 0.97 |
| 2 | 0.0200 | 33.29 | 0.076 | 0.037 | 923 | 96.61 | 1271.15 | 6.91 | 40.20 | 3.85 | 37.74 | 0.94 |
| 3 | 0.0200 | 33.29 | 0.076 | 0.037 | 1040 | 108.85 | 1432.28 | 8.77 | 42.06 | 3.48 | 38.45 | 0.91 |
| 4 | 0.0200 | 33.29 | 0.076 | 0.037 | 1230 | 128.74 | 1693.95 | 12.26 | 45.55 | 4.87 | 40.02 | 0.88 |
| 5 | 0.0200 | 33.29 | 0.076 | 0.037 | 1416 | 148.21 | 1950.11 | 16.25 | 49.54 | 6.53 | 42.39 | 0.86 |
| 6 | 0.0200 | 33.29 | 0.076 | 0.037 | 1500 | 157.00 | 2065.79 | 18.24 | 51.53 | 6.51 | 44.52 | 0.86 |


eccentricity= 0.032m

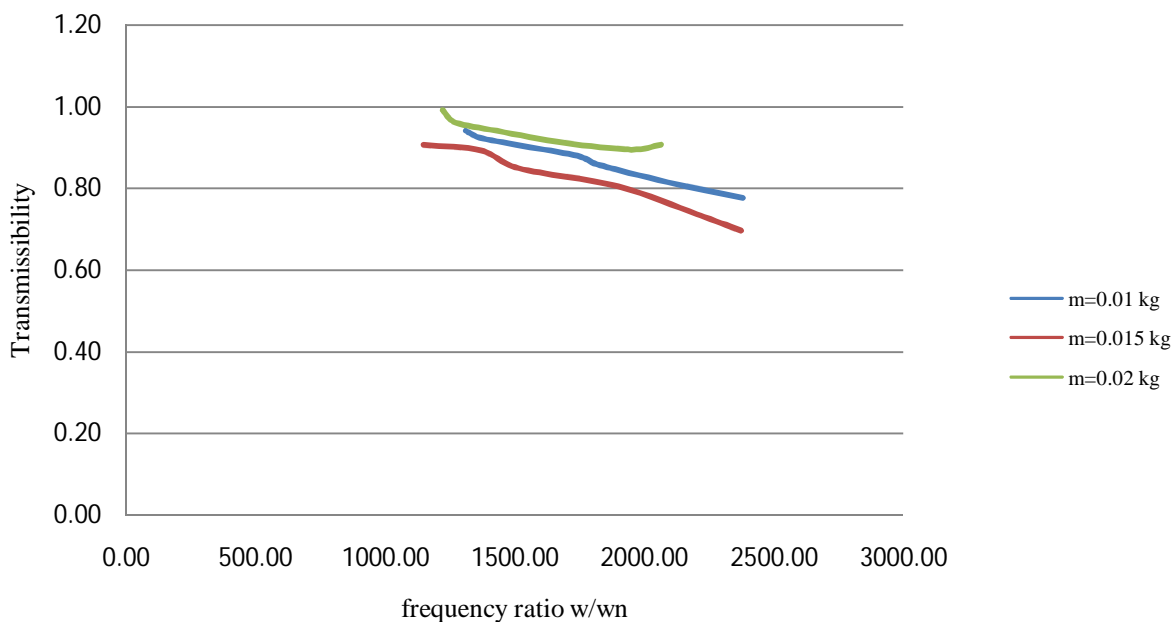

Graph 7 Wood Transmissibility for eccentricity 0.032m

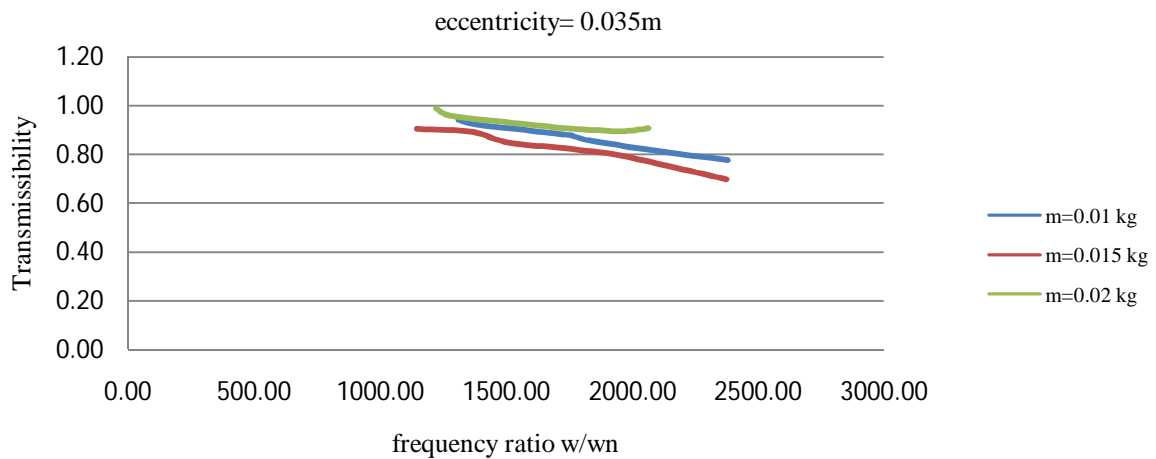

Graph 8 Wood Transmissibility for eccentricity 0.035m

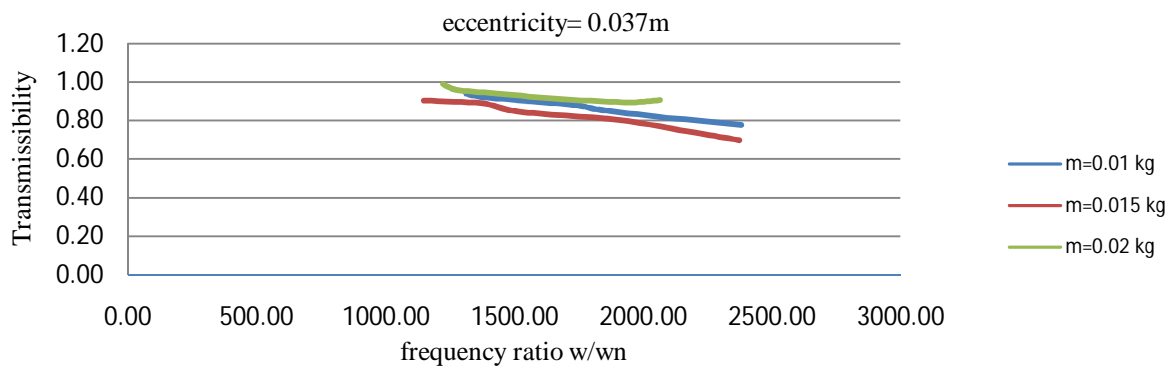

Graph 7 Wood Transmissibility for eccentricity 0.037m

IV. CONCLUSION

The force transmissibility of different isolator are calculated by using load cell (weighing machine). Hence from graphical representation results are obtained.

- A. As frequency of dynamic vibration increases, torque transmissibility decreases.
- B. For all type types of isolating materials result shows value of transmissibility is lower than one it means that all the time transmitted force is less than impressed force.
- C. As rotating masses increases from 10gm to 20 gm and frequency of vibration increases ultimately result in decreasing transmissibility in spring, rubber and wood isolation.
- D. For spring, rubber and wood, the graph frequency ratio increases, transmissibility decreases. Transmissibility of spring, rubber and wood $Tr < 1$.
- E. Transmissibility decreases with increasing order of frequency due to dynamic vibration using rubber as a isolation material. It concludes that rubber isolator gives best transmissibility.

REFERENCES

- [1] J. M. Krodkiewski Department of Mechanical and Manufacturing Engineering, The University of Melbourne, Melbourne, Victoria 3052, Australia
- [2] Department of Electrical Engineering, School of Tecnology and Management, Polytechnic Institute of Leiria Campus 2 – Morro do Lena – Alto do Vieiro, 2411-901 Leiria, Apartado 4163, Portugal
- [3] frequency Response, Damping, And Transmissibility Characteristics Of Top-Loaded Corrugated Containers U.S.D.A. FOREST SERVICE RESEARCH PA PER FPL 160 1971
- [4] Transmissibility and DPMI analysis of the seated posture of Human under Low frequency vibration. N.V. Amar Kishore, A.S. Prashanth, V.H. Saran, S.P. Harsha*.



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)