



# IJRASET

International Journal For Research in  
Applied Science and Engineering Technology



---

# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume: 8      Issue: V      Month of publication: May 2020**

**DOI: <http://doi.org/10.22214/ijraset.2020.5211>**

**[www.ijraset.com](http://www.ijraset.com)**

**Call:  08813907089**

**E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)**

# Modelling and Control of 3-DOF Helicopter

Harish Desai<sup>1</sup>, Akash. S<sup>2</sup>, Santosh Kumar Choudhary<sup>3</sup>

<sup>1, 2, 3</sup>Manipal academy of higher education, Manipal institute of technology, Manipal

**Abstract:** The objective of this paper is to evolution of a mathematical modeling for and control of helicopter three degree of freedom. And these mathematical modeling is done using the free body diagram. The PID controller is designed. For designing of PID, skogestad tuning method was used. The results are clearly shows that the controller performs good for all the three axis such as pitch, elevation and roll axis. And also the results shows that it can control system like with working characteristics in spite of non linear systems.

**Keywords:** Mathematical modelling, control, PID, skogestad, 3-dof helicopter.

## I. INTRODUCTION

The helicopter with three degree of freedom consist of a long pivoted and which is fixed on a vertical bars, two motors are fixed at the end of the arm which has variations in voltage and also which create thrust force at the opposite end the counterweight is provided and this is provided in order to control the angle of elevations such as pitch and travel.

The model based control approach to be contingent on the mathematical representation of the system. Usually the helicopter considerably highly non-linear, as the complication of the system potential to complete and model of the system becomes very difficult. In order to stabilize this nonlinear system many control strategies have been involved. In [1] using LQR (Linear-Quadratic-Regulator) technique controller is planned. In [2]to control the travel angle cascade controller is designed. In[3] controller is designed for a fuzzy controller that control travel angle and elevation of the helicopter.

A robust control was designed for the small helicopters such[4] that and also in order to track attitude in some mission. In some cases the flexible neural Tolerant control scheme is considered in subject with uncertainties, external disturbances and also actuator faults[5]. All the unmanned helicopter are highly non-linear and also Multiple-input and multiple-output system with subjected to uncertainties, and disturbances [6]-[7][8][9][10]. To allowtesting platform for the flight control unmanned helicopter some 3-DOF models are developed by the Quanser[11].

The tracking error problem was examined for MIMO for non linear system and the stability evidence for closed loop system were given[12]. Considering the unmanned helicopters as a complex non linear systems, the main challenge is to control and to achieve the performance in the existence of the non linearity, disturbances and the actuator faults[13] [14] [15].

## II. EXPERIMENTAL SETUP AND MECHANICAL MODEL

The helicopter composed by a base reference such that its arm is connected with two joints. The one arm is about to rotate in the vertical axis and another one is tilt in the horizontal axis. The body of the helicopter is ascend onone of the two limits such that it is tilting in the “pitch axis”. It has two propellers along with this DC motors are provided such that depending upon the applied voltage it generates force. On the other limit the counter weight is mounted. There are three encoders are provided such that it masures the three axis (pitch, travel, elevation) with the resolution of 0.0015rad.

The block diagram of helicopter is shown in below figure.



Figure 1. 3-DOF helicopter

We know that in order to study the motion of the helicopter we need to study the dynamics of the mechanical modelled helicopter. In this model the mass is concentrated in four points in this four mass the two are represents counter weight and arms other two represents motor-propeller –assemblies.

**A. Mathematical Modelling**

The diagram of three degree of freedom helicopter is shown above. In order to describe the helicopter dynamics we use Euler – Lagrange formula such that we can describe differential equations for the pitch angle ( $\rho$ ), elevation angle ( $\epsilon$ ), travel angle ( $\tau$ ).

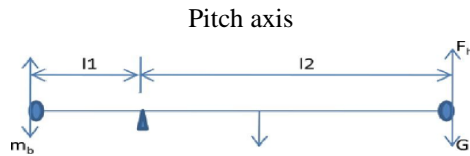


Figure 2. Pitch axis model

Assume roll to be zero,

i.e. pitch dynamics of 3 DOF helicopter is:

$$J_e \ddot{\epsilon} = l_1 F_h - l_2 G$$

$$= K_c l_1 (v_1 + v_2) - T_g$$

$$J_e \ddot{\epsilon} = K_c l_1 (v_s) - T_g$$

Where,

$\epsilon$  = pitch angle

$J_e = m_h l_1^2 + m_b l_2^2$  (moment of enervation of system about pitch axis)

$m_b$  = mass of balance blocks

$m_h$  = total mass of two propeller motors

$v_1$  &  $v_2$  = applied voltage resulting in forces  $F_z$  &  $F_z$  respctive  $I_y$

$K_c$  = force constant of propeller combination

$l_1$  = distance from axis point to propeller

$l_2$  = distance from pivot point to balance

$T_g$  = gravitational torque

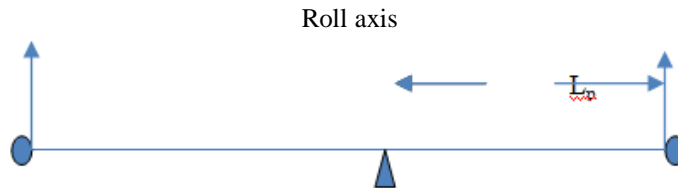


Figure 3. Roll axis model

If first motor generates high force than the second motor, helicopter will be over turned in dextrorotary.

i.e. Roll axis dynamic of 3-DOF helicopter is modeled as,

$$J_p \ddot{p} = F_1 l_p - F_2 l_p$$

$$= K_c l_p (v_1 - v_2)$$

$$J_p \ddot{p} = K_c l_p v_d$$

Where,

$P$  = Roll axis angle

$J_p$  = moment of enervation of system about roll axis

$l_p$  = distance from axis to motor

Travel axis

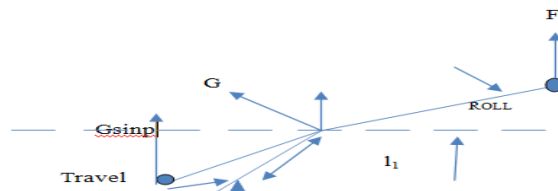


Figure 4. Travel axis model

When travel axis slanted and over turned, the component G will produce torque such that it will produce acceleration in the travel axis. Assuming that body has rolled up by an angle 'P', the axis dynamic of 3-DOF helicopter is modified as,

$$J_t \ddot{r} = -G \sin(\rho) l_1$$

$$J_t \dot{r} = -K_p \sin(\rho) l_1$$

Where,

$J_t \ddot{r}$  = moment of eneration of system

$\dot{r}$  = rate of travel in rad/sec

$K_p$  = required force for the helicopter to maintain flight and G

Also, roll is zero, in travel axis no force is pass.

The positive roll causes the acceleration in travel with negative direction. For designing speed controller for travel axis, model is considered for position controller  $J_t \ddot{r} = -K_p \sin(\rho) l_1$ .

### III.SIMPLIFYING MODEL OF 3-DOF HELICOPTER

Assumptions for simplifying model of 3-DOF helicopter

- 1) All angles are scientifically small , so that linear approximation is valid.
- 2) Coupling dynamics is neglected.
- 3) Gravitational torque is neglected.
- 4) Friction forces are neglected.

i.e.  $\ddot{\epsilon}_1 = (K_c l_1 / J_e) v_s$ ;  $\ddot{\rho} = (K_c l_1 / J_p) v_d$ ;  $\dot{r} = (G l_1 / J_t) P$

Where,

$$U_1 = (v_s + v_d)/2, U_2 = ((v_s - v_d)/2)$$

Using laplace transform ,

$$\epsilon(s) = (K_c l_1 / J_e s^2) v_s(s); p(s) = (K_c l_p / J_p s^2) v_d(s); R(s) = (G R_l / J_t s) p(s)$$

Parameters to be consider,

$J_e$	1.8145 kgm°
$J_t$	1.8145 kgm*
$J_p$	0.0319
<b>G</b>	4.2591
$l_1$	0.88 m
$l_2$	0.35 m
$l_p$	0.17 m
$K_p$	12 N/V

Table 1. parameters for design

From the above equations by applying the parameter values,

$$\epsilon(s) = ((5.8917)/s^2) v_s(s)$$

$$p(s) = ((63.9894)/s^2) v_d(s)$$

$$R(s) = ((2.0055)/s) p(s)$$

A. Open loop response for 3-DOF helicopter

Open loop response for three axis helicopter using MATLAB simulink was developed. The results and graph for the three axis is shown in below figure.



Figure 5. pitch angle tf

The graph of amplitude vs time for pitch axis is shown below.

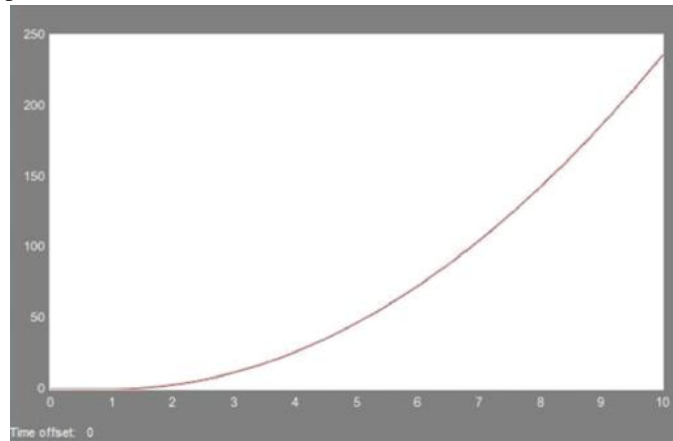


Figure 6. Response of pitch angle

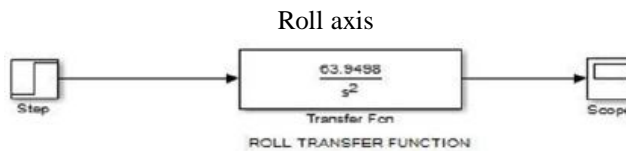


Figure 7. Roll axis tf

The graph of amplitude vs time for roll axis is shown in below figure.

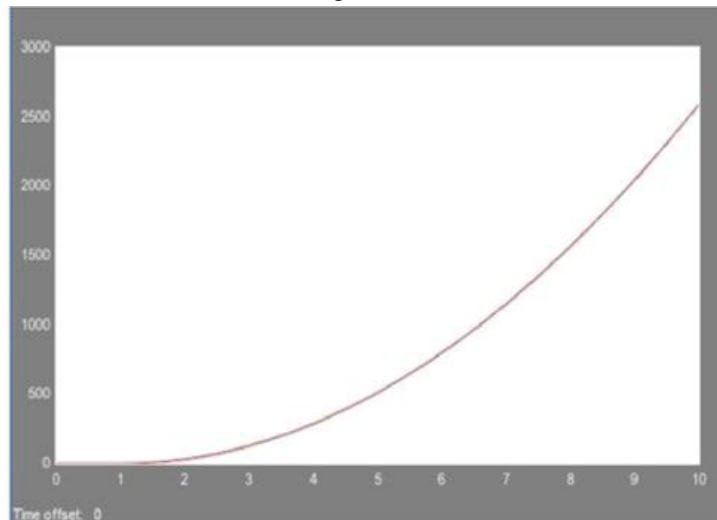


Figure 8. Response of roll angle

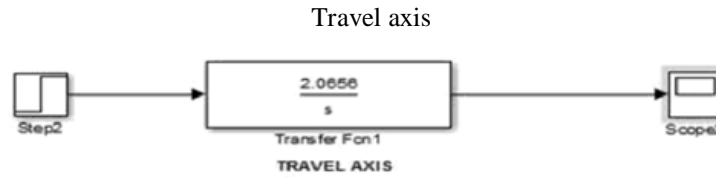


Figure 9. Travel axis tf

The graph of amplitude vs time for travel axis is shown in below figure.

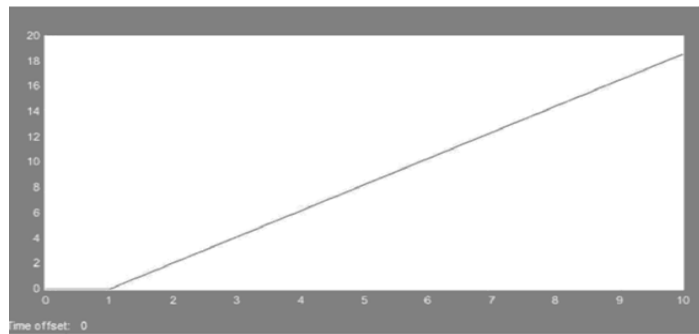


Figure 8. Response of travel angle

**B. PID Control Design For 3-Dof Helicopter**

The strategy to stabilizing a 3-DOF helicopter founded on PID design and the PID design is done using Skogestad tuning itictliod. i.e. using skogestad fontiula i'c can design a PID values for the helicopter stabilization.

Skogestad tuning formula.

$$G(s) = ((K^{11} - e^{\theta s})/s^2) \quad (\text{Assume } \theta = 0.123s)$$

$$G(s) = ((K^1 - e^{\theta s})/s^2)$$

For elevation axis,

$$\epsilon(s) = (5.8197/s^2) v_s(s)$$

$$k_p = 0.2367; k_i = 0.6; k_d = 1.7116$$

For roll axis,

$$P(s) = ((63.9408) / S^2) Vd(S)$$

$$K_p = 0.0215 ; k_i = 0.6 ; k_d = 1.7116$$

For travel axis,

$$R(s) = ((2.0655) / s) p(s)$$

$$K_p = 1.13 ; k_i = 0.6$$

Using MATLAB simulink the PID values were added to the response for three angles such as pitch, roll, travel angle. The simulink for PID designed value are show n in below figure.

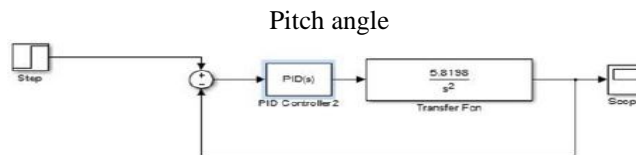


Figure 9. PID cntroler for pitch angle

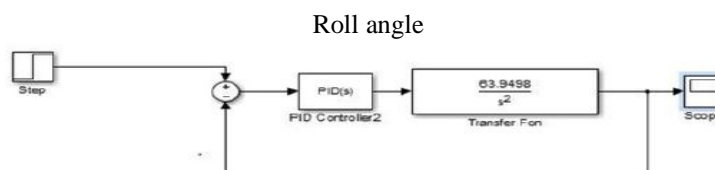


Figure 10. PID controller for roll angle

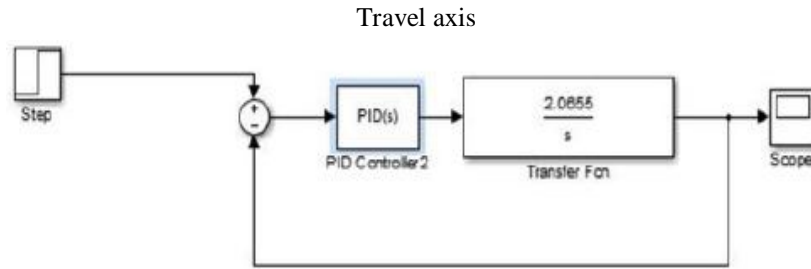


Figure 11. PID controller for travel axis

The response of the PID controller for all the three axis is shown in below figure. From the response we observed that the open loop for the system is works effectively without any disturbances.

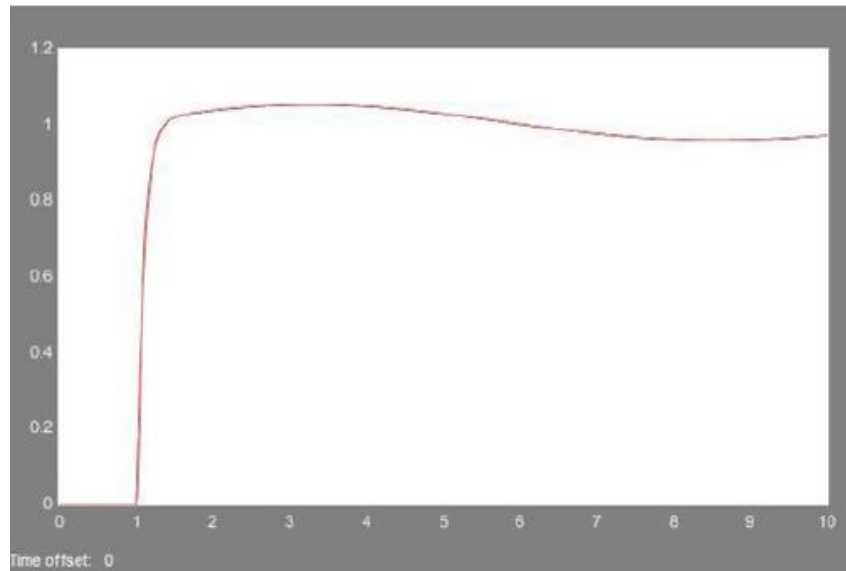


Figure 12. Response of pitch angle with PID controller

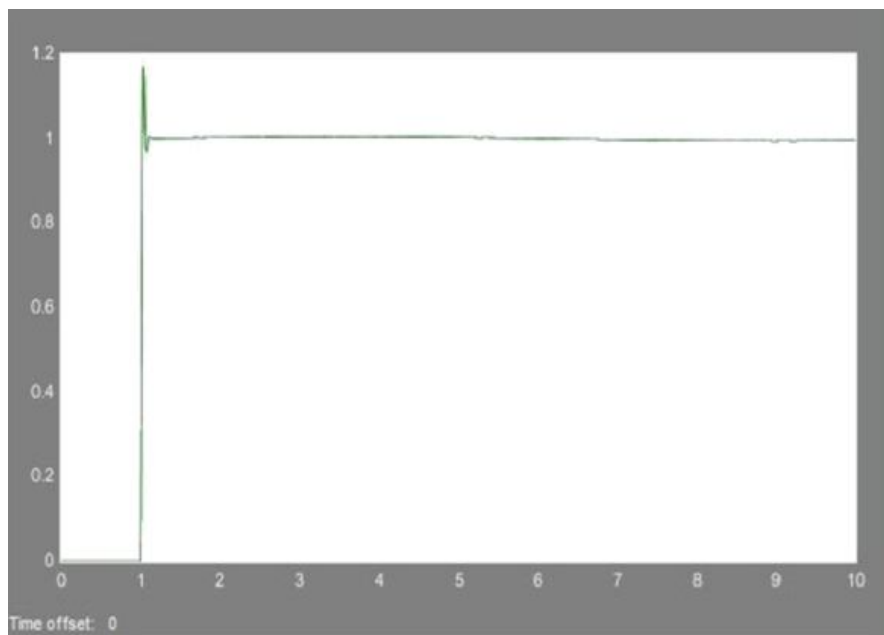


Figure 13. Response of roll angle with PID controller

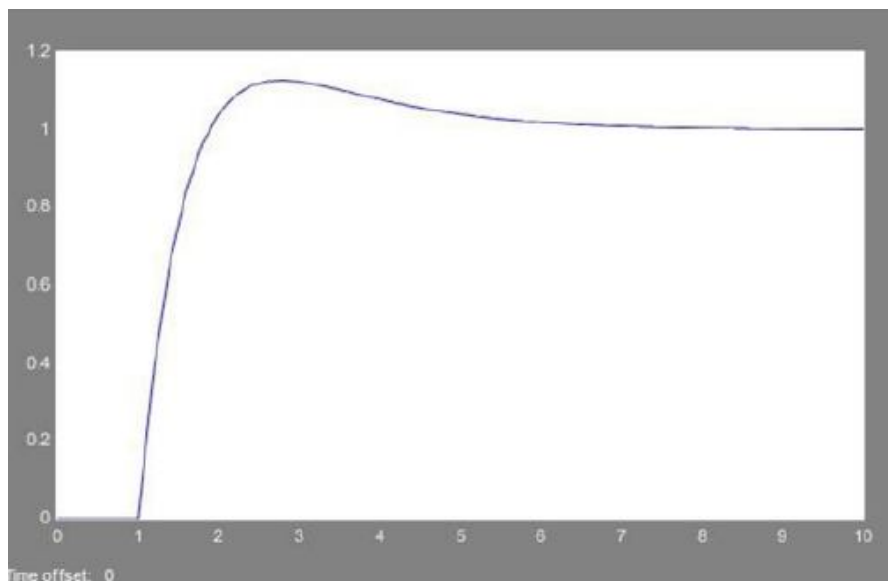


Figure 14. Response of travel axis with PID controller

#### IV. CONCLUSIONS

The main aim of this paper was to expansion of a PID controller using skogetsad tuning method for the 3-DOF helicopter. The results are clearly shows that the controller performs good for all the three axis such as pitch, elevation and roll axis. And also the results shows that it can control system like with working characteristics in spite of non linear systems. Forward work on the subject could include tuning of the model. Mainly the mathematical model over the three axis required forward improvement since the simulation and in real time is non identical with small considerable amount.

In addition the work could also include testing of other control. Development of a simpler LQR controller could give a comparison to the PID controller developed in this report.

#### V. ACKNOWLEDGMENT

I heart fully thanks for my lecturers.

#### REFERENCES

- [1] Ameerul Hakeem MohdHairon, HasmahMansor, Teddy Surya Gunawan, Sheroz Khan. "Robust Control of Bench-top Helicopter Using Quantitative Feed back Theorv" TELKOMNIKA Indonesian Journal of Electrical Engineering, pp 500 - 507. 2015. DOI: 10.11591/telkommnika.v14i3.7899
- [2] Lei Yang, Lidong Zhang, Qing Li. "Design and application of fuzzy sliding mode control en the 3-DOF helicopter". International Workshop on Intelligent Systems and Applications, 200g. Doi: io. ioo/iWISA.2009.5072806.
- [3] B. Zhu, H. H. — T. Liu, and Z. Li. "Robust distributed attitude synchronization of multiple three-DOF experimental helicopters," Control Engineering practice, vol.36, pp.87-99, 2015.
- [4] L. Marconi, R. Naldi, "Robust full degree-of-freedom tracking control of a helicopter", tomatica, vol.43, no. 11, pp. 1909-1920, Nov. 2007.
- [5] Mou Chen, Peng Sni, Cneng-Chew Lim "Adaptive Neural Fault-Tolerant Control of a 3-DOF Model Helicopter System", vol 46, Issue 2
- [6] Y. Yang, G. Feng, J. S. Ren, "A com bined backstepping and szmall-gainb approach to robust adaptive fuzzy control for strict-feedback nonlinear systems", IEEE Trans Syst. Man Cybern, A Syst Humans, vol. 34, no. 3, pp. 406-420, May 2004.
- [7] Z. J. Li, Y. Kang, "Dynamic coupling switching control incorporating support vector machines for wheeled mobile manipulators with hybrid joints", Automatica, vol. 46, no. 5, pp. 785-958, 2010.
- [8] C. Yang, Y. Li, S. S. Ge, T. H. Lee, "Adaptive control of a class of discrete-time MIMO nonlinear systems with uncertain couplings," Int. J. Control, vol. 83, no. 10, pp. 2020- 2013, 2010.
- [9] Z. J. Li, J. X. Li, Y. Kang, "Adaptive robust coordinated control of multiple mobile manipulators interacting with rigid environments", Automatica, vol. 4d, no. 10, pp. 2028- 2034, 2010.
- [10] B. Zheng, Y. S. Zhong, bust attitude regulation of a 3-DOF helicopter benchmark: Theory and experiments", IEEE Trans. Ind. Electron., vol. no. 2, pp. 660-670, Feb.
- [11] S. C. Tong, S. Sui, Y. M. Li, "Fuzzy adaptive output feedback control of MIMO nonlinear systems with partial tracking errors constrained", IEEE Trans. Fuzzy Syst., vol 23, no. 4, p 29-742, Aug. 2015.
- [12] A. Falcoz, D. Henry, A. Zolghadri, "Robust fault diagnosis for atmospheric reentry vehicles: A case4 study", IEEE Trans. Syst. Man Cybern. A Syst. Humans, vol 40, no. 5, pp. 886-899, Sep. 2010.
- [13] A. Falcoz, D. Henry, A. Zolghadri, "Robust fault diagnosis of nonlinear systems using interval constraint satisfaction and analytical redundancy relations," IEEE Trans. Syst. Man Cybern. Syst., vol, 44, no. 1, pp, 18-29, Jan. 2014





10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)