



# IJRASET

International Journal For Research in  
Applied Science and Engineering Technology



---

# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume: 5**

**Issue: V**

**Month of publication: May 2017**

**DOI:**

[www.ijraset.com](http://www.ijraset.com)

Call:  08813907089

E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)

# Integral based Load Frequency Control

Lokendra Kumar<sup>1</sup>

<sup>1</sup>Asstt. Prof(Contract). in EE Deptt. at Rajkiya College of Engineering, Chandpur, Bijnor (U.P.)

**Abstract:** The aim of this paper is to model, carry and analysis of Load frequency control in three area power system. Load frequency control of multi-area interconnected thermal generating areas means zeroing of the integral area control errors, so that system frequency and tie-line changes are maintained at their scheduled values. To achieve this, in this paper, Integral controller is used to determine dynamic frequency of the system using MATLAB.

**Keywords:** load frequency control, dynamic analysis, integral controller.

## I. INTRODUCTION

The large-scale power systems are normally composed of control areas (i.e. multi-area) or regions representing coherent groups of generators. The various areas are interconnected through tie-lines. The tie-lines are utilized for contractual energy exchange between areas and provide inter-area support in case of abnormal conditions. Without loss of generality we shall consider a three-area case connected by a tie line as illustrated in Fig. 2. The concepts and theory of three-area power system is also applicable to other multi-area power systems i.e. four-area, five-area etc.

Fig. 1. Shows schematically the speed governing system of a steam turbine. The system consists of the following components:

### A. Fly ball speed governor

This is the heart of the system which senses the change in speed (frequency). As the speed increases the fly balls move outwards and the point B on linkage mechanism moves downwards. The reverse happens when the speed decreases.

### B. Hydraulic amplifier

It comprises a pilot valve and main piston arrangement. Low power level valve movement is converted into high power level piston valve movement. This is necessary in order to open or close the steam valve against high pressure steam.

### C. Linkage mechanism

ABC is a rigid link pivoted at B and CDE is another rigid link pivoted at D. This link mechanism provides a movement to the control valve in proportion to change in speed. It also provides a feedback from the steam valve movement.

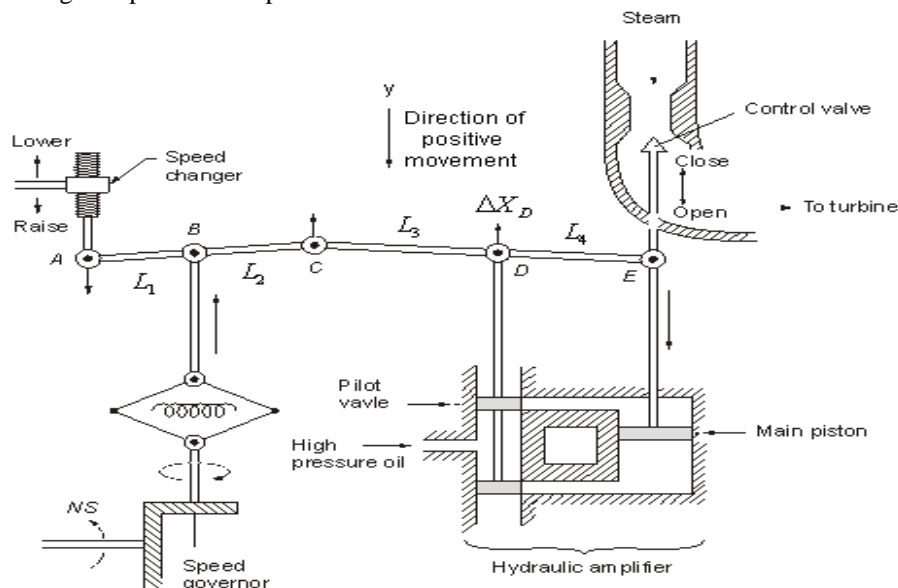


Fig. 1. Model of Turbine speed governing system

## International Journal for Research in Applied Science & Engineering Technology (IJRASET)

### D. Speed changer

It provides a steady state power output setting for the turbine. Its downward movement opens the upper pilot valve so that more steam is admitted to the turbine under steady conditions (hence more steady power output). The reverse happens for upward movement of speed changer.

Let the point A on the linkage mechanism be moved downwards by a small amount  $\Delta y_A$ . It is a command which causes the turbine power output to change and can therefore be written as

$$\Delta y_A = K_C \Delta P_C$$

Where  $\Delta P_C$  is the commanded increase in power:

The command signal  $\Delta P_C$  (i.e.  $\Delta y_E$ ) sets into motion a sequence of events - The pilot valve moves upwards, high pressure oil flows on to the top of the main piston moving it downwards; the steam valve opening consequently increases, the turbine generator speed increases, i.e. the frequency goes up.

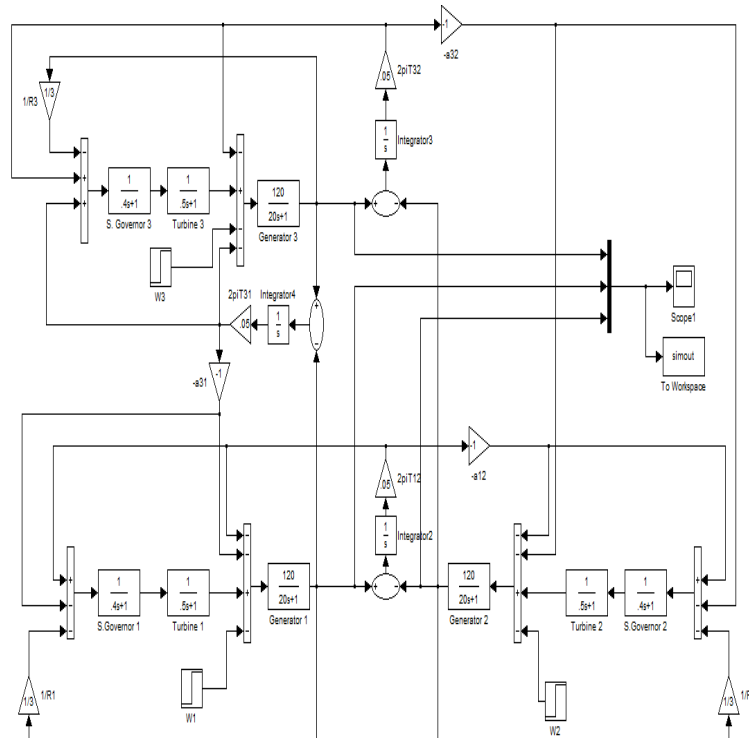


Fig.2. Block diagram of three-area load frequency control without controller

Load-frequency control (LFC) is a very important component in power system operation and control for supplying sufficient and reliable electric power with good quality. The objective of the LFC is to satisfy the following classical requirements in a multi-area interconnected power system :

- 1) Zero steady-state errors of tie-line exchanges and frequency deviations.
- 2) Optimal transient behaviour.
- 3) In steady state: the power generation levels should satisfy the optimal dispatch conditions.

Many investigations have been reported in the past pertaining to load frequency control of a multi-area interconnected power system. In the literature, some control strategies have been proposed based on classical linear control theory . However, because of the inherent characteristics of the changing loads, the operating point of a power system changes continuously during a daily cycle. Thus, a fixed controller may no longer be suitable in all operating conditions. There are some authors who have applied variable structure control to make the controller insensitive to system parameters change. However, this method requires information on the system states which are very difficult to know completely. The two area are connected through tie lines , if there is a disturbance in one area then other other area is also disturbed so it is necessary for the system to operate in a proper manner.

# International Journal for Research in Applied Science & Engineering Technology (IJRASET)

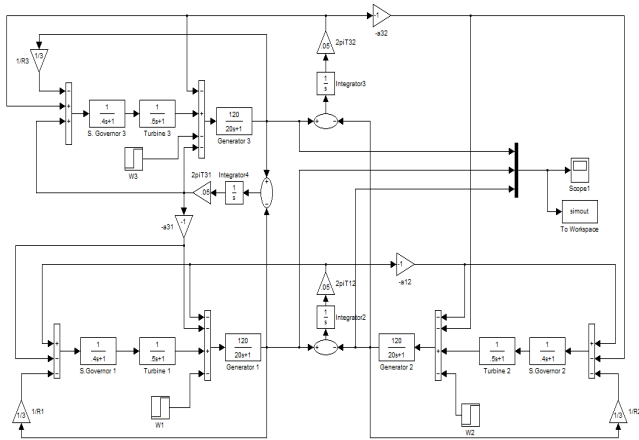


Fig.3. Simulation model without controller

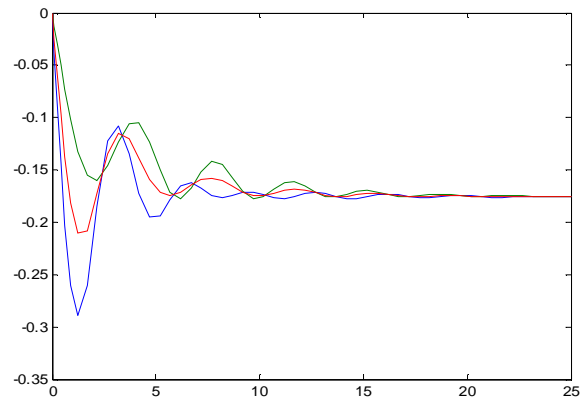


Fig.4..Dynamic response without controller

**E. Block Diagram of Three-Area LFC with Integral Controller:**

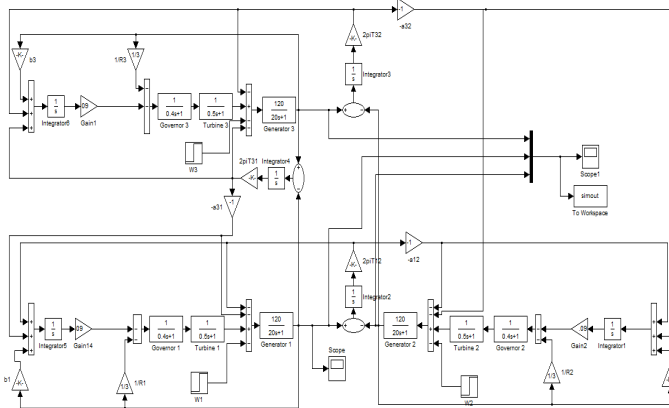


Fig.5.Simulation model with integral controller

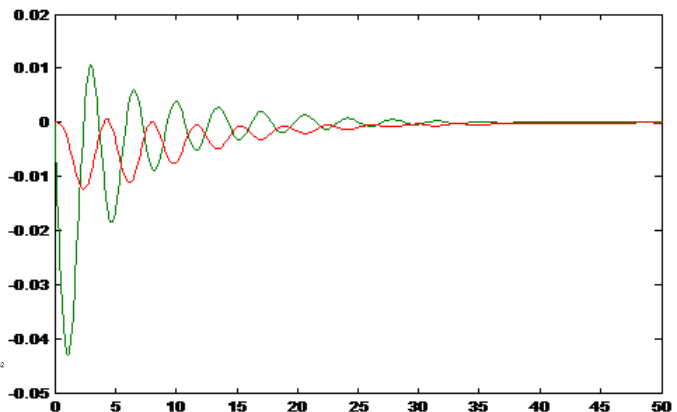


Fig.6.Dynamic response with integral controller

**F. Comparison between simulation model with integral controller and without integral controller**

For $\Delta f_1$	With Integral Controller	
	Simulink	Workspace
Settling Time (s)	35.0	35.0
Peak overshoots (pu)	-0.0286	-0.0416
Freq. Error $\Delta f_{ss}$ (pu)	0	0

For $\Delta f_1$	Without Integral Controller	
	Simulink	Workspace
Settling Time (s)	23.5	35.0
Peak overshoots (pu)	-0.0286	-0.0286
Freq. Error $\Delta f_{ss}$ (pu)	-0.0188	-0.0188

## II. CONCLUSION

In this Paper we use Integral controller for Improving the stability of the system. When We compare the both System .i.e system with Integral controller or with Integral controller, we find that Integral controller remove the steady state error and reduce the Peak overshoot.

**A. Nomenclature**

$f_i$  Nominal system frequency of  $i^{th}$  area. [Hz]

$\Delta f_i$  Incremental frequency deviation of  $i^{th}$  area. [Hz pu]

## International Journal for Research in Applied Science & Engineering Technology (IJRASET)

$\Delta P_{Di}$  Incremental load demand change of  $i^{\text{th}}$  area. [pu MW]

$T_{sg_i}$  Speed governor time constant of  $i^{\text{th}}$  area [sec.]

$K_{sg_i}$  Gain of speed governor of  $i^{\text{th}}$  area

$R_i$  Governor Speed regulation of the of  $i^{\text{th}}$  area

$T_{ti}$  Turbine time constant of  $i^{\text{th}}$  area.

$K_{ti}$  Gain of turbine of  $i^{\text{th}}$  area

$K_{psi}$  Gain of power system (generator load) of  $i^{\text{th}}$  area

$$K_{psi} = \frac{1}{B}$$

$T_{psi}$  Power system time constant of  $i^{\text{th}}$  area

$$T_{psi} = \frac{2H_i}{B_i f_i^0}$$

$H_i$  Inertia constant of  $i^{\text{th}}$  area [MW-sec/MVA]

$\Delta P_{Gi}$  Incremental generator power output change of  $i^{\text{th}}$  area [pu MW]

$K_{ii}$  Gain of integral controller of  $i^{\text{th}}$  area

$ACE_i$  Area control error of  $i^{\text{th}}$  area

$u_i$  Control input of  $i^{\text{th}}$  area

$w_i$  Disturbance vector of  $i^{\text{th}}$  area

$\Delta P_{tie,ij}$  Incremental tie line power change of  $i^{\text{th}}$  &  $j^{\text{th}}$  area [pu MW]

### B. System Data

$f_i$	=	50	[Hz]
$P_{ri}$	=	2000	[MW]
$P_{rj}$	=	2000	[MW]
$T_{sg_i}$	=	0.08	[sec.]
$T_{psi}$	=	20	[sec.]
$T_{ti}$	=	0.03	[sec.]
$R_i$	=	2.4	[Hz .pu /MW]
$T_{ij}$	=	0.08674	
$a_{ij}$	=	1	
$K_{ii}$	=	0.671	
$K_{psi}$	=	120	[Hz .pu /MW]
$b_i$	=	0.425	[pu MW/Hz]

### REFERENCES

- [1] Charls E. Fosha and Olle I. Elgerd, "The Meghawatt-Frequency Control Problem: A New Approach via Optimal Control Theory", IEEE Trans. on PAS, Vol.

## International Journal for Research in Applied Science & Engineering Technology (IJRASET)

- PAS-89, No. 4, April 1970.
- [2] Mathur M.D. and Ghosh S., "A Comprehensive Analysis of Intelligent Controllers for Load Frequency Control", In the Proceedings of IEEE Power India 2006 Conference. Delhi. April 10-12, 2006.
  - [3] D. K. Chaturvedi, P.S. Satsangi and P.K. Kalra, "Load Frequency Control: A Generalized neural network approach", Electrical Power and Energy Systems, vol. 21, pp. 405-415, 1999.
  - [4] S P Ghosal , "Multi-area Frequency and Tie-line Power Flow Control with Fuzzy Logic Based Integral Gain Scheduling" Journal of Institution of Engineers (India), Vol. 84, December 2003, pp 135-141.
  - [5] Saadat H., "Power System Analysis", McGraw-Hill, 1999.
  - [6] A.Soundarrajan and S. Sumathi, "Effects of Non-linearities in Fuzzy Based Load Frequency Control", International Journal of Electronic Engineering Research, Vol. 1, November 1 (2009) pp. 37-51.
  - [7] H.D. Mathur and H.V. Manjunath, "Frequency Stabilization Using Fuzzy Logic based Controller for Multi-Area Power System", The South Pacific Journal of Natural Science, 2007, 4, 22-30.
  - [8] Gayadhar Panda, Sidhartha Panda and Cemal Ardil, "Automatic Generation Control of Inteconnected Power System with Generation Rate Constraints by Hybrid Neuro Fuzzy Approach", International Journal of Electrical Power and Energy Systems Engineering, Vol. 2, Number 1, Winter 2009 pp 13-18
  - [9] C. Ertugrul and I. Kocaarslan , "A Fuzzy Gain Scheduling PI Controller Application for an Interconnected Electrical Power System", Electr. Power Syst. Res., vol. 73, pp. 267-274, 2005
  - [10] C. Ertugrul and I. Kocaarslan, "Load Frequency Control in Two Area Power System using Fuzzy Logic Controller", Energy Conversion and Management, vol. 46, pp. 233-243, 2005.
  - [11] S.K. Gupta, "Power System Engineering, Umesh Publishers", New Delhi, India, 2009.
  - [12] Elgerd. O. I., "Electric Energy Systems Theory : an introduction", New York : McGraw-Hill,1982.
  - [13] Gaddam Mallesham, Akula Rajani, "Automatic Generation Control using Fuzzy Logic", 8<sup>th</sup>International Conference on Development and Application Systems Suceava, Romania, May 25-27, 2006, pp. 128-137.
  - [14] O.P. Malik, A. Kumar and G.S. Hope, "A Load Frequency Control Algorithm based on Generalized Approach", IEEE Trans. Power Systems, vol. 3, no. 2, pp. 375-382, 1988.
  - [15] A. Kumar, O. P. Malik, and G. S. Hope, "Variable Structure-System Control Applied to AGC of an Interconnected Power System", IEEE Proc. 132, Part C, no. 1, pp. 23-29, 1985
  - [16] Pan. C.T., and Liaw, C.M., "An Adaptive Controller for Power System Load-Frequency Control", IEEE Trans. on Power Systems, vol. 4, no. 1, pp. 122-128, Feb. 1989
  - [17] Murat LUY, I. Kocaarslan, Ertugrul CAM, M. Cengiz Taplamacioglu, "Load Frequency in Single Area Power System by Artificial Neural Network (ANN)", University of Pitesti



10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)