



# IJRASET

International Journal For Research in  
Applied Science and Engineering Technology



---

# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume: 5      Issue: IX      Month of publication: September 2017**

**DOI: <http://doi.org/10.22214/ijraset.2017.9103>**

**[www.ijraset.com](http://www.ijraset.com)**

**Call:  08813907089**

**E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)**

# Improvement Of Power Quality Using Photovoltaic Dynamic Voltage Restorer

Saliha Aarif<sup>1</sup>, Er. Ravinder Kaur Randhawa<sup>2</sup>

<sup>1</sup>P.G. Student, Department of Electrical engineering, Guru Nanak Dev Engineering College, Punjab, India

<sup>2</sup>Assistant Professor, Department of Electrical engineering, Guru Nanak Dev Engineering College, Punjab, India

**Abstract:** *In today's scenario the power quality has become one of the major requirements in the power system where electricity is concern. The power quality problems are generally produced by power electronics equipment's. These equipment's may produce nonlinear loads. These can produce interruption in power system hence produce power quality problems. Some of the power quality problems are voltage sag, voltage swell, transients, harmonics, voltage spikes etc. Among this voltage sag is one of the major power quality problems. It has detrimental effect on the system operation. In this way, there is a need to compensate it in order to avoid perturbation in the system. For this a Custom Power Device is used namely 'Photovoltaic Dynamic Voltage Restore'. Photovoltaic system used with dynamic voltage restorer can help for energy storage for battery system for further operation. It is non-conventional source of energy. So, it is cheaper. A three-phase source is connected with dynamic voltage restorer and photovoltaic system to have better results in the mitigation of voltage sag. The results under three-phase fault condition and the output waveform of Photovoltaic systems under MPPT control can be obtained using MATLAB/Simulink.*

**Keywords:** *Photovoltaic Dynamic Voltaic Restorer; Voltage Sag; Maximum Power Point Tracking; Three-phase source*

## I. INTRODUCTION

The power system consists of generation, transmission and distribution systems. In generation system, enormous power is generated with the system that is used to generate power. In transmission system, the power that is generated through generating unit is transmitted by wires to long distances while transferring the power, perturbation occurs due to abnormal conditions of circuit. Thus, this power is distributed by distribution system. Distribution system is essential where power quality interruptions concern. [1] This is because there is a direct connection between customer or distribution system in regards of power. So, the distribution system is the major area of concern. As it is concerned already that power quality is the essential part for the electricity consumption customers and it is also important for the utility that is providing us electricity. so it is require concentrating on the improvement of the quality of power so that reliability can be improved. In order to enhancement of power quality there is a need of some power quality improvement alternative that provides us better solution. One of the major solutions to power quality problems are use of compensating type devices which comes under Custom Power Devices. All compensating type devices have their own benefits and drawbacks. But DVR (Dynamic Voltage Restorer) is chosen because of its advantages over other devices. [11] DVR has merit over UPS (Uninterrupted Power Supply) like low cost, high efficiency, low losses and less maintenance. That's why DVR is utilized instead of UPS. DVR is preferred in place of DSTATCOM (Distribution Static Compensator) because of its (DVR) small size in comparison to DSTATCOM. Otherwise DSTATCOM can also use. Basically, DSTATCOM is similar to STATCOM as both follow the same principle. SVC (Static Var Compensator) antedates the DVR but still DVR prefers more due its capability is more as compared to DVR and also DVR has ability to control active power flow. This is the reason we utilize DVR (Dynamic Voltage Restorer) over other compensating devices. Therefore, the scope of thesis is on the application of Dynamic Voltage Restorer and evaluation of DVR with its components, controlling and detecting techniques. [11]. That's the reason for choosing DVR over other custom power devices as it has more benefits over other compensating type devices.

## II. PHOTOVOLTAIC BASED DYNAMIC VOLTAGE RESTORER

The voltage or power supply should be reliable to function properly in the system where generation, transmission and distribution process is going on. In this way, it is important to improve the quality of power. This can be done using CPD or compensating type devices. Dynamic Voltage Restorer or DVR is the one of the compensating type device used for the power quality. DVR works to remove voltage sag, voltage swell and also Harmonics in the system. The major interruptions are caused in distribution side. In this thesis work, voltage sag problem has been identified which is generally caused by three phase faults. In order to improve the quality of power by mitigating the level of voltage, a custom power device called Dynamic Voltage Restorer (DVR) has been considered

for exploration. As there are variety of generation sources i.e. DC. Three-phase etc. there is a need to combine these types of power generators in a common transmission line, hence PV and three phase generation units has been considered to combine by DVR to get the load power.

### III. BASIC DYNAMIC VOLTAGE RESTORER

Dynamic voltage restorer (DVR) is a series compensating device. It is used to inject voltage in series in order to balance the voltage in the system. DVR is used not only for compensating the voltage but also used to detect the faults in the system and to control it to enter into the system. DVR consists of injection transformer, filter, voltage source converter, energy storage devices and control system are shown in Fig. 1

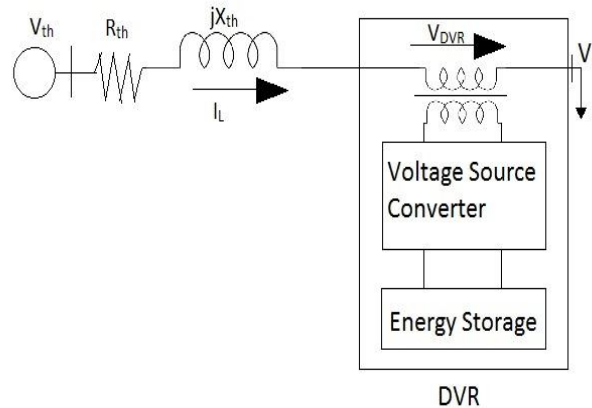


Fig 1. Basic DVR with its Component

There are different methodologies for compensating the voltage magnitude and also there are some techniques used for detection the fault in the system. Controlling techniques are also used to control the imperfections i.e. power quality problems in the system

#### A. DVR Modelling

The hybrid model is made using three-phase source, PV & DVR system. DVR is located in between source and load. For that three-phase source is taken and static load is considered in the system between these DVR is located. Fig. 2 shows the block diagram of three-phase generation system, PV & DVR system.

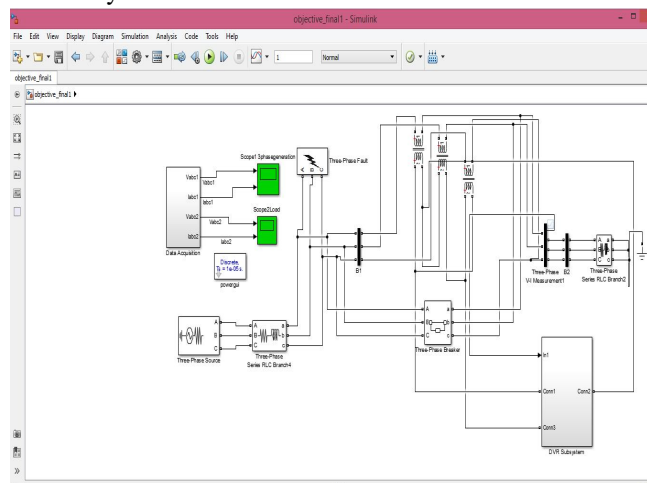


Fig 2. Simulation Model

The parameters of test system of hybrid model of Three-phase generation system, PV & DVR system are shown in table 1. Three-phase source and static load is taken. The block diagram shows the three-phase source is connected with three-phase series RLC

branch. Here only RL branch is considered as only DS or short wire is considered. RLC branch is considered only when transmission or long-distance wire is considered. A source branch B1 is taken over which three-phase fault is connected. Due to this a voltage distraction occurred in the system because of that system voltage goes decreases from its nominal value. This voltage disturbance is known as voltage sag. This is shown in slope 1 and is compensated by DVR the results.

Table 1. shows the parameters which are considered during modelling of whole system that consists of three-phase source of 50 Hz frequency and resistance is of 0.1Ω. Source impedance that include resistance of 0.001 Ω and inductance of 0.005 H. here capacitance i.e. C is neglected as DVR dealing with DS only. Static load is taken with constant R & L. the value of voltage and current has been measured at source, load side and DVR side.

TABLE I  
SYSTEM PARAMETERS FOR ANALYSIS

Sr No.	System quantities	Standards
1	Source	Three-phase, 50 Hz, 0.1Ω
2	Source Resistance and Inductance	0.001Ω, 0.005 H
3	Fault Resistance and Switching time	0.01Ω ,0.2 to 0.4
4	Load Resistance and Inductance	1Ω ,1H
5	Voltage measurement	Phase-ground

Two winding injection transformers is connected in the system which is used for coupling the balanced and unbalanced system. Primary winding is connected with unbalanced system and secondary winding is connected with DVR which is used for the compensation process. Same side static load is connected which is also being affected by three-phase fault. The simulation model of DVR is shown in Fig. 2 is made using MATLAB R2016a/SIMULINK.

IV. PHOTOVOLTAIC SYSTEM

Photovoltaic systems include PV array system which consists of two or more solar panel that converts sun light into electricity. Photovoltaic system is a non-conventional source of energy like wind turbine etc. It is used with DVR system for energy storage. This system will provide energy to dc source which is used by inverter system to convert dc energy into ac energy for further applications of DVR system. The Equivalent circuit model of photovoltaic cell is shown in Figure 3.

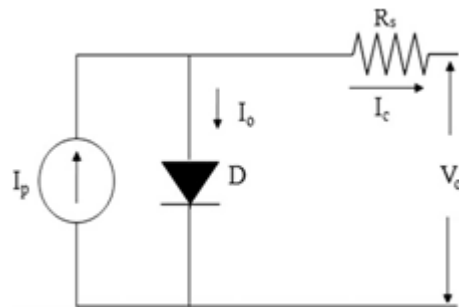


Fig 3. Equivalent Circuit Model of PV Cell

The Photo Voltaic model is created using basic equations of photovoltaic cells including the effects of temperature changes and irradiation. The photovoltaic equation is shown in equation No.1

$$V_c = AKT_c/e * \ln(I_{ph} + I_o - I_c/I_o) - R_s I_c \tag{1}$$

Where,

V<sub>c</sub> is cell output voltage in volts.

A: fitting factor.



E: electron charge.

$I_{ph}$  : Photo current (10 A).

$I_o$  is reverse saturation current of diode (0.0002 A).

k is Boltzmann constant ( $1.38 \times 10^{-22} \text{ J}^0\text{k}$ ).

$I_c$  :cell output current in A.

$R_s$  is solar cell internal resistance (0.001  $\Omega$ ).

$T_c$ : operating temperature of the reference cell ( $40^0\text{c}$ ).

### A. Photovoltaic Modelling

Photovoltaic system is considered and is modelled by using Simulink. As shown in Figure 4. The photovoltaic system or cell is used as a nonconventional source of energy. The photovoltaic system or cell is used as a nonconventional source of energy. This cell is connected with Dynamic Voltage Restorer. Photovoltaic system is considered and is modelled by using Simulink. The photovoltaic system or cell is used as a nonconventional source of energy.

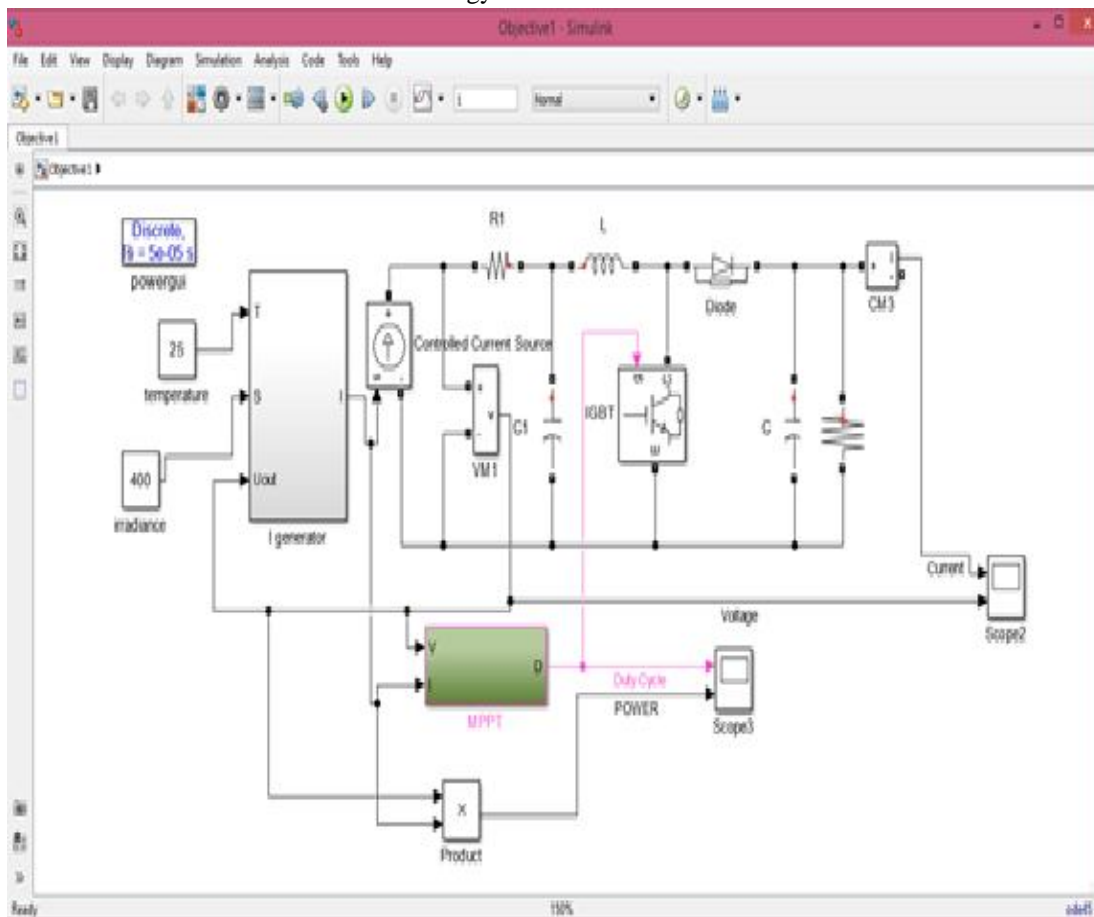


Fig 4. Simulation model of PV system

Fig 4. shows the block diagram of photovoltaic system using Simulink. In this block diagram, it is shown that the temperature ( $25^0\text{c}$ ) and irradiance ( $800 \text{ w/m}^2$ ) are taken as an input to I generator. When light falls on the generator it will convert into electricity i.e. light energy is converted into electrical energy. Current source is used to control the amount of current generated by I generator. Simultaneously MPPT is used to extract maximum power from generator which is used to provide gate pulse for IGBT switch so that there is no fluctuation in the entire system. The Photovoltaic system is used to provide huge amount of energy for battery from it inverter system takes energy for further process. The parameters of test system of Photovoltaic system are given in table 2. The system quantities temperature and irradiance are required as an input to the system. With these quantities, the light energy of photo cells can be converted into electricity.

TABLE II  
PARAMETERS OF PV SYSTEM

Sr No.	System quantities	Standards
1	Temperature	25 <sup>0</sup> c
2	Irradiance	800 W/m <sup>2</sup>
3	Source Impedance	R=1Ω, L= 0.01 H
4	IGBT Resistance and Voltgae	0.001Ω ,1V
5	Diode Resistance and Voltage	0.001Ω ,0.8V

Table 2 shows that the parameters of PV cell. Which are considered in thesis work. It is observed that temperature and irradiance are taken 25<sup>0</sup>c and 800 W/m<sup>2</sup> respectively. In source impedance, i.e. RLC branch Resistance and Inductance are 1 Ω and 0.01 H respectively. Insulator Gate Bipolar Transistor is taken as a universal bridge. Whose resistance and voltage are taken as 0.001Ω and 1V. Similarly, diode resistance and inductance are taken as 0.001 Ω and 0.8V respectively.

**V. RESULTS AND DISCUSSIONS**

In this thesis work, to prove the effectiveness of PV based DVR for power quality problems like voltage sag, voltage swell, harmonics etc. on distribution system. The DVR is modelled using MATLAB/SIMULINK to compensate faults on the system. Three phase faults are compensated at source side. The purpose of DVR is to improve power quality on distribution system having load. The voltage sag, voltage swell occurs due to fault on the system.

**A. Voltage Sag Compensation Using Dvr**

The three phase fault conditions are considered in the test system. The faults can cause power quality interruptions in the system mainly voltage sag. As voltage sag is predominant found in the system and have severe impact so it needs to compensate this and this work is done by DVR. Fig 5. shows that the voltage is balanced between time 0 to 0.2 sec. but due the 3-phase fault voltage is decreased from 0.2 sec to 0.4 sec. This decreased voltage is known as voltage sag is shown in the Fig 5.

Fig5.also shows the voltage compensation by DVR to improve the power quality of the system.

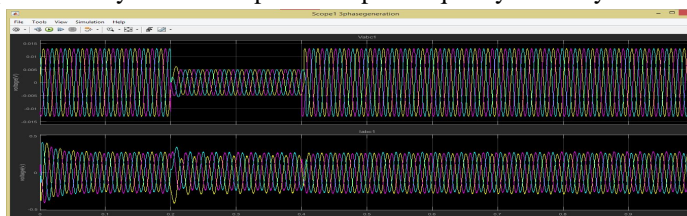


Fig 5. Voltage sag and sag compensation

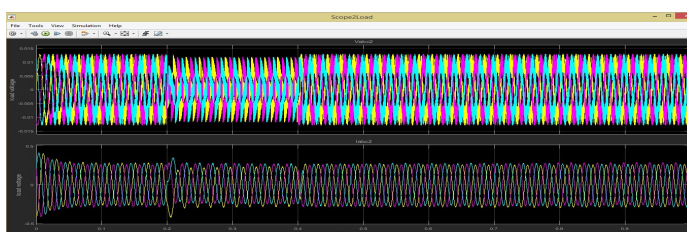


Fig 6. Load voltage before and after compensation

Fig 6. Shows the load voltage also affected by the occurrence of 3-phase fault in the system from the same switching time. The switching time of fault is 0.2 sec to 0.4 sec. It means that voltage sag occurs between these times as shown in the Fig 6 and this voltage sag is compensated by using DVR. Similarly load voltage is also compensated by DVR.

### B. Results Under Photovoltaic System

Fig 7 shows that the current and voltage waveform of Photovoltaic system. Here it is shown that after the Maximum Power Point Tracking control the value of current is increasing from zero to its maximum point for providing energy to dc source. The supply voltage waveform initially is being interrupted from 0 to 0.3 sec and after maximum power point tracking it is becoming smooth slowly from 0.3 sec to 0.9 sec. Fig 7. shows that the supply voltage waveform initially is being interrupted from 0 to 0.3sec and after maximum power point tracking it is becoming smooth slowly from 0.3sec to 0.9 sec.

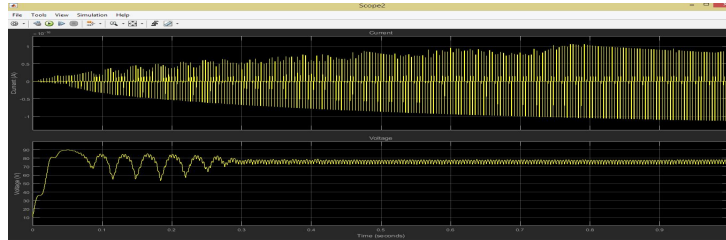


Fig 7. Current and voltage waveform of photovoltaic system

After maximum power point tracking gate pulses output and power by MPPT control for Insulated Gate Bipolar Transistor control is shown in fig 8.

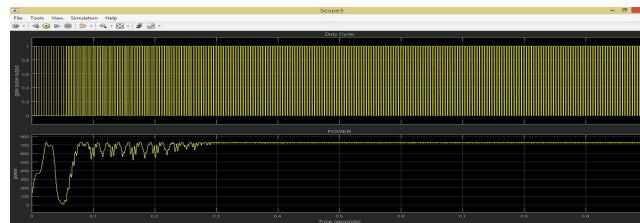


Fig.8 Gate pulses output and Power by MPPT control

These waveforms show the results of Photovoltaic system. Duty cycle is the fraction of period in which a system is being active. Duty cycle is expressed in percentage or ratio.

## VI. CONCLUSION

A compensating type device is used to compensate voltage sag. This device name is Dynamic Voltage Restorer. This device is used with Photovoltaic system. PV cell acts as an energy storage device just like capacitor. It gives its energy to dc source i.e. battery. From this inverter system is run with its components mainly universal bridge. A hybrid model of three phase generation system, photovoltaic system and dynamic voltage restorer is made using MATLAB/SIMULINK. The results are taken from this power tool system under three phase fault conditions. Most probably voltage sag has much chance to occur in the system. So, in this research work voltage sag and also load side voltage is being compensated by using Dynamic Voltage Restorer (DVR).

## REFERENCES

- [1] Abijeet G, S. and Kumar S, P.(2014)" Enhancement of Power Quality Problem by Using Dynamic Voltage Restorer" 2014 International Journal of Innovative Research in Advanced Engineering (IJRAE) ISSN: 2349-2163 Volume 1 Issue 6
- [2] AlMathnani,A.O., Mohamed,A.and Ali,M.A.M.(2007)"Photovoltaic Based Dynamic Voltage Restorer For Voltage Sag Mitigation" 2007 5th Student Conference on Research and Development, **IEEE Conference Publications** 2007, pp: 1 – 6
- [3] AppalaNaidu,T.(2016)" The Role Of Dynamic Voltage Restorer (DVR)in improving power quality" 2016 2nd International Conference on Advances in Electrical, Electronics, Information, Communication and Bio-Informatics (AEEICB) ,pp: 136 – 141
- [4] Babu,.PS.and Kamaraj,K(2013)"Performance investigation of dynamic voltage restorer using PI and fuzzy controller" 2013 International Conference on Power, Energy and Control (ICPEC), pp: 467 – 472
- [5] Deepika,S.,Saranya,M.andPoorani,V(2015)"PI controller based dynamic SAG compensator with PV PANEL: PIcontroller based DVR"2015 International Conference on Advanced Computing and Communication Systems, pp: 1 – 6
- [6] Ganesh,S.N.V.,Reddy,K.R.and Ram,B.V.S.(2011)"Different control strategies for power quality improvement using dynamic voltage restorer" Students' Technology Symposium (TechSym), 2011 IEEE, pp: 316-322





10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)