



iJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 7 Issue: VI Month of publication: June 2019

DOI: <http://doi.org/10.22214/ijraset.2019.6043>

www.ijraset.com

Call: ☎ 08813907089

E-mail ID: ijraset@gmail.com

Synthesis and Characterization of Polyaniline

Somnath Gadekar¹, Ajay Javale², Pradip Kadam³, Dhananjay Raut⁴, Prof. Chatte U. A.⁵

^{1, 2, 3, 4}Department of Electrical Engineering, SPPU

Abstract: Synthesis of polyaniline as the main approach to obtain electroactive and conducting composite materials. Conducting composite material formed in the form of semiconductor. Organic polymer semiconductor material like polyaniline (polymeraldine salt) can be easily synthesized and it is the only conducting polymer material whose electronic structure and electrical properties can reversibly controlled by oxidation and protonation. PANI exist in three state leucoemeraldine, emeraldine, pernigraniline. But only emeraldine salt shows conducting nature in the form of semiconductor. PANI used various applications, they can replace metals and semiconductors, because they have conductivity feature, low density, and easy process ability. Polyaniline is a representative from the family of conducting polymer having high environmental stability. This paper shows chemical method for synthesis of Polyaniline and compare its semiconducting properties with conventional semiconductor.

Keywords: Synthesis, Polyaniline, Conducting Polymer, Analysis, Semiconductor

I. INTRODUCTION

The Polymer systems with unique properties are the recent fields of increasing scientific and technical interest, offering the opportunity to synthesize a broad variety of promising new materials, with a wide range of electrical, optical and magnetic property. Technological uses depend crucially on the reproducible control of the molecular and super a molecular architecture of the macromolecular via a simple methodology of organic synthesis. Among the conducting polymer, Polyaniline (PANI) is one such polymer whose synthesis does not require any special equipment or precautions. Conducting polymers generally show highly reversible redox behavior with a noticeable chemical memory and hence have been considered as prominent new materials for the fabrication of the devices like industrial sensors. The properties of conducting polymers depend strongly on the doping level, protonation level, ion size of dopant, and water content. Conducting PANI is prepared either by electrochemical oxidative polymerization or by the chemical oxidative polymerization method. The emeraldine base form of PANI is an electrical insulator consisting of two amine nitrogen atoms followed by two imine nitrogen atoms. PANI (emeraldine base) can be converted into a conducting form by two different doping processes: protonic acid doping and oxidative doping. Protonic acid doping of emeraldine base corresponds to the protonation of the imine nitrogen atoms in which there is no electron exchange. In oxidative doping, emeraldine salt is obtained from leucoemeraldine through electron exchanges. The mechanism causing the structural changes is mainly recognized to the presence of -NH group in the polymer backbone, whose protonation/deprotonation will bring about a change in the electrical conductivity as well as in the color of the polymer..

II. MATERIALS

A. Conventional Semiconductor

- 1) **Silicon:** Silicon is a chemical element with symbol Si and atomic number 14. It is a hard and brittle crystalline solid with a blue-grey metallic lustre; and it is a tetravalent metalloid and semiconductor.
- 2) **Germanium:** Germanium is a chemical element with symbol Ge and atomic number 32. It is a lustrous, hard, grayish-white metalloid in the carbon group, chemically similar to its group neighbours silicon and tin. Pure germanium is a semiconductor with an appearance similar to elemental silicon.
- 3) **ZnO:** Zinc oxide is the inorganic wide band gap semiconductor compound and it is insoluble with water. Due to oxygen vacancies, it acts as N type semiconductor. It also act as piezoelectric material with PV application. As force is applied on ZnO, it develops internal polarization and develops voltage and current. It has ability to make thin flexible film. It can be used in PV, Piezoelectric sensor, acoustic micro sensor.

B. Conducting Polymer Material

We know that most of polymers are insulators and they can be used for insulating wires, cables, switches, measuring probes, tools and a variety of other items. In order to make them conductive we have to increase the carrier concentration. If one decreases the band gap and increase the delocalization of electrons then one may expect higher conductivity in the materials. Polymers are usually offer a resistance of the order of giga ohm i.e. (10^9 ohms) and even higher than that consequently. The fact that polymers can be used as conductors of electricity and they can be made as good conductor as copper which is surprising. There are needs of

lightweight materials which are conductive rather than metals like copper. Generally metals have tendency of corrosion so that it diminishes (vanishes) after sometime. To overcome this difficulty a need can be completed by applying electrical conductive polymers. These electrical conductive polymers can be used in potentiometers, different capacitors, PCBs as a transistors or a diode and in many other applications. Following are some conducting polymer material.

C. P3HT(3-Hexylthiophene-2, 5-diyl)

P3HT is the organic polymer material. It can be used for organic polymeric solar cell because of its small bandwidth. This material act as donor material, (P) type semiconducting material. P3HT is highly soluble, high thermal stability and excellent material for thin film . But disadvantage of this material is poor matching of photons absorbance with solar cell spectrum.

D. PCBM (Phenyl C61 Butyric acid Methyl Ester)

PCBM is the derivative of fullerene and it is organic polymer material. It has very good electron acceptor potential. So It may be used in polymer organic solar cell as acceptor, (N) type semiconducting material. It is excellent material for flexible thin film.

E. Conducting Polymer Materials

Table 1 .Conducting Polymer Materials

Sr. No.	Name of material	Property
1	P3HT	P Type semiconducting material
2	PCBM	N type semiconducting material
3	PANI	Act as P type, N type, piezoelectric according to doping
4	ZNO	Act as N type and piezoelectric

III. METHODS OF SYNTHESIS OF POLYANILINE

A. Electrochemical Synthesis

Out of above four methods electrochemical process is the simplest method to achieve a suitable conducting polymer film and hence this method is chosen. variation in molarity or deposition one can have change in the conductivity of the prepared polymer film.

The method requires a monomer of which a polymer is to be prepared, suitable solvent in which a solute can be dissolved and some electrolyte for addition of conduction ions.

This can be taken in a beaker like container with suitable quantity two electrodes are used which are cathode and anode. Graphite used as a cathode electrode, at one end and steel plate at other end as an anode. This deposition requires very low voltage. A constant voltage power supply is generally preferred for the application of voltage to the cell so that constant voltage can be applied for the preparation of films of polymers. This voltage can be applied by two different methods. But in this project potentiostatic method is used.

1) Reaction

* Solvent + Monomer + Electrolyte Polymerization Conducting Polymer.

* Distilled Water + 1 M Distilled Aniline + Acid Polymerization Conducting Polymer.

B. Chemical Method

The chemical synthesis of polyaniline is effected by adding an oxidizing agent to the acidic solution of monomer under controlled conditions. Various chemical oxidizing agent such as potassium dichromate, ammonium persulphate, hydrogen peroxide, potassium periodate, ceric nitrate, potassium persulphate etc. have been used by different workers. Generally stoichiometric equivalent of oxidant is used since if used too high quantity of oxidant used degradation of the polymer is observed. The reaction is mainly carried out in acid medium particularly in Sulphuric acid medium at pH between 0 and 2. However, other acids such as HCl, HNO₃, H₂SO₄ maleic acid are also used (pH=1) as a medium of synthesis of polyaniline.

When chemical oxidant is added to aniline in a reaction vessel and left for a certain period of time under stirring, the solution gradually becomes coloured and greenish black precipitate appears. The colouration of the solvent is possibly due to the formation of soluble oligomers.

The polymer synthesized by chemical method is then isolated from the reaction medium by filtration. The precipitate is then washed and conditioned using an appropriate solvent depending on the nature of the studies that has to be carried out. Further, free standing films can be obtained by dissolving the chemically synthesized product in a suitable solvent and casting it on a spin rotator. The processing of the films by such kind of method appears to be advisable since in many places these films are found to be suitable for certain applications.

C. Result

The peak observed at 3688 and 3544 cm^{-1} is attributed to OH stretching vibrations. The characteristic bands at 3099 cm^{-1} is corresponding to Alkanes ($-\text{CH}_2-$) stretching CH Deformation.. The band around 3497 cm^{-1} is attributed to the NH stretching. The bands around 1651& 1470 cm^{-1} can be assigned to CH medium and CH weak stretching. Thus the FTIR spectral results confirm the formation of Polyaniline.

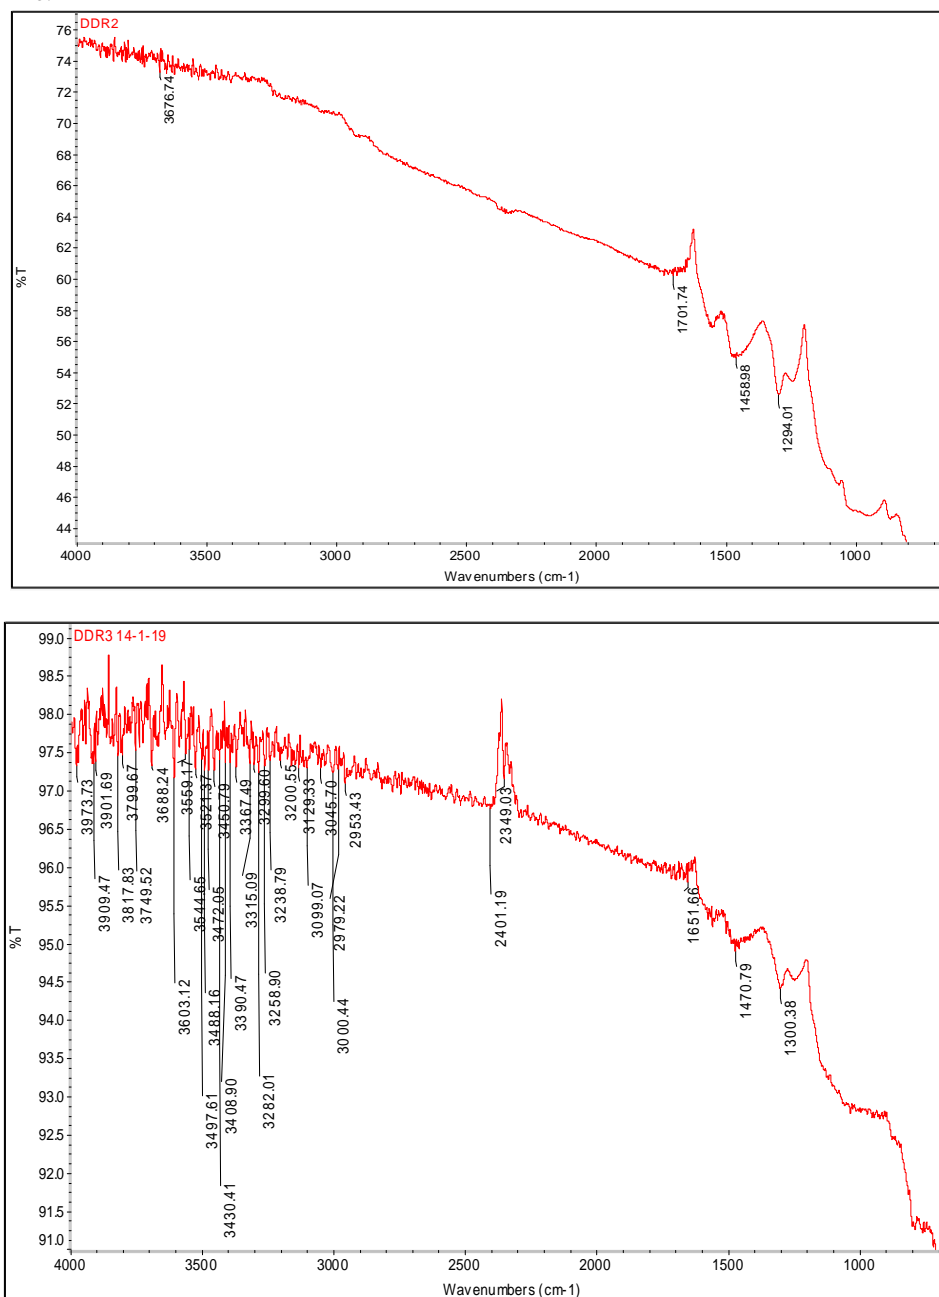


Figure. FTIR –Spectroscopy Graph

D. Peak Analysis

Sr. No.	Peak No.	Wavelength Range	Bond strength	Group
1	1	3688	Medium	O-H Stretching
2	2	3544	Strong	O-H Stretching
3	3	3521		
4	4	3497	Medium	N-H Stretching
5	5	3200	Weak	O-H Stretching
6	6	3129		
7	7	099	Medium	C-H Stretching
8	8	2349	Strong	O=C=O Stretching
9	9	1651	Weak	C-H Bending
10	10	1470	Medium	C-H Bending
11	11	1300	Medium	O-H Bending

E. XRD(X-Ray diffraction)

X-Ray analysis is applied to the understanding of characteristics of nano-material and nanostructure of crystalline material, semi-crystalline materials and amorphous material. Analysis of peak shape give information about crystalline size and other aspect of microstructure.

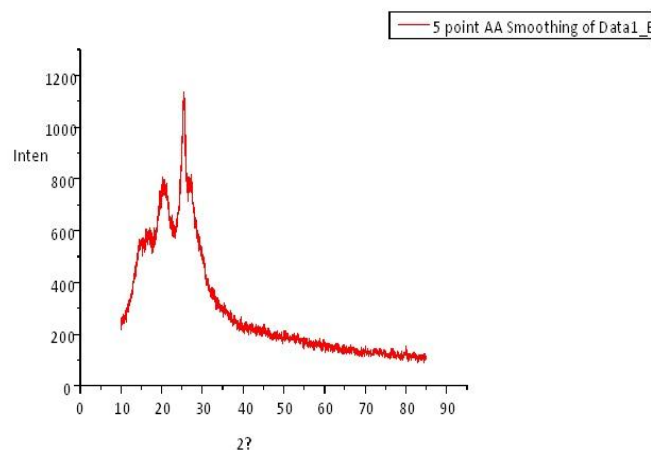


Figure. XRD Analysis Graph

From above graph its highest peak point has less dark so polyaniline shows crystalline material property. Crystalline material has higher conductivity than amorphous material.

Comparison with other semiconductor material

Sr.no	Comparison point	PANI	Si	Ge
1	Bandgap	1.9ev	1.14ev	0.67ev
2	Doping	HCl , H ₂ SO ₄ , PTSA, DBSA, LA	<u>antimony, phosphorus, arsenic, boron, aluminium, gallium</u>	<u>antimony, phosphorus, arsenic, boron, aluminium, gallium.</u>
4	Structure	Flexible ,Crystalline	Crystalline amorphous, hard and brittle	Lustrous, hard
5	Flexibility	Flexible	Flexible at nanostructure	Flexible at nanostructure
6	Environmental friendly	Environmental friendly material	Less environmental friendly than PANI	Less environmental friendly than PANI
7	Colour	Green	Blue-gray	Grayish-white
8	Cost	Cheaper in cost	High cost	High cost
9	availability	Easily available in India	Not easily available in India	Not easily available in India

IV. CONCLUSION

This paper shows the alternative method for synthesis of Polyaniline that can be used for the solar cell. It can be shown the crystalline structure having the good semiconducting properties.

REFERENCES

- [1] Zh. A. Boeva and V. G. Sergeyev, Polyaniline: Synthesis, Properties, and Application. POLYMER SCIENCE Series C Vol. 56 No. 1 2014.
- [2] SambhuBhadra, Nikhil K. Singha, DipakKhashtgir, Electrochemical Synthesis of Polyaniline and its Comparison with Chemically Synthesized Polyaniline. Published online in Wiley InterScience 2006.
- [3] SambhuBhadra, Nikhil K. Singha, DipakKhashtgir, Electrochemical Synthesis of Polyaniline and Its Comparison with Chemically Synthesized Polyaniline, Applied Polymer Science, vol.25867, 2006.
- [4] Synthesis and Characterization of Nano Size Conducting Polyaniline, CH. Srinivas¹, D. Srinivas², B. Kavitha³, N. Narsimlu⁴, K. Siva Kumar, IOSR Journal of Applied Physics (IOSRJAP), Volume 1, Issue 5, PP 12-15, 2012
- [5] Conducting Polymers and their Applications, Murat Ates¹, TolgaKarazehira and A. SezaiSarac², Current Physical Chemistry, Vol. 2, Issue No. 3, 2012.
- [6] DohyukYoo, Jung Joon Lee, Chanil Park, HyangHee Choi, and Jung-Hyun Kim, N-type Organic Thermoelectric Materials Based on Polyaniline Doped with Aprotic Ionic Liquid 1-Ethyl-3-methylimidazolium Ethyl Sulfate, RSC advances, vol 00, PP 1-3, 2013.
- [7] DeeptiDhuriya, Brijesh Kumar and R. K. Chauhan, Recent Advancement in Organic Solar Cells and Comparison between Various Structures, 2015.
- [8] D. Vatansever, R. L. Hadimani¹, T. Shah¹, and E. Siores, Hybrid Photovoltaic-Piezoelectric Flexible Device for Energy Harvesting from Nature, Advances in Science and Technology, Vol 77, PP 297-301, 2013.
- [9] Joe Briscoe, SafaShoae, James R. Durrant and Steve Dunn¹, Piezoelectric Enhancement of Hybrid Organic/Inorganic Photovoltaic Device. Power MEMS IOP Publishing Journal of Physics, Conference Series 476 (2013) 012009, 2013.
- [10] Yaser M. Haddara, Peter Ashburn, Darren M. Bagnall, Silicon-germanium: Properties, Growth and application, Materials for Electronics, 2003.
- [11] S Ramakrishnan, Conducting polymer, conducting polymer, Vol.2, No.11, pp.48-58, 1997.



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)