



# **iJRASET**

International Journal For Research in  
Applied Science and Engineering Technology



---

# **INTERNATIONAL JOURNAL FOR RESEARCH**

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume: 8      Issue: I      Month of publication: January 2020**

**DOI: <http://doi.org/10.22214/ijraset.2020.1049>**

**[www.ijraset.com](http://www.ijraset.com)**

**Call: ☎ 08813907089**

**E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)**

# Static and Modal Analysis of Propeller Shaft of LMV

Arun Kumar Gupta<sup>1</sup>, Shatrughan Mishra<sup>2</sup>, R P Singh<sup>3</sup>

<sup>1, 2, 3</sup>Mechanical Engineering Department, IPS-CTM Gwalior

**Abstract:** The propeller shaft is the very important component in a vehicle, motion of any the vehicle can be done by the propeller shaft. i.e. transmission of torque from the engine to wheels is performed by a shaft. This shaft is known as a propeller shaft. The automobile like cars having various mechanical elements are built to create the vehicle fuel efficient that in result make the transportation economical, the weight of that vehicle ought to be reduced. the overall objective of this work is to design and weight optimization of propeller shaft of the light motor vehicle. This project deals with drive shaft of MARUTI OMNI to design the shaft for its minimum dimensions and satisfy current drawback with specification then replace typical steel material with composite material. The composite materials are lightweight with additional strength & stiffness, replacement of composite materials to traditional steel materials utilized in automotive vehicle components can scale back the weight and improve the mechanical properties of these parts. Here a part model created for individual dimensions in CATIA V5R19 software. Than modeling, Torsional buckling analysis and Modal analysis will be applied for propeller shafts using ANSYS R14.5 to validate the theoretical calculations and analytical results. The obtained results are compared with Carbon/Epoxy composite material which are chosen as better replacement material for regular steel material in terms of many mechanical properties for light motor vehicle.

**Keywords:** Drive shaft, Composite material, Carbon/ Epoxy fibre, CATIA V5R19, ANSYS R14.5

## I. INTRODUCTION

Drive Shaft is a rotating shaft that transmits power from the engine to the differential gear of a rear wheel drive vehicles Driveshaft must operate through constantly changing angles between the transmission and axle. Automotive drive Shaft is a very important component of vehicle. The present project focuses on the design of such an automotive driveshaft by composite materials, the main advantages of the present design are only one piece of composite driveshaft is possible that fulfil all the requirements of drive shaft. The basic requirements considered here are torsion strength, torsion buckling and bending natural frequency. An optimum design of the draft shaft is done, which is cheapest and lightest but meets all of the above high load is the most requirements.

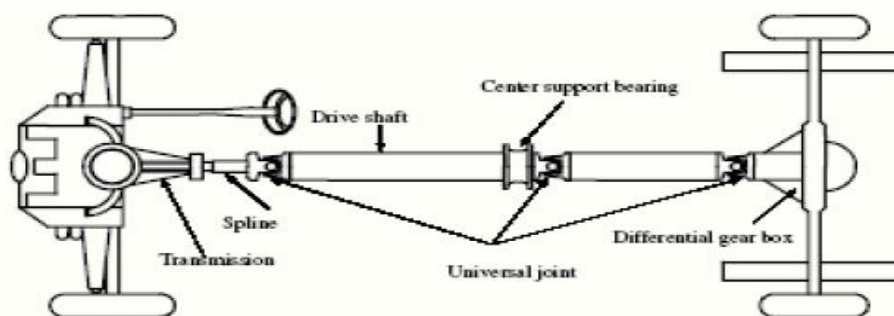


Fig-1 Propeller shaft and component

Drive shafts are used as power transmission tubing in many applications, including cooling towers, pumping sets, aerospace, trucks and automobiles. In the design of metallic shaft, knowing the torque and the allowable shear stress for the material, the size of the shaft's cross section can be determined. In the today's days there is a heavy requirement for lightweight materials vehicle.

- 1) **Composite Materials:** A new kind of material which is formed due to combination of two or more metals or non metals is known as composite materials. Generally composite materials are lighter and stronger than conventional metals. The usages of composite materials were started from early 20th century itself. Concrete is one of the most famous composite material which is widely used in building bridges, houses, skyscrapers, etc., There are many types of composite materials like carbon epoxy, glass epoxy, Kevlar, etc.,

## II. LITRATURE REVIEW

V Jose Ananth Vino et al [1] This paper deals with the replacement of conventional propeller shaft with the composite shaft. Design parameter was optimized for optimizing the weight of the shaft. the modeling is done by SOLIDWORKS software. He evaluated stress under subjected load, defection and natural frequency using ANSYS.

S Dharmadhikari J P Giri et al [2] Study deals with design and analysis of composite drive shaft using Ansys and genetic algorithm.

S Shinde et al [3] This paper deals with Design of propeller shaft For Mahindra considering torque capacity, Shear stress, and critical rpm requirement. And epoxy and aluminum material used for replacement of conventional shaft.

Bhirud P.P et al [4] This paper deals with the replacement of steel shaft with E glass resin composite drive shaft. ANSYS is used as analysis software.

Salaisivabalan T et al [5] This paper deals with propeller shaft of MARUTI OMNI to design shaft for its minimum dimension. then part can be created in NX 8.5 and after modeling Torsional buckling analysis and model analysis can be carried out in NX NASTRAN. Obtained results can be compared.

Parshuram D et al [6] in this work studied weight optimization of the shaft by using the composite material. design of the shaft is carried out in CATIA and analysis is carried out in ANSYS.

S P Maske et al [7] This paper deals with Failure analysis and design optimization of propeller shaft of Bus. the SAE 1045 Steel shaft is replaced by Chromium steel SAE 3145 and analysis can be carried out in ANSYS.

D Khushwaha et al [8] this paper deals with optimal design and analysis of composite drive shaft for a light commercial vehicle. The design is carried out in PRO-E and analysis in ANSYS.

## III. DESIGN OF PPELLER SHAFT

Transmission of power can be improved through the reduction of mass inertia and light weight. In the design of SM45C steel shaft, knowing the torque and the allowable shear stress for the steel material.

### A. Problem Specification

The specifications were assumed appropriately, supported the literature review and standards offered for automobile propeller shaft particularly Maruti Omni <sup>[3]</sup>.

The torque transmission capacity of the drive shaft (T) = 59 Nm

The shaft has to stand up to buckling torque (Tb) specified  $T_b > T$

The minimum bending natural frequency of the shaft (f<sub>nb min</sub>) = 80 Hz

Maximum diameter of the propeller shaft (d<sub>o</sub>) = 0.051 m

Length of the propeller shaft (l) = 0.562 m

First the traditional steel shaft was designed to facilitate comparison in terms of mass savings. Be it the traditional shaft or the composite one, the design ought to be supported the subsequent criteria

- 1) Torsional strength
- 2) Buckling torque
- 3) Bending Natural frequency

The mechanical properties of steel and composite material are taken from the literature available mentioned in the Table 1.

Table-1. Mechanical properties of materials for propeller shaft

Mechanical Properties	Units	Steel (SM45C)	Carbon epoxy
Young's Modulus	GPa	207.0	131.6
Shear Modulus	Gpa	80.0	7.6
Poisson Ratio		0.3	0.281
Density	Kg\MM3	7600	1550
Shear Stress	N\MM2	29.419	40

### B. Torsional Strength

The maximum torsional strength of the Steel shaft is calculated by using torsion equation [7]

$$\tau/r = T/J = G\theta/l$$

Where, T is torque transmitted in Nm.

$$\text{Polar moment of inertia (J)} = \pi/32 (d_o^4 - d_i^4) = 1.43019 \times 10^{-7} \text{ m}^4$$

$$\text{Mean radius of shaft (rm)} = r_o + r_i^2 = 0.02475 \text{ m}$$

$r_o$  = is outside radius of hollow shaft in m

$r_i$  = inside radius of hollow shaft in m

$$G = \text{Shear Modulus} = 80 \times 10^9 \text{ N/m}^2$$

Assume angle of twist in radians ( $\theta$ ) =  $5 \times \pi/180$  radian

$$\text{Shear stress } (\tau) = G\theta/rm = 307.45 \times 10^6 \text{ N/m}^2$$

Now,  $\tau/r = T/J$ ,  $T = 1776.61 \text{ Nm} > 59 \text{ Nm}$ . Therefore design is safe

### C. Bending Natural Frequency

Minimum bending natural frequency for Steel shaft ( $f_{nb} \text{ min}$ ) = 80 Hz

$$\text{Natural frequency (f}_{nb}) = \pi/2 \sqrt{E_x I_x m} / L^4$$

Where,  $E_x = 207 \times 10^9 \text{ N/m}^2$

$$\text{Moment of inertia in x direction (I}_x) = \pi/64 (d_o^4 - d_i^4) = 7.1509 \times 10^{-8} \text{ m}^4$$

$$\text{The mass per unit length of the shaft (m}_x) = \rho \pi/4 (d_o^2 - d_i^2) = 1.8311 \text{ Kg/m}$$

Where, density of steel ( $\rho$ ) = 7850 Kg/m<sup>3</sup>

$$d_o = 0.051 \text{ m}, d_i = 0.048 \text{ m}$$

Therefore bending natural frequency ( $f_{nb}$ ) = 447.15 Hz > 80 Hz

### D. Critical Speed

N is the maximum speed of the transmission system = 5000 rpm

$$\text{Critical speed of the Steel shaft (N}_{cr}) = 60 \times f_{nb} = 51002.6 \text{ rpm} > N$$

### E. Weight of Steel Drive Shaft

$$\text{Weight} = \text{Density} \times \text{Volume} = 1.1478 \text{ Kg.}$$

## IV. DESIGN OF COMPOSITE SHAFT

### A. Torsional Strength

The maximum torsional strength,  $\tau/r = T/J = G\theta/l$

T is torque transmitted in Nm

$$\text{Polar Moment of Inertia (J)} = \pi/32 (d_o^4 - d_i^4) = 5.16848 \times 10^{-7} \text{ m}^4$$

Where,  $d_o = 0.051 \text{ m}, d_i = 0.035 \text{ m}$

$$\text{Mean radius of shaft (rm)} = r_o + r_i^2 = 0.0215 \text{ m}$$

$$\text{Shear Modulus (G)} = 7.6 \times 10^9 \text{ N/m}^2$$

Assume, angle of twist ( $\theta$ ) =  $5 \times \pi/180$  radians

$$l = \text{length of shaft} = 0.562 \text{ m}$$

$$\text{Shear stress } (\tau) = G\theta/rm = 25.37 \times 10^6 \text{ N/m}^2$$

$$\text{Hence, } T = 609.94 \text{ Nm} > 59 \text{ Nm.}$$

### B. Bending Natural Frequency

Minimum bending natural frequency for composite shaft ( $f_{nb} \text{ min}$ ) = 80 Hz.

$$\text{Natural frequency (f}_{nb}) = \pi/2 \sqrt{E_x I_x m} / L^4$$

$$E_x = 177 \times 10^9 \text{ N/m}^2$$

$$\text{Moment of inertia in x direction (I}_x) = \pi/64 (d_o^4 - d_i^4) = 2.5842 \times 10^{-7} \text{ m}^4$$

$$\text{The mass per unit length (m}_x) = \rho \pi/4 (D_o^2 - d_o^2) = 1.67509 \text{ Kg/m}$$

Where, density of composite material ( $\rho$ ) = 1550 Kg/m<sup>3</sup>

$$\text{Bending natural frequency (f}_{nb}) = 821.82 \text{ Hz} > 80 \text{ Hz}$$



### C. Critical Speed of Shaft

$N = 5000 \text{ rpm}$

Critical speed of the  $(N_{cr}) = 60 \times f_{nb} = 49309.33 \text{ rpm} > N$

### D. Weight of composite Drive Shaft

Weight  $(W) = \text{Density} \times \text{Volume} = \rho \times \pi/4 (D^2 - d^2) \times L = 0.9414 \text{ Kg}$

The design parameters for both the shafts are calculated and mentioned below in Table 2.

Properties	Units	Steel	Carbon/Epoxy
Inner Dia	Mm	48.434	35
Max. Shaer Stress	Mpa	307.45	25.37
Bending Natural	Hz	447.15	906.56
Critical Speed	N	26829.36	54939.6
Mass	Kg	1.1478	0.9348

## V. FINITE ELEMENT ANALYSIS

The steel shaft model is imported from CATIA V5R19 software to ANSYS R14.5 and analyzed for the maximum deflection, maximum shear stress as well as the Von-Mises stress values. The ensuing values are placed in Table 3. The fastened constraint is applied at the one end of the shaft

Steel Drive shaft analysis result (Fig-2-7 )

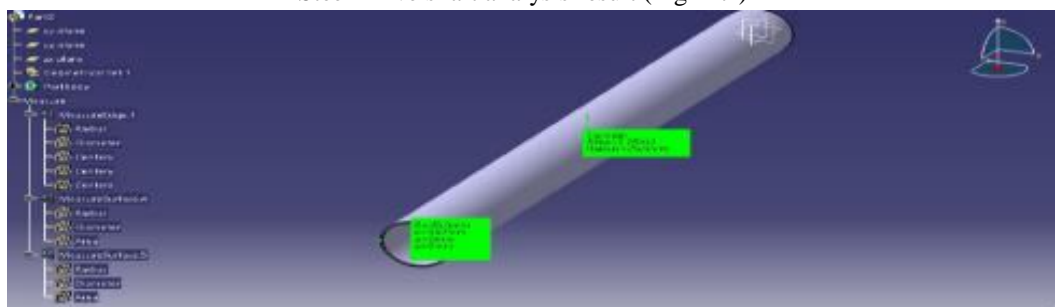


Fig-2 Part modal

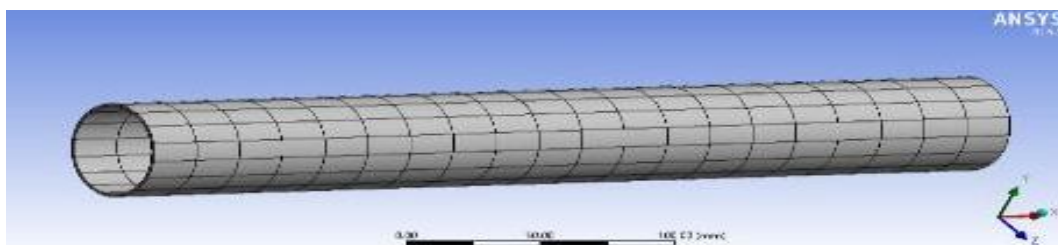


Fig-3 Meshing

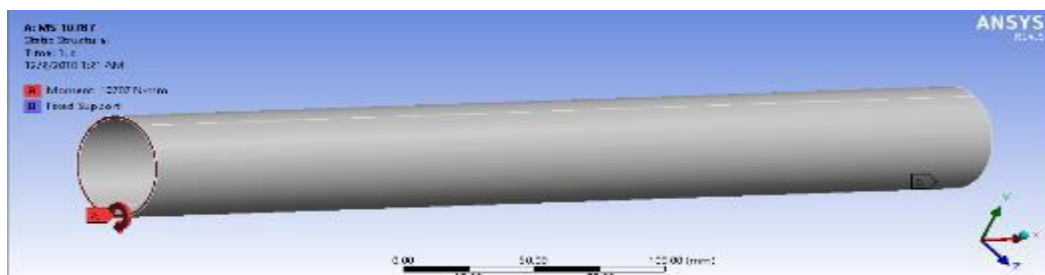


Fig-4 Boundary conditions

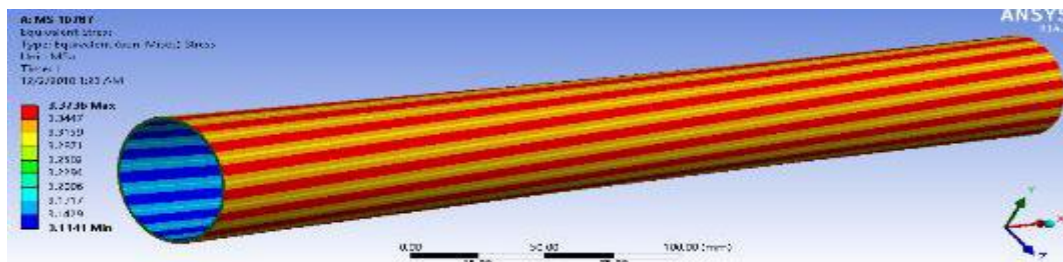


Fig-5 Von-Mises stress

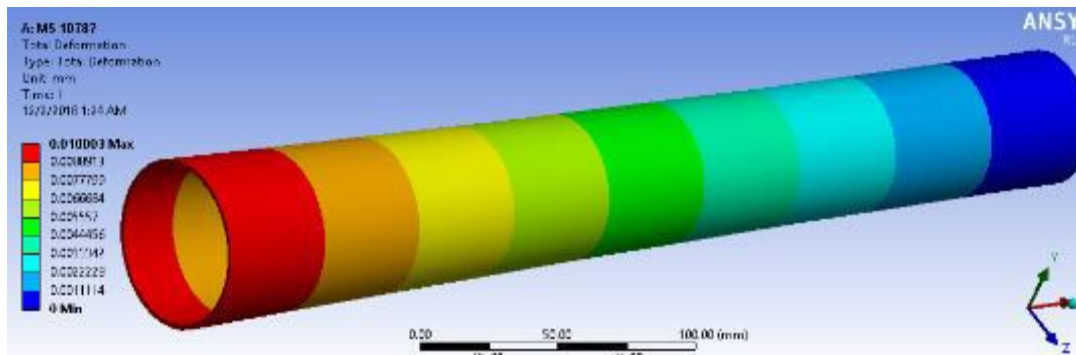


Fig-6 Total deflection

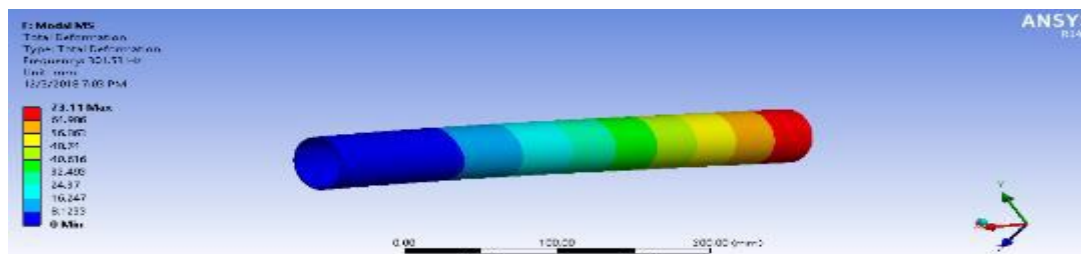


Fig-7 Modal analysis

Composite drive shaft analysis result(Fig 8-13)



Fig-8 Part model

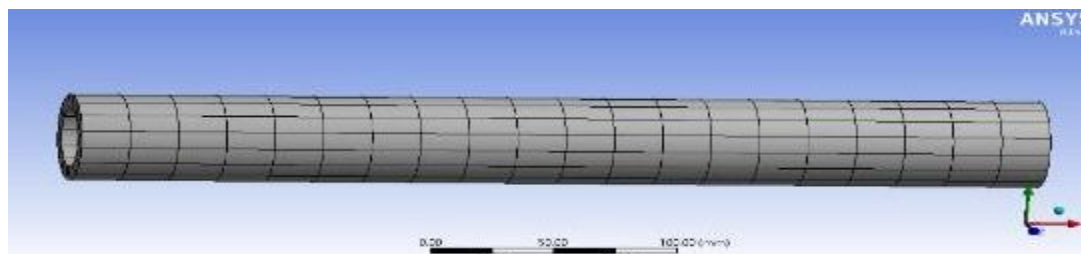


Fig-9 Meshing

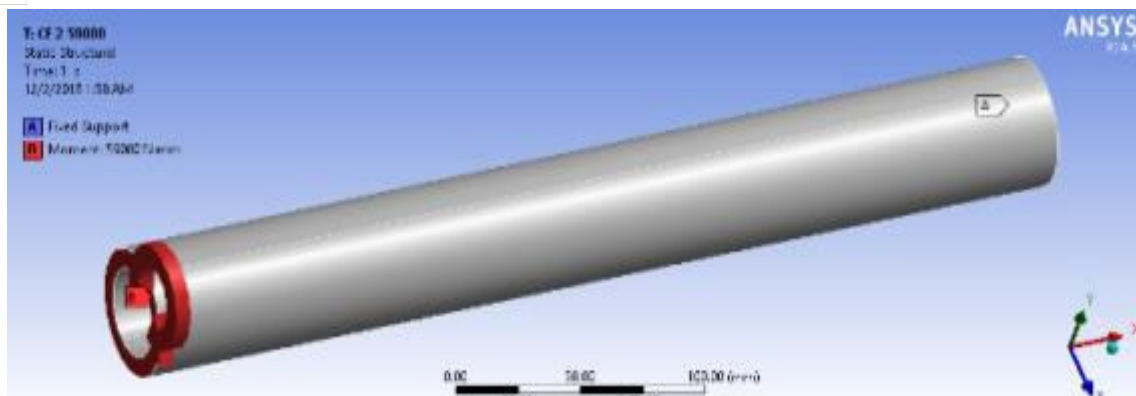


Fig-10 Boundary conditions

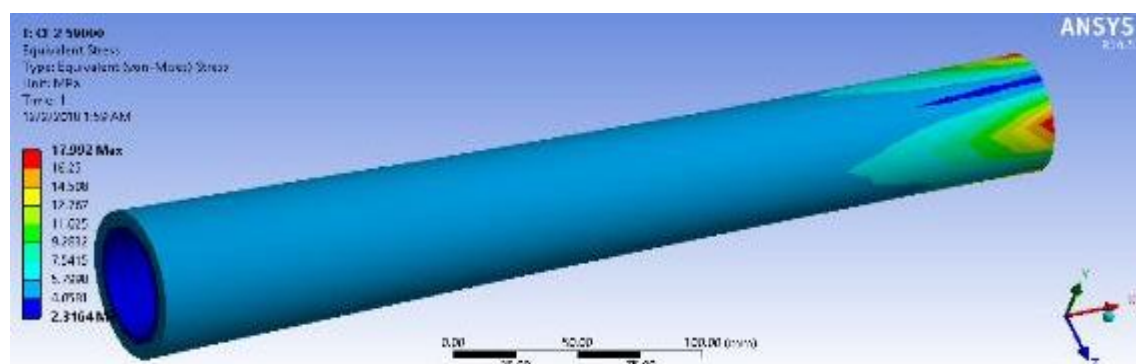


Fig-11 Von-Mises stress

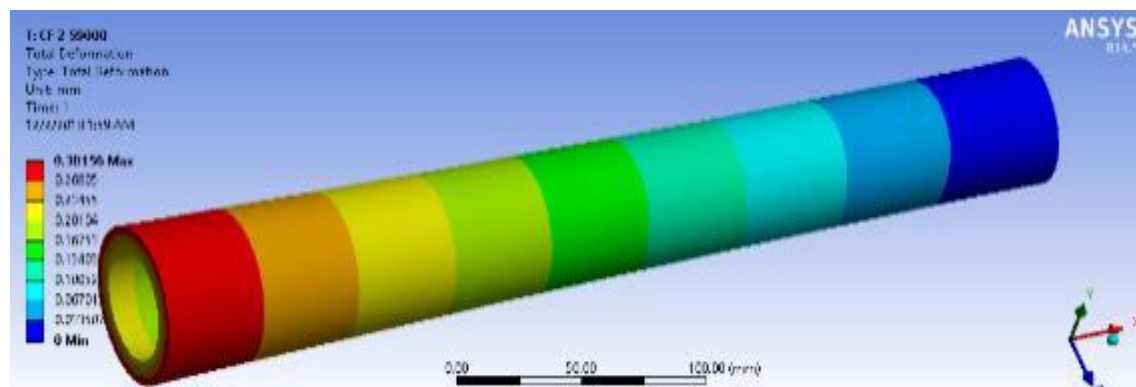


Fig-12 Total deflection..

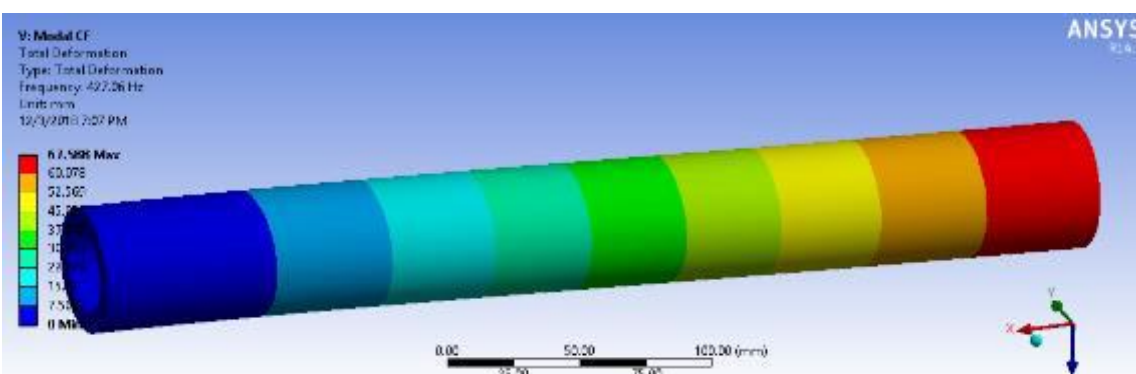


Fig-13 Modal analysis


## VI. RESULTS AND COMPARISON

### A. Torsional Buckling


The steel shaft model has imported from CATIA V5R19 software to ANSYS R14.5 and analyzed for the maximum deflection, maximum shear stress as well as the Von-Mises stress value. The resulting values are tabulated as in Table 3. The fixed constraint is applied at the one edge of the shaft. The twisting moment is applied at the other edge of the shaft.

Table 3. Torsional Buckling analysis results and comparison


Material	Deflection(mm)	Von Misses Stress(Mpa)
Steel	0.05471	18.452
Carbon/Epoxy	0.30156	17.992

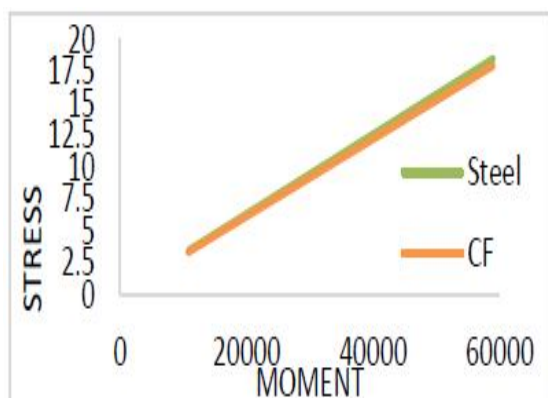


Graph- 1 Moment Vs Stress

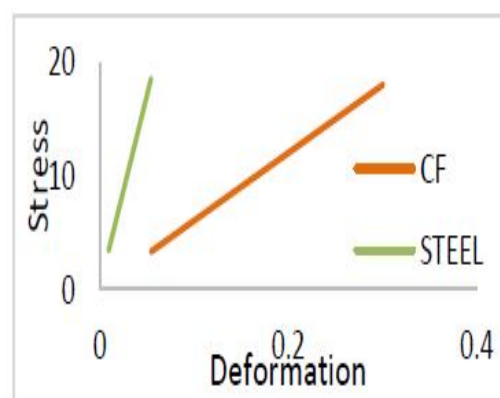

Graph-2 Deformation Vs Moment

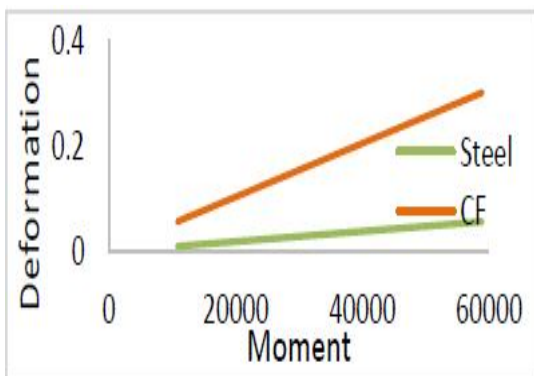

Graph- 3 Moment Vs Deformation

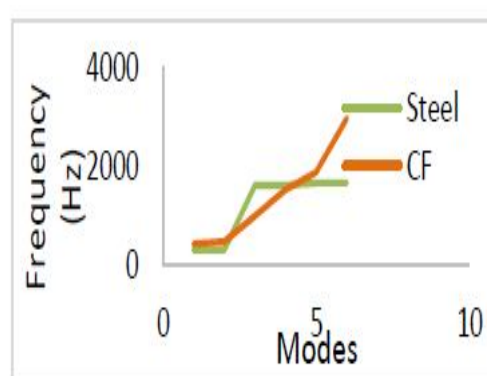

Graph-4 Modes Vs Frequency

### B. Modal Analysis

When bending natural frequency is high then critical speed is also high. Therefore, the shafts have more range of speed if the natural frequency is high [3]. From comparison of natural frequency of both conventional Steel shaft and Carbon/ Epoxy composite shaft it is clear that composite shaft having higher values of natural frequency as shown in table 4. Result and Comparison of Modal Analysis which is more preferable for drive shaft in light motor vehicle.

Table 4. Result and Comparison of Modal Analysis

Material	Mode-1	Mode-2	Mode-3	Mode-4
Steel	301.53	3.01.53	1603.4	1660.2
Carbon/epoxy	427.06	476.13	984.08	1510.3



## VII. CONCLUSION

From the torsional buckling and modal analysis the deformation, shear stress, Von-Mises stress, critical speed, bending natural frequency and weight are determined which gives better results as compare to Steel shaft. In comparison Carbon/Epoxy composite shaft is best solely in weight reduction which is 18.55% lesser than steel shaft. Carbon/Epoxy composite shaft is best in shear stress and Von-Mises stress is 41.63% larger and bending natural frequency of Carbon/Epoxy composite shaft is also larger than steel shaft. Therefore a Caron/Epoxy composite shaft can use as a propeller shaft for light motor vehicles like Maruti Omni.

## REFERENCES

- [1] V. Jose Ananth Vino, Dr. J H Hussain "Design, and analysis of propeller shaft" International journal of innovative research in science, Engineering and technology vol 4, issue 8, August 15
- [2] S R Dharmadhikari "Design and analysis of composite drive shaft using ANSYS and GA" IJOR vol 3, Issue 1, Jan-Feb 13 pp 490-496
- [3] S. Shinde "Design and optimization of propeller shaft made up of composite materials" International engineering journal pp 1046-1053
- [4] Bhirud Pankaj Prakash "Analysis of drive shaft" international journal of mechanical and production engineering, ISSN 2320-2092, vol 2, issue 2, Feb 14
- [5] Salaisivabalan T, Natarajan R "Design, and analysis of propeller shaft of an automobile using composite materials" international journal of innovative research of science, engineering, and technology, vol 5, issue 5, may 2015
- [6] Parshuram D, "Design and analysis of hybrid drive shaft for automotive" The International Journal of Engineering And Science (IJES), vol 2, issue 2, P 160-171,2013
- [7] SP Maske "Failure analysis and design modification of propeller shaft of bus" IJRASET, vol 4, Issue 10.ISSN 2321-9653
- [8] D Khushwa "Optimal analysis and composite drive shaft for a light motor vehicle" IJAERD, ISSN 2348-6406.
- [9] Salaisivabalan T. 2016. Design and Analysis of Propeller Shaft of an Automobile Using Composite Materials. International Journal of Innovative Research in Science, Engineering and Technology, 5 (5): 7916-7923.
- [10] Mohammad Reza Khoshnavan 2011. Design and Modal Analysis of Composite Drive Shaft for Automotive Application. International Journal of Engineering Science and Technology, 3: 2543-2549.
- [11] A. R. Abu Talib 2009. Developing a hybrid, carbon/glass fiber-reinforced, epoxy composite automotive drive shaft. Materials and Design. 514-521.
- [12] Atul Kumar Raikwar. 2016. Design and optimization of automobile propeller shaft with composite materials using FEM Analysis. International Journal of Engineering Development and Research. 4 (4): 39-48.
- [13] Mr. N. Rajendar. Design and Analysis of Composite Drive Shaft. International Journal of Science, Engineering and Technology Research. 6(1): 51-59.



10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)