



# IJRASET

International Journal For Research in  
Applied Science and Engineering Technology



---

# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume: 4      Issue: III      Month of publication: March 2016**

**DOI:**

**[www.ijraset.com](http://www.ijraset.com)**

**Call:  08813907089**

**E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)**

# Low Cost Reliable 3D Printer Design Using CPU Board XMC4500

S. Suresh<sup>1</sup> (PG Scholar), V.Senthilkumaran <sup>2</sup> (Assistant Professor)

Department of Electronics & Communication Engineering,  
Mahendra Engineering College, Namakkal District, TN, India.

**Abstract--3D printing is a process of making a three-dimensional solid object of virtually any shape from a digital model. A 3D printer is just like a normal color printer. The main difference is that it prints with plastic and 3-dimensional objects. The printer prints small plastic threads in layers forming the object as required. 3D printing is achieved using an additive process where successive layers of material are laid down in different shapes. So, in this I have used five stepper motor and one extruder from which layer by layer object forming by serial communication with pc and communicate 3D printer by using CAD software to receive 3D object with help of controller XMC4500.**

**Keywords: xmc4500, G-Code, Marlin Software, Printed Head (EXTRUDER), ABS Plastic, Power Supply.**

## I. INTRODUCTION

3D printing is a form of additive manufacturing technology where a three dimensional object is created by laying down successive layers of material. It is also known as rapid prototyping, is a mechanized method whereby 3D objects are quickly made on a reasonably sized machine connected to a computer. A 3D printer is a limited type of industrial robot that is capable of carrying out an additive process under computer control. It is used in a variety of industries including jewellery, footwear, industrial design, architecture, engineering and construction, automotive, aerospace, dental and medical industries, education and consumer products. The 3D printing concept of custom manufacturing is exciting to nearly everyone. This revolutionary method for creating 3D models with the use of inkjet technology saves time and cost by eliminating the need to design; print and glue together separate model parts. So using 3D printer it is possible to make complete model in a single process. The basic principles include flexibility of output, and translation of code into a visible pattern.

## II. SCOPE OF WORK

In today's scenario, making of die is very much difficult, time consuming and costly as well. Purpose of serving 3D printing technology is to make all kind of die in more easier way, very much less time consuming and cost effective. For example, if user wants to make die of soap, then it may cost INR. 25,000, where the same die can be made by 3D printer in very much less cost compared to the previous. Similarly, die for the jewellery, statues, enclosures of any product, architectural models etc. can be made by using 3D printer. In automobile industries, for making die of any part of the automobile, 3D printer is very much helpful. So, instead of making die manually or by existing technologies, 3D printer is far better, less time consuming, more accurate, cost effective and easy system.

### BLOCK DIAGRAM

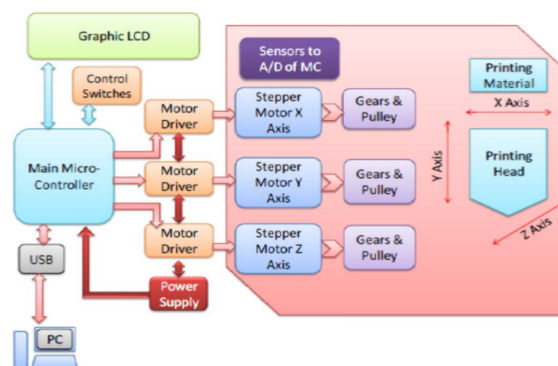


Fig 1. Block Diagram of 3D Printer

Fig.1 General Block diagram for 3d printer

## International Journal for Research in Applied Science & Engineering Technology (IJRASET)

### A. Printer Control Board

Printer Control Board is heart of 3D Printer which controls precise motion of stepper motors using stepper drivers. Board contains a microcontroller which is interfaced to host application on computer via USB. Stepper drivers are used to control stepper motors which provides higher current for operation of stepper motors. The firm ware written in controller will convert the g-code information given by 3D CAD file of object to be printed, to a precise step angles of stepper motors. Extruder stepper motor controls motion of Filament in extruder

### III. WORKING PRINCIPLE

The 3D printing process consists of following steps

- 3D CAD Modelling
- Firmware Uploading
- Connecting printer to host Application
- Slicing the 3D model and start Printing

#### A. 3D CAD Modelling

The process starts by designing 3D CAD model of a object to be printed in any CAD tool such as AutoCAD as shown in figure 9. Then these 3D models are opened in host application using stereo lithography (.stl) file format. There are lots of open source host application softwares are available.

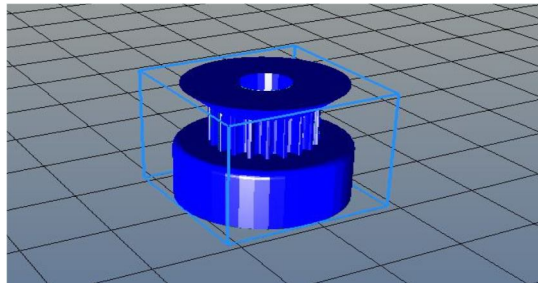


Figure 2: CAD model of 3D object to be printed (Pulley)

#### B. Firmware Uploading

Once CAD model is ready, printer should be connected using printer control board to computer and upload the modified firmware into microcontroller. There are many open source firmware available. Repetier firmware is very famous and compatible with many boards, so Repetier is used after modifying it with Cartesian to cylindrical conversion for 3D Potter. The Firmware is heart of Printer Board which controls precise motion of all stepper motors according to g-code data.

#### C. Connecting Printer To Host Application

Then we have to connect the printer to computer using the host application via USB port. Here we have to set required connection settings such as baud rate etc. Once Printer is connected to computer we can control printer head through application. Then we set the head position at home where we intend to start the printing on printing bed.

#### D. Slicing The 3D Model And Start Printing

There are different slicing methods such as concentric, honeycomb, rectilinear etc. Slicing is method of splitting CAD models into layers with some defined set of structure. Then we slice the 3D model into digital cross-sections for the machine to successively use as a guideline for printing as shown in figure 10




Figure 3: Slicing of CAD model





## International Journal for Research in Applied Science & Engineering Technology (IJRASET)

code, you use a slicing program. Some examples of slicing programs include Slic3r, Kisslicer, RepSnapper, and RepRap Host Software. The process of converting STL to G-code slices the model, then looks at the cross section of each slice and figures out the path that the print head

### H. Result

Finally the design implement to the processor then the printer print the object .now we get the object.



### IV. CONCLUSION AND FUTURE WORK

This Paper implemented a high-end technology of 3-D printing, which could prove to be a milestone in the field of die making. The final implementation provides a very cost effective and feasible solution to 3-D printing, making it more viable to consumers and opening a wide area of development in this field. The development of this 3D Printer gave a greater insight towards a low cost system which could prove so much useful for preparing a die.

Though, this 3D Printer did require overcoming some challenges, like the modeling needed some pretty tough mathematical calculations, and some trial and error methods. After some breaking and some re-assembling, when the mechanical chassis and the structure were ready, the main problem came into picture. The movement of the extruder required up to 5 different stepper motors to be moved simultaneously, which in turn needed 5 motor drivers. Controlling them through g-codes required thorough understanding of Marlin software and the code sequences, this, proved to be quite useful, at the later stages of the development.

But, once the whole structure and the program were ready, it was able to print dies successfully, and according to the demanded specifications. Though there are many features that can be added, and this would be a never ending field of research, the objective of the dissertation limits the scope to what was implemented, and proposes it as a low cost solution in manufacturing die and other such jobs/products.

### REFERENCES

- [1] <http://arduino.cc/en/Main/arduinoBoardMega2560>
- [2] [http://www.wvshare.com/datasheet\\_html/L293D-PDF.html](http://www.wvshare.com/datasheet_html/L293D-PDF.html)
- [3] <http://www.ti.com/lit/ds/symlink/l293d.pdf>
- [4] <http://www.parallax.com/sites/default/files/downloads/27964-Stepper-Motor-Documentation.pdf>
- [5] [http://www.omega.com/auto/pdf/REF\\_IntroStepMotors.pdf](http://www.omega.com/auto/pdf/REF_IntroStepMotors.pdf)
- [6] "Printing Embedded Circuits" Periard D., Malone E., Lipson H., (2007) , Proceedings of the 18th Solid Freeform Fabrication Symposium, Austin TX, Aug 2007, pp.503-512.
- [7] "Design in the age of 3D printing, Lipson, H. (2012) Thinking outside the CAD Box", Mechanical Engineering, September 2012, pp. B - G.
- [8] "Advanced technology and market trend of printed electronic (1sted.)", Korean Scientist and Engineers Network. (2011) South Korea: Kim, S. H.
- [9] "Printable Materials and Printing Technology Road Map (1sted.)", Korea Environmental Nano Research Center. (2010). South Korea: Kim, N. S., Oh, D. H., Lee, Y. J., Lee, J.H., Jo, Y. K., Hwang, J. H., and Hong, S. I.
- [10] "The difference between ABS and PLA for 3D printing". Chilson, L. (Jan. 27, 2013). Retrieved from <http://www.protoparadigm.com/blog/2013/01/the-difference-between-abs-and-pla-for-3d-printing>.
- [11] "Manufacturing of the model of State's assembly using 3D printer/3D printing technology in architecture field", Kim, A. J. (June 30, 2011).



10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)