



# **iJRASET**

International Journal For Research in  
Applied Science and Engineering Technology



---

# **INTERNATIONAL JOURNAL FOR RESEARCH**

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume: 4**

**Issue: XII**

**Month of publication: December 2016**

**DOI:**

**[www.ijraset.com](http://www.ijraset.com)**

**Call: ☎ 08813907089**

**E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)**

# **Thermal Effects on Mullite Coated Diesel Engine Piston for Various Coating Thickness**

Kirubadurai. B<sup>1</sup>, Thivya Prasad. D<sup>2</sup>, Dinesh. G<sup>3</sup>, Mahesh Prem Kumar. H<sup>4</sup>

<sup>1,2,3,4</sup>Assistant Professor in Mechatronics Department

Er. Perumal Manimegalai College of Engineering, Hosur, Tamil nadu-635117

**Abstract:** Diesel engines are prime role in medium and heavy duty applications due to grander characteristics such as lower fuel consumption, high engine power output and lower emissions as compared with gasoline functioned engines. In this research is to investigate the temperature distribution and the effects of thermal barrier coated in diesel engine piston as a function of various coating thickness. Multi coatings are used to increase the performance of high temperature components in diesel engines. The piston is modelled using PRO-E wildfire software. The thermal analysis are performed on the piston for various coating thickness by means of using commercial code namely ANSYS 13.0 version. The piston temperature distribution is calculated for both conventional and coated pistons in order to control the thermal stresses and deformations within acceptable levels. Based on the above thermal analysis the optimum coating thickness is suggested for diesel engines. The performance results of optimum thickness coated piston are compared with conventional and coated pistons.

**Key words:** thermal barrier, coating thickness, thermal stresses.

## **I. INTRODUCTION**

The function of the piston is to absorb the energy released after the air fuel mixture is ignited by the high temperature. The piston accelerates producing useful mechanical energy. To accomplish this, the piston must be sealed so that it can compress the mixture of air and fuel does not allow gases out of combustion chamber. This can be accomplished by piston rings which also help to prevent oil from entering the combustion chamber from underneath the piston. Another function of rings is to keep the piston from contacting the cylinder wall. Less contact area between the cylinder and piston reduces friction, thereby increasing efficiency. The concept of insulating cooled heat engine components such as diesel engine piston and valves from hot working fluids with a ceramic thermal barrier coating is very efficient one. A practical system, however, has only been identified in the past few years. Thermal barrier coating (TBC) is applied to metallic components to reduce metal temperature, reduce life cycle cost, increase the environmental resistance and in some cases reduce noxious exhaust emissions.

Mullite based coatings are ceramic combustion chamber coatings originally developed for adiabatic or low heat rejection engines have been shown to reduce diesel emissions. Reported results indicate that in-cylinder mullite coatings are capable of reducing the carbonaceous fraction of diesel particulates without increasing Nox or other regulated emissions. Reductions in total PM emissions may be achieved by combining mullite coatings with diesel oxygen catalysts. In-cylinder coatings are most effective in reducing emissions from older technology engines of relatively low thermal efficiency.

## **II. THERMAL ANALYSIS OF DIESEL ENGINE PISTON**

It is important to calculate the piston temperature distribution in order to control the thermal stresses and deformations within acceptable levels. The temperature distribution enables us to optimize the thermal aspects of the piston design at lower cost, before the first prototype is constructed. As much as 60% of the total engine mechanical power lost is generated by piston ring assembly.

The piston skirt surface slides on the cylinder bore. A lubricant film fills the clearance between the surfaces. The small values of the clearance increase the frictional losses and the high values increase the secondary motion of the piston. Most of the Internal Combustion (IC) engine pistons are made of an aluminium alloy which has a thermal expansion coefficient, 80% higher than the cylinder bore material made of cast iron. This leads to some differences between running and the design clearances. Therefore, analysis of the piston thermal behaviour is extremely crucial in designing more efficient engine. The thermal analysis of piston is important from different perspectives. First, the highest temperature of any point in piston must not exceed more than 66% of the melting point temperature of the alloy. This limit temperature for the current engine piston alloy is about 640 K. Temperature distribution leads to thermal deformations and thermal stresses. The piston thermal deformation has an important role in piston skirt design which has a potential to reduce friction and piston slap. In this design, both of the thermal and mechanical stresses must be

## International Journal for Research in Applied Science & Engineering Technology (IJRASET)

considered indicating the importance of piston thermal analysis.

In the recent work, Li used finite element method to analyse the piston thermal behaviour. Because of symmetry, he only used a quarter of the piston. He applied the thermal boundary conditions of piston symmetrically. He used simple combustion model for combustion side boundary condition. His numerical results matched with experiment well. The piston was subjected to the coupled action of thermal and mechanical loads. The results would be used as source data for the development of a global elastic hydrodynamic model and was provided a good tool for piston design analysis. The piston is modelled with different coating thickness using PRO-E wild fire software. The thermal analysis are performed using commercial code namely ANSYS 13.0 version. The conventional and the coated piston are compared each other to outcome the optimum thickness for diesel engine applications.

### III. ENGINE SPECIFICATIONS

Thermal analysis is carried out on Texvel engine piston.

Table 1: Texvel Engine specifications

|                             |                                                                           |
|-----------------------------|---------------------------------------------------------------------------|
| Type                        | Single cylinder, vertical, four stroke cycles, water cooled diesel engine |
| Bore in mm                  | 85                                                                        |
| Stroke in mm                | 110                                                                       |
| Speed in rpm                | 1500                                                                      |
| Connecting rod length in mm | 235                                                                       |
| Compression ratio           | 18:1                                                                      |
| Brake Horse power           | 6.5                                                                       |
| Loading                     | Rope brake                                                                |
| Lubrication system          | Forced type                                                               |
| Injection timing            | 19.58 <sup>0</sup> BTDC                                                   |

#### A. Calculations Of Heat Transfer Coefficients

The piston receives the heat from the hot gases formed by burning mixture of a particular air/fuel ratio , the boundary conditions around the piston body are different from region to region .In this work the calculations of the thermal analysis depends on the theories of the convection heat transfer analysis that could be applied to piston and piston rings.

#### B. Combustion Chamber Side Thermal Boundary Condition

The mathematical description of the forced fluid flow on a cylinder surface is so complicated whereas in the parts of an internal combustion engine especially the piston, the effect of the hot gases on it is very complicated, and in order to calculate the heat transfer coefficient at the piston crown surface, the heat transfer is described as a forced convection heat transfer inside a cylinder . The heat transfer from the combustion gases is assumed to be similar to the turbulent heat transfer of gases in a cylinder as follows:

$$Nu = C Re^m Pr^n \dots$$

Where

Nu is the Nusselt number,

Re is Reynolds number and

Pr is Prandtl number.

The m exponent is typically assumed to be 0.8 for fully developed turbulent flow and n = 0.3or 0.4 for the cooling or heating respectively .The constant C is to be found from the experimental studies. Benson mentioned that Gunter F.Hohenberg, presented a developed relationship for the equation by using the cylinder volume as a function of the piston diameter

$$h_g = 226.8 P^{0.8} T^{-0.4} (V_p + 1.4)^{0.8}$$

Where,

$h_g$  – convective heat transfer coefficient

P= indicated mean effective pressure acting on the piston in bar = 7.67bar

## International Journal for Research in Applied Science & Engineering Technology (IJRASET)

$T =$  bulk temperature =  $656^{\circ}\text{C}$  (reference temperature)

$V_p =$  mean velocity of the piston =  $2 \times L \times N = 2 \times 11 \times 1500 = 5.5 \text{ m/s}$   $h_g = 356.36 \text{ W/m}^2\text{K}$

### C. Heat Transfer Coefficient Between Piston Crown And Liner

The ring land heat transfer model is based on the flow between the two, parallel plates. According to Reynolds number which is less than 2000, it could be assumed that the flow is laminar. To get the value of the heat transfer coefficient Nusselt number should be found for the laminar flow between two parallel plates. where this number is,

$$Nu = h \times D_h / k = 8.235$$

So the heat transfer coefficient will be equal to,  $h_r = 8.235k/D_h$ ,  $D_h = 4A/P$

Where,

$D_h$  = is the hydraulic diameter

$A$  = is the cross-section area ( $\text{m}^2$ ) and is equal to;  $A = 2b \times 1$  unit depth

$P$  = the perimeter in (m) and is equal to;  $P = 2$ ,

therefore the hydraulic diameter will be equal to;  $D_h = 4b$ .

$b$  = clearance between piston and liner =  $0.09 \text{ mm}$

$K$  = thermal conductivity of gas =  $0.184 \text{ W/mK}$

$h = 1515.24 \text{ W/m}^2\text{K}$

$T =$  bulk temperature =  $315^{\circ}\text{C}$  (reference temperature)

### D. Heat Transfer Coefficient In The Rings

Thermal circuit method is used to model the heat transfer in the ring land and skirt region. with the following assumptions:

- 1) The effect of piston motion on the heat transfer is neglected;
- 2) The rings and skirt are fully engulfed in oil and there are no cavitations;
- 3) The rings do not twist;
- 4) The only heat transfer mode in the oil film is assumed to be conduction.


The resistances are:

$$R_1 = \ln(r_2/r_1) / (2 \times 3.14 \times L_1 \times k_{\text{ring}}) \quad \text{ring resistance}$$

$$R_2 = \ln(r_3/r_2) / (2 \times 3.14 \times L_2 \times k_{\text{oil}}) \quad \text{oil film resistance}$$

$$R_3 = \ln(r_4/r_3) / (2 \times 3.14 \times L_3 \times k_{\text{ring}}) \quad \text{block resistance}$$

$$R_4 = 1/h_{\text{water}} \cdot A_s \quad \text{water-jacket resistance}$$

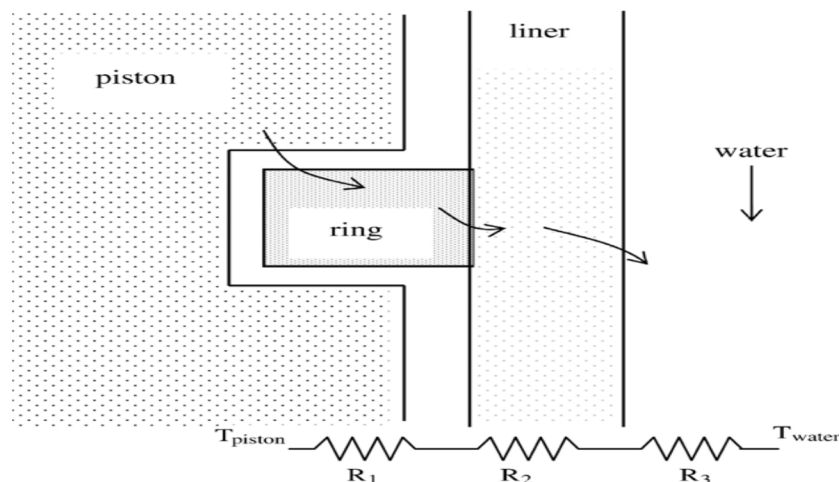

Thermal circuit resistance model for heat transfer from the rings

## International Journal for Research in Applied Science & Engineering Technology (IJRASET)

( $R_1$ : ring resistance,  $R_2$ : block resistance,  $R_3$ : water-jacket resistance)

$r_1$ =inner radius of the ring =41.08mm

$r_2$ =Outer radius of the ring=44.45mm

$r_3$ =Bore radius= 42.5mm

$r_4$ =Inner radius of water jacket=45.5mm

$L_1$  and  $L_3$  are the widths of the heat transfer paths 2.36 and 6mm respectively.

$A_s$ = the effective area in contact with the coolant.

$$= 2 \times 3.14 \times \text{liner radius} \times \text{liner height}$$

$$= 2 \times 3 \times 45.5 \times 110 \times 10^{-6} = 0.30314314 \text{ m}^2$$

When the above values is substituted in the equations we get  $R_1$ ,  $R_3$ , and  $R_4$  are 0.10230, 0.034811 and 0.02285 W/mK respectively.

$$R_{\text{tot}} = R_1 + R_2 + R_3 = 0.159 \text{ w/mk}$$

The effective heat transfer coefficient is obtained from

$$h_{\text{eff}} = 1 / (R_{\text{tot}} \times A_{\text{eff}}) \quad A_{\text{eff}} = \text{Piston surface in contact with ring.}$$

$$= 2 \times 3.14 \times (r_2 - r_1) \times n$$

$$= 2 \times 3.14 \times 8 \times 10^{-3} \times (41.08 - 44.45) \times 10^{-3}$$

$$= 6.77 \times 10^{-4} \text{ m}^3$$

$$h_{\text{eff}} = 1 / (R_{\text{tot}} \times A_{\text{eff}}) = 9046.56 \text{ w/m}^2\text{k}$$

$$T = \text{bulk temperature} = 160^\circ\text{C (reference temperature)}$$

### E. Heat Transfer Coefficient Of Piston Crown Underside

The crown underside is cooled by splash cooling type. The value of convective heat transfer coefficient is calculated from the following equation.

$$h = 900 \times (N/4600)^{0.35}$$

$h$ =convection heat transfer coefficient

$N$ =speed of the engine = 1500rpm.

$$h = 608 \text{ w/m}^2\text{k}$$

$$T = \text{bulk temperature} = 100^\circ\text{C}$$

### F. Heat Transfer Coefficient Of Piston Skirt Underside

The skirt underside, the heat transfer coefficient value is calculated from the equation

$$h = 240 \times (N/4600)^{0.35}$$

$h$ =convection heat transfer coefficient

$N$ =speed of the engine = 1500rpm.

$$h = 162.135 \text{ w/m}^2\text{k}$$

$$T = \text{bulk temperature} = 100^\circ\text{C}$$

Table: 2 the boundary conditions of the piston

| Region                         | Temperature ( $^\circ\text{C}$ ) | Heat transfer coefficient |
|--------------------------------|----------------------------------|---------------------------|
| Combustion chamber             | 656                              | 356.36                    |
| Between piston crown and liner | 315                              | 1515.24                   |
| Rings                          | 160                              | 9046.56                   |
| Crown underside                | 100                              | 608                       |
| Skirt underside                | 100                              | 162.35                    |
| Skirt outside                  | 85                               | 60                        |



# International Journal for Research in Applied Science & Engineering Technology (IJRASET)

## IV. GEOMETRIC MODELLING

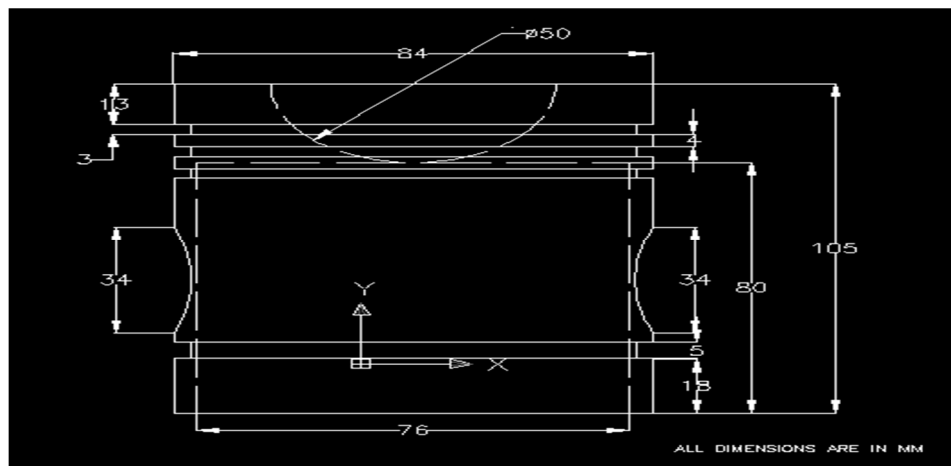


Figure 2: Dimensions of the Texvel engine piston

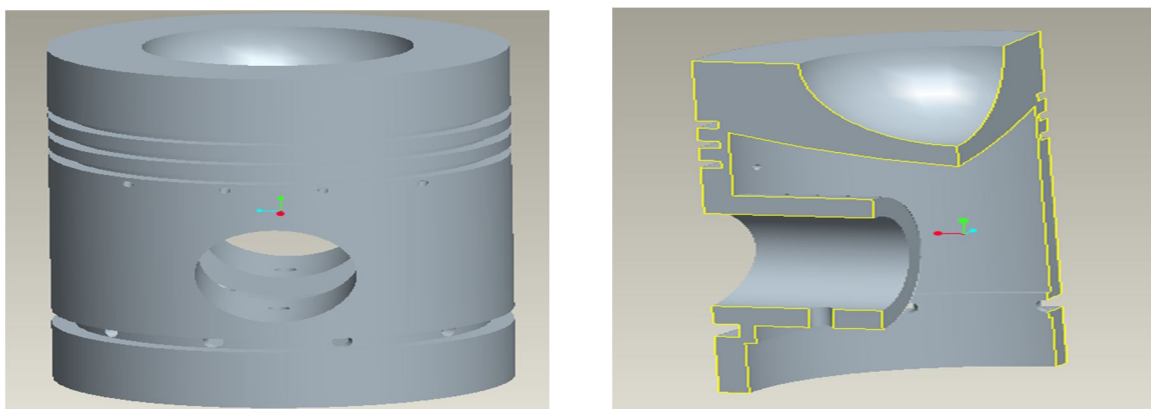


Figure 4: Texvel Engine Piston

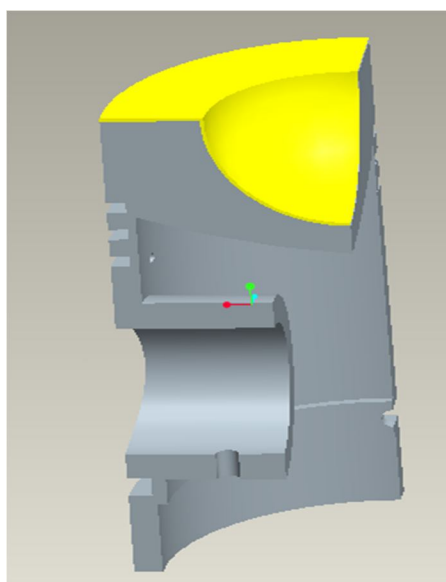


Figure 5: Piston with a coating Thickness of 0.65mm NiCrAl

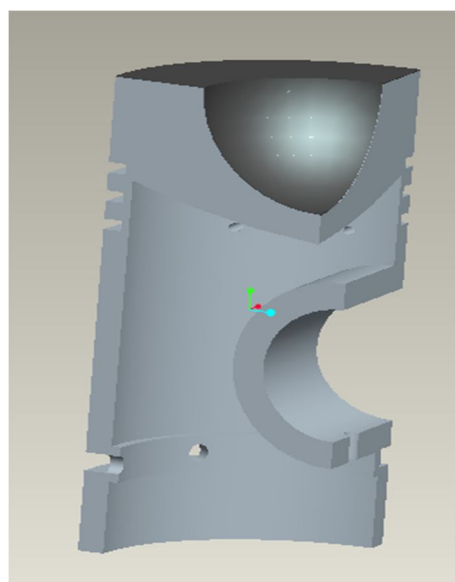


Figure 6: Piston with a coating thickness of 0.05mm Mullite + 0.60mm NiCrAl

## International Journal for Research in Applied Science & Engineering Technology (IJRASET)

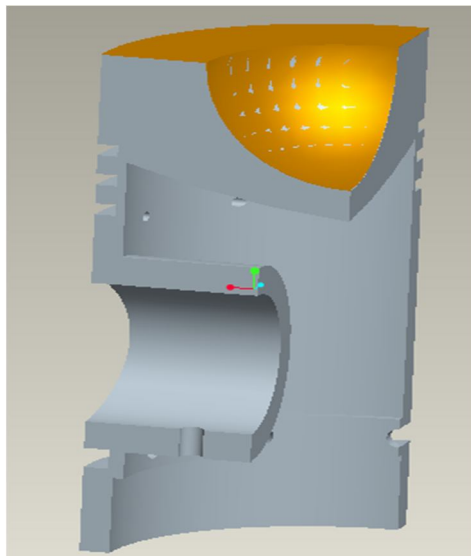


Figure 7: Piston with a coating thickness of 0.10mm Mullite +0.55mm NiCrAl

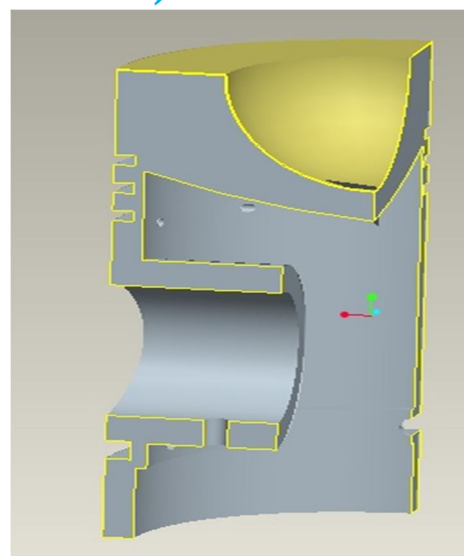


Figure 8: Piston with a coating thickness of 0.15mm Mullite +0.50mm NiCrAl

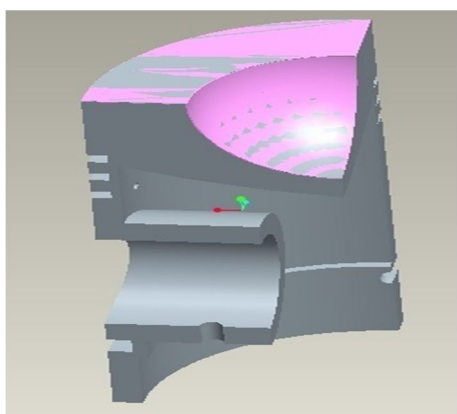


Figure 9: Piston with a coating thickness of 0.20mm Mullite +0.45mm NiCrAl

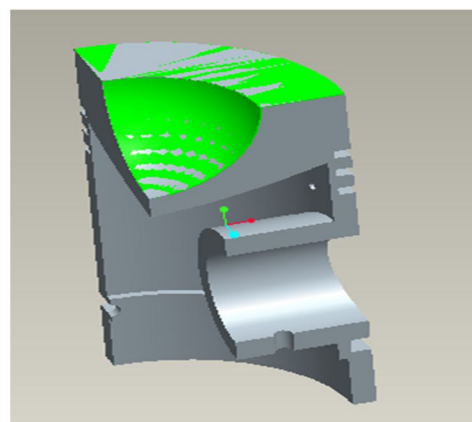


Figure 10: Piston with a coating thickness of 0.25mm Mullite +0.40mm NiCrAl

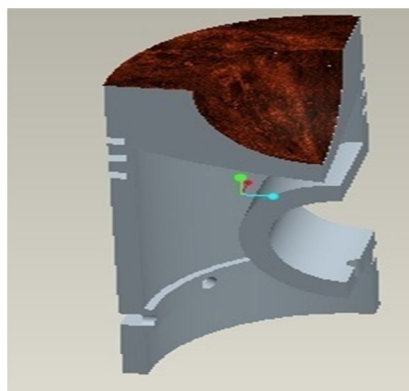


Figure 11: Piston with a coating thickness of 0.30mm Mullite +0.35mm NiCrAl

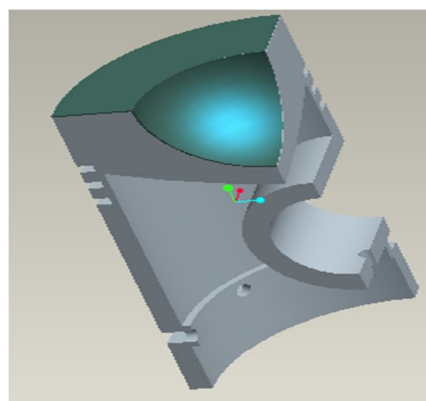


Figure 12: Piston with a coating thickness of 0.35mm Mullite +0.30mm NiCrAl

## International Journal for Research in Applied Science & Engineering Technology (IJRASET)

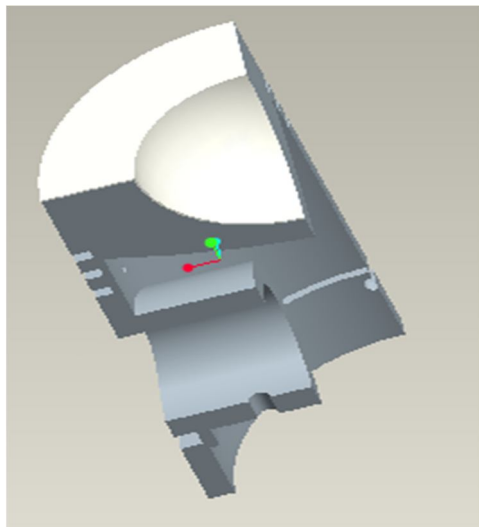


Figure 13: Piston with a coating thickness of 0.40mm Mullite +0.25mm NiCrAl

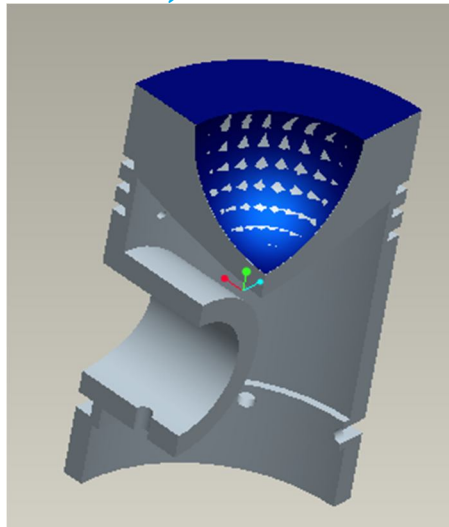


Figure 14: Piston with a coating thickness of 0.45mm Mullite +0.20mm NiCrAl

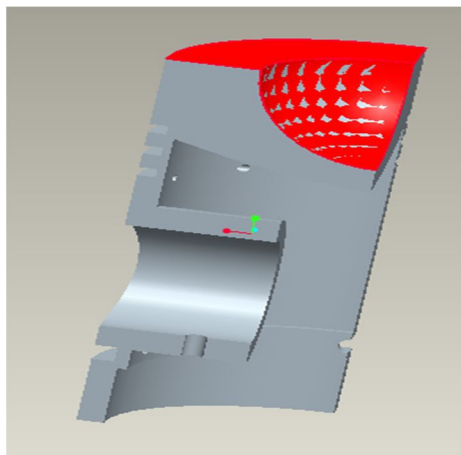


Figure 15: Piston with a coating thickness of 0.50mm Mullite +0.15mm NiCrAl

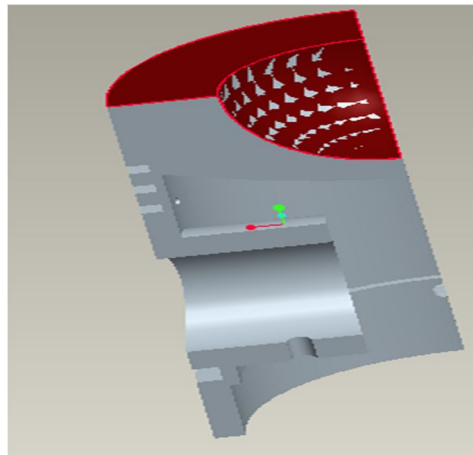


Figure 16: Piston with a coating thickness of 0.55mm Mullite +0.10mm NiCrAl

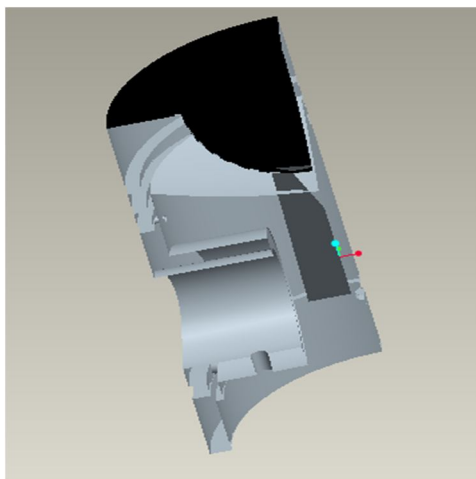


Figure 17: Piston with a coating thickness of 0.60mm Mullite +0.05mm NiCrAl

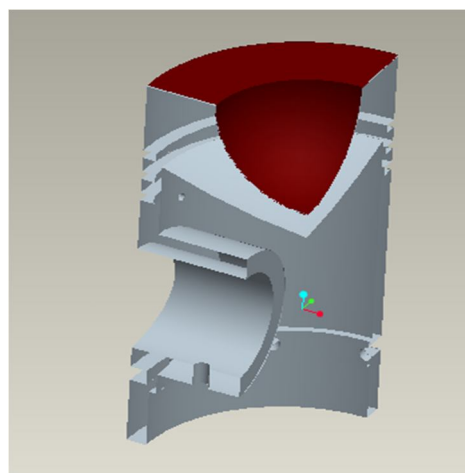


Figure 18: Piston with a coating thickness of 0.65mm Mullite



# International Journal for Research in Applied Science & Engineering Technology (IJRASET)

## V. RESULTS AND DISCUSSIONS

The temperature distribution along the conventional and coated piston is seen for various coating thickness involved. The temperature results are obtained and compared individually for all the coating thickness. The temperature distributions for conventional, coated and 0.55mm mullite coated piston are shown in figures.

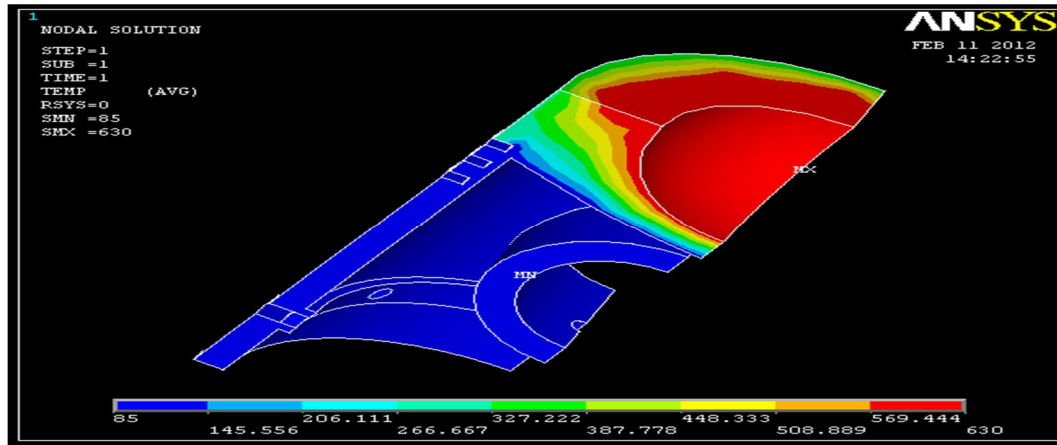


Figure 19: Temperature distribution for conventional piston

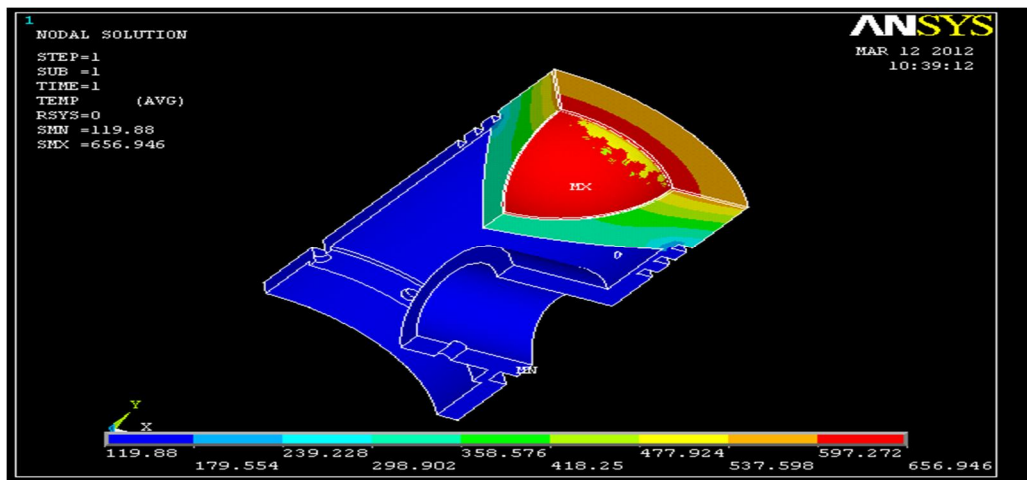


Figure 20: Temperature distribution for coated piston

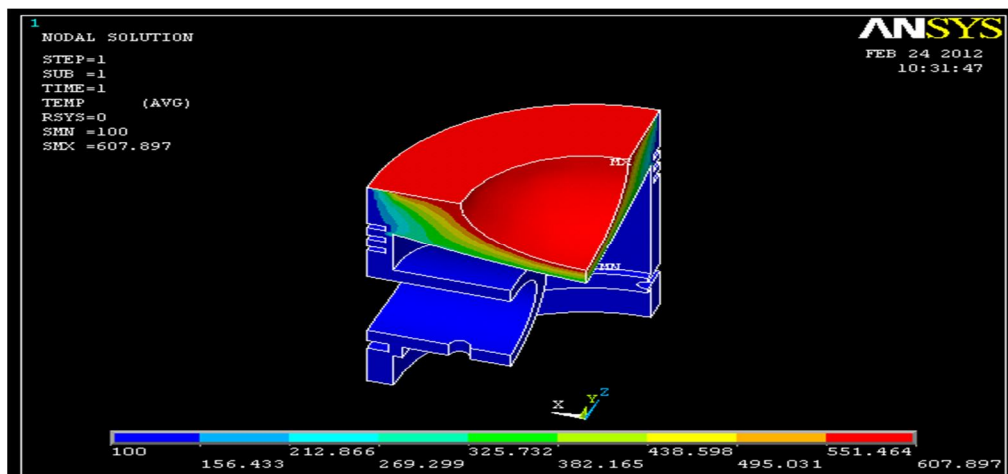


Figure 21: Temperature distribution for 0.55mm mullite coated piston

## International Journal for Research in Applied Science & Engineering Technology (IJRASET)

Table 3: Performance tabulation for standard 19.58 degree injection timing

| LOAD | TIME | B.P  | TFC   | SFC      | BTE   | FP  | IP   | BMEP  | IMEP | MEE   | ITE   |
|------|------|------|-------|----------|-------|-----|------|-------|------|-------|-------|
| Kg   | s    | KW   | Kg/hr | Kg/KW hr | %     | KW  | KW   | bar   | bar  | %     | %     |
| 1    | 138  | 0.2  | 0.55  | 2.706866 | 3.068 | 1.8 | 2    | 0.265 | 2.63 | 10.09 | 30.31 |
| 5    | 128  | 1.01 | 0.59  | 0.583668 | 14.23 | 1.8 | 2.81 | 1.326 | 3.69 | 35.93 | 39.46 |
| 10   | 127  | 2.02 | 0.59  | 0.294132 | 28.23 | 1.8 | 3.82 | 2.651 | 5.01 | 52.87 | 53.22 |
| 15   | 102  | 3.03 | 0.74  | 0.244149 | 34.01 | 1.8 | 4.83 | 3.977 | 6.34 | 62.72 | 54.04 |
| 20   | 86   | 4.04 | 0.88  | 0.217179 | 38.24 | 1.8 | 5.84 | 5.302 | 7.67 | 69.17 | 55.09 |

Table 4: Performance tabulation for coated engine 19.58 degree injection timing

| LOAD | TIME | B.P  | TFC   | SFC      | BTE   | FP  | IP   | BMEP  | IMEP | MEE   | ITE   |
|------|------|------|-------|----------|-------|-----|------|-------|------|-------|-------|
| Kg   | S    | KW   | Kg/hr | Kg/KW hr | %     | KW  | KW   | bar   | bar  | %     | %     |
| 1    | 143  | 0.2  | 0.53  | 2.612221 | 3.179 | 2.5 | 2.7  | 0.265 | 3.55 | 7.473 | 42.4  |
| 5    | 133  | 1.01 | 0.57  | 0.561726 | 14.78 | 2.5 | 3.51 | 1.326 | 4.61 | 28.76 | 51.22 |
| 10   | 130  | 2.02 | 0.58  | 0.287344 | 28.9  | 2.5 | 4.52 | 2.651 | 5.93 | 44.68 | 64.46 |
| 15   | 125  | 3.03 | 0.60  | 0.19925  | 49.68 | 2.5 | 5.52 | 3.977 | 7.25 | 54.78 | 75.83 |
| 20   | 91   | 4.04 | 0.83  | 0.205246 | 40.46 | 2.5 | 6.54 | 5.302 | 8.58 | 61.76 | 65.29 |

Table 5: Performance tabulation for 0.55mm mullite coated engine 19.58 degree injection timing

| LOAD | TIME | B.P  | TFC   | SFC      | BTE   | FP  | IP   | BMEP  | IMEP | MEE   | ITE   |
|------|------|------|-------|----------|-------|-----|------|-------|------|-------|-------|
| Kg   | s    | KW   | Kg/hr | Kg/KW hr | %     | KW  | KW   | bar   | bar  | %     | %     |
| 1    | 158  | 0.2  | 0.477 | 2.386    | 3.48  | 2.3 | 2.5  | 0.265 | 3.21 | 8.60  | 43.50 |
| 5    | 149  | 1.01 | 0.506 | 0.501    | 16.36 | 2.3 | 3.32 | 1.326 | 4.24 | 30.51 | 54.29 |
| 10   | 142  | 2.02 | 0.531 | 0.262    | 31.57 | 2.3 | 4.32 | 2.651 | 5.54 | 46.75 | 67.52 |
| 15   | 139  | 3.03 | 0.542 | 0.179    | 46.40 | 2.3 | 5.33 | 3.977 | 6.83 | 56.84 | 81.62 |
| 20   | 119  | 4.04 | 0.634 | 0.156    | 52.88 | 2.3 | 6.34 | 5.302 | 8.13 | 63.72 | 83.26 |

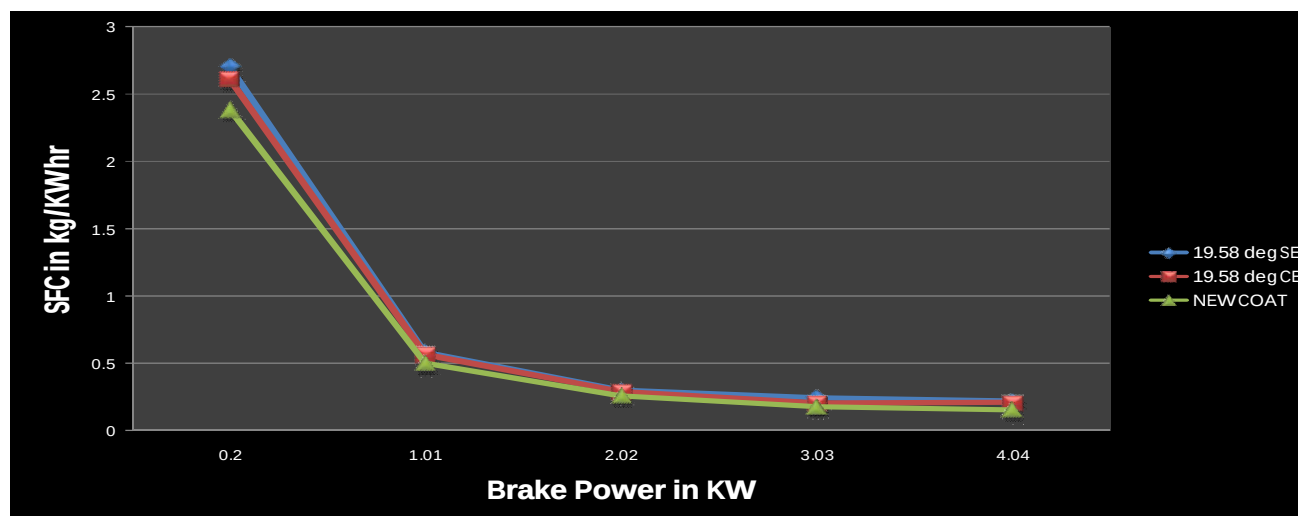


Figure 22: Brake power Vs Specific fuel consumption.

## International Journal for Research in Applied Science & Engineering Technology (IJRASET)

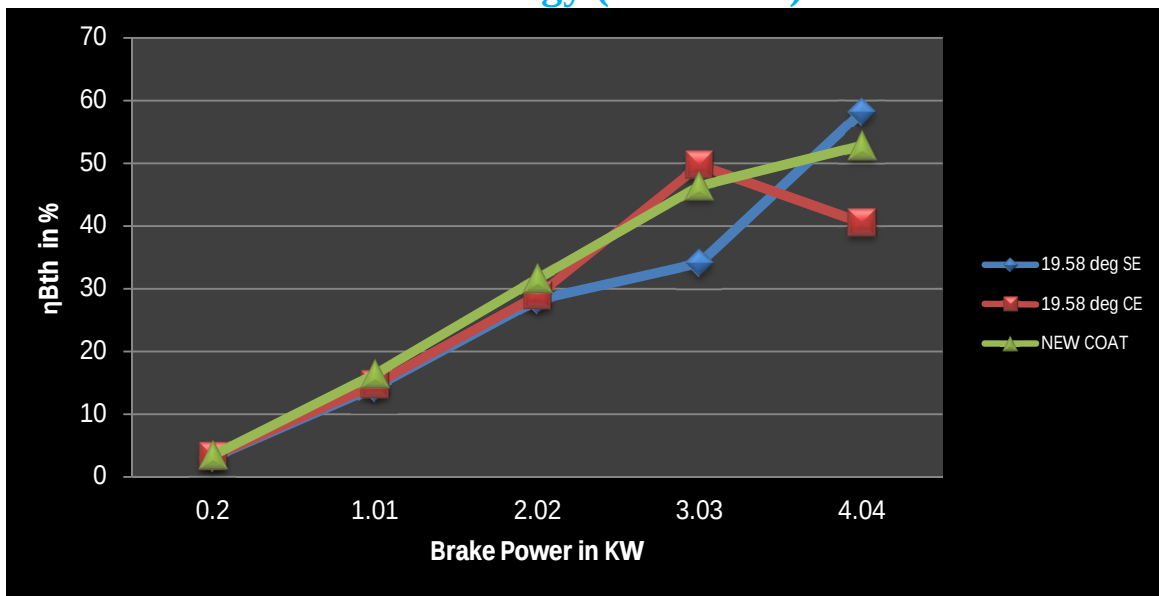


Figure 23: Brake power Vs Brake thermal efficiency.

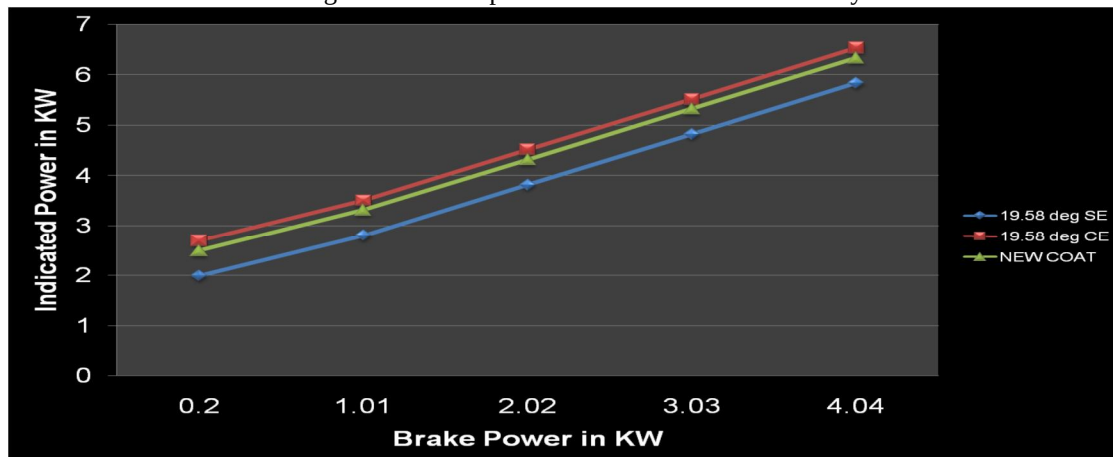


Figure 24: Brake power Vs Indicated power.

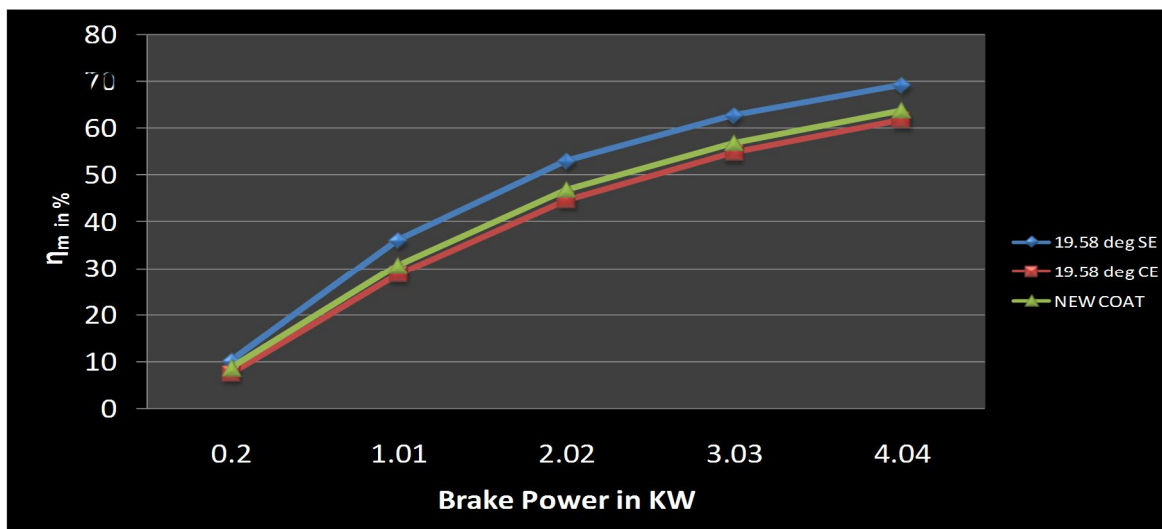


Figure 25: Brake power Vs Indicated thermal efficiency.

## International Journal for Research in Applied Science & Engineering Technology (IJRASET)

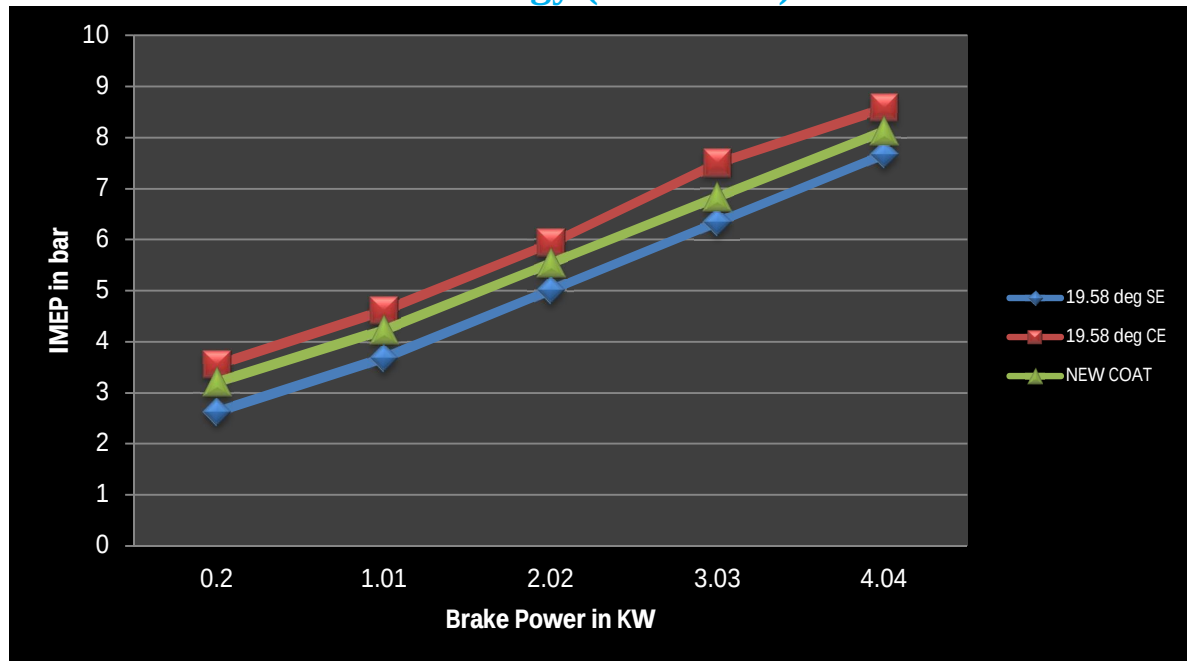


Figure 26: Brake power Vs Indicated mean effective pressure.

### VI. CONCLUSION

The thermal analysis has been performed on the conventional and coated with optimum thickness of the pistons. The temperature distributions are predicted by using ANSYS software package. The results of the analysis reveal that, the combustion chamber temperature of the conventional piston is 630 degree Celsius. The combustion chamber temperature values are increased from 650.579 degree Celsius to 668.786 at some intervals for 0.05mm to 0.50mm coating thickness. This is due to the very small layer of the coating thickness. The temperature of the combustion chamber in 0.55mm mullite coated piston is decreased to 607 degree Celsius. The temperature contours are also evenly distributed in 0.55mm coated piston. Then the combustion chamber temperature values are gradually increased for other coating thickness greater than 0.55mm. From the above analysis, it is concluded that 0.55mm coating thickness is the optimum coating thickness for diesel engine applications. The temperature and the stress values are reduced then the cooling load is also diminished for 0.55mm coating thickness. Thermal efficiency of the optimum thickness coated piston is 8% increase compared to the conventional and coated pistons and Specific fuel consumption is 4.5% decreased compared to the coated engine.

### REFERENCES

- [1] Ekrem Buyukkaya □, Muhammet Cerit "Thermal analysis of a ceramic coating diesel engine piston using 3-D finite element method" Received 14 February 2007; accepted in revised form 4 June 2007 Available online 13 June 2007.
- [2] V. Esfahanian, A. Javaheri, M. Ghaffarpour,\* "Thermal analysis of an SI engine piston using different combustion boundary condition treatments" Received 17 August 2004; accepted 4 May 2005. Available online 29 September 2005.
- [3] Mahdi hamzehei ,Manochehr rashidi" Determination of Piston and Cylinder Head Temperature Distribution in a 4-Cylinder Gasoline Engine at Actual Process"
- [4] "Internal Combustion Engines "by K.K Ramalingam, 2000 Scitech Publications (India) Pvt Ltd.
- [5] "Internal Combustion Engines " by V. Ganasan, 1998, Tata McGraw-hill Publishing Co, Ltd.
- [6] Bormane, G., Nishiwaki, K., "InternalCombustion Engine Heat Transfer", Prog Energycombustion Science, vol.13, PP.1-46, 1987"
- [7] Thomas, D, "Principles and Methods of Temperature Measurement", Wiley, 1988.
- [8] Heywood, J.B, "Internal Combustion Engine Fundamentals," McGraw-Hill, New York, 1988
- [9] Wu. H, Chiu. C, A., "Study of TemperatureDistribution in a Diesel Piston - Comparison of Analytical and Experimental Results", S.A.E 861278, 1986.
- [10] Ong, J.H, "Steady State Thermal Analysis of a Diesel Engine Piston", Computer Industrial, vol 15, No.3, PP.255-268, 1990.
- [11] Hara, M., and Oguri, T., "Measurement of Piston Temperature of Spark-Ignition Engines",BullJ.S.M.E, PP. 382-389, 1959
- [12] Scholp, A.C., Furman, G. and Binda,P., "AnInstrument for Piston Temperature Measurement",SAE Congress, PP.37-39, 1947
- [13] Furuham, S., Nakamura, T.,Tada, T, and Oya,Y., "Piston Temperature of an Automobile Engine", Bull J.S.M.E, PP. 776-783, 1964.
- [14] Gopinath C.V. ,Gudimetal P. " Finite Element Analysis of Reverse Engineered Internal Combustion Engine Piston"
- [15] C.H. Li, Piston thermal deformation and friction considerations,SAE Paper 820086, 1982.
- [16] Y. Liu, R.D. Reitz, Multidimensional modeling of combustion chamber Surface temperatures, SAE Paper 971539, 1997.
- [17] Y. Liu, R.D. Reitz, Modeling of heat conduction within chamber walls for Multidimensional internal combustion engine simulations, Int. J. Heat Mass Transfer

## International Journal for Research in Applied Science & Engineering Technology (IJRASET)

41 (6-7) (1998) 859-869.

- [18] M.Tahar Abbas, P. Maspeyrot, A. Bounif, J. Frene, A thermomechanical Model of direct injection diesel engine piston, in: Proceedings of the institution of mechanical engineers, Part D: Automotive Engineering, vol. 218, IMechE, 2004.
- [19] S.V. Bohac, D.M. Baker, A global model for steady state and transient SI engine heat transfer studies, SAE Paper 960073, 1996.
- [20] Handbook of Internal Combustion Engines, SAE International
- [21] Ferguson, R.C., Kirkpatrick, T.A. Internal Combustion Engines, John Wiley. & Sons, New York, 2001.
- [22] Han, S., Chung, Y., Empirical Formula for Instantaneous Heat Transfer Coefficient in Spark Ignition Engine. SAE paper 972995, 1997.

### AUTHOR DETAILS

|                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|    | KIRUBADURAI BALARAMAN received the B.E. degree in AERONAUTICAL Engineering from VELTECH Engineering College, Chennai. He got master degree in THERMAL ENGINEERING from GOVERNMENT COLLEGE OF TECHNOLOGY, Coimbatore. Currently working as an Assistant Professor in Mechatronics department in Er.Perumal Manimegalai College of Engineering, Hosur, India. His has Research interest in heat transfer, IC engine and Refrigeration                                 |
|    | THIVYA PRASAD.D received the B.E. degree in ELECTRONICS AND INSTRUMENTATION Engineering from MOOKAMBIGAI College Of Engineering, Trichy. He got master degree in POWER ELECTRONICS AND DRIVES from SASTRA UNIVERSITY, Thanjavur. Currently working as an Assistant Professor in Mechatronics department in Er.Perumal Manimegalai College of Engineering, Hosur, India. He has Research interest in power electronics, control system and hydraulics and pneumatics |
|  | DINESH.G received the B.E. degree in INSTRUMENTATION AND CONTROL Engineering from ADHIYAMAAN College of Engineering, Hosur. He got master degree in ELECTRONICS AND CONTROL Engineering from, SATHIYABAMA UNIVERSITY, Chennai. Currently working as an Assistant Professor in mechatronics department in Er.Perumal Manimegalai College of Engineering, Hosur, India. He has Research interest in Automation and process Control system.                            |
|  | MAHESH PREM KUMAR.H received the B.E. degree in COMPUTER SCIENCE Engineering from NATIONAL college of Engineering, TIRUNELVELI. He got master degree in MECHATRONICS Engineering from KARPAGAM COLLEGE OF ENGINEERING, Coimbatore. Currently working as an Assistant Professor in Mechatronics department in Er.Perumal Manimegalai College of Engineering, Hosur, India. He has Research interest in Automation , Composite Materials and IC Engine                |





10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)