



# **iJRASET**

International Journal For Research in  
Applied Science and Engineering Technology



---

# **INTERNATIONAL JOURNAL FOR RESEARCH**

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume: 5      Issue: III      Month of publication: March 2017**

**DOI: <http://doi.org/10.22214/ijraset.2017.3227>**

**[www.ijraset.com](http://www.ijraset.com)**

**Call:  08813907089**

**E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)**

# Advanced Pesticide Sprayer using Blimp Balloons

Yogitha S<sup>1</sup>, I. Harish<sup>2</sup>, Prasanna Kumar R<sup>3</sup>, Soundar Rajan R<sup>4</sup>, Vignesh P<sup>5</sup>, Vishnuvardhanan M<sup>6</sup>

<sup>1,2</sup>Assistant Professor, <sup>3,4,5,6</sup>UG Students, Dept. of ECE

Sri Shakthi Institute of Engg and Technology, Coimbatore, TN, India.

**Abstract:** The main aim of this method is to obtain short delay in the control loop so that spraying UAV can process the information. An algorithm is evaluated to adjust the UAV route under change in wind intensity and direction. Also the impact of the number of communication message of the UAV minimized reducing pesticides wastage. The main objective is to spray pesticides with less man power and energy consumption. To reduce man power we use quad-copters to spray pesticides. To reduce energy consumption we use helium filled blimp balloon. The balloon is based on its dimensions were suitable for use in indoor environments and outdoor environment. Our main goal was to develop a simple and safe model for evaluating different autonomously controlled navigation techniques.

**Keywords:** Blimp balloons, Quad copter, Unmanned Aerial Vehicle (UAV), Pesticide Sprayer.

## I. INTRODUCTION

The World Health Organization estimates that there are 3 million cases of pesticide poison in each year and up to 220,000 deaths, primarily in developing countries. There is low possibility of spraying to the trees that are tall in nature, to overcome these flaws we introduce a technique of spraying the pesticide with the use of helium balloons. In contrast to a rigid airship, a blimp has no internal structure to maintain the shape of its hull envelope. Rather, its shape is maintained by a higher pressure of the gas. Quad copters generally use two pairs of identical fixed pitched propellers; two clockwise (CW) and two counter-clockwise (CCW). By changing the speed of each rotor it is possible to specifically generate a desired total thrust; to locate for the center of thrust both laterally and longitudinally; and to create a desired total torque, or turning force measures proportionately more than is customary.

## II. EFFECTS OF CHEMICALS

Acute organophosphate and carbonate exposure causes signs and symptoms of excess acetylcholine, such as increased salivation and perspiration, narrowing of the pupils, nausea, diarrhea, decrease in blood pressure, muscle weakness, and fatigue. Some organophosphates also have a delayed neurological reaction characterized by muscle weakness in the legs and arms. Among the most promising alternatives to organophosphates were synthetic pyrethroids. However, pyrethroids can cause hyper-excitation, aggressiveness, incoordination, whole-body tremors, and seizures. Acute exposures in humans, usually resulting from skin exposure due to poor handling procedures, usually resolve within 24 hours. Pyrethroids can cause an allergic skin response, and some pyrethroids may cause cancer, reproductive or developmental effects, or endocrine system effects. In China, it's estimated that 500,000 people suffer pesticide poisoning annually, and some 500 of them die. Children seem to be greatly susceptible to the toxic effects of pesticides. These results correlated with early exposure to pesticides.

### A. Effect on Humans (Women and Infants) on Exposure to Pesticides

Exposure to some pesticides can be 'hell' for a pregnant lady as it can easily lead to death of baby and even if the baby is produced will have lots of disorders or even loss of limbs.

### B. Ways to Overcome the Effect

There are various methods that are implemented today in various parts of the world to reduce the consequences caused to human beings (manual pesticide sprayers). The ones in use today are

- 1) Tractors (Deere) equipped with GPS system and huge sprayers which can automatically spray from the ground.
- 2) Using of a Remote Piloted Vehicle (RPV) for spraying pesticides (an RC helicopter). This method efficiently used the pesticides (10- 15% more efficient than manual spraying) and also could substitute 50 workers. Sadly this project was cancelled long ago.
- 3) Greenhouse pesticide spraying through pipelines and nozzle system.
- 4) Line following robot have been proposed to be an alternate.

## International Journal for Research in Applied Science & Engineering Technology (IJRASET)

### C. Demerits

- 1) Tractors occupy a large area to maneuver thus eating up large areas that could be used for plantations.
- 2) The Remote Piloted Vehicle uses a RC helicopter which can be hard to control and spraying can be not even.
- 3) The greenhouse method of spraying pesticides through pipelines running through supports are not suitable in open fields, which will demand high power pumps to pump pesticides over long distances due to major losses. Also it will be difficult to actually build a pipe system in a particular area of pest infestation and spray only there. (It occupies more time to locate the area of pest infestation and build a piping system as it involves a lot of labor and time too.)
- 4) Line following robots may be hard to implement in an actual scenario as they are not good in rough and hilly terrains. Carrying the equipment and the pesticide can bring much complexity to maneuvering and controlling. Hilly terrains. Carrying the equipment and the pesticide can bring much complexity to maneuvering and controlling

### III. PROPOSED SYSTEM

#### A. Automated Pesticide Sprayer

APS is basically a blimp (zeppelin) integrated into a quad copter to spray pesticides in open fields. The main aim of this system is to reduce the ill-effects to humans, lessen the time used for spraying, and use economically the pesticides and to use under any climatic conditions. A Quad copter with a mechanism which can come back to its reference or initial position is used here. This increases the control of the Quad-copter. The blimp gives the lift and the propellers take care of the steering part and the quad copter takes care of the control and also supports the lift and propelling of the Quad-copter. The balloon is connected to the quad copter (mainly) so that the gondola (spray platform) can be lowered, to ease spraying which is explained later.



Fig 1 helium balloon

#### B. There are Three Ways of Implementing this

- 1) A GPS system is integrated into it. In areas where multiple cropping patterns are implemented, certain cropping patterns, or certain pest infested area alone can be targeted and commanded to be quarantined. E.g. Paddy – brown plant hopper, which produces brown circular patches of infested crops in a paddy plantation.
- 2) A proximity sensor can be attached in the front face of the blimp which takes a turn on encountering a sign board and thus follows a trajectory which covers the whole field area.
- 3) A Quad-copter can also be used to spray liquid fertilizers over a uni-crop patterned field by just giving the length and breadth of the field and also specifying a reference co-ordinate.


#### C. Merits

Can be used to spray on hilly terrains E.g. On tea plantations as it's aerielly sprayed and the terrain is of no consequence. Can be used to spray uni-crop, multi-crop pattern and almost any cropping pattern in fields. Increases the efficiency of spraying (like we saw in the RPV) and also can substitute 50 workers thus saving 50 workers from the harmful effects. Reduces the time for spraying when compared to manual spraying. Pesticides are evenly sprayed. More area can be brought under cultivation (unlike the GPS integrated Deere tractors based automation which needs some area for them to maneuver on the ground). Increases the turnover from cultivation, by using AAPS, Thus it increases the economy of the country as a whole. Another advantage is that the spray platform (the gondola of the blimp) can be lowered to any desired level which aids the spraying of pesticide from beneath the leaves. Also it can be used to spray from the top as well and thus covering a large verity of crops for which AAPS can be used. Various attachments like multipoint nozzle rotors and probes with multiple nozzles fitted to it can also be used to increase its usage. The pesticides can be mixed and carried in containers (cartridges) which can be pressurized to spray by a piston arrangement (similar to a syringe).

## International Journal for Research in Applied Science & Engineering Technology (IJRASET)

### IV. WORKING PRINCIPLE OF QUAD COPTER

The piston which pushes out the pesticide in the cartridge will be actuated by a cam shaped like shown in the picture. When the cam completes one rotation the piston will be in its max displacement from the home position and it comes back to its home position using a spring. The rotation of the cam is brought about by the worm and worm wheel arrangement driven by a small dc motor. So in one rotation of the cam the whole cartridge is used and the gear ratio should be correspondingly adjusted. A sensor senses when the cam has completed its one rotation (piston reaches the maximum displacement from home position) and stops the Quad-copter which will then continue moving when the cartridge is replaced. The cartridge can be replaced when the piston has come back to its home position only. An alternate way of actuating the piston is to connect the piston to a connecting rod connected from a disc, which is driven by a worm and worm wheel mechanism which in turn is run by a DC motor. The same sensors can be used here to sense the position of the piston, thus ensuring all the pesticide has been removed. The cartridge can be removed only when the piston comes back to its home position.

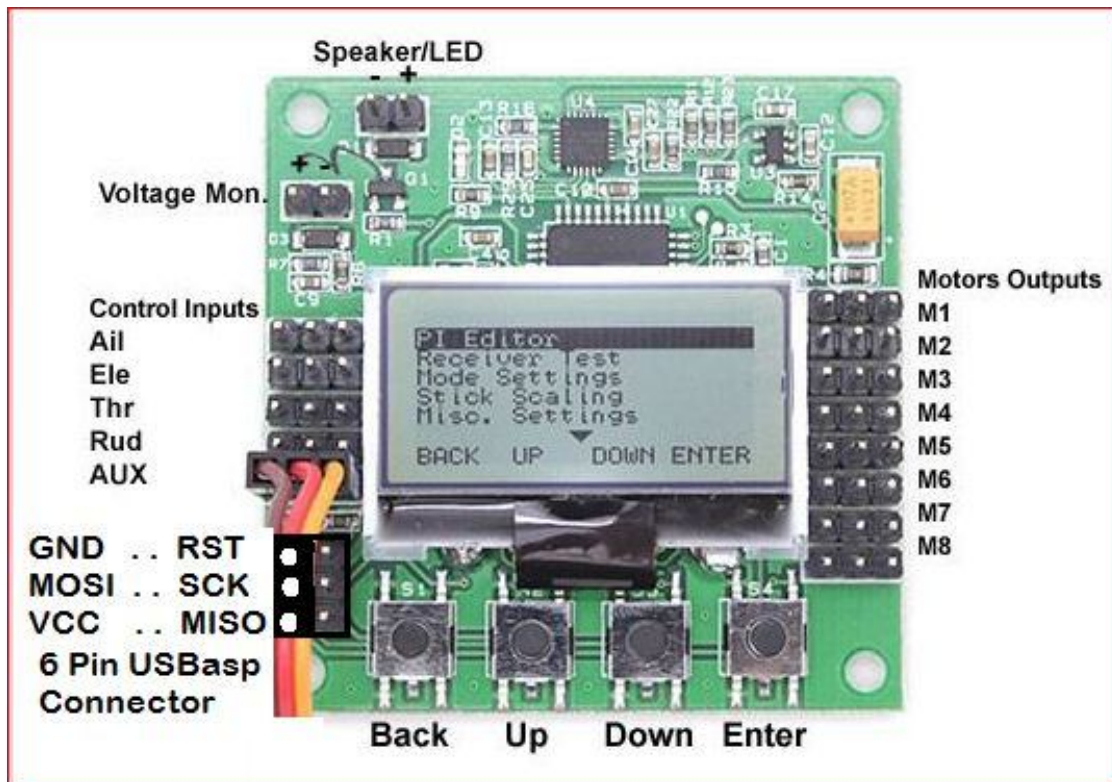

. Fig 2 kkmulticopter v2.1 Processor layout structure

### V. IMPORTANT CONSIDERATIONS WHILE DESIGNING A QUAD-COPTER

#### A. Characteristics of Frame

The most suitable way to begin with is the skeleton of the Quad copter, the frame. The frame is considered the largest (in volume) component used in the Quad copter and a very important one. Choosing a frame to fulfill the required need is essential, critical, and also not simple. The frame should be light-weight yet strong to tolerate possible accidents and crashes, it has also to be thin.

#### B. Characteristics of Propeller

The mechanical lifting element of the Quad copter is the propellers. High quality propellers are made by different manufacturers to deliver great performance of lifting power at a very small weight; to minimize the torque needed for spinning them by the motor's rotor. As mentioned propellers are manufactured from a variety of materials such as; plastic, which is cheap, available, and light, but is by nature fragile meaning it could be damaged or broken easily. Wood is tough and mid-priced but is certainly heavier than plastic. Lastly is the carbon fiber which is tough and light-weight but more expensive than the previous two types.

## International Journal for Research in Applied Science & Engineering Technology (IJRASET)

### C. Characteristics of Electronic Speed Controller

ECS's are required to run the BLDC motors in the Quad copter. The ESC is a standalone chip that's connected to the receiver's control channels and then coupled with the BLDC motor. For a better understanding of the ESC, it's more conventional to consider it as a pulse-width modulation (PWM) controller for the BLDC motors. PWM in short is a great way of controlling some modern electronics such as a BLDC motor, a fast variation between the motor being fully off and fully on powered, more conveniently described as a percentage called the duty cycle. Controlling the duty cycle means controlling the speed of the BLDC motor without any losses and also without affecting the load.

### D. Design of Software

After selecting the right hardware components, the next step is to have a proper design for the code that will run on the Quad copter. This phase is the hardest of all and needs so much patience and constant tuning and monitoring. Having a snappy control loop is essential as the Quad copter tries to self-stabilize itself, without such a loop, the flight could be sluggish with a huge amount of errors, which will be also accumulative and eventually would result in a crash with unexpected consequences. Starting off with a simple, yet much enriched flow chart of how should the program embedded in the micro-controller look like and behaves. A flow chart is very similar to the block diagram; brief and comprehensive.

The process begins with providing the power through the battery, at this instance hardware components will initialize and boot. After that the sensors will be calibrated, taking the nominal value that they "see" and consider it as the reference. The receiver would then start testing the frequency and channels in order to make sure that it is correctly connected with the transmitter. The phase called arming can now take place, setting different modes and configuration such as; turning the whole system off (disarm). The next two steps are mainly getting the values that the sensors read and then sending those values to the proportional-Integral (PD) which will get the error and output the final values with the help of the desired values from the transmitter and receiver. To conclude, mixing is the process of sending the commands to the motors based on the desired input plus the output value generated from the PD.



Figure 3 quadcopter

## VI. ALGORITHM

### A. Using a Pre-Programmed Chip

Assume that breadth of field sprayed in one straight run of blimp be 30cm.

Step 1: Start

Step 2: Get values of length and breadth of field

Step 3: Trigger the motion of the piston towards the extreme end of the cartridge as the blimp starts moving Step 4: If – piston at extreme end of the cartridge, go to step 8, else go to step 5

## International Journal for Research in Applied Science & Engineering Technology (IJRASET)

- Step 5: Move the blimp till \*present position < breadth\* and if \*present position < breadth = move\*; else go to step 6  
Step 6: Turn 90 degrees left move 30 cm, store this value in L1 and then turn again 90 degrees left  
Step 7: Move forward  
Step 8: Stop

### B. Using a Proximity Sensor

- Using previous assumption Step 1: Start  
Step 2: Trigger the motion of the piston to the extreme end of the cartridge  
Step 3: Check if signal is received from sensor (that piston has reached the extreme end)  
Step 4: If yes, go to Step 12 else, go to step 5  
Step 5: Move forward  
Step 6: Check if signal is detected from the proximity sensor at the front end of blimp.  
Step 7: If yes, go to Step 8 else, go to step 5  
Step 8: Turn 90degrees to the left, move 30cm, again turn 90degrees left and move forward  
Step 9: Check if signal is detected from next proximity sensor  
Step 10: If yes, go to Step 11 else, go to step 5  
Step 11: Turn 90degrees right, move 30cm forward turn 90 degrees right move forward  
Step 12: Stop

## VII. BLIMP DESIGN

It has no rigid internal structure and obtains the shape of its hull only by internal overpressure. The only solid parts are the gondola and the tail fins. The advantages of this non-rigid structure are obvious. Not only is the ship many times lighter than a comparable rigid airship, but also almost as resistant to weather conditions, if an adequate envelope material is chosen.

### A. Advantages in using a Blimp

- 1) A minimum of expenses has been realized to achieve the aims of the project.
- 2) The airship may be de- and reassembled for transportation purposes in very short time. The most economical of these forces from the production of lift point of view is undoubtedly the static lift wherein buoyant force is generated by the displacement of a portion of the supporting medium by the body and for airborne vehicles (like Blimps), it is the balloon.

### B. Various Lift Forces in a Blimp

The inefficiency of the static lift vehicle comes when it is required to move through the surrounding medium. Due to the nature of displacement buoyancy, these vehicles tend to be very large and, as a result, they develop a great deal of dynamic drag when in motion. The dynamic effects of the motion can be used to an advantage, however, if the motion can be used to generate lift. By shaping the body, or a portion thereof, as a lift producing foil, a lifting force may be developed to support the weight of the body, provided sufficient forward speed is attained. A principle disadvantage of the dynamic lift vehicle is that it requires forward motion of some finite velocity to generate the lift. As a result, this vehicle can neither fly very slowly nor can it remain airborne at zero forward velocity (hover). If these attributes are required, one must provide some sort of internal powering for the static lift, such as a vertical jet exhaust, or a propeller with a vertical down flow [3].

Having defined these primary sources of lifting force, one might observe that it is possible to use two of these sources, or even all three, in combination. By doing so, one moves from the pure lifting force source, for example static lift, to a hybrid source, such as a partial static lift and a partial dynamic lift. This is exactly the technique used here. Its envelope produces static lift, while the two motors provide powered static lift and is also supported by the quad copters, and dynamic lift when the hull is positioned.

## VIII. CONCLUSION

This method can be used in all situations. Of used for highly toxic pesticides this will not lead to unemployment problems. This can also be used in places where laborers are hard to find. They can hasten the pesticide spraying process thereby lowering the casualties due to pesticide exposure, preventing encounters with venomous snakes such as Russell's viper and cobra which can be found regularly in fields thereby reducing the amount of snake bite cases. Also keeps the food chain healthy. Since they are sprayed

## International Journal for Research in Applied Science & Engineering Technology (IJRASET)

from lower altitude, environmental pollution can be reduced

### REFERENCES

- [1] Castillo, Lozano & Dzul, "Modelling and Control of Mini-Flying Machines," 2005 Springer.
- [2] Gabriel M. Hoffmann, Haomiao Huang, Steven L. Waslander, "Quad copter Helicopter Flight Dynamics and Control: Theory and Experiment" AIAA.
- [3] Setting manual for black or blue version (Atmega168) [On-line]. <http://www.kkmulticopter.kr/?modea=manual> March 29, 2014]
- [4] [Wiki-ProjectLoon] Project Loon <http://en.wikipedia.org/wiki/projectloon>
- [5] [TheRegisterGuard] Floating an Idea- Weather Balloons could still gaps in wireless service
- [6] Handy Guide to Google's Project Loon <http://readwrite.com/2013/06/19/a-handy-guide-to-google-project-loon#awesm=~onut8LsNNgRW2R>
- [7] <http://en.wikipedia.org/wiki/Pesticide>.
- [8] [http://www.epa.gov/opp00001/health/human.htm#health effects](http://www.epa.gov/opp00001/health/human.htm#health%20effects).
- [9] <http://toxipedia.org/display/toxipedia/Effects+of+Pesticides+on+Human+Health>
- [10] <http://www.nkkhoo.com/2013/03/23/automation-in-agriculture-like-spraying-pesticide-and-fertilizer>.
- [11] <http://www.bvsde.paho.org/bvsacd/cd37/1176.pdf>
- [12] Stepniewski, W. Z., Rotary-wing aerodynamics, Dover Publications, New York, NY, 1984.



10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)