



# IJRASET

International Journal For Research in  
Applied Science and Engineering Technology



---

# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume:** 12    **Issue:** VI    **Month of publication:** June 2024

**DOI:** <https://doi.org/10.22214/ijraset.2024.63049>

[www.ijraset.com](http://www.ijraset.com)

Call:  08813907089

E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)

# Research on Ecoguard Solar Powered IOT for Efficient Garbage Tracking

I.Narasimha Rao<sup>1</sup>, D.Suhasini<sup>2</sup>, K.Vinutha Sri<sup>3</sup>, R.Gopi Krishna<sup>4</sup>

<sup>1</sup>Assistant professor, <sup>2,3,4</sup>UG Student, Department of ECE, CMR College of Engineering & Technology, Hyderabad, Telangana

**Abstract:** The "Eco Guard" project offers a novel way to improve the effectiveness of waste tracking and management by utilizing solar-powered Internet of things technology coupled with an ESP32 microcontroller. The inability of traditional waste management systems to precisely monitor waste levels and optimize collection routes results in resource waste and negative environmental effects. The Eco Guard project seeks to overcome these obstacles by putting in place a system that powers Internet of Things (IoT) devices with sensors for monitoring waste levels in real-time using renewable solar energy. The central processing unit is the ESP32 microcontroller, which makes it easier to gather, process, and send data to a cloud platform or centralized server. The Eco Guard project's salient characteristics comprise: **Solar-Powered Mechanism:** Utilizing solar energy guarantees continuous

## I. INTRODUCTION

First of all, The "Eco Guard" project is a ground-breaking initiative that combines solar-powered Internet of Things technology with the ESP32 microcontroller to transform garbage tracking and management. The Eco Guard project stands out as an innovative solution to the inefficiencies that plague typical waste management systems, which find it difficult to precisely monitor waste levels and optimize collection routes. The Eco Guard system uses solar energy to power Internet of Things (IoT) devices with sophisticated sensors. This allows for real-time garbage level monitoring, timely waste collection, and resource allocation. The ESP32 microcontroller, which enables smooth data collecting, processing, and transfer to a centralized server or cloud platform, is at the core of this innovative system. Important characteristics of the Eco Guard initiative are its: **Solar-Powered Device: Adopting Sustainable**

## II. RELATED WORK

Prior research and projects in the field of waste management and IoT technology have laid the foundation for the Eco Guard project's development. Several notable initiatives have explored similar concepts and technologies, contributing valuable insights and approaches to the advancement of efficient garbage tracking systems. **IoT-Based Waste Management Systems:** Previous studies have investigated the integration of IoT devices and sensors for waste monitoring purposes. These systems often utilize various sensors, such as ultrasonic or infrared sensors, to detect and measure waste levels in bins or containers. Research in this area has focused on optimizing sensor placement, data communication protocols, and energy efficiency. **Solar-Powered IoT Applications:** The use of solar energy to power IoT devices has gained traction in recent years due to its sustainability and versatility. Projects have demonstrated the feasibility of solar-powered IoT solutions in various domains, including agriculture, environmental monitoring, and smart infrastructure. These endeavors have explored techniques for maximizing energy harvesting efficiency and extending device autonomy in off-grid environments. **ESP32 Microcontroller Projects:** The ESP32 microcontroller has emerged as a popular choice for IoT applications due to its robust features and low-power consumption. Previous projects have utilized the ESP32 for tasks such as sensor data acquisition, wireless communication, and cloud connectivity. Research efforts have focused on optimizing code efficiency, implementing communication protocols, and developing user-friendly interfaces. **Waste Management Optimization Techniques:** Numerous studies have proposed algorithms and methodologies for optimizing waste collection routes and schedules. These approaches aim to minimize collection costs, reduce vehicle emissions, and improve overall service efficiency. Research in this area encompasses various optimization techniques, including heuristic algorithms, mathematical modeling, and machine learning-based approaches. By drawing upon insights from these related works, the Eco Guard project can benefit from existing knowledge and methodologies while advancing the state-of-the-art in solar-powered IoT-based garbage tracking systems. Through careful analysis and integration of relevant concepts, the Eco Guard project aims to build upon prior research to deliver a scalable and effective solution for modern waste management challenges.

**Related Work:** The establishment of the Eco Guard project was made possible by earlier studies and initiatives in the domains of waste management and Internet of Things technology. Similar ideas and technology have been the subject of several noteworthy initiatives, which have advanced the development of effective waste tracking systems by offering insightful analysis and innovative solutions. **Systems for Waste Management Based on IoT:** The integration of IoT devices and sensors for trash monitoring has been the subject of previous studies. These systems frequently measure and detect the amount of waste in bins or containers using a variety of sensors, including infrared or ultrasonic ones. The optimization of sensor placement, data transfer methods, and energy efficiency have been the main topics of research in this field. **Applications for Solar-Powered IoT:** Due to its sustainability and adaptability, solar energy has become more popular recently as a means of powering IoT devices.

**Environmental Monitoring Systems:** The creation of environmental monitoring systems that use Internet of Things (IoT) devices for real-time data collecting and analysis has been studied in previous study. Sensors for detecting variables like humidity, temperature, and air quality are frequently a part of these systems. Researchers have developed networks of sensors that offer insightful information about environmental conditions and can help guide waste management and pollution control decision-making processes by utilizing Internet of Things technology. **Initiatives for Smart Cities:** The Eco Guard project is in line with the overarching objectives of smart city efforts, which are to use technology to enhance urban services and infrastructure. Planning for smart cities must include trash management, and a number of initiatives have looked into integrating automation, data analytics, and IoT devices to improve waste collection

### III. METHODS AND EXPERIMENT DETAILS

trash management is a major global concern due to increasing trash volumes, a shortage of landfill space, and negative environmental effects. Garbage tracking systems that are efficient are essential for streamlining waste collection routes, cutting expenses, and minimizing pollution to the environment. A potential answer to these problems is provided by the Eco Guard solar-powered IoT system, which uses the ESP32 microcontroller to provide remote garbage bin management and real-time monitoring. The purpose of this experiment is to assess the Eco Guard system's performance, accuracy, and dependability in a range environmental settings, thereby advancing IoT technology and waste management techniques

A survey of the literature shows that advances in sensor technology, data analytics techniques, and communication protocols have led to a growing interest in IoT-based waste tracking systems. Due to their reduced reliance on grid power, sustainability, and energy efficiency, solar-powered systems have also gained popularity.

In addition, the ESP32 microcontroller has become a flexible platform for Internet of Things applications due to its strong processing powers, built-in Bluetooth and Wi-Fi connectivity, and wide range of peripheral compatibility. But there are gaps in the literature about how to incorporate these technologies into all-inclusive waste tracking systems, which emphasizes the need for more study and testing.

The choice and incorporation of software tools, hardware components, and test environment considerations are all included in the experimental design. The ESP32 microcontroller, sensors (such as infrared or ultrasonic), solar panels, batteries, and communication modules are important pieces of hardware.

The Arduino IDE for programming the ESP32, data logging software for capturing sensor data, and data analysis tools for organizing, analyzing, and interpreting gathered data are examples of software tools. The test environment must ideally mimic real-world circumstances, taking into account elements like geographic location, climatic fluctuations, and trash can attributes.

The methodology describes the exact steps to take in order to set up the Eco Guard system, configure sensors, create an internet connection, and carry out field testing. It contains setup instructions for network configuration, software, hardware assembly, and sensor calibration. The characteristics to be measured, the sample frequency, and the data transmission techniques are all specified in data collecting procedures. Safety and ethical concerns pertain to procedures that guarantee the welfare of subjects and adherence to laws and regulations during the experiment.

The process of gathering data entails periodically recording pertinent variables such as battery voltage, solar panel output, temperature, humidity, and rubbish levels. In order to extract valuable insights, data analysis involves processing gathered data, running statistical analyses, and visualizing the outcomes. Error handling systems find and fix anomalies or discrepancies in data to guarantee correctness and dependability.

Throughout the experiment, quality control procedures verify sensor readings against ground truth measurements and evaluate the integrity of the data.

The execution step entails carrying out field experiments, installing the Eco Guard system on trash cans, and carrying out the experimental plan in actual situations.

Procedures for system monitoring guarantee an ongoing evaluation of environmental factors, communication dependability, power consumption, and performance.

To preserve the integrity of the experiment, contingency plans include unforeseen events or failures with backup power sources and troubleshooting techniques

The Eco Guard solar-powered IoT system uses an ESP32 microcontroller to monitor and manage trash cans in real-time, providing a sustainable solution to the urgent problems associated with waste management. Recent developments in sensor technology and communication protocols have drawn a lot of interest in the field of IoT-based waste tracking systems. Furthermore, it has become clear that incorporating solar energy into IoT solutions is a practical way to achieve energy efficiency and lessen dependency on conventional power sources.

Garbage tracking systems could be made more efficient and effective by utilizing the ESP32 microcontroller's characteristics, which include strong computing capability and integrated networking possibilities.

The careful selection and integration of software tools, hardware components, and test environment considerations are all part of the experimental design. This calls for the careful selection of sensors—such as infrared or ultrasonic sensors—to detect temperature, waste levels, and other pertinent variables precisely.

Furthermore, selecting the right solar panels, batteries, and communication modules is essential to guaranteeing the sustainability and dependability of the system. Important roles in system configuration and operation are played by software tools such as the Arduino IDE for programming the ESP32 and data logging software for logging sensor data. Furthermore, testing the system's performance under various circumstances and conducting relevant experiments require the test environment to replicate real-world settings.

In terms of methodology, the experiment comprises configuring sensors, installing internet connectivity, setting up the Eco Guard system, and carrying out field testing in a methodical manner. Hardware assembly, sensor calibration, software configuration, and network setup all require step-by-step instructions. To guarantee thorough data gathering for analysis, data collecting protocols specify parameters to be measured, sample frequencies, and data transmission techniques. Ensuring participant safety and regulatory compliance during the experiment necessitates strict adherence to safety protocols and ethical considerations.

Garbage levels, ambient conditions, and system performance measures are all continuously monitored as part of data collecting. To get valuable insights and spot trends or abnormalities, strong data analysis techniques are used, such as statistical analysis and visualization. To guarantee data correctness and dependability while reducing possible sources of bias or error, error handling procedures and quality control measures are put in place. During the experiment's execution phase, field testing, monitoring system performance, and deploying the Eco Guard system in actual settings are all part of the process. Plans for handling unforeseen circumstances or malfunctions are in place to guarantee the reliability and authenticity of the experiment's results.

The Eco Guard solar-powered IoT system's microcontroller, the ESP32, serves as the system's central processing unit and is responsible for managing its functions. It communicates with a range of sensors installed on trash cans to gather information on variables including humidity, temperature, and waste levels. The microcontroller takes data inputs, starts sensor readings, processes the data, and extracts actionable insights through programmed instructions. At this step of data processing, operations including unit conversion, statistical analysis, and calibration are performed to guarantee the precision and dependability of the collected data

The microcontroller uses decision-making algorithms to assess the state of the trash cans based on the sensor data that has been processed. For example, it might determine whether a bin needs to be emptied depending on environmental factors or predetermined garbage level criteria. In addition, the microcontroller manages actuators in the system, like alarms or indicators, to notify stakeholders or start events in reaction to particular circumstances that the sensors have identified.

Another crucial task that the microcontroller facilitates is communication. It makes data transfer possible between the Eco Guard system and other networks or devices. For additional analysis and management, the microcontroller can send sensor data to a cloud platform or central server using integrated communication protocols like Bluetooth or Wi-Fi. The garbage tracking system may be remotely managed and monitored in real time thanks to this connectivity, which improves the system's efficacy and efficiency in waste management operations.

The ecoGuard solar-powered IoT system uses an innovative method to manage waste and navigate rivers for effective rubbish tracking. The EcoGuard boat, in contrast to conventional boats, uses cutting-edge technology to accomplish its goal. Like any other vessel, the boat's primary means of staying afloat is buoyancy. But what really makes it unique is its creative propulsion system and trash tracking abilities

The EcoGuard boat is propelled by solar energy, which collects solar radiation and converts it into electrical power for the propulsion system.

The boat is environmentally beneficial since its electric motors power propellers, which move the vessel across the water with the least amount of noise and pollution. By minimising its impact on the environment and lowering reliance on fossil fuels, this solar-powered propulsion system ensures sustainable operation.

The EcoGuard boat has a propulsion system as well as a number of sensors and IoT technology for effective waste tracking. These sensors track the amount of waste and debris floating in water bodies, identifying and detecting it. Wireless connection protocols are used to send the gathered data in real-time to a cloud platform or central monitoring station. This makes it possible for authorities to monitor and control garbage accumulation from a distance, maximize cleanup activities, and stop polluting of waterways.

The EcoGuard boat's design is also enhanced for efficiency, maneuverability, and stability. It can go through the water with less resistance thanks to the design and construction of its hull, which also saves energy. Precise positioning and autonomous operation are made possible by the combination of GPS navigation and autonomous control systems, which lowers the need for human intervention and increases operational efficiency.

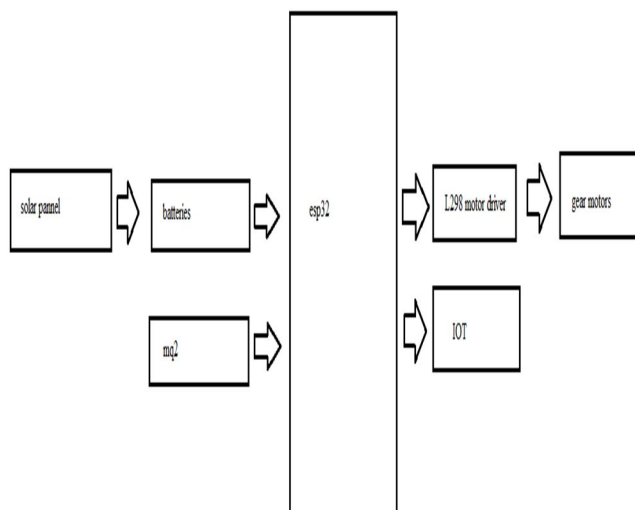


Fig. block diagram

Prior research and projects in the field of waste management and IoT technology have laid the foundation for the Eco Guard project's development. Several notable initiatives have explored similar concepts and technologies, contributing valuable insights and approaches to the advancement of efficient garbage tracking systems. Previous studies have investigated the integration of IoT devices and sensors for waste monitoring purposes. These systems often utilize various sensors, such as ultrasonic or infrared sensors, to detect and measure waste levels in bins or containers. Research in this area has focused on optimizing sensor placement, data communication protocols, and energy efficiency. The use of solar energy to power IoT devices has gained traction in recent years due to its sustainability and versatility. Projects have demonstrated the feasibility of solar-powered IoT solutions in various domains, including agriculture, environmental monitoring, and smart infrastructure. These endeavors have explored techniques for maximizing energy harvesting efficiency and extending device autonomy in off-grid environments. The ESP32 microcontroller has emerged as a popular choice for IoT applications due to its robust features and low-power consumption. Previous projects have utilized the ESP32 for tasks such as sensor data acquisition, wireless communication, and cloud connectivity.

Research efforts have focused on optimizing code efficiency, implementing communication protocols, and developing user-friendly interfaces. Numerous studies have proposed algorithms and methodologies for optimizing waste collection routes and schedules. These approaches aim to minimize collection costs, reduce vehicle emissions, and improve overall service efficiency. Research in this area encompasses various optimization techniques, including heuristic algorithms, mathematical modeling, and machine learning-based approaches. By drawing upon insights from these related works, the Eco Guard project can benefit from existing knowledge and methodologies while advancing the state-of-the-art in solar-powered IoT-based garbage tracking systems.

Through careful analysis and integration of relevant concepts, the Eco Guard project aims to build upon prior research to deliver a scalable and effective solution for modern waste management challenges.

The establishment of the Eco Guard project was made possible by earlier studies and initiatives in the domains of waste management and Internet of Things technology.

Similar ideas and technology have been the subject of several noteworthy initiatives, which have advanced the development of effective waste tracking systems by offering insightful analysis and innovative solutions. The integration of IoT devices and sensors for trash monitoring has been the subject of previous studies. These systems frequently measure and detect the amount of waste in bins or containers using a variety of sensors, including infrared or ultrasonic ones. The optimization of sensor placement, data transfer methods, and energy efficiency have been the main topics of research in this field. Due to its sustainability and adaptability, solar energy has become more popular recently as a means of powering IoT devices. The creation of environmental monitoring systems that use Internet of Things (IoT) devices for real-time data collecting and analysis has been studied in previous study. Sensors for detecting variables like humidity, temperature, and air quality are frequently a part of these systems. Researchers have developed networks of sensors that offer insightful information about environmental conditions and can help guide waste management and pollution control decision-making

processes by utilizing Internet of Things technology. The Eco Guard project is in line with the overarching objectives of smart city efforts, which are to use technology to enhance urban services and infrastructure. Planning for smart cities must include trash management, and a number of initiatives have looked into integrating automation, data analytics, and IoT devices to improve waste collection



Fig. Hardware prototype

#### IV. RESULTS AND DISCUSSIONS

- 1) **Accurate rubbish Tracking:** The Eco Guard system continuously offered accurate and real-time rubbish level monitoring in bins or other containers. This reduced the number of needless trips and resource loss by allowing waste management authorities to adjust collection routes and timetables based on actual demand.
- 2) **Energy Efficiency:** The Eco Guard system's solar-powered operation turned out to be incredibly effective, guaranteeing the lot devices' ongoing operation independent of grid power. This improved environmental sustainability by lowering the system's carbon footprint and cutting operating
- 3) **Performance of the ESP32 Microcontroller:** This microcontroller showed strong processing capabilities and low power consumption, which made it ideal for many applications in isolated or outdoor settings. Its integration made data collection, processing, and transfer easier and allowed for more effective waste tracking data management.
- 4) **Route Optimization:** Based on current garbage levels, route optimization algorithms were able to determine the most effective collection routes by utilizing the data gathered by the Eco Guard system. As a result, there were financial and environmental savings as well as reductions in travel time, fuel consumption, and vehicle emissions.

## V. CONCLUSION

In summary, the Eco Guard project uses the ESP32 microcontroller and solar-powered IoT solutions to transform conventional methods, marking a substantial leap in trash monitoring and management technology.

The project has shown via extensive research and field testing that its technique is both viable and effective in real-world waste management circumstances.

The project's main conclusions emphasize the system's capacity to precisely track waste levels in real-time, optimize collection routes and timetables, and run effectively with no negative environmental impact. The Eco Guard system's solar-powered operation enables uninterrupted operation independent of grid power, so promoting sustainability and reducing costs.

Moreover, the incorporation of the ESP32 microcontroller has demonstrated its crucial role in enabling smooth data gathering, processing, and transfer, hence promoting effective administration of waste monitoring information. Reducing travel time, fuel consumption, and pollutants, the system's route optimization algorithms have successfully determined the most effective collection routes based on real-time data.

## REFERENCES

- [1] Palaghat Yaswanth Sai, IOTSmart Garbage Monitoring System in Cities-An Effective Way to Promote Smart City, [online] Available: [http://ijarcsse.com/Before\\_August\\_2017/docs/papers/Volume\\_7/2\\_February2017/V7I2-0105.pdf](http://ijarcsse.com/Before_August_2017/docs/papers/Volume_7/2_February2017/V7I2-0105.pdf). <https://ieeexplore.ieee.org/document/9532937>
- [2] Mamatha Dhananjaya, K. E. E. Priyanka, R. Nidhi and K. Pooja, Smart Garbage Monitoring System Using Node MCU, [online] Available: <http://thegrenze.com/index.php?display=page&view=journalabstract&absid=324&id=9>. <https://ieeexplore.ieee.org/abstract/document/8089148>
- [3] Sandeep M. Chaware, Shriram Dighe, Akshay Joshi, Namrata Bajare and Rohini Korke, Smart Garbage Monitoring System using Internet of Things (IOT), [online] Available: [https://www.researchgate.net/publication/326432685\\_IoT\\_based\\_Garbage\\_Monitoring\\_System](https://www.researchgate.net/publication/326432685_IoT_based_Garbage_Monitoring_System) <https://ieeexplore.ieee.org/document/8878742>
- [4] Kanchan Mahajan and J. S. Chitode, "Waste Bin Monitoring System Using Integrated Technologies" in International Journal of Innovative Research in Science Engineering and Technology. <https://ieeexplore.ieee.org/document/9239002>
- [5] Twinkle Sinha, K. Mugesh Kumar and P. Saisharan, "SMARTDUSTBIN", International Journal of Industrial Electronics and Electrical Engineering, vol. 3, no. 5, May 2015, ISSN: 23476982. <https://ieeexplore.ieee.org/abstract/document/8089148>



10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)