



# IJRASET

International Journal For Research in  
Applied Science and Engineering Technology



---

# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume:** 11    **Issue:** XI    **Month of publication:** November 2023

**DOI:** <https://doi.org/10.22214/ijraset.2023.56038>

[www.ijraset.com](http://www.ijraset.com)

Call:  08813907089

E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)

# Advancements in Energy-Harvesting Techniques for Agricultural Applications: A Review

Yogesh Pandey<sup>1</sup>, Sushmita M. Dadhich<sup>2</sup>, Nifa Mehraj<sup>3</sup>

<sup>1</sup>Assistant Professor, Division of Soil & Water Conservation Engineering, CoAE&T, SKUAST-K, Shalimar, Srinagar, J&K-190025, India

<sup>2</sup>Assistant Professor, Division of Soil & Water Engineering, CoAE&T, SKUAST-J, Chatha, Jammu, J&K-180009, India

<sup>3</sup>Ph. D. Scholar, Division of Soil & Water Conservation Engineering, CoAE&T, SKUAST-K, Shalimar, Srinagar, J&K-190025, India

**Abstract:** Over time, there has been rapid advancement in wireless sensor network (WSN) technologies. These networks have proven to be efficient tools in enhancing agricultural productivity. One significant development in WSNs is the integration of energy harvesting capabilities, allowing them to extract energy from the surrounding environment and utilize it to power wireless Internet of Things (IoT) devices. Energy harvesting involves converting ambient energy from various sources such as solar power, wind, and mechanical vibrations into usable power for devices. This review focuses on exploring the different techniques of energy harvesting for WSNs that can be effectively employed in agricultural monitoring systems. Additionally, it addresses the power consumption issues prevalent in agriculture and aims to identify the most effective strategies for resolving these problems. **Keywords:** Energy-Harvesting, Solar energy, Wireless-power transfer, Airflow energy, Vibration energy, Microbial fuel cell energy.

## I. INTRODUCTION

Energy-harvesting techniques have witnessed significant progress, particularly in the realm of agriculture. These techniques enable the extraction of energy from the environment, providing a sustainable power source for various agricultural applications. This review explores the latest advancements in energy-harvesting technologies tailored for agricultural purposes. The limited battery capacity of sensor nodes presents a significant constraint in their operation.

Previous research has introduced several energy-efficient schemes to address the power consumption challenge associated with sensor nodes. An alternative approach to mitigate the limited lifespan of these nodes is the utilization of energy-harvesting techniques. These techniques have been developed to enable sensor nodes to extract various forms of energy, such as solar power, wireless power transfer (WPT), mechanical vibrations, kinetic energy, and wind energy, from their surrounding environments (Adu-Manu *et al.*, 2018, Sudevalayam *et al.*, 2011) as shown in Fig. 1. Rechargeable sensor nodes, in comparison to traditional ones, can operate continuously for an extended period.

Ambient energy can be directly converted into electrical energy to power the sensor nodes or stored for future use. In the realm of agricultural applications, energy harvesting proves to be valuable in prolonging the lifespan of sensor nodes. Table 1 showcases the energy-harvesting techniques employed in previous research on precision agriculture, including their respective categories, wireless protocols, output energy/power, agricultural applications, and limitations. Energy-harvesting mechanisms can be combined with batteries in sensor nodes to enhance their performance.

For instance, a sensor node utilizing solar energy can effectively charge its batteries during daylight hours when sufficient sunlight is available. Conversely, during night time when sunlight is unavailable, power reduction techniques like sleep mode (i.e., duty cycle) can be employed to conserve energy.

Furthermore, when the sensor node's batteries have low residual energy, the node can enter restricted sleep periods (i.e., low duty cycle) and reduce transmission power (Bouazzi *et al.*, 2021, Nintanavongsa *et al.*, 2013). Implementing a maximum power point tracking system is another reliable technique for long-term battery charging, minimizing the charge-discharge cycle of the battery (Mazunga F. & Nechibvute A. 2021, Anisi *et al.*, 2017).

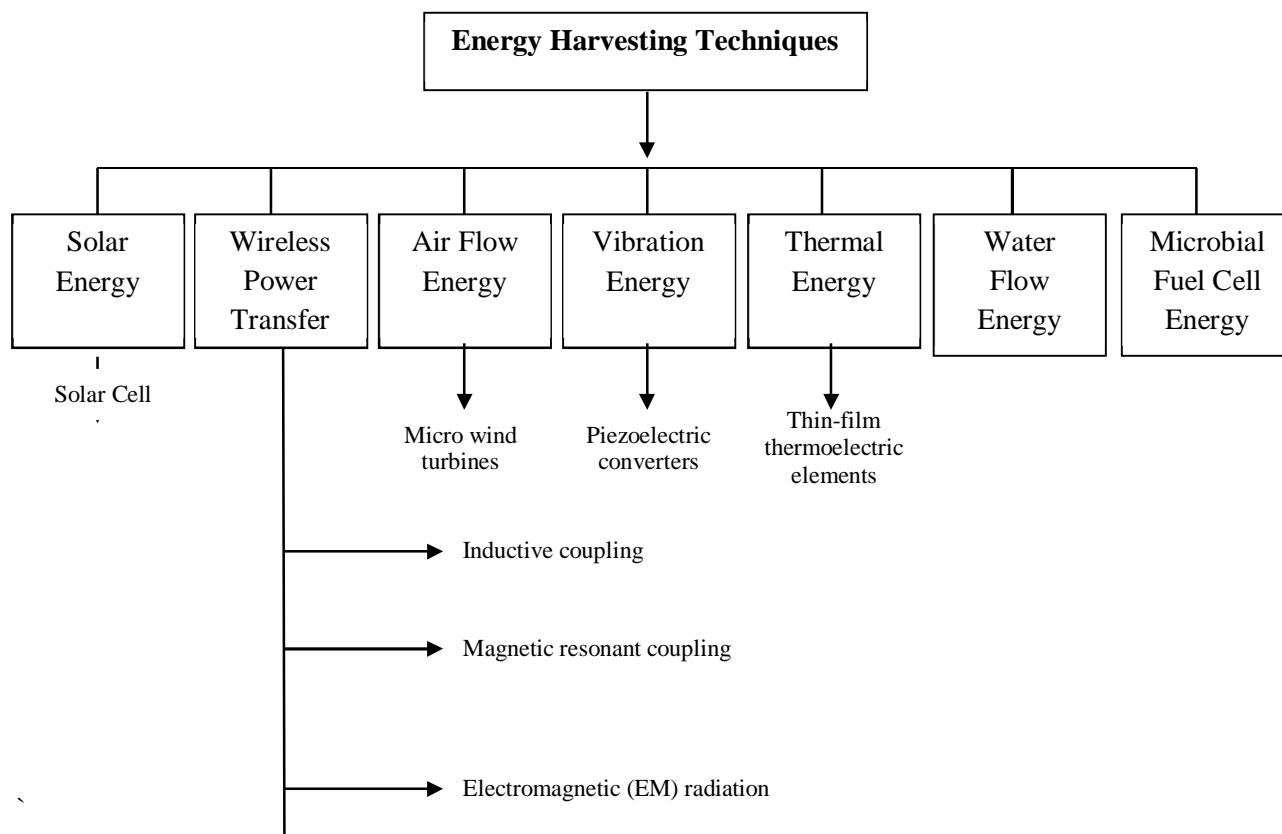


Figure 1. Energy-harvesting techniques in agriculture based on wireless sensor networks

Table 1. Energy-harvesting techniques for previous research works used in agricultural applications

| Energy Harvesting Techniques  | Reference Example               | Wireless Protocol/ Device | Harvesting Energy/Power / Power Saving | Sensors/Actuators  | Applications                   | Limitations  |
|---|---------------------------------|---------------------------|--|--|--------------------------------|--|
| Solar Energy<br>Solar cell  | Zou <i>et al.</i> , 2016        | ZigBee (CC2530)           | 500 mW                                 | Shadow detection, temperature, and humidity/shadow tracking to save energy | Trees in the agriculture field | Solar cell system is generally irregular and extensively influenced by the weather changes |
| WPT<br>Inductive coupling<br>Magnetic resonant coupling<br>Electromagnetic wave | Mittleider <i>et al.</i> , 2016 | Zigbee                    | 2.4 W                                  | Vibration, pressure soil moisture, and temperature                         | Agriculture fields             | Strong coupled magnetic resonance are required   |
|   | Simic <i>et al.</i> , 2015      | N/A                       | 1315 J                                 | Agricultural environments sensors/water processing system                  | Agriculture areas              | Exhausting the UAV battery   |
|   | Chen <i>et al.</i> , 2016       | Zigbee                    | N/A                                    | Temperature, Strain, humidity, and displacement                            | Agriculture fields             | Harvested energy is inadequate to replenish an ad hoc network with multi-hop               |

|   |                                   |  |                  |  |                        |  |
|---|-----------------------------------|--|------------------|--|------------------------|--|
| Air Flow Energy<br>Wind Turbine                 | Nayak <i>et al.</i> ,<br>2015     | Zigbee                                       | 70–100 mW        | Ambient temperature, rain fall, and soil moisture/irrigation system  | Vineyard               | Wind power is inefficient when the wind intensity is not constant and irregular  |
| Vibration Energy<br>Piezoelectric<br>convertors | Müller <i>et al.</i> ,<br>2010    | ZigBee (CC2420 and CC2500) and CC1100        | 200 $\mu$ W      | Ambient vibration sensor   | Agricultural machinery | Transmission errors due to Interferences from similar neighboring WSN and third-party system                           |
|   | Bertacchini and Larcher, 2016     | IEEE 802.15.4 (CC2500)                       | 14%              | MEMS inertial  | Agricultural machinery | N/A  |
|   | Scorcioni <i>et al.</i> ,<br>2011 | IEEE 802.15.4                                | 724 $\mu$ W@2.0g | Vibration sensor   | Agricultural machinery | Duty-cycle of the end device must be modified according to the total power collected by the piezoelectric convertor    |
| Thermal Energy<br>Thermo electrical elements    | Philipp <i>et al.</i> ,<br>2012   | ZigBee (CC2530 embedded in HaLOEWEn platform | N/A              | Temperature and soil moisture/irrigation control system  | Precision irrigation   | Harvested energy is comparatively low based on thermoelectric element  |
| Water Flow Energy                               | Morais <i>et al.</i> ,<br>2008    | ZigBee                                       | 16–19 mW         | Soil moisture, air temperature, relative humidity, soil temperature, and solar radiation/irrigation control system | Precision Agriculture  | The amount of energy harvested is not enough alone to supply the ZigBee router node                                    |
| Microbial Fuel Cell Energy                      | Sartori and Brunelli, 2016        | LoRa   | 296 $\mu$ W      | Capacitive phreatimeter/irrigation system  | Precision agriculture  | The amount of microbial fuel cell power is not enough to power the LoRa wireless protocol and microcontroller directly |

### A. Solar Energy

Solar energy derived from photovoltaic systems has found valuable applications in agriculture-based wireless sensor networks (WSNs) (Fasla & Anil 2021, Akhtar *et al.*, 2015). The use of solar cells presents an effective solution (Zhang *et al.*, 2017) to ensure the longevity and sustainability of agricultural monitoring systems. Numerous studies have employed solar cell energy to provide long-term power to sensor nodes in agriculture applications. For instance, Gutierrez *et al.* (2014) developed an irrigation system based on the ZigBee wireless protocol. The system aimed to optimize water usage for agricultural crops by placing temperature and soil moisture sensors within the plant roots. These sensors transmitted data to a web application via a gateway. The system employed solar cell panels and rechargeable batteries to power the WSN. Notably, water savings of up to 90% were achieved compared to conventional irrigation methods, making it suitable for geographically isolated regions with limited water sources. Zou *et al.* (2016) focused on enhancing the battery lifetime of a WSN by leveraging harvested energy, specifically solar cells, and employing shadow detection techniques.

This approach allowed sensor nodes to adjust their scheduling to optimize power production and battery levels. Routing and clustering mechanisms were utilized to optimize data transmission, and a Bayesian network provided warning reports of potential bottlenecks. Experimental results demonstrated the effectiveness of these techniques in enabling continuous and efficient network operations. Sah *et al.*, 2023 proposed a modified PROfile energy (Pro-energy) prediction technique to control unnecessary errors in solar-based harvesting systems related to the sensing devices, which estimates the most similar profile-based energy observation in previous time slots.

Their proposed method uses prior energy measurements to show future energy status in the respective time slots. Experimental observations on various performance matrices validate that the modified Pro-energy prediction technique exhibits more promising and superior performance than existing EMWA, weather-conditioned moving average (WCMA), and Pro-energy methods. Ravi *et al.* (2016) developed a micro-irrigation system powered by a small solar cell.

They conducted a life cycle assessment, comparing the proposed system with traditional methods such as aloe vera cultivation. The evaluation highlighted the economic viability of the solar-powered system for rural areas, emphasizing its potential for agricultural electrification and economic growth. Roblin (2016) presented an irrigation system that relied on solar cells for regions with abundant sunlight. This system replaced traditional electricity grid or diesel generator-based pumps with solar-powered ones. The study showcased the advantages of solar-powered irrigation systems, including uninterrupted availability and reduced operating costs compared to other energy resources. Kumar *et al.* (2015) proposed a similar irrigation system that utilized photovoltaic panels to power a water pump.

This system improved water usage efficiency by converting continuous water flow into controlled drips. The integration of energy harvesting techniques with packet transmission control was suggested by Kwon *et al.* (2015). Their prediction technique enhanced WSN performance by adjusting packet transmissions based on estimated energy levels, resulting in improved throughput and power consumption. Hou *et al.* (2010) implemented a solar cell-powered WSN in a greenhouse for humidity and temperature control. The system employed low-power microcontrollers and transceivers to minimize power consumption. In another study by Alippi *et al.* (2012), a solar cell served as a battery charger for a WSN-based ZigBee wireless transceiver, enabling monitoring of vineyards' humidity, temperature, rain level, and leaf wetness. These studies demonstrate the effective utilization of solar energy and solar cell technologies in agricultural WSNs, enabling efficient monitoring and control of agricultural parameters while minimizing power consumption.

### B. Wireless Power Transfer

Recent advancements in wireless power transfer (WPT) hold the potential to greatly extend the lifespan of Wireless Sensor Networks (WSNs), allowing them to operate continuously. WPT techniques enable the transmission of electromagnetic energy between devices without the need for physical contact. This capability has the potential to overcome the power supply limitations of WSNs. As a result, researchers have explored the use of mobile nodes capable of delivering power to deployed sensor nodes (Lai and Hsiang 2019, Mittleider *et al.*, 2016; Chen *et al.*, 2016). However, WPT technology presents challenges in terms of energy cooperation among neighbouring nodes in WSNs. To address this, future research aims to enable sensor nodes to harvest energy from the environment and transfer it to other nodes in the network, creating a self-sustaining network (Gurakan *et al.*, 2016). Recent studies have focused on multi-hop energy transfer (Kaushik *et al.*, 2013; Xie *et al.*, 2013), which has paved the way for new energy cooperative schemes and WPT charging protocols. WPT can be categorized into three main subcategories: electromagnetic (EM) radiation, magnetic resonator coupling, and inductive coupling, as depicted in Figure 2. Wireless charging in WSNs can be achieved through EM radiation and magnetic resonant coupling. EM signals, however, suffer from attenuation over distance and may pose health risks due to active radiation. On the other hand, magnetic resonant coupling proves to be efficient within several meters and can meet the power requirements of WSNs in agricultural settings. Numerous studies have utilized WPT to charge sensor nodes in various applications and fields. Overall, recent developments in WPT offer promising solutions for enhancing the longevity and sustainability of WSNs. By leveraging energy harvesting and cooperative techniques, WSNs can operate continuously and efficiently in various applications, including agriculture.

### C. Air Flow Energy

Utilizing wind energy is an additional method for harvesting energy that can be employed to supply power to sensor nodes in agricultural applications. In the study conducted by Nayak *et al.*, 2014, an adaptive routing protocol, wind energy harvesting, and sleep scheduling were investigated to reduce the power consumption of ZigBee transceivers and prolong the lifespan of the Wireless Sensor Network (WSN).

#### D. Vibration Energy

Piezoelectric-based vibration energy can be effectively utilized to charge the battery of sensor nodes, thereby extending their operational lifespan. In a study conducted by Müller et al. (2010), various Wireless Sensor Network (WSN) protocols based on ZigBee (CC2420 and CC2500) and CC1100 were analyzed for their suitability in agricultural applications. To achieve real-time capability, low latency, and deterministic behavior in the context of agricultural machinery, a fully synchronous protocol with a time-slot architecture was proposed. The main objective of their application was to monitor the back door position and filling level of a forage wagon using a ZigBee (CC2420) RF transceiver. Clock synchronization among all nodes was implemented to ensure precise power on/off timings for each sensor node. Additionally, an energy-harvesting unit based on a piezoelectric material was designed, providing an average power output of 200  $\mu\text{W}$  to the sensor nodes. With this setup, the sensor node was able to transmit a data payload of nine bytes in just 40 ms.

#### E. Water flow Energy

Morais et al. (2008) developed a multi-energy sources platform specifically designed for precision agricultural applications. The researchers investigated the viability of water flow, wind speed, and solar radiation as potential energy sources to fulfill the requirements of a ZigBee router node in a Wireless Sensor Network (WSN). They presented several powered solutions for WSNs based on these energy sources.

In terms of water flow energy, the authors focused on utilizing the water flow in the pipes of crop irrigation systems to generate energy for the ZigBee router node. This approach can be implemented in various agricultural settings such as greenhouses, aquaculture, and hydroponic systems, where water recirculation through pipes is continuous. Similar to larger hydroelectric generation utilities, a turbine connected to a small direct current (DC) generator can be driven by the water flow in the pipes, which originates from the main water source.

The experimental results demonstrated that when the three energy sources (water flow, wind, and solar) were combined, they were able to generate 58 mAh of energy, surpassing the energy requirement of the ZigBee router node, which was 39 mAh. Specifically, the design focused on harnessing water flow energy from irrigation system pipes to generate power for the ZigBee router node. This innovative concept can be applied in diverse agricultural settings, such as greenhouses, aquaculture, and hydroponic systems, where water recirculation in pipes remains constant. Similar to conventional hydroelectric generation setups, the water flow from the main source can be utilized to drive a turbine connected to a small direct current (DC) generator.

#### F. Microbial Fuel Cell Energy

Microbial fuel cells are another type of energy harvesting technique that extracts energy from an energy-neutral system. Sartori and Brunelli (2016) proposed the use of microbial fuel cells to power an underground freshwater monitoring system. This system was designed to monitor water levels in the phreatic zone, artesian wells, and tanks. It consisted of a low-cost phreatic sensor, a low-power microcontroller (MSP430FR5739), and a low-power LoRa wireless protocol. However, the energy extraction from the microbial fuel cell, which amounted to 296  $\mu\text{W}$ , was insufficient to directly power the active mode of the LoRa wireless protocol and microcontroller.

To address this, a DC-to-DC boost converter was employed to raise the input voltage from a small value of 130 mV to 4.5 V. It should be noted that solar cells are commonly preferred in agricultural applications as they are easy to install, efficient in sunny conditions, and provide higher energy output compared to other energy harvesting techniques. Table 1 illustrates the energy supply capabilities of various harvesting techniques.

Solar panels, for instance, can provide 100  $\text{mW}/\text{cm}^2$ , while radio frequency, thermal, vibration, wind, microbial fuel cell, magnetic resonant coupling WPT, and water flow techniques offer lower energy outputs of 0.001, 0.06, 0.8, 1.0, 0.296, 14, and 19 mWs, respectively (Morais et al., 2008; Sartori et al., 2016; Paradiso et al., 2005; Seah et al., 2013). In a practical example depicted in Figure 2 (Part A), the power consumption of the WSN components from Alippi et al. (2012) is considered. With power requirements of 35 mW for ZigBee (Chipcon CC2420), 0.27 mW for the temperature sensor, 3 mW for the humidity sensor, 0.27 mW for the rain gauge sensor, 5 mW for the leaf wetness sensor, and 24 mW for the ATmega128L microcontroller (Abbasi et al., 2014), a single solar panel measuring  $2 \times 2 \text{ cm}^2$  would be sufficient to power this WSN. However, as the power consumption of the WSN increases, the size of the solar panel would need to be adjusted accordingly.

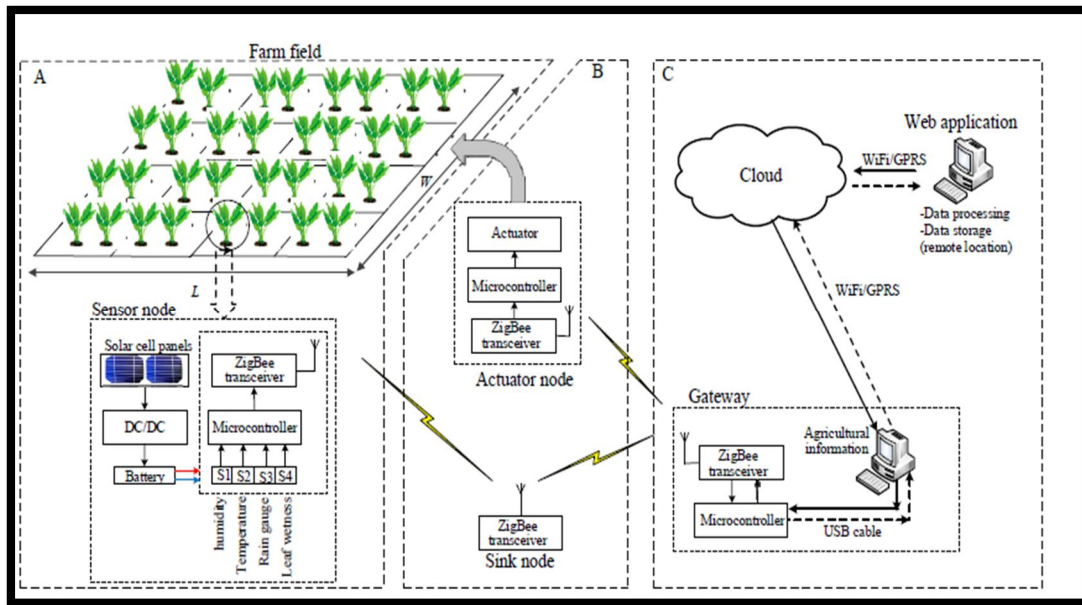


Figure 2. Example of farm field-based Internet of Things (IoT) and provided by a solar cell battery charger: (a) Agriculture sensor node with related sensor and solar cell, (b) Sink and actuator nodes, and (c) Gateway node and cloud computing (Source: Jawad *et al.*, 2017)

## II. CONCLUSIONS

This paper presents a comprehensive review on energy-harvesting techniques in agriculture. The taxonomy presented in this review highlights various types of energy harvesting techniques suitable for the agricultural domain, including solar energy, wireless power transfer, airflow energy, vibration energy, water flow energy, and microbial fuel cell energy. Among these techniques, solar cells are preferred for most agricultural operations as they can serve as efficient battery chargers for wireless sensor networks (WSNs). Solar cells are easy to install, perform well in sunlight, and provide higher energy output compared to other energy-harvesting techniques. Specifically, solar panels can generate a power supply of  $100 \text{ mW/cm}^2$ , while vibration, wind, microbial fuel cell, magnetic resonant coupling wireless power transfer, and water flow techniques can provide power outputs of 0.8, 1.0, 0.296, 14, and 19 mW, respectively. Furthermore, this review also investigates and compares previous research to identify the current challenges and issues associated with implementing WSNs in agricultural applications.

## REFERENCES

- [1] Abbasi, A.Z.; Islam, N.; Shaikh, Z.A. A review of wireless sensors and networks' applications in agriculture. *Comput. Stand. Interfaces* **2014**, *36*, 263–270.
- [2] Adu-Manu K. S., Adam N., Tapparello C., Ayatollahi H. and Heinzelman W. Energy-Harvesting Wireless Sensor Networks (EH-WSNs): A Review. *ACM Trans. Sen. Netw.* **14**, 2, Article 10 (May 2018), 50 pages.
- [3] Akhtar, F.; Rehmani, M.H. Energy replenishment using renewable and traditional energy resources for sustainable wireless sensor networks: A review. *Renew. Sustain. Energy Rev.* **2015**, *45*, 769–784.
- [4] Alippi, C.; Boracchi, G.; Camplani, R.; Roveri, M. Wireless sensor networks for monitoring vineyards. In *Methodologies and Technologies for Networked Enterprises: Artdeco: Adaptive Infrastructures for Decentralised Organisations*; Anastasi, G., Bellini, E., Di Nitto, E., Ghezzi, C., Tanca, L., Zimeo, E., Eds.; Springer: Berlin/Heidelberg, Germany, 2012; pp. 295–310.
- [5] Anisi, M.H.; Abdul-Salaam, G.; Idris, M.Y.I.; Wahab, A.W.A.; Ahmedy, I. Energy harvesting and battery power based routing in wireless sensor networks. *Wirel. Netw.* **2017**.
- [6] Bouazzi I., Zaidi M., Usman M. and Shamim M. Z. A new medium access control mechanism for energy optimization in WSN: traffic control and data priority scheme. *J Wireless Com Network* **2021**, *42* (2021).
- [7] Chen, S.; Shu, Y.; Yu, B.; Liang, C.; Shi, Z.; Chen, J. Demo: Mobile wireless charging and sensing by drones. In *Proceedings of the 14th Annual International Conference on Mobile Systems, Applications, and Services Companion*, Singapore, 25–30 June 2016.
- [8] Fasla K. A. & Anil M., A Solar Energy Harvesting System for WSN Node in Industrial Sectors, *International Journal of Engineering Research & Technology (IJERT)* Volume 11, Issue 06 (June 2022).
- [9] Gurakan, B.; Ozel, O.; Yang, J.; Ulukus, S. Energy cooperation in energy harvesting communications. *IEEE Trans. Commun.* **2013**, *61*, 4884–4898.
- [10] Gutierrez, J.; Villa-Medina, J.F.; Nieto-Garibay, A.; Porta-Gandara, M. A. Automated irrigation system using a wireless sensor network and gprs module. *IEEE Trans. Instrum. Meas.* **2014**, *63*, 166–176.

- [11] Hou, J.; Gao, Y. Greenhouse wireless sensor network monitoring system design based on solar energy. In Proceedings of the International Conference on Challenges in Environmental Science and Computer Engineering (CESCE), Wuhan, China, 6–7 March 2010; pp. 475–479.
- [12] Jawad, H.M., Nordin, R., Gharghan, S.K., Jawad, A.M. and Ismail, M., 2017. Energy-efficient wireless sensor networks for precision agriculture: A review. *Sensors*, 17(8), p.1781.
- [13] Kaushik, K.; Mishra, D.; De, S.; Basagni, S.; Heinzelman, W.; Chowdhury, K.; Jana, S. Experimental demonstration of multi-hop RF energy transfer. In Proceedings of the IEEE 24th Annual International Symposium on Personal, Indoor, and Mobile Radio Communications (PIMRC), London, UK, 8–11 September 2013; pp. 538–542.
- [14] Kumar, M.; Reddy, K.; Adake, R.; Rao, C. Solar powered micro-irrigation system for small holders of dryland agriculture in India. *Agric. Water Manag.* **2015**, 158, 112–119.
- [15] Kwon, K.; Yang, J.; Yoo, Y. Adaptive control of the packet transmission period with solar energy harvesting prediction in wireless sensor networks. *Sensors* **2015**, 15, 9741–9755.
- [16] Lai W. Y., Hsiang T.R. Wireless Charging Deployment in Sensor Networks. *Sensors*. 2019; 19(1):201.
- [17] Mazunga F., Nechibvute A., Ultra-low power techniques in energy harvesting wireless sensor networks: Recent advances and issues, *Scientific African*, Volume 11, 2021,
- [18] Mittleider, A.; Griffin, B.; Detweiler, C. Experimental analysis of a uav-based wireless power transfer localization system. In Proceedings of the 14th International Symposium on Experimental Robotics, Tokyo, Japan, 3–6 October 2016; pp. 357–371.
- [19] Morais, R.; Matos, S.G.; Fernandes, M.A.; Valente, A.L.; Soares, S.F.; Ferreira, P.; Reis, M. Sun, wind and water flow as energy supply for small stationary data acquisition platforms. *Comput. Electron. Agric.* **2008**, 64, 120–132.
- [20] Müller, G.; Rittenschober, T.; Springer, A. A wireless sensor network using energy harvesting for agricultural machinery. *E & I Elektrotech. Informationstech.* **2010**, 127, 39–46.
- [21] Nayak, A.; Prakash, G.; Rao, A. Harnessing wind energy to power sensor networks for agriculture. In Proceedings of the International Conference on Advances in Energy Conversion Technologies (ICAECT), Manipal, India, 23–25 January 2014; pp. 221–226.
- [22] Nintanavongsa, P.; Naderi, M.Y.; Chowdhury, K.R. Medium access control protocol design for sensors powered by wireless energy transfer. In Proceedings of the IEEE INFOCOM, Turin, Italy, 14–19 April 2013; pp. 150–154.
- [23] Paradiso, J.A.; Starner, T. Energy scavenging for mobile and wireless electronics. *IEEE Pervasive Comput.* **2005**, 4, 18–27.
- [24] Ravi, S.; Macknick, J.; Lobell, D.; Field, C.; Ganesan, K.; Jain, R.; Elchinger, M.; Stoltenberg, B. Colocation opportunities for large solar infrastructures and agriculture in drylands. *Appl. Energy* **2016**, 165, 383–392.
- [25] Roblin, S. Solar-powered irrigation: A solution to water management in agriculture? *Renew. Energy Focus* **2016**, 17, 205–206.
- [26] Sah D. K., Hazra A., Kumar R. Amgoth T. Harvested Energy Prediction Technique for Solar-Powered Wireless Sensor Networks, *IEEE Sensors Journals*, Vol. 23, Issue 8 (2023).
- [27] Sartori, D.; Brunelli, D. A smart sensor for precision agriculture powered by microbial fuel cells. In Proceedings of the IEEE Sensors Applications Symposium (SAS), Catania, Italy, 20–22 April 2016; pp. 1–6.
- [28] Seah, W.K.G.; Tan, Y.K.; Chan, A.T.S. Research in energy harvesting wireless sensor networks and the challenges ahead. In *Autonomous Sensor Networks: Collective Sensing Strategies for Analytical Purposes*; Filippini, D., Ed.; Springer: Berlin/Heidelberg, Germany, 2013; pp. 73–93.
- [29] Sudevalayam, S.; Kulkarni, P. Energy harvesting sensor nodes: Survey and implications. *IEEE Commun. Surv. Tutor.* **2011**, 13, 443–461.
- [30] Xie, L.; Shi, Y.; Hou, Y.T.; Lou, A. Wireless power transfer and applications to sensor networks. *IEEE Wirel. Commun.* **2013**, 20, 140–145.
- [31] Zhang, Z.; Wu, P.; Han, W.; Yu, X. Remote monitoring system for agricultural information based on wireless sensor network. *J. Chin. Inst. Eng.* **2017**, 40, 75–81.
- [32] Zou, T.; Lin, S.; Feng, Q.; Chen, Y. Energy-efficient control with harvesting predictions for solar-powered wireless sensor networks. *Sensors* **2016**, 16, 53.





10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)