



# IJRASET

International Journal For Research in  
Applied Science and Engineering Technology



---

# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume:** 10    **Issue:** XII    **Month of publication:** December 2022

**DOI:** <https://doi.org/10.22214/ijraset.2022.48312>

[www.ijraset.com](http://www.ijraset.com)

Call:  08813907089

E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)

# Analysis of Tall Building by Various Types of Structural Forms under Earthquake Analysis

Mr. Harsh Kushwaha<sup>1</sup>, Prof. Rahul Sharma<sup>2</sup>

<sup>1</sup>PG Student, Department of Civil Engineering, Prashanti Institute of Technology & Science, Ujjain (M.P.), India

<sup>2</sup>Assistant Professor & Head, Department of Civil Engineering, Prashanti Institute of Technology & Science, Ujjain (M.P.), India

**Abstract:** *In the current world scenario, high-rise buildings are favoured due to the rapid rise in land values, land shortages, and to conserve land in rural areas for agricultural use. The construction of high-rise buildings primarily depends on wind and seismic loads.*

*The performance of buildings depends on the structural configuration. The structural system of a high-rise building is designed to work with vertical gravity loads and mainly with lateral loads caused by wind and seismic activity. The structural system consists only of elements designed to transfer loads, all other elements that are not involved in the transfer of loads are called non-structural element.*

*The research assist the analysis of G+16 Storey level with various mode of structural form used in tall building construction. The G+16 Tall building is modelled on CSI ETBAS for Zone 4 under seismic analysis by Response spectrum analysis. The various types of structural form used in the model 1 to model 6.*

*The structural form consists of 1) Moment resisting frame 2) Building with Braced Frame Structure 3) Building with Hull-Core (Tube-in-Tube Structure) 4) Building with Shear Wall 5) Building with Composite 6) Building with Outrigger Structure. The research concluded that the model cases no 3 is optimised under the G+16 Storey building. Other than model 2, 4, 1 & 6 recommended for optimised case in descending order.*

**Keywords:** *G+16, Tall Building, On CSI ETBAS, Zone 4, Structural Form, Response Spectrum Analysis*

## I. INTRODUCTION

Building systems are also known as structural systems - a system that ensures the structural stability of a building. Depending on the nature of the building, one or more architectural systems can be applied to a single high-rise building. The adequacy of the lateral load bearing system must be determined by a structural engineer competent in the structural analysis and design of high-rise structures.

Tall buildings have become increasingly popular as a term in development and it has become a trend to build a tall building. Due to the scarcity of land in enclosed areas, the easiest option is to build a tall building to accommodate all the services. High-rise buildings are constructed as mixed developments, residential buildings, office functions, and other important features that must be included when designing high-rise buildings. In addition, depending on the characteristics of the building the structural engineer must select the building to proceed with the design. In addition, these structures described below can be identified as load-resistant systems.

There are various types of reinforcing structures such as reinforcing frame structures, Dry frame structures, Wall Structures, Tube in Tube and others.

## II. OBJECTIVE OF THE RESEARCH

- 1) Study of various structural forms 1) Moment resisting frame 2) Building with Braced Frame Structure 3) Building with Hull-Core (Tube-in-Tube Structure) 4) Building with Shear Wall 5) Building with Composite 6) Building with Outrigger Structure. Analysis of G+16 Storey level with various mode of structural form used in tall building construction.
- 2) To model the G+16 Tall building with various structural form cases in CSI ETBAS
- 3) Seismic analysis under Response spectrum analysis for Zone 4.
- 4) To find out the optimised model cases of structural form of G+16 Storey building.

### III. METHODOLOGY & MODELLING

The different models are to be proposed for the in the building Tall Building taken: **G+16**

Table 1: Proposed Models details

| S. No. | Model Description                                | Model Code |
|--------|--|------------|
| 1      | Building with Moment resisting frame             | Model 1    |
| 2      | Building with Braced Frame Structure             | Model 2    |
| 3      | Building with Hull-Core (Tube-in-Tube Structure) | Model 3    |
| 4      | Building with Shear Wall Structure.              | Model 4    |
| 5      | Building with Composite Structure                | Model 5    |
| 6      | Building with Outrigger Structure                | Model 6    |

Table 2: Building Parameters for All Models


| Building Parameters for All Models |                          |                         |
|------------------------------------|--------------------------|-------------------------|
| S. No.                             | Particular               | Details                 |
| 1                                  | Grid Spacing X-direction | 5.00 m c/c              |
| 2                                  | Grid Spacing Y-direction | 5.00 m c/c              |
| 3                                  | Storey Height            | 3.50 m                  |
| 4                                  | Plan Dimension           | 30.00 x 30.00 m         |
| 5                                  | Building Height (G+16)   | 59.50 m                 |
| 6                                  | Slab thickness           | 150 mm thick            |
| 8                                  | Partition Wall Density   | 20.00 KN/m <sup>3</sup> |
| 9                                  | Concrete                 | M-20                    |
| 10                                 | Rebar                    | HYSD 500                |
| 11                                 | Column-Foundation Joint  | Fixed at base           |

Table 3: Seismic Data Taken


| S. No. | Description               | Details    |
|--------|---------------------------|------------|
| 1      | Seismic Zone              | Zone- IV   |
| 2      | Zone Factor               | 0.24       |
| 3      | Soil Type                 | Medium     |
| 4      | Importance Factor         | 1.15       |
| 5      | Response Reduction Factor | 5          |
| 6      | Direction                 | Both X & Y |

#### A. Model Description


##### 1) Model 1:- Building with Moment resisting frame

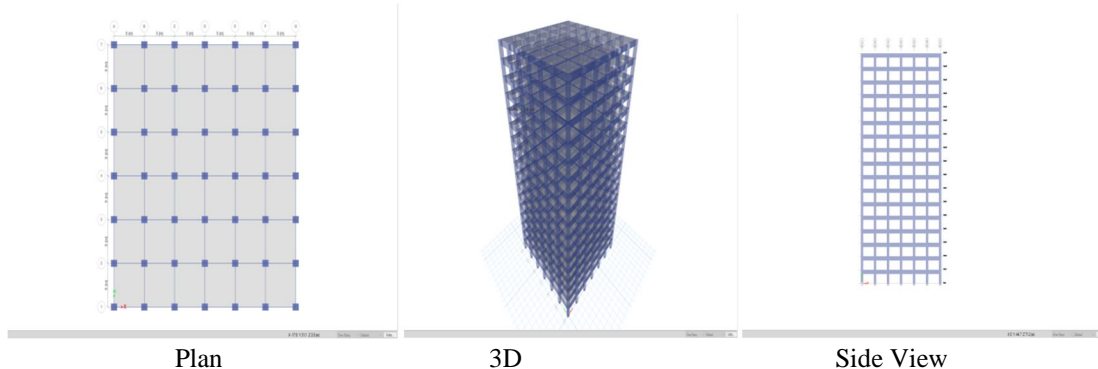


2) Model 2:- Building with Braced Frame Structure

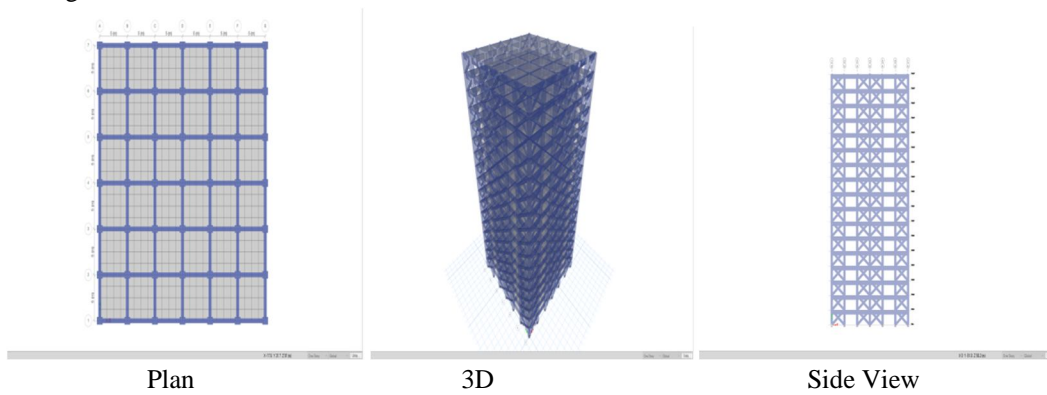


3) Model 3: Building with Hull-Core (Tube-in-Tube Structure)

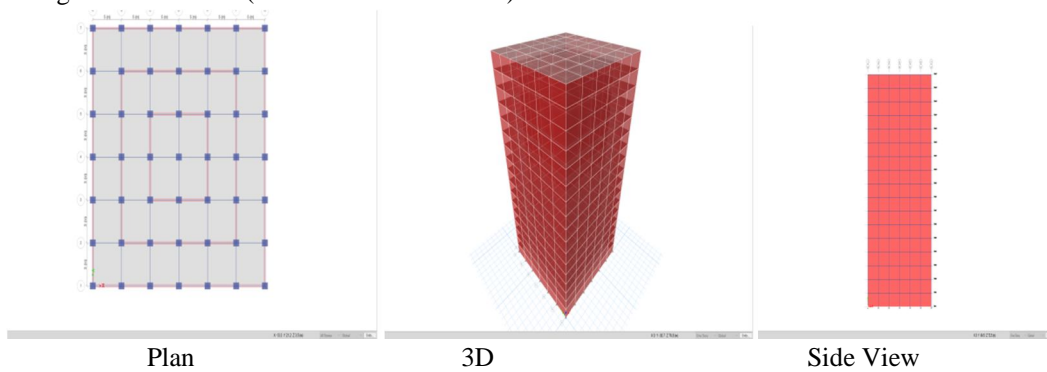


4) Model 4: Building with Shear Wall Structure.

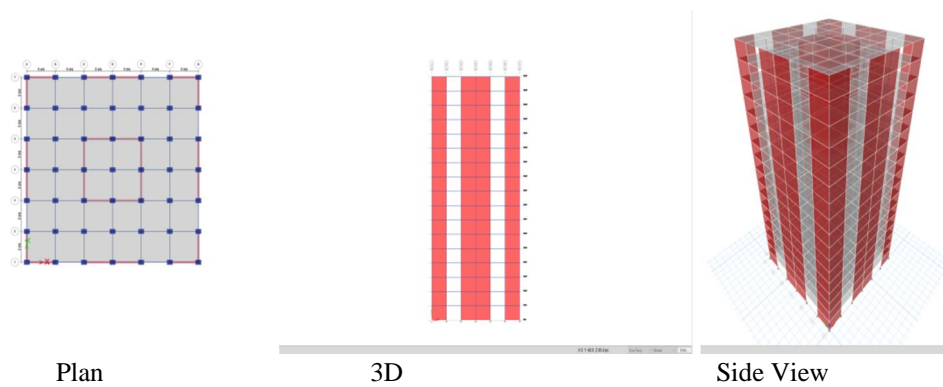

5) Model 5: Building with Composite Structure

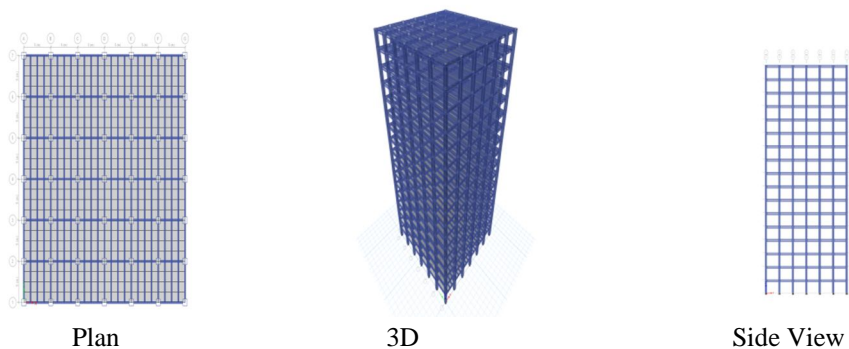

6) Model 6: Building with Outrigger Structure

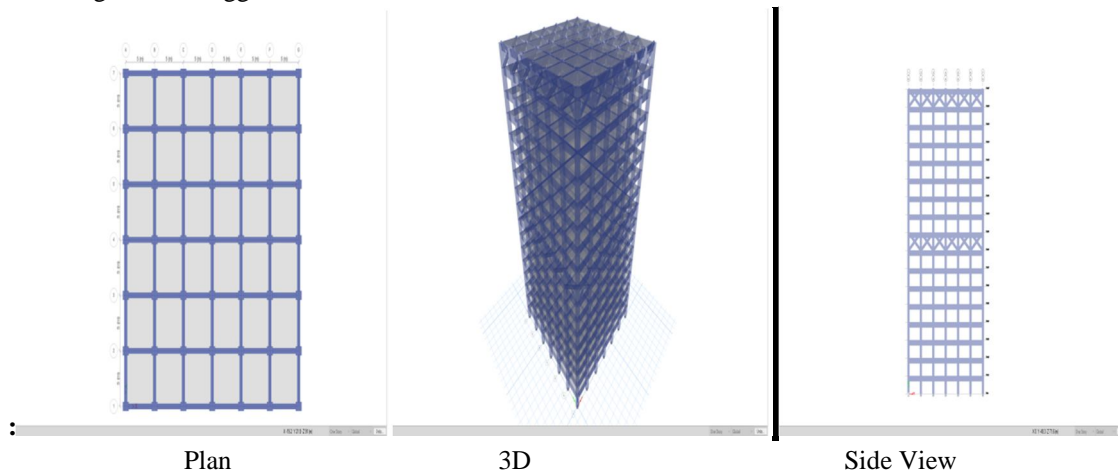


IV. RESULT PARAMETERS

A. Parameter 1: Maximum Storey Displacement level

1) Maximum Storey Displacement

Table 4 : Maximum Storey Displacement

| S. No. | Model Cases | X-Direction | Y-Direction |
|--------|-------------|-------------|-------------|
| 1      | Model 1     | 32.235      | 783.221     |
| 2      | Model 2     | 28.105      | 530.718     |
| 3      | Model 3     | 10.929      | 104.376     |
| 4      | Model 4     | 21.845      | 280.265     |
| 5      | Model 5     | 36.22       | 1612.946    |
| 6      | Model 6     | 30.7        | 743.431     |

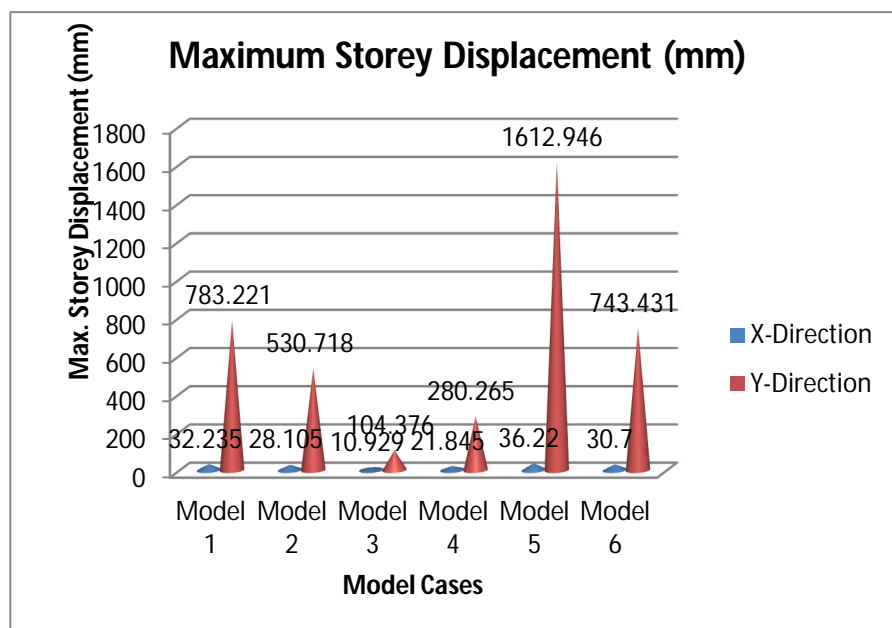

2) Storey Level Displacement

Table 5: Storey level Displacement of G+16 Storey in X-Direction for all Cases

| S. No. | Case/Storey Level | Model 1 | Model 2 | Model 3 | Model 4 | Model 5 | Model 6 |
|--------|-------------------|---------|---------|---------|---------|---------|---------|
| 1      | G+16              | 32.235  | 28.105  | 10.929  | 21.845  | 36.22   | 30.7    |
| 2      | G+15              | 31.383  | 27.104  | 10.367  | 20.787  | 35.466  | 30.119  |
| 3      | G+14              | 30.265  | 25.908  | 9.757   | 19.625  | 34.509  | 29.027  |
| 4      | G+13              | 28.889  | 24.536  | 9.102   | 18.374  | 33.306  | 27.596  |
| 5      | G+12              | 27.287  | 23.005  | 8.41    | 17.036  | 31.85   | 25.923  |
| 6      | G+11              | 25.493  | 21.336  | 7.689   | 15.621  | 30.152  | 24.053  |
| 7      | G+10              | 23.538  | 19.551  | 6.948   | 14.141  | 28.223  | 22.033  |
| 8      | G+9               | 21.454  | 17.674  | 6.194   | 12.615  | 26.078  | 19.944  |
| 9      | G+8               | 19.27   | 15.731  | 5.436   | 11.06   | 23.726  | 18.117  |
| 10     | G+7               | 17.013  | 13.745  | 4.685   | 9.496   | 21.178  | 17.298  |
| 11     | G+6               | 14.709  | 11.742  | 3.948   | 7.946   | 18.443  | 15.517  |
| 12     | G+5               | 12.501  | 9.749   | 3.234   | 6.435   | 15.539  | 13.319  |
| 13     | G+4               | 10.312  | 7.791   | 2.553   | 4.989   | 12.494  | 10.988  |
| 14     | G+3               | 8.064   | 5.912   | 1.914   | 3.637   | 9.361   | 8.588   |
| 15     | G+2               | 5.776   | 4.168   | 1.325   | 2.413   | 6.246   | 6.148   |
| 16     | G+1               | 3.49    | 2.509   | 0.799   | 1.358   | 3.348   | 3.713   |
| 17     | Ground            | 1.342   | 1       | 0.343   | 0.517   | 1.037   | 1.428   |


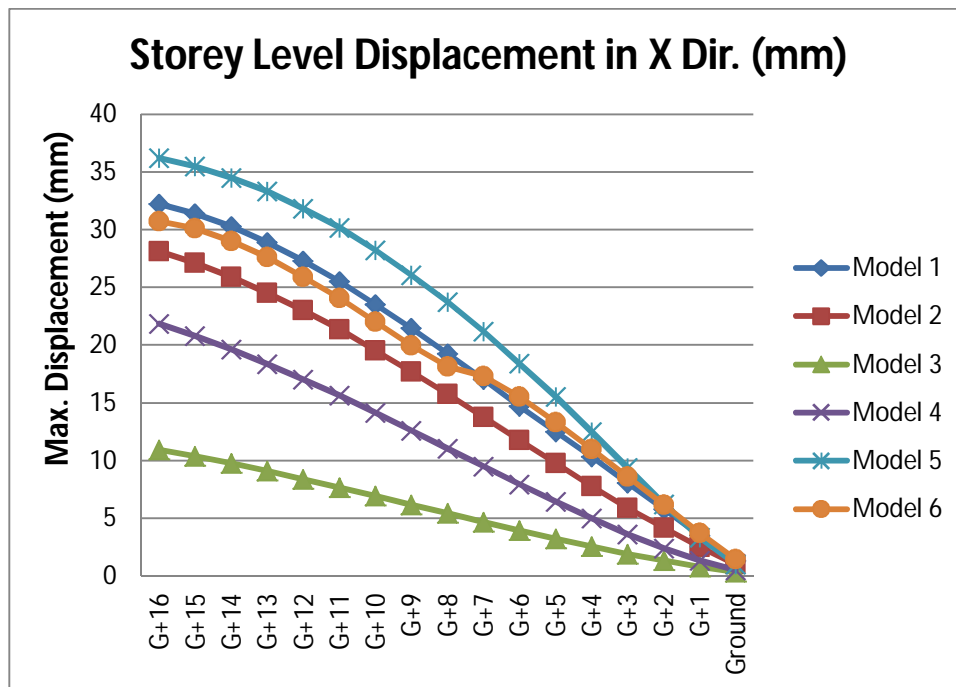


Fig. : Storey level Displacement of G+16 Storey in X-Direction for all Cases

Table 6: Storey level Displacement of G+16 Storey in Y-Direction for all Cases


| S. No. | Case/ Storey level | Model 1 | Model 2 | Model 3 | Model 4 | Model 5  | Model 6 |
|--------|--------------------|---------|---------|---------|---------|----------|---------|
| 1      | G+16               | 783.221 | 530.718 | 104.376 | 280.265 | 1612.946 | 743.431 |
| 2      | G+15               | 766.727 | 514.022 | 99.296  | 267.423 | 1582.123 | 732.262 |
| 3      | G+14               | 744.987 | 494.263 | 93.811  | 253.445 | 1542.242 | 711.15  |
| 4      | G+13               | 717.8   | 471.535 | 87.944  | 238.388 | 1490.918 | 683.351 |
| 5      | G+12               | 685.403 | 445.899 | 81.73   | 222.225 | 1427.279 | 650.183 |
| 6      | G+11               | 648.101 | 417.489 | 75.217  | 205.006 | 1351.268 | 612.126 |
| 7      | G+10               | 606.245 | 386.513 | 68.459  | 186.835 | 1263.291 | 569.686 |
| 8      | G+9                | 560.222 | 353.239 | 61.521  | 167.862 | 1164.04  | 524.081 |
| 9      | G+8                | 510.45  | 317.985 | 54.47   | 148.281 | 1054.411 | 482.493 |
| 10     | G+7                | 457.372 | 281.119 | 47.378  | 128.322 | 935.477  | 465.611 |
| 11     | G+6                | 401.458 | 243.063 | 40.323  | 108.261 | 808.529  | 416.848 |
| 12     | G+5                | 343.209 | 204.294 | 33.387  | 88.413  | 675.169  | 357.639 |
| 13     | G+4                | 283.153 | 165.357 | 26.657  | 69.143  | 537.525  | 295.44  |
| 14     | G+3                | 221.852 | 126.882 | 20.226  | 50.874  | 398.663  | 231.68  |
| 15     | G+2                | 159.924 | 89.607  | 14.197  | 34.104  | 263.415  | 167.13  |
| 16     | G+1                | 98.237  | 54.416  | 8.686   | 19.433  | 139.984  | 102.731 |
| 17     | Ground             | 39.368  | 22.439  | 3.81    | 7.564   | 43.073   | 41.193  |

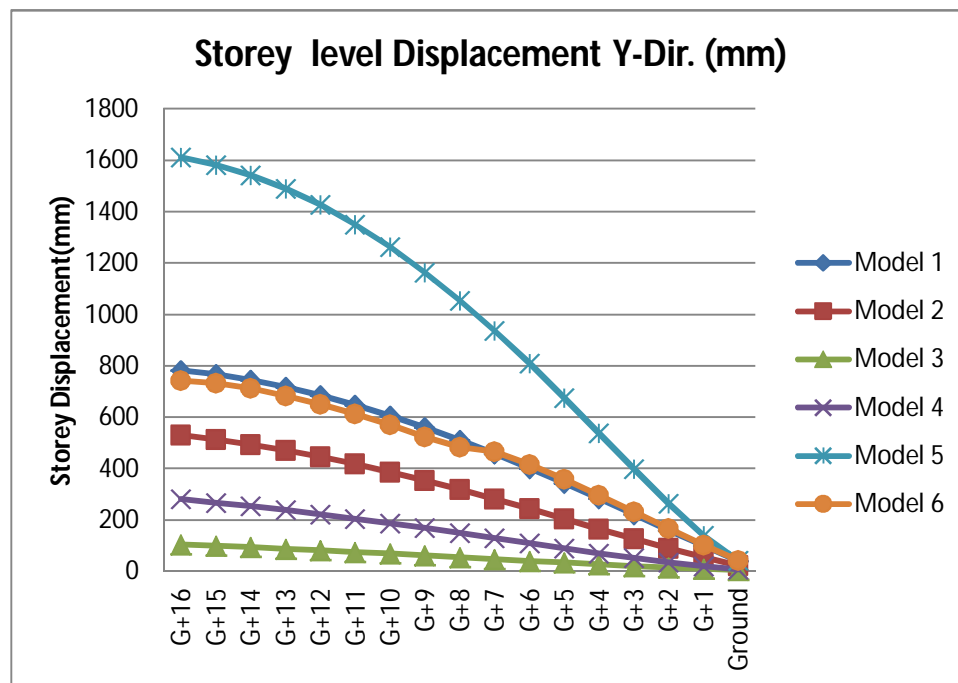

**B. Parameter 2: Base Shear Result**

Table 7: Base Shear of G+16 Storey for all Cases


| Case    | Base Shear     |                |
|---------|----------------|----------------|
|         | X-Dir.         | Y-Dir.         |
|         | F <sub>x</sub> | F <sub>y</sub> |
| Model 1 | 15414.73       | 358246.81      |
| Model 2 | 18720.86       | 363139.79      |
| Model 3 | 39676.64       | 436754.04      |
| Model 4 | 27425.88       | 382085.15      |
| Model 5 | 9119.78        | 371020.43      |
| Model 6 | 16395.56       | 375211.13      |

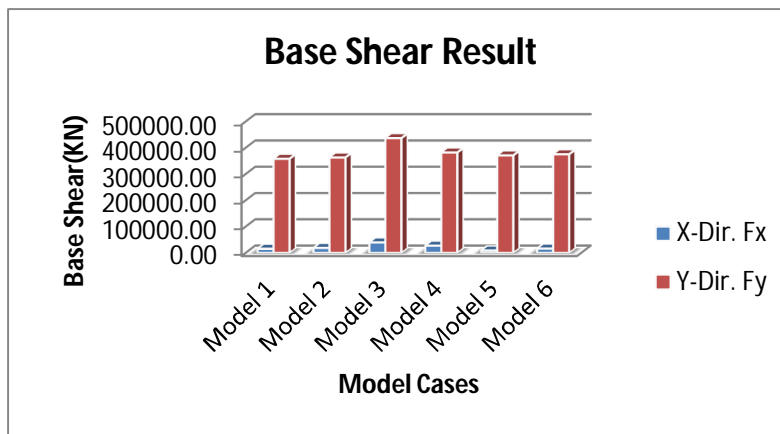

**C. Parameter 3: Storey Acceleration Result**

Table 8: Storey Acceleration

| Case    | X-Dir.         | Y-Dir.         | Z-Dir.         |
|---------|----------------|----------------|----------------|
|         | U <sub>x</sub> | U <sub>y</sub> | U <sub>z</sub> |
| Model 1 | 743.77         | 14121.87       | 1221.64        |
| Model 2 | 876.2          | 14829.28       | 2184.48        |
| Model 3 | 1399.27        | 15726.64       | 4568.56        |
| Model 4 | 1174.66        | 15686.23       | 2554.85        |
| Model 5 | 565.99         | 14194.8        | 311.66         |
| Model 6 | 706.98         | 13762.42       | 1140.55        |

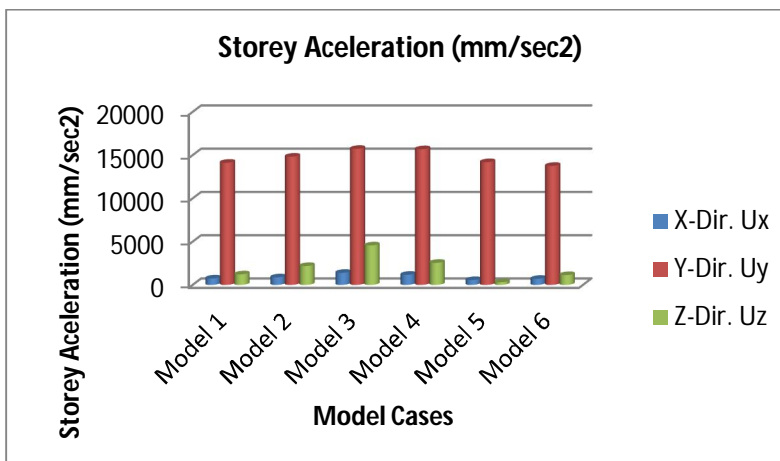




D. Parameter 4: Shear Force Result

Table 9: Shear Force in Column Result


| Case    | Shear Force (kN) |           |
|---------|------------------|-----------|
|         | X-Dir            | Y-Dir     |
| Model 1 | 366.9446         | 8477.0402 |
| Model 2 | 1517.6012        | 5572.2995 |
| Model 3 | 400.7235         | 885.3599  |
| Model 4 | 956.6469         | 3475.938  |
| Model 5 | 208.0086         | 8626.1483 |
| Model 6 | 387.4115         | 8784.1646 |

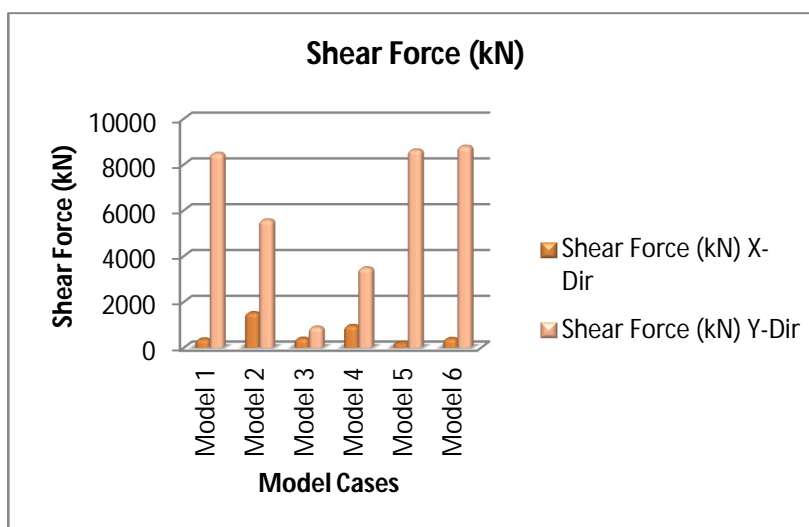

E. Parameter 5: Bending Moment Result

Table 10: Bending Moment in Column Result

| Case    | Bending Moment (kN-m) |           |
|---------|-----------------------|-----------|
|         | X-Dir                 | Y-Dir     |
| Model 1 | 17148.4739            | 812.6099  |
| Model 2 | 9994.5861             | 2654.8709 |
| Model 3 | 1794.3518             | 702.5513  |
| Model 4 | 6094.9559             | 1676.0734 |
| Model 5 | 41471.999             | 1002.011  |
| Model 6 | 17960.0665            | 863.5613  |

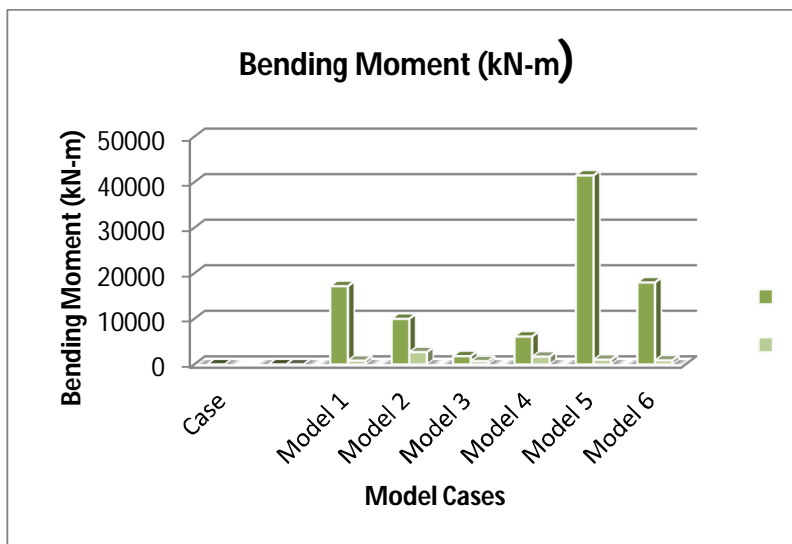

## V. CONCLUSIONS

The list out conclusions made under the analysis of G+16 Storey level with various mode of structural form used in tall building construction. These conclusions are valid for this project only.

- 1) The Maximum Storey Displacement is reduced in Model 2,3,4,6 in X- direction with respect to Case 1. In Y direction Maximum Storey Displacement is reduced case 2,3,4,6. The higher value found in case 5.
- 2) Under deflection check in X & Y direction, X direction all case found satisfactory but in Y direction case 3 is under the limit.
- 3) On comparing Storey level Displacement model 5 found not recommended for construction.
- 4) In X direction shear value in column is found least in model 5, slightly increment found in the value for model 3, 4, 6. The higher value found in Model 2 as compare to Model 1 (Normal structural case). The same case found in Y direction also.
- 5) There is reduction in bending moment value in column found from model 2 to 5, there is increment found in the value for model 6 in X direction. For Y direction the higher value found in Model 2, 4, 5,6 as compare to Model 1 ( Normal structural case). Least value found in Model 3.
- 6) Increment in Base shear is found in new structural forms cases, due to extra elements introduced in the forms.

Over all it is concluded that model case 3 Building with Hull-Core (Tube-in-Tube Structure) is optimised structure under G+ 16 storeys under respective location and zone. Other than model 2, 4, 1 & 6 recommended for optimised case in descending order.

## REFERENCES

- [1] M. Borah, S. Choudhury (2021) "Seismic Performance of Tall Buildings with Different Structural Systems" International Conference on Advances in Structural Mechanics and Applications (ASMA-2021) Department of Civil Engineering, National Institute of Technology Silchar, India.
- [2] S. Ramteke, P. Kale & et. al. (2021) "Analysis and Design of Shear Wall to Retain Seismic Forces by Using ETABS" Prof. Subhashini Ramteke, International Journal of Engineering Research and Applications, ISSN: 2248-9622, Vol. 11, Issue 6, (Series-III) June 2021, pp. 04-10.
- [3] S. Abbood, M. A. Jasim & et.al. (2021) "High Rise Buildings: Design, Analysis, and Safety: An Overview" Avanti Publishers International Journal of Architectural Engineering Technology, ISSN (online): 2409-9821 High Rise Buildings: Design, Analysis, and Safety – An Overview
- [4] Karthik A., Ankit Batra, Sakshi Gupta (2020) Analysis of Tall Building with Different Lateral Force Resisting System
- [5] Mr. Jaiprakash C, Ramya B V (2019) Analysis of Tall Building Structure Subjected to Wind and Earthquake Loads in Different Seismic Zones, International Research Journal of Engineering and Technology (IRJET) e-ISSN: 2395-0056, Volume: 06 Issue: 07 | July 2019 [www.irjet.net](http://www.irjet.net) p-ISSN: 2395-0072 2019, IRJET, Impact Factor value: 7.211 | ISO 9001:2008 Certified Journal, Page 1024
- [6] B. Mohammadzadeh, J. Kang (2019) The 2019 World Congress on Advances in Structural Engineering and Mechanics (ASEM19) Jeju Island, Korea, September 17 - 21, 2019 Seismic analysis of High-rise steel frame building considering irregularities in plan and elevation'
- [7] S. Abbood, M. Mahmood & et. al. (2018) Seismic Response Analysis Of Linked Twin Tall Buildings With Structural Coupling, International Journal of Civil Engineering and Technology (IJCIET) Volume 9, Issue 11, November 2018, pp. 208–219, Article ID: IJCIET, Volume=9&Issue=11, ISSN Print: 0976-6308 and ISSN Online: 0976-631
- [8] A.Pavan Kumar Reddy, R.Master Praveen Kumar (2017) Analysis of G+30 Highrise Buildings by Using Etabs for Various Frame Sections In Zone IV and Zone V, International Journal of Innovative Research in Science, Engineering and Technology (An ISO 3297: 2007 Certified Organization) Vol. 6, Issue 7, DOI:10.15680/IJRASET.2017.0607287 Pp 14600 14614
- [9] ANicola Longarini, Luigi Cabras & et. al. (2017) Structural Improvements for Tall Buildings under Wind Loads: Comparative Study Hindawi Shock and Vibration Volume 2017, Article ID 2031248, 19 pages <https://doi.org/10.1155/2017/2031248>



- [10] Bhalchandra p. Alone, Ganesh Awchat (2017) Study on seismic analysis of high-rise building by using software Seismic Analysis in software of STAAD pro v8i (Ground +3 Basements + 50 storeys) ISSN: 2455-2631, IJSDR , Volume 2, Issue 8. IJSDR1708018 International Journal of Scientific Development and Research (IJSDR) Pp 123-131.
- [11] E. RaviKumar, P. Raghava, Dr.T.Suresh Babu (2017) Seismic Analysis of Tall Building for Different Earthquake Zones , International Journal of Emerging Technologies in Engineering Research (IJETER) Volume 5, Issue 4, April (2017)
- [12] Y.M. Abdlebasset, E.Y. Sayed-Ahmed, S. A. Mourad (2016) Seismic Analysis of High-Rise Buildings with Transfer Slabs: State-of-the-Art-Review Electronic Journal of Structural Engineering 16(1) 2016, Pp 38-51.
- [13] Mr. Ashish A. Mohite1, Prof. G.R. (2015) Earthquake Analysis of Tall Building with Tuned Mass Damper. Patil IOSR Journal of Mechanical and Civil Engineering (IOSR-JMCE) e-ISSN : 2278-1684, p-ISSN : 2320-334X Innovation in engineering science and technology (NCIEST-2015) JSPM'S Rajarshi Shahu College Of Engineering,Pune-33,Maharashtra ,India PP 113-122.
- [14] Nishant Rana, SiddhantRana (2014) Structural Forms Systems for Tall Building Structures, SSRG International Journal of Civil Engineering (SSRG-IJCE) volume1 issue4 September 2014 ISSN: 2348 – 8352 Page 33-36.
- [15] K. Shaiksha vali,B. Ajitha (2014) International Journal of Engineering Research & Technology (IJERT) ISSN: 2278-0181 IJERTV3 IS100779, Vol. 3 Issue 10, October- 2014 Seismic Analysis in Tall Buildings for Hard Soil Type and Different Seismic Zones
- [16] F. Naeim, L. D. Carpenter & et. al. (2012) An Alternative Procedure for Seismic Analysis and Design of Tall Buildings, 15 WCEE LISBOA.



10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)