



IJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 10 **Issue:** II **Month of publication:** February 2022

DOI: <https://doi.org/10.22214/ijraset.2022.40242>

www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com

Effect of Annealing Temperature on Polypyrrole Super Capacitive Behaviour

Miss. Priti N. Jadhav¹, Dr. K.V. Sukhatankar²

^{1, 2}Department of Physics, Gogate Jogalekar College Ratnagiri, 415612, Maharashtra, India

Abstract: Polypyrrole was synthesized by using potentiostatic electrodeposition method. Polypyrrole deposits on stainless steel for 25 min and it annealed at 50^oc, 70^oc, 100^oc and 200^oc, the effects of annealing temperature on polypyrrole morphology were studied by using scanning electron morphology technique. Similarly the super capacitive behaviour of polypyrrole was studied using cyclic voltammetry and charging-discharging technique. Maximum specific capacitance 62.87 F/gm is obtained at 70^oC.

Keywords: potentiostatic, cyclic voltammetry, annealing temperature, polypyrrole, electrodeposition, stainless steel.

I. INTRODUCTION

The conducting polymers, have created a new area of research. Conducting polymers are important and interesting classes of new organic materials that have gained considerable attention in the recent years. These polymers have unique properties which have led to some commercial applications such as manufacturing of printed circuit boards, corrosion protection, electro chromic displays, electrolytic capacitors, rechargeable batteries and conductive coating for textile sensors, light emitting diodes electromagnetic shielding ,etc.[5,8-11].A polymer is a long – chain molecule that compose a large number of repeating units of identical structure. New conducting polymer structures have been developed over the past two decades with the hope of obtaining better properties than polyacetylene .In many researches it is found that polypyrrole is very sensitive to moisture, because this leads to leaching of the counter ion and thus to decrease in conductivity. Annealing makes the chain mobile to acquire a stable morphology and also to enhance the properties by elimination of moisture content. Polypyrrole is one of the most important conducting, easy to synthesize polymer. Due to enormous properties such as chemical, electrical, optical, surface morphological, etc.it used in many application like solar cell, supercapacitor, and biosensor etc. [3] .

Many of researcher studied effect of annealing temperature on polypyrrole. Rashmi Saxsena [5]has reported that polypyrrole phase was changed in range from 110^oC-170^oC, Sutar Rani[4] reported that around 100^oc water gets evaporated from material and its FTIR Spectrum recorded at different temperature are in good agreement with the TG/DTA data, Riza Ansari[6] reported that thermal treatment of PPY membrane did not lead to any improvement.

In this paper, we have synthesized polypyrrole by elctropolymerization technique using 5 sulfosalicylic acid. Then it was annealed at 50^o c, 70^o, 100^o, 200^o c and studied supercapacitive behaviour using cyclic voltammetry and charging-discharging techniques. Surface morphology of polypyrrole was studied with the help of SEM, XRD and Raman spectra.

II. EXPERIMENTAL METHOD

For electrodeposition of Polypyrrole we have used 99% pure pyrrole and 5 sulfosalicylic acid. In 0.1M Pyrrole added 0.01 M of 5 sulfosalicylic acid to adjust PH 2.2.We have applied 0.7 volt to the cell for 25 min, after elctrodeposition, annealed Polypyrrole samples at 50^oc,70^oc,100^ocand 200^oc for 3 hours. This electrodeposition is carried out by three electrode system, stainless steel is used as working electrode, graphite is used as counter elctrode and saturated calomel is used as reference electrode. Before deposition, we cleaned stainless steel substrate properly, then we polished Stainless steel with zero grade paper and then rinsed with acetone and ethanol ;etched in HNO₃ for few second and finally cleaned them ultrasonically with distilled water. Electrodeposited polypyrrole are chemically characterized by cyclic voltammetry, charging-discharging and impedance spectroscopic method by using metrohm autolab PGSTAT 204. Confirmation of polypyrrole were confirmed with the help of XRD, Raman spectroscopy and electrochemical impedance technique.

III. RESULT AND ANALYSIS

A. XRD

XRD shows the structure of polypyrrole, [figure 1 a to d](#) shows amorphous structure of polypyrrole. Peaks are attributed for steel, it is indexed by square. Hump at 20 to 26 degree shows pure amorphous nature of polypyrrole [5]. Water starts its evaporation at around 100^o c and at 200^oC it gets completely evaporated from the thin film.

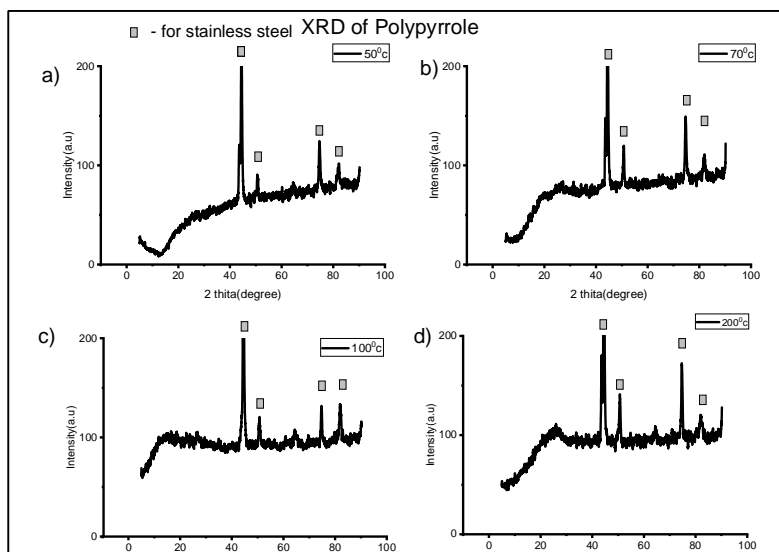


Figure 1: XRD of Polypyrrole a) 50⁰c b) 70⁰c c) 100⁰c d) 200⁰c

B. Raman Spectra

This is one of the most used technique for confirmation of material. From the above [figure2](#) peak at 929, 933 cm⁻¹ attributes the polypyrrole ring which is absent in 200⁰c, peak 970, 977, 984 cm⁻¹ attributes C-H Bond, peaks from 1050 cm⁻¹ to 1052 cm⁻¹ shows C-H plane symmetry band, the band from 1235 cm⁻¹ to 1249 cm⁻¹ shows C-H asymmetry plane, which is absent at 200⁰c. Peaks at 1377 cm⁻¹ and 1378 cm⁻¹ shows C-N asymmetry plane which are greater than wave numbers obtained at 200⁰c. Peaks from 1582 cm⁻¹ to 1592 cm⁻¹ are obtained because of the C=C backbone stretch of PPY. Around 100⁰c water starts its evaporation hence at 200⁰c water gets completely evaporated, so polypyrrole ring vanishes slowly at increasing temperature.

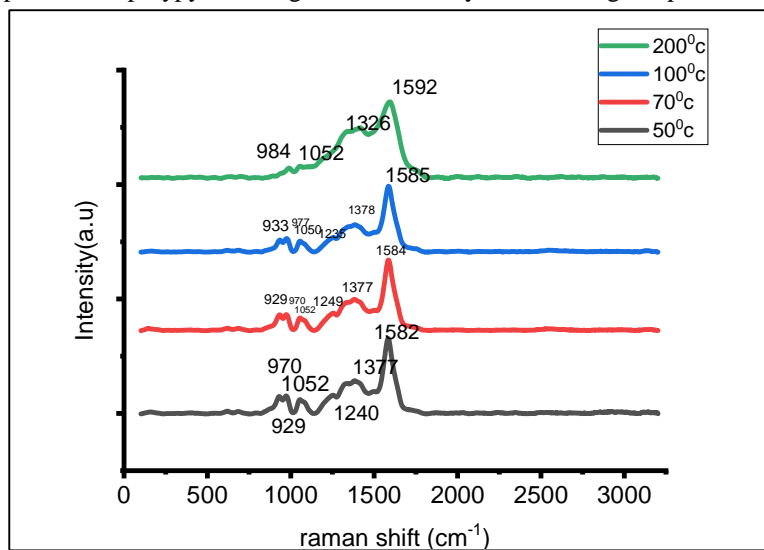


Figure 2: Raman Spectra for Polypyrrole for annealing temperature 50⁰c, 70⁰c, 100⁰c, 200⁰c

C. SEM Image

Surface morphology was studied with the help of scanning electron morphology technique. In [figure3](#) a at 50⁰c image looks like cauliflower structure and more dense structure is observed somewhat like cabbage, its size is about 2 micro meter, at 70⁰c all particles are uniformly distributed and shows cloud like cluster, its average size is 480 nm, at 100⁰c particles are agglomerated [3] in spherical shape and are seen distributed non uniformly, surrounded by cauliflower like structure at periphery, at 200⁰c particle structure looks like agglomerated shape [3] and cauliflower structure but, due to reduction of water content some granular like particles are formed on it.

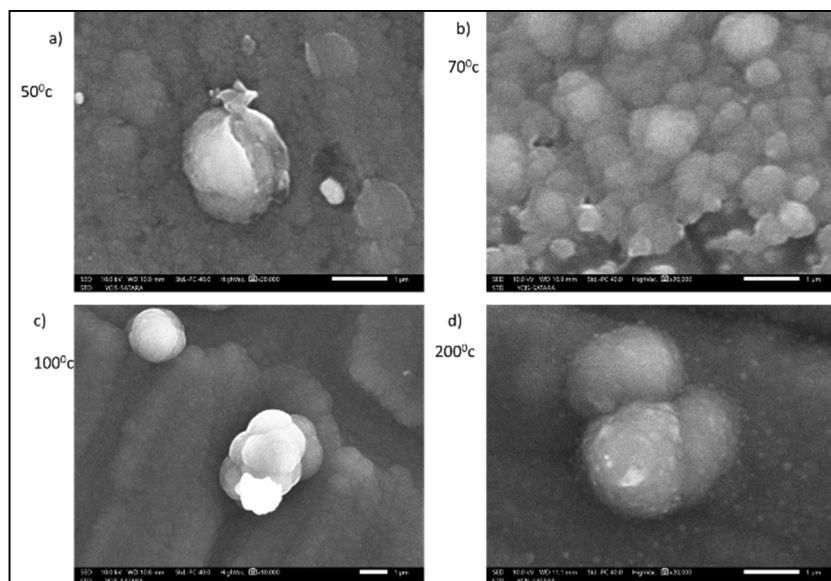


Figure 3:- SEM Image for a) 50⁰c b) 70⁰c c) 100⁰c d) 200⁰c

D. Electrochemical Characterization

1) *Cyclic Voltammetry*: Cyclic Voltammogram is one of the technique which is used to study supercapacitive behaviour of material. Using this technique we have studied supercapacitive behaviour of Polypyrrole in 0.5 M of Na₂So₄ at voltage range from -0.5 V to 0.4 V at 2mV/sec.

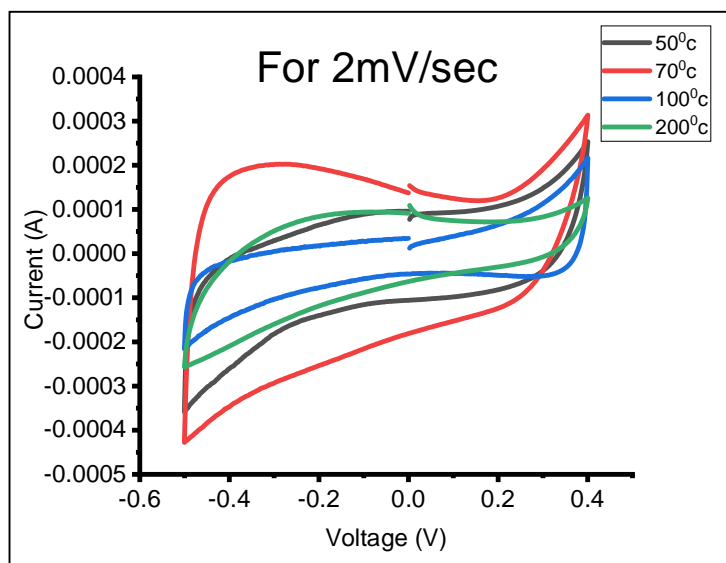


Figure 4(a): Cyclic Voltammogram curve of polypyrrole for 50⁰c, 70⁰c, 100⁰c,200⁰c in 0.5MNa₂So₄

figure4(a) shows temperature at 50⁰ and 70⁰, area under the curve increase, while at increasing temperature greater than 70⁰ area under the curve reduces, so maximum capacitance is 62.87 F/gm at 70 degree for scan rate of 2mV/sec. At increasing temperature from 100⁰ C to 200⁰C polypyrrole shows poor capacity performance.

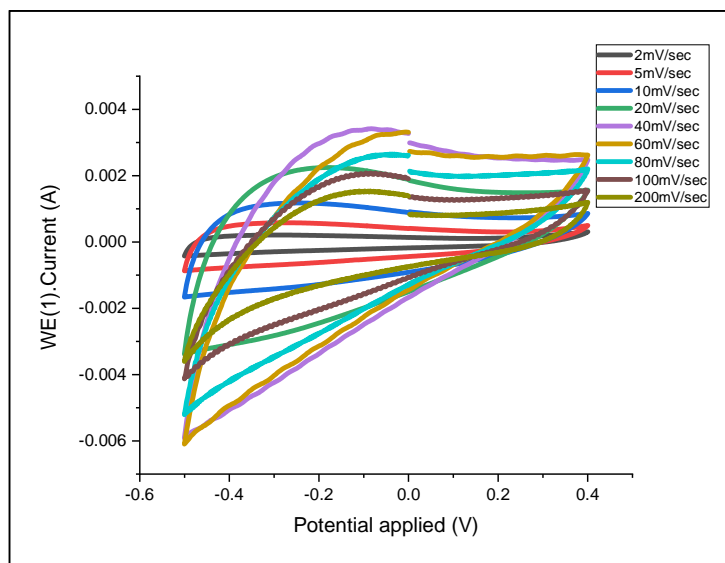


Figure 4(b): scan rate wise cyclic voltammetry curve of polypyrrole at 70⁰c in 0.5Na2So4

The figure 4(b) for 70⁰c shows that at increasing scan rate area under the curve increases, for low scan rate electrons enter inside pore of film, so specific capacitance is larger at low scan rate. For fast scan rate with increase in scan rate, specific capacitance (Cs) decreases of all polypyrrole films. Ideally capacitive behaviour of the film is observed from CV curves which depict, increase in current with increases scan rate.

2) *Charging- Discharging Curve:* Figure 5 shows the charging-discharging curve for polypyrrole at 50⁰, 70⁰, 100⁰, 200⁰C in 0.5 M of Na2SO4 at 0.5 mA current. Voltage window for charging- discharging curve is 0 to1 V, it represents pseudocapacitive behaviour of polypyrrole. Maximum specific capacitance from charging-discharging curve is 21.66 F/g. The charging-discharging curve shows asymmetry Nature and maximum energy density and power density are 10.57wh/kg and 292.88W/kg respectively.

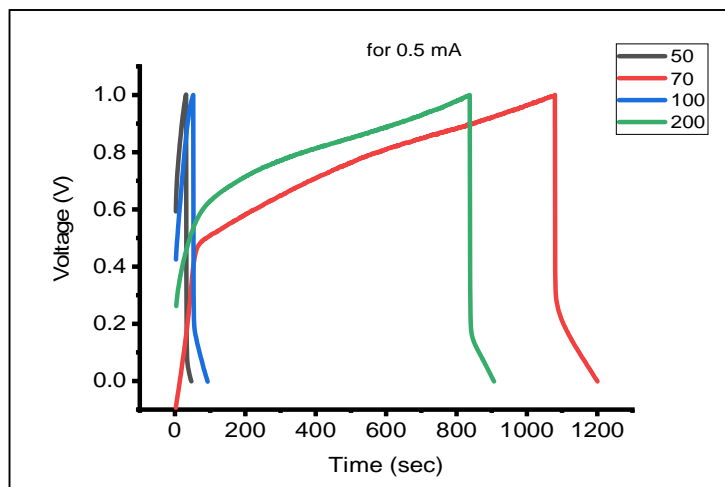


Figure 5 charging discharging curve of polypyrrole for 50⁰c, 70⁰c, 100⁰c, 200⁰c

IV. CONCLUSION

Effect of annealing temperature on polypyrrole and its characterization is successfully studied, its supercapacitive was studied in 0.5M of Na2SO4 from cyclic Voltammetry. Film annealed at 70⁰c shows maximum capacitance (62.87 F/gm). At 100⁰c evaporation of water starts and at 200⁰c water completely gets evaporated which is observed in raman spectra and some granual particle is form around film and is observed with the help of SEM. Due to low porosity at other annealing temperature film capacitance reduces.



REFERENCES

- [1] Shalini Kulandaivalu , Nadrah Suhaimi , Yusran Sullaiman, Scientific reports 20 March 2019[https://doi.org/10.1038/s41598_019_41203-3].
- [2] Liang Zhang ,Xialeio, Junning Wan, Qiang Cui, Xuefeng Chu, Hui Suo, Chun Zhao and Dong He, World Scientific Journal, Vol.15, No.3(2020)2050031, DOI:10.1142/S1793292020500319.
- [3] Vishal K. Pandita, Nafeesa M. Soudagara, Chandrakant D. Lokhandeb, Sneha S. Joshia, Materials Today: Proceedings 23 (2020) 246–259.
- [4] Sutar Rani Anand, Murugendrappa M.V, international journal of Material Science, volume 12, 2017.
- [5] Rashmi Saxena, Kananbala Sharma, N.S. Saxena, international journal of applied engineering research , volume 8(2018).
- [6] Reza Ansari, research online.
- [7] Yuan Ming Huang, Fu-fang Zhou, Qing-lan M, Ming Meng, and Chunxu Pan Materials Science Forum Vols 663-665 (2011) pp 682-685, Trans Tech Publications, doi:10.4028/www.scientific.net/MSF.663-665.682
- [8] C.Pratt, Application of conducting polymers review article,(2003).
- [9] M.M. Chehimi, E. Abdelijalie, synth. Mwt. 14515-22(2004)
- [10] G.Smitha Kundy, R.Rajagopalam, Judeo. iroh, "J.App. Polymer science", 83 a970-1977(2002).
- [11] J.R.Fried, Polymer science and Technology, New Delhi Prentice Hall of India, pp.461(1999)



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)