



# IJRASET

International Journal For Research in  
Applied Science and Engineering Technology



---

# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume: 10    Issue: VI    Month of publication: June 2022**

**DOI: <https://doi.org/10.22214/ijraset.2022.44248>**

**[www.ijraset.com](http://www.ijraset.com)**

**Call:  08813907089**

**E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)**

# Effect of Fuel Injection Pressure on Spray Characterization of Mahua Biodiesel Blend Using CRDI Injection System

C. Syed Aalam

Assistant Professor, Department of Mechanical Engineering, Annamalai University

**Abstract:** In this study, the effect of fuel injection pressure on spray characterization of mahua biodiesel blend (B20) was visually analysed using CRDI fuel injection system. To analyse the spray characteristics, biodiesel blend fuel (B20) has injected at different injection pressures like 20, 30, 40 and 50 MPa pressures. The fuel injection pressures and fuel injection durations were varied using electronic control module fitted with CRDI system. The spray structure of mahua biodiesel blend (B20) were recorded using a high-speed camera. For testing purpose one port of CRDI unit was connected with the solenoid fuel injector and other ports were closed. From the results obtained, it is clear that the spray tip penetration and spray cone angle were increased when the fuel injection pressure was increased from 20 to 50 MPa.

**Keywords:** Spray Characterization, CRDI, Diesel engine, Biodiesel, Fuel injection pressure.

## I. INTRODUCTION

The over exploitation of Fossil fuels is becoming ever more threatened because of it is non-renewable. Lacks of energy supply and ecological pollution have increased with the increase of automobiles in the world. As a result, research on alternate fuel like biodiesel has drawn more attention. Biodiesel is a renewable and eco friendly, which has large, sources of raw materials. The production of biodiesel is carried out through many processes like transesterification, thermal cracking and catalytic cracking. In the transesterification process consist of break the triglycerides into monoglyceride with the use of alcohols. Biodiesel can be directly utilize or blended with diesel in different proportions, and they can be used in a diesel engine without any significant modification. The demand for petro based fuels and the stringent emission norms, many researchers have been found the new compression ignition (CI) approaches. For examples, gasoline compression ignition GCI, premixed charge compression ignition (PCCI), homogeneous charge compression ignition (HCCI), reactivity-controlled compression ignition (RCCI) and low-temperature combustion (LTC) [1]. The fuel spray characteristics like spray tip penetration (SIP) and spray cone angle (SCA) have a considerable influence on the combustion characteristics and exhaust emissions. In this work, the influences of the fuel injection pressure on the spray and atomization behaviour of mahua biodiesel were investigated.

## II. SPRAY STRUCTURE

The fuel is introduced into the combustion chamber through the fuel injector nozzle with a high pressure differential between the common rail tube and the engine cylinder. The liquid fuel jet atomizes into small drops. The spray entrains air and spread out as the mass flow in the spray increases. The outer edge of the fuel droplets evaporates first, creating an air-fuel vapor mixture around the liquid containing core. At a low jet velocity, breakup of fuel droplet due to the unstable growth of surface waves caused by surface tension and results in fuels drops larger than the jet diameter. As the fuel jet velocity is increased, the force due to relative motion of the jet and the surface tension force and lead to a reduction in fuel drop diameter. Further increases in fuel jet velocity lead to the breakup in the atomization regime, where the breakup of the outer surface of the jet occurs at the nozzle exit and results in smaller diameter than the nozzle diameter. The high jet velocity is possible through the high pressure fuel injection using common rail fuel injection system. When the fuel is injected at high pressure, jet velocity increased and leads to the smaller diameter of fuel drops. For jets in the atomization regime, the spray cone angle  $\theta$  was found using the following relationship:

$$\tan \frac{\theta}{2} = \frac{1}{A} 4\pi \left( \frac{\rho_g}{\rho_l} \right)^{\frac{1}{2}} \frac{\sqrt{3}}{6}$$

Where  $\rho_l$  and  $\rho_g$  are the liquid and gas densities in  $\text{kg} / \text{m}^3$ ,

A is the nozzle hole area in  $\text{m}^2$ .

From the above correlation, it is clear that the nozzle hole area plays a major role in spray cone angle. In this work, six hole injector w used and it has very small nozzle hole area when compared with the conventional fuel injectors.

### III. MASS FLOW RATE THROUGH INJECTOR NOZZLE

The pressure upstream of the injector nozzle can be estimated, and assuming flow through nozzle is one-dimensional, incompressible and quasi-steady, the mass flow rate of fuel injected  $m_f$  through the nozzle:

$$m_f = C_d A_n \sqrt{2\rho_f (P_{inj} - P_{cyl})} \frac{\Delta\theta}{360N} , kg/cycle$$

Where  $C_d$  is the coefficient of discharge,

$A_n$  is the nozzle flow area in  $m^2$ ,

$\rho_f$  is the fuel density in  $kg / m^3$ ,

$(P_{inj}-P_{cyl})$  is the pressure drop across nozzle orifice in Pascal,

$\Delta\theta$  is the injection duration in degrees crank angle and

$N$  is the engine speed in RPM.

Generally,  $P_{inj} \gg P_{cyl}$ . Thus, for a given injection rate and injection duration  $\Delta\theta$  in crank angles, the injection pressure should vary with speed as,

$$P_{inj} \propto N^2$$

### IV. SPRAY PENETRATION

The fuel spray penetrates across the combustion chamber has an important influence on better air-fuel mixing. Fuel injection pressure has a more significant effect on the spray penetration. Many correlations based on turbulent gas jet theory and experimental data have been proposed for fuel spray penetration. The correlation of spray tip penetration  $S$  versus pressure is given as:

$$S = 0.39 \left( \frac{2\Delta p}{\rho_l} \right)^{\frac{1}{2}} t$$

$$S = 2.95 \left( \frac{\Delta p}{\rho_g} \right)^{\frac{1}{4}} (d_n t)^{\frac{1}{2}}$$

Where  $\Delta p$  is the pressure drop across the nozzle in pascals,

$\rho_l$  and  $\rho_g$  are the liquid and gas densities,

$d_n$  is the nozzle diameter in metre and  $t$  is the time in seconds.

### V. EXPERIMENTAL SETUP

The spray characteristics of the MME20 fuel blend was analyzed to study the influence of injection pressure on the atomization performance. A high-speed camera was used in this experiment. The camera featured a maximum electronic shutter exposure of  $5 \mu s$  with a corresponding maximum resolution of  $128 \times 256$ . The captured images were downloaded to a computer connected to the camera. Because of the inclination of the nozzle holes, the central axis of the spray trajectory was towards the camera. The schematic diagram of the experimental set-up for spray photography is shown in Figure 1.

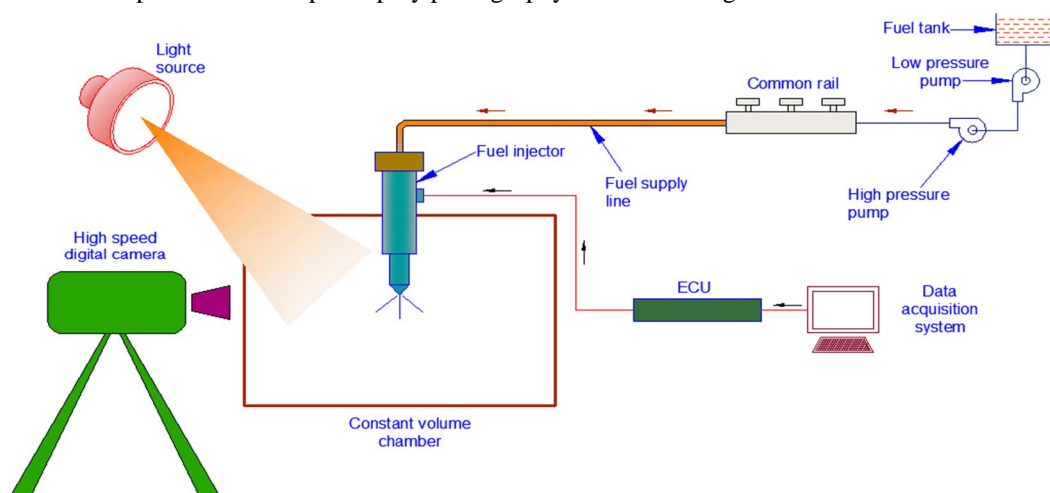


Figure 1 Schematic diagram of the experimental set-up for spray photography



## VI. RESULTS AND DISCUSSION

The structure of the MME20 fuel spray has been observed with the set-up described. Tests were carried out for four different fuel injection pressures (20, 30, 40, and 50 MPa). On account of the data obtained, there exists a highly dense segment where the spatial distribution of the MME20 fuel blend is uniform pretty close to the nozzle exit. Further downstream of the nozzle, the high density portion starts to break up on the outer edge of the spray structure. This appeared as a fish-bone shaped structure of the spray. The pictures are taken 1.6 ms after fuel injection starts. As expected, an increase in penetration length resulted from an increase in injection pressure. Figure 2 shows the fuel injection from a 6-hole nozzle and Figure 3 shown maximum tip penetration of MME20 at different fuel injection pressures. As shown in the figure, the MME20 shows higher spray tip penetration at high injection pressure (50 MPa).



Figure 2 Fuel injection from 6-hole nozzle (A) at 20 MPa (B) at 30 MPa (C) at 40 MPa (D) at 50 MPa

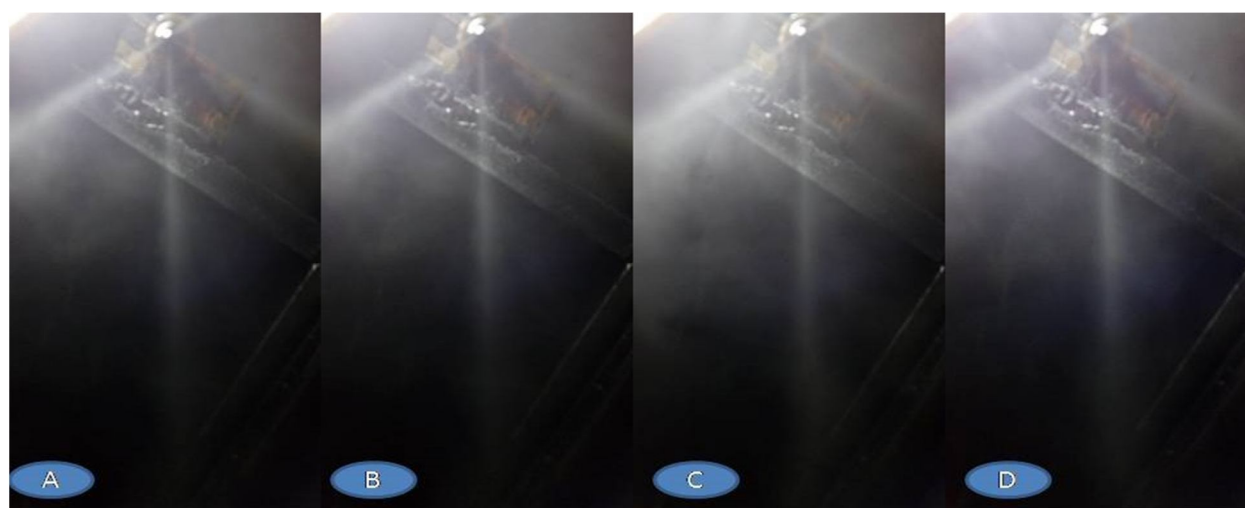


Figure 3 Images shown maximum tip penetration (A) at 20 MPa (B) at 30 MPa (C) at 40 MPa (D) at 50 MPa

## VII. CONCLUSION

Fuel spray has a direct influence on performance, combustion efficiency, and emissions control. Better fuel atomization can promote through the proper mixing of fuel and air. Therefore, it is important to evaluate the spray tip penetration (SIP) and spray cone angle (SCA) of fuel. In this work, the analysis of macro spray characteristics like SIP and SCA were visually analysed through high speed camera. The obtained results show that, the SIP and SCA both increase with increasing the fuel injection pressure from 20 to 50 MPa. The Maximum injection pressure of 50 MPa shows the optimum SIP and SCA.

## REFERENCES

- [1] Geng, L.M., Chen, Y., Chen, X.B., Lee, C.F., 2019a. Study on combustion characteristics and particulate emissions of a common-rail diesel engine fueled with n-butanol and waste cooking oil blends. *J. Energy Inst.* 92, 438–449.
- [2] Algayyim, S.J.M., Wandel, A.P., 2021. Macroscopic and microscopic characteristics of biofuel spray (biodiesel and alcohols) in CI engines: a review. *Fuel* 292, 120303. <https://doi.org/10.1016/j.fuel.2021.120303>.
- [3] Dai, X., Wang, Z., Liu, F., Wang, C., Sun, Q., Xu, C., 2019. Simulation of throttling effect on cavitation for nozzle internal flow. *Fuel* 243, 277–287. <https://doi.org/10.1016/j.fuel.2019.01.073>.
- [4] Putrasari Y, LIM O. A study of a GCI engine fueled with gasoline-biodiesel blends under pilot and main injection strategies. *Fuel* 2018;221:269–82.
- [5] Payri R, Garcia A, Domenech V, Durrett R, Plazas Torres A. Hydraulic behavior and spray characteristics of a common rail diesel injection system using gasoline fuel. *SAE Tech Pap* 2012
- [6] Kim K, Bae C, Johansson B. Spray and Combustion Visualization of Gasoline and Diesel under Different Ambient Conditions in a Constant Volume Chamber 2013;C. [7] Postrioti L, Grimaldi CN, Ceccobello M, Gioia R Di. Diesel Common Rail Injection System Behavior with Different Fuels. *SAE Tech* 2004;1:29.
- [7] Panneerselvam, N.; Murugesan, A.; Vijayakumar, C.; Kumaravel, Arumugam; Subramaniam, Dhanakotti; Avinash, A. Effects of injection timing on bio-diesel fuelled engine characteristics -An overview. *Renewable and Sustainable Energy Reviews*(2015), 50, 17–31.
- [8] Mohamed Shameer, P.; Ramesh, Kasimani; Sakthivel, Rajamohan; Purnachandran, Ramakrishnan. Effects of fuel injection parameters on emission characteristics of diesel engines operating on various biodiesel: A review. *Renewable and Sustainable Energy Reviews*(2017), 67(3), 1267–1281.
- [9] Sayin, Cenk; Ilhan, Murat; Canakci, Mustafa; Gumus, Metin. Effect of injection timing on the exhaust emissions of a diesel engine using diesel-methanol blends. *Renewable Energy*(2009), 34(5), 1261–1269.
- [10] Soid, Shahril Nizam Mohamed; Zainal, Z. Alimuddin. Spray and combustion characterization for internal combustion engines using optical measuring techniques -A review. *Energy*(2011), 36(2), 724–741.
- [11] C. Syed Aalam, C.G. Saravanan, B. Prem Anand, Impact of high fuel injection pressure on the characteristics of CRDI diesel engine powered by mahua methyl ester blend, *Applied Thermal Engineering*, Volume 106, 5 August 2016, Pages 702-711.
- [12] C. Syed Aalam, C.G. Saravanan, M. Kannan. Experimental investigations on a CRDI system assisted diesel engine fuelled with aluminium oxide nanoparticles blended biodiesel, *Alexandria Engineering Journal*, Vol. 54(3), September 2015, Pages 351–358



10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)