



# **iJRASET**

International Journal For Research in  
Applied Science and Engineering Technology



---

# **INTERNATIONAL JOURNAL FOR RESEARCH**

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume:** 13      **Issue:** III      **Month of publication:** March 2025

**DOI:** <https://doi.org/10.22214/ijraset.2025.67928>

**[www.ijraset.com](http://www.ijraset.com)**

**Call:** ☎ 08813907089

**E-mail ID:** [ijraset@gmail.com](mailto:ijraset@gmail.com)

# Explosive Ordnance Disposal Rover

Pratik Kadam<sup>1</sup>, Switej Mhatre<sup>2</sup>, Rishabh Yadav<sup>3</sup>, Fardin Dayli<sup>4</sup>, Liril George<sup>5</sup>

<sup>1, 2, 3, 4</sup>Fourth-Year Student, <sup>5</sup>Assistant Professor, Department of Electronics and Telecommunication Engineering, Pillai College of Engineering, Navi Mumbai, Maharashtra, India

**Abstract:** In this paper, we present the development of an explosive ordnance disposal (EOD) rover, which has become crucial in modern military and civilian defense operations to mitigate the risks associated with handling hazardous explosives. This project focuses on designing and implementing a human-controlled rover capable of safely disposing of Improvised Explosive Devices (IEDs). Equipped with advanced sensors such as live-streaming cameras and metal detectors, the rover enables technicians to defuse explosive materials especially (IEDs) from a safe distance, protecting their lives while allowing real-time communication for remote operation in hazardous environments. Leveraging intelligent algorithms and Raspberry Pi technology, the rover analyzes sensor data in real-time to ensure accurate identification of potential threats. Additionally, it features a manipulator arm or robotic gripper to safely handle and dispose of detected explosives, minimizing risks to human operators. The project also prioritizes the development of a user-friendly interface to facilitate the remote operation and monitoring of the rover, ensuring operator safety. Overall, this research enhances the capabilities of EOD teams by providing a sophisticated robotic platform for addressing the challenges of explosive threat detection and disposal in various operational settings.

**Keywords:** Explosive Ordnance Disposal, Robotics, Raspberry Pi, Remote Control, Real-Time Streaming, Metal Detection.

## I. INTRODUCTION

The increasing use of unexploded ordnance and improvised explosive devices (IEDs) in both military and civilian areas poses significant risks to human life. Traditional explosive ordnance disposal (EOD) methods require technicians to handle these devices directly, putting them in danger. Given the complexity and sensitivity of explosives, safe and precise handling is critical, especially in high-pressure environments. EOD rovers have become essential for addressing these challenges, allowing technicians to operate from a safe distance and significantly reducing the risk to human operators in hazardous zones. EOD rovers, like the one developed in this project, are designed to enhance safety and efficiency during explosive disposal operations. Equipped with live-streaming cameras, metal detectors, and a robotic manipulator arm, the rover can neutralize explosives remotely. Using Raspberry Pi technology and intelligent algorithms, it processes real-time sensor data to ensure accurate identification and handling of threats. With a user-friendly interface for remote control and monitoring, this system provides EOD teams with a reliable tool to address explosive threats while keeping personnel out of harm's way.

### A. Background

The background of explosive ordnance disposal (EOD) rovers reflects the urgent need for safer methods to address the dangers posed by explosives in military and civilian contexts. Traditional EOD practices often require direct interaction with hazardous materials, putting technicians at risk. As the threat from unexploded ordnance and improvised explosive devices (IEDs) has increased, the limitations of these manual methods have become evident. The integration of robotics and automation into EOD operations enables remote handling of explosives, significantly enhancing safety and operational effectiveness.

### B. Problem Statement

Bomb disposal remains one of the most dangerous tasks in law enforcement and military operations due to the high probability of injury or fatality during the disarming process. Traditionally, bomb technicians must physically approach the suspicious package to identify, diagnose, and disarm explosive devices. This proximity to a potentially hazardous object increases the risk to human life. Additionally, in highly populated or sensitive areas, the repercussions of a failed intervention can be catastrophic.

To address these challenges, a remote monitoring and controlling application is proposed for the safe analysis of suspicious packages or bombs. This system leverages modern robotics, wireless communication, sensors, and real-time video streaming to facilitate the remote analysis and handling of hazardous objects. The application must support real-time data processing, allow for precise robotic control, and be equipped with advanced detection algorithms to identify explosive materials, hazardous chemicals, or suspicious wiring.

The primary goal is to safeguard the lives of bomb disposal experts by reducing the need for human presence near the bomb, thereby improving overall safety and efficiency.

### C. Objective

The primary objective of the Explosive Ordnance Disposal (EOD) robot is to enhance safety and efficiency in the handling, and neutralization of explosive threats in various hazardous environments. By leveraging advanced technologies, the robot aims to minimize human involvement in high-risk scenarios, thereby reducing the potential for injury or fatality among operators. Equipped with sophisticated sensors and a manipulative arm. Its remote operation capabilities further ensure that personnel can monitor and control the robot from a safe distance, thereby enhancing situational awareness while maintaining operational effectiveness. Overall, the EOD robot serves as a vital tool for military, law enforcement, and emergency response teams, promoting safety and efficacy in explosive threat management.

**Mobility and Structure:** The EOD robot is engineered with a robust, all-terrain chassis that enables it to navigate through challenging environments such as rubble, uneven terrain, and confined spaces. This mobility ensures that the robot can access areas that are difficult or unsafe for human operators to reach. Constructed from lightweight materials, the robot is both durable and agile, able to withstand the rigors of its operational environment while maintaining stability during movement.

**Real-Time Data Surveillance:** The Raspberry Pi camera, integrated into a real-time surveillance system, captures live video feeds to monitor suspicious objects or areas. By leveraging basic image processing techniques, the system can detect changes in the environment, such as movement or unusual activities. The camera streams data continuously, enabling operators to assess potential threats in real-time. This setup provides a cost-effective and efficient solution for immediate situational awareness in critical environments.

**Manipulator Arm for Handling Explosives:** The robot features a high-precision manipulative arm designed for safely handling and neutralizing explosives. This arm can perform delicate tasks, such as cutting wires, without triggering detonation. Interchangeable tools, such as cutters and disruptors, add versatility, enabling the robot to adapt to different types of explosive devices and scenarios, thereby enhancing its operational effectiveness.

**Remote Communication and Operation:** The EOD robot is equipped with a robust wireless communication system that allows operators to monitor and control its activities from a safe distance, greatly enhancing safety. This system can operate over Wi-Fi communication channels. The user interface is designed to be intuitive, allowing operators to manage the robot's functions and respond swiftly to emerging threats based on real-time data and visual feeds.

### D. Contributions

This research contributes significantly to the field of Explosive Ordnance Disposal (EOD) robotics in several impactful ways:

#### 1) Innovative Integration:

The project showcases a novel approach by combining movement, manipulation, sensing, and communication subsystems into a cohesive and functional EOD rover. By leveraging affordable and widely available components, this integration facilitates a more efficient design process and enhances the overall functionality of the robot.

#### 2) Cost-Effectiveness:

Utilizing the Raspberry Pi 3B+ and other low-cost hardware components allows for the creation of a scalable EOD solution that is economically viable. This affordability ensures that the technology can be adopted across various operational settings, making it accessible to a broader range of organizations, including smaller agencies with limited budgets.

#### 3) Real-Time Control and Streaming:

The implementation of a real-time, web-based control interface with live video streaming significantly enhances operator situational awareness. This feature enables operators to monitor the robot's activities and make informed decisions based on live feeds, thereby improving the effectiveness of EOD operations.

#### 4) Precision Manipulation:

The incorporation of a robotic arm designed specifically for precise wire-cutting operations is a notable advancement. This functionality enables the effective neutralization of explosive devices while minimizing the risk to operators, thereby enhancing the robot's overall operational capabilities.

### 5) *Enhanced Safety and Efficiency:*

By enabling remote operation, the research demonstrates a marked improvement in safety for EOD technicians. Reducing the need for direct human interaction with explosive threats not only protects personnel but also increases operational efficiency, allowing for quicker response times in critical situations.

## II. LITERATURE REVIEW

**Real-Time Speech Interactive Bomb Disposal Robot:** This paper discusses the development of a bomb disposal robot that can be controlled through voice commands. It integrates real-time speech recognition for robot navigation and task execution, enhancing operator control and safety.

**Raspberry Pi-Based Bomb Detection System:** This study focuses on a bomb detection robot using a Raspberry Pi for real-time surveillance and detection. The robot is equipped with sensors to detect explosives and provide a live video feed to the operator for remote monitoring and decision-making.

**VNC Server-Based Surveillance System:** This paper covers the use of a Virtual Network Computing (VNC) server to control and monitor robots remotely. The system allows for real-time video streaming and control over long distances, improving security operations in bomb disposal and surveillance tasks.

**Military Spying and Bomb Disposal Robot:** The paper presents a multi-functional robot capable of both spying and bomb disposal. It is equipped with a camera for surveillance, robotic arms for wire-cutting, and a metal detector to locate explosives, making it suitable for high-risk military operations.

### A. *Previous Work*

Several projects and research efforts have been conducted in the development of Explosive Ordnance Disposal (EOD) robots, focusing on improving safety and operational efficiency. One significant example is the *Real-Time Speech Interactive Bomb Disposal Robot* which integrates real-time speech recognition for enhanced navigation and task execution, allowing operators to control the robot through voice commands. This system improves operator safety by minimizing physical contact with dangerous explosives [1]. Additionally, the *Raspberry Pi-Based Bomb Detection System* utilized a Raspberry Pi for real-time surveillance, detecting explosives through sensor data while streaming live video for operator monitoring and decision-making [2]. Another noteworthy advancement is the *VNC Server-Based Surveillance System*, where a Virtual Network Computing (VNC) server allows remote control and video streaming for bomb disposal and surveillance tasks, enabling safe operation over long distances [3]. Moreover, the *Military Spying and Bomb Disposal Robot* integrates multiple functionalities, such as metal detection, robotic arms for wire-cutting, and real-time surveillance, specifically designed for high-risk military operations [4]. These projects highlight various technological innovations and the benefits of robotics in handling dangerous materials. They underscore the necessity for remote control, real-time data analysis, and multi-functional capabilities to ensure safer, more efficient operations in hazardous environments.

### B. *Gap Identification*

While the existing systems have contributed significantly to the field of bomb disposal robotics, several gaps remain unaddressed. Firstly, many systems, such as the *Real-Time Speech Interactive Bomb Disposal Robot* and *VNC Server-Based Surveillance System*, rely on limited communication technologies that may not offer real-time feedback in environments with poor connectivity or interference [1], [3]. There is also a lack of emphasis on enhancing precision manipulation, as most previous works do not fully explore advanced robotic arms capable of performing intricate tasks like wire-cutting in unpredictable scenarios. Additionally, current systems like the *Raspberry Pi-Based Bomb Detection System* focus heavily on surveillance and detection but offer limited functionality in handling and disarming explosives [2]. The reliance on basic image processing and sensor-based detection in such systems may lead to false positives or insufficient identification of complex threats. Moreover, the integration of user-friendly interfaces for real-time streaming and remote control is still underdeveloped in most of these works. The challenge lies in creating a seamless, responsive user interface that can operate in real-time under various environmental constraints, ensuring smooth communication between the operator and the robot during critical operations. Addressing these gaps by enhancing communication systems, improving precision in robotic manipulation, and developing more intuitive control interfaces is crucial for the next generation of EOD robots.

### III. METHODOLOGY

The development of an Explosive Ordnance Disposal (EOD) robot involves a structured approach integrating robotics, real-time communication, and sensor analysis. This project uses a human-controlled rover equipped with a Raspberry Pi, advanced sensors (such as metal detectors and cameras), and a robotic arm for neutralizing Improvised Explosive Devices (IEDs). The control system is developed using Python, with a web-based interface for remote operation. Real-time data is streamed from the rover's cameras and sensors, processed through the Raspberry Pi, and relayed to the operator. The methodology focuses on creating an effective remote-operable system to handle hazardous materials without endangering human lives. Similar approaches have been used in previous works where Raspberry Pi and camera systems were utilized for real-time monitoring and data collection.

The development of the Explosive Ordnance Disposal (EOD) Rover was executed through a structured and systematic approach encompassing design, implementation, testing, and evaluation phases. This section delineates the methods and procedures employed to achieve the project objectives, detailing the approach, data collection strategies, tools and techniques utilized, and common pitfalls encountered during the development process.

#### A. Approach

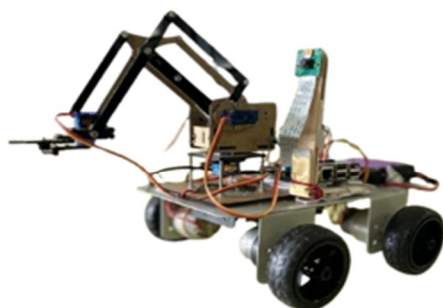
The research adopted a multidisciplinary approach integrating principles from robotics, computer science, and electrical engineering to design and develop a functional EOD rover. The methodology is divided into the following key stages:

- 1) **System Design and Architecture:** The requirements analysis for effective Explosive Ordnance Disposal (EOD) operations identified key features such as mobility, sensor integration, remote control capabilities, and manipulation functions as essential. Based on these requirements, appropriate hardware components were selected, including the Raspberry Pi 3B+ for processing, motors to ensure mobility, and various sensors for detection. Additionally, a fixed end effector equipped with a cutter was chosen to enhance functionality, taking into account both cost-effectiveness and performance criteria. A modular design approach was adopted to facilitate independent development and testing of the various subsystems, which improves troubleshooting processes and allows for easier upgrades in the future.
- 2) **Hardware Integration:** The chassis and mobility system was constructed using a robust all-terrain design, enabling the EOD robot to navigate through various environments. Motor drivers and wheels were integrated to ensure reliable movement across different terrains. For sensor integration, live-streaming cameras and metal detectors were mounted strategically on the chassis to enable optimal data collection and real-time monitoring. Additionally, a fixed end effector equipped with a cutter was installed, specifically designed for cutting wires of explosive devices. This fixed configuration enhances the robot's reliability and precision during delicate explosive handling tasks.
- 3) **Software Development:** The operating system and programming aspects involved installing and configuring the Raspberry Pi OS, using Python for scripting and controlling the rover's various functions. Real-time data processing was implemented through the development of algorithms designed to analyze sensor data, enabling accurate threat identification and decision-making during EOD operations. Additionally, a user-friendly interface was created using web-based technologies to allow for seamless remote control and monitoring of the rover, ensuring operators can effectively manage its functions from a distance.



Fig. 1 User Interface To Control Rover

- 4) **Communication System Setup:** A Wi-Fi based communication system was implemented using a Wi-Fi module integrated with the Raspberry Pi 3B+ to enable seamless data transmission between the rover and the operator's interface. For live video streaming, the Real-Time Streaming Protocol (RTSP) was utilized, ensuring low-latency and high-quality video transmission. This setup allows for effective real-time monitoring and control, crucial for EOD operations that require precise, timely feedback from the rover's environment.
- 5) **Testing and Validation:** Initial testing was conducted in simulated environments to validate the rover's performance. These tests focused on assessing the rover's mobility across various terrains, ensuring sensor accuracy for effective data collection, and verifying the functionality of the end effector, specifically its ability to reliably cut wires of explosive devices. This controlled testing phase was crucial in identifying potential improvements and ensuring the rover's readiness for real-world EOD operations.


**Rover**

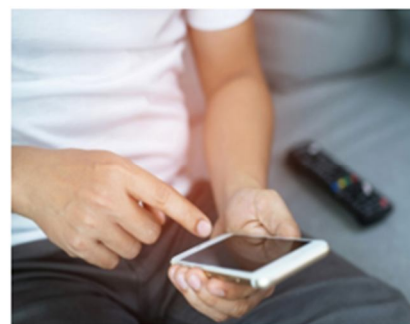
**Wireless Communication**

**User Control**

Fig.2 Proposed Remotely Operated Bomb Disposal Robot

### B. Data Collection

Data collection was integral to both the development and evaluation phases of the EOD rover. Sensor data acquisition involved capturing continuous live-streaming video feeds using Raspberry Pi cameras to provide real-time visual data for operator monitoring and situational assessment. Metal detectors were also utilized to identify the presence of explosive materials, collecting detailed data on metal composition and location. For operational data logging, key metrics such as rover speed, direction, and maneuverability were recorded to analyze mobility performance across various terrains. End effector operations were logged during explosive handling tasks to evaluate its precision and effectiveness. Communication logs were maintained to track data transmission quality, latency, and reliability of the wireless communication system, ensuring consistent operator control. Additionally, user interaction data was monitored by tracking operator interactions with the interface, including control commands and response times, to assess usability. Qualitative feedback was also gathered from operators during testing phases to understand the user experience and identify any operational challenges for future improvements.

### C. Tools and Techniques

The project leveraged a combination of hardware and software tools, along with specific techniques to facilitate the development and functionality of the EOD rover:

- 1) **Hardware Tools:** The Raspberry Pi 3B+ served as the central processing unit for the EOD rover, managing sensor data, control commands, and communication with the operator interface. Motors and a motor driver were used to provide precise control over the rover's movement, enabling speed and direction adjustments as needed. The rover was equipped with sensors, including live-streaming cameras and metal detectors, which ensured comprehensive threat detection and situational awareness during operations. A fixed end effector with a cutter was specifically designed for cutting wires of explosive devices, offering reliability and precision in explosive handling tasks. Additionally, wireless modules were integrated to facilitate reliable communication between the rover and the operator, ensuring smooth and consistent remote control.

- 2) **Software Tools:** The Python programming language was used to develop the control scripts, data processing algorithms, and interface functionalities for the EOD rover. OpenCV was integrated for image processing and real-time video analysis, enhancing the rover's threat detection capabilities.

The Flask framework was employed to build the web-based user interface, enabling operators to remotely control and monitor the rover through a browser. Additionally, a VNC server was implemented to provide remote desktop access, allowing operators to visualize and manage the rover's camera feeds and functions efficiently.

- 3) **Development Techniques:** An Agile development approach was adopted during the EOD rover's creation, enabling an iterative process that allowed for continuous testing, feedback, and refinement of both hardware and software components. Multiple prototypes were developed to test different configurations and functionalities before finalizing the design, ensuring optimal performance. Simulation and modeling tools were also used to predict rover behavior and sensor performance across various scenarios, which helped reduce the need for extensive physical testing and allowed for early identification of potential issues.
- 4) **Future Enhancements:** The integration of environmental sensors such as temperature and humidity will be considered in subsequent development phases. These sensors will complement AI-driven autonomous operations, enabling the rover to make informed decisions based on environmental conditions without direct human control.

#### D. Common Mistakes

During the development of the EOD rover, several common mistakes were identified and addressed to ensure the system's success and reliability. One significant issue was inadequate power management, where underestimating the power requirements of components led to insufficient battery life and unexpected shutdowns. To resolve this, comprehensive power audits were conducted, and higher-capacity batteries were implemented to ensure stable power distribution. Poor sensor integration also posed challenges, as improper placement and calibration resulted in inaccurate data collection and unreliable threat detection. This was mitigated by optimizing sensor placement through environmental analysis and conducting thorough calibration procedures. Another issue was relying solely on simulated testing, which overlooked challenges in real-world conditions such as varied terrains and interference. Expanding the testing phases to include real-world scenarios allowed for identifying and addressing these issues.

Additionally, the user interface was initially overcomplicated, making remote operation difficult for operators. Streamlining the interface by focusing on essential controls improved usability and reduced operator error. Communication latency was another challenge, as high latency hindered real-time control and responsiveness. This was addressed by optimizing the communication protocol to minimize delays and ensure smooth data transmission. A lack of redundancy also threatened mission success, with critical components being single points of failure. To enhance resilience, redundant systems were introduced for essential components like communication modules and power supplies. Finally, inadequate documentation and training led to operator misuse and decreased efficiency. Comprehensive user manuals were developed, and training sessions were conducted to ensure proper usage and maximize the rover's capabilities.

### IV. EXPERIMENTAL RESULTS

The performance of the Explosive Ordnance Disposal (EOD) rover was evaluated through a series of comprehensive tests conducted in simulated environments, which aimed to assess its mobility, sensor accuracy, manipulation capabilities, and overall operational effectiveness.

TABLE I  
MOBILITY PERFORMANCE METRICS

Terrain Type	Speed (m/s)	Stability Rating (1–5)
Flat Concrete	0.8	4.5
Gravel	0.6	3.5
Inclined Rubble	0.3	3

- 1) **Mobility and Terrain Navigation:** The EOD rover demonstrated remarkable mobility across various challenging terrains, including rubble, uneven surfaces, and confined spaces. During testing, the all-terrain chassis effectively navigated obstacles and maintained stability, showcasing its robustness and agility. The integrated motor drivers enabled precise control over speed and direction, allowing the rover to manoeuvre through complex environments that are typically hazardous for human operators. Data collected on the rover's speed and manoeuvrability confirmed its capability to traverse difficult landscapes efficiently, fulfilling one of the critical design requirements for safe EOD operations.

- 2) **Sensor Accuracy and Capabilities:** The integrated sensors, including live-streaming cameras and metal detectors, were evaluated for their accuracy and reliability in detecting potential threats. The live-streaming cameras provided high-resolution video feeds that allowed operators to monitor the environment in real-time. Through rigorous testing, the camera system was able to detect movement and unusual activities with a high degree of accuracy, enhancing situational awareness for operators. The metal detectors performed effectively in identifying explosive materials, successfully differentiating between various metal compositions and alerting operators to the presence of potential threats. The data collected from these sensors confirmed their operational effectiveness in real-world scenarios.
- 3) **Manipulator Arm Performance:** The robotic manipulative arm, designed for precise handling of explosives, was subjected to various tests to evaluate its performance. The arm successfully executed delicate tasks such as cutting wires and manipulating small components without triggering detonation, demonstrating high precision and reliability. The testing phase confirmed that the manipulator arm could efficiently neutralize threats while minimizing risks to operators.

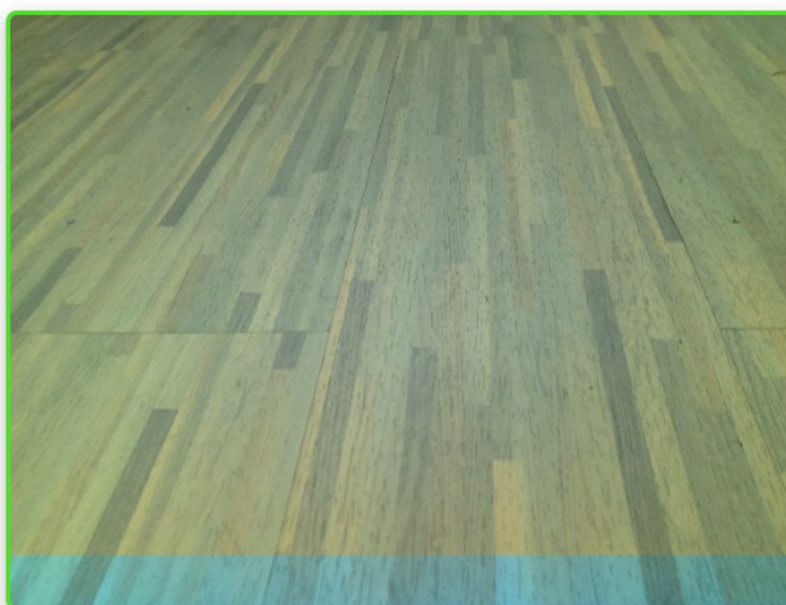


Fig. 3 Live Streaming Camera Result

## V. FUTURE SCOPE

- 1) **Integration of Artificial Intelligence (AI):** Future developments could focus on incorporating advanced AI and machine learning algorithms to enhance the rover's autonomous decision-making capabilities. This would allow the rover to analyse environmental data in real-time, identify potential threats more effectively, and make decisions without constant human intervention, thereby increasing operational efficiency.
- 2) **Advanced Sensor Technologies:** The inclusion of cutting-edge sensors, such as hyperspectral imaging and ground-penetrating radar, could improve the rover's detection capabilities. These technologies would enable the rover to identify a broader range of explosive materials and concealed threats, providing comprehensive situational awareness for EOD teams.
- 3) **Enhanced Manipulative Arm:** Future iterations of the rover could focus on improving the dexterity and strength of the manipulative arm through the use of soft robotics or advanced materials. This enhancement would allow the rover to perform more complex tasks, such as defusing intricate explosive devices or conducting on-site repairs.
- 4) **Customization for Various Environments:** The EOD rover could be designed to operate effectively in diverse environments, including urban settings, disaster-stricken areas, and military operations. Customization for specific applications would increase its versatility and enable broader use in humanitarian missions and search and rescue operations.
- 5) **Swarm Robotics Implementation:** Expanding the communication infrastructure to support multiple rovers operating simultaneously in a coordinated manner could significantly enhance overall operational effectiveness. Implementing swarm robotics principles would allow for greater coverage of hazardous areas and enable complex operations involving multiple units working together seamlessly.
- 6) **Improved Communication Systems:** Future developments could include enhancing the communication protocols to minimize latency and increase reliability. This improvement would ensure smooth data transmission and enable effective remote control, particularly in challenging environments.
- 7) **User Training and Documentation Enhancements:** Providing comprehensive training programs and user manuals for operators will be essential to maximize the rover's capabilities and ensure effective usage. Future efforts could focus on developing virtual training environments to simulate various scenarios operators may encounter.

## VI. CONCLUSION

The development of the Explosive Ordnance Disposal (EOD) rover marks a significant advancement in bomb disposal technology, effectively addressing the critical need for safer and more efficient methods of handling explosive threats. Through a multidisciplinary approach integrating robotics, sensor technology, and real-time communication, the rover demonstrated remarkable mobility across challenging terrains, ensuring operator safety in hazardous environments. Its integrated sensors provided real-time situational awareness and effective threat detection, while the manipulative arm exhibited high precision in executing delicate tasks without triggering detonation. By minimizing human involvement in high-risk scenarios, the EOD rover significantly reduces the potential for injury or fatality among bomb disposal technicians, enhancing overall operational efficiency and paving the way for future advancements in EOD robotics, including the potential integration of environmental sensors and autonomous capabilities.

## REFERENCES

- [1] Rakshith, Prithvi Prakash, Sandesh Fernandes, Syed Rahul, "Real Time Speech – Interactive Bomb Disposal Robot With Face and Object Recognition", 2017 International Conference on Electrical, Electronics, Communication, Computer and Optimization Techniques (ICEECCOT)
- [2] Somen Nayak, Kunteya Shaw, Jayashish Choudhury, Anirban Chakraborty, Asif Iqbal, Sumit Kumar Bera., Sourav Shah "Unmanned Multifunction Robot for Industrial and Military Operation over Resource Constrained Networks: An approach", 978-1-5386-©2017 IEEE
- [3] D.N.S. Ravi Kumar, Durgesh Kumar "VNC Server based Robot for Military Applications", IEEE International Conference on Power, Control, Signals and Instrumentation Engineering (ICPCSI-2017)
- [4] Kunj Gudhka, Aishwarya Kadam, Devika Kale, Manil Rupani, Prof. Tilottama Dhake, "War Field Spying Robot Using Wireless Camera", International Journal of Electrical and Electronics Research, vol. 4, no. 1, pp. 85-92, 2016.
- [5] Jignesh Patoliya, Haard Mehta, Hitesh Patel, "Arduino Controlled War Field Spy Robot using Night Vision Wireless Camera and Android Application", 5th Nirma University International Conference on Engineering, 2015.



10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)