



# IJRASET

International Journal For Research in  
Applied Science and Engineering Technology



---

# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume:** 11    **Issue:** VI    **Month of publication:** June 2023

**DOI:** <https://doi.org/10.22214/ijraset.2023.53892>

[www.ijraset.com](http://www.ijraset.com)

Call:  08813907089

E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)

# Investigation of Techniques for Enhancement of Efficiency of a Hybrid Photovoltaic and Solar Thermal System: Literature Review on Applications and its Advancement

Smita Dinker<sup>1</sup>, Dr. Anil Kumar<sup>2</sup>, Dr. Akhilendra Yadav<sup>3</sup>

<sup>1,3</sup>Electrical and Electronics Department SRMSCET Bareilly Bareilly, U.P. India

<sup>2</sup>HOD of Electrical Department IFTEM University Moradabad, U.P. India

**Abstract:** Over the most recent couple of decades, tremendous consideration is drawn towards photovoltaic-thermal systems because of their advantages over the solar thermal and PV applications. This paper intends to show different electrical and thermal aspects of photovoltaic-thermal systems and the researches in absorber design modification, development, and applications. From the previous review articles, it has been concluded that the heat energy exhausted from the PV module can be further utilized in different ways and helps in achieving better efficiency. Furthermore, the types of photovoltaic-thermal systems such as air collector, water collector, and combi system, coupling with heat pump and their application to buildings are also stated. This paper also discussed certain design aspects like modifications in the flow channel by adding fins, thin metallic sheets, roll-bond absorber, and porous media and the effect of these modifications on the hybrid system's efficiency. Furthermore, the use of the latest technologies such as nano fluids, thermoelectric generators, and phase-change materials improves the overall system performance. The role of soft-computing techniques is forecasting the impact of various parameters on the photovoltaic-thermal system is also discussed.

**Keywords:** PVT combi · Thin metallic sheets (TMS) · Phase-change materials (PCM) · Nano-fluids

## I. INTRODUCTION

The industrial reformation in the eighteenth century has tremendously hiked energy demand globally. The developed countries around the globe shift their focus towards sustainable power sources, especially solar and wind, to meet the increasing energy demand [1]. Amongst all the available sustainable energy sources, the solar PV has the highest capital cost, but due to its lower operational cost and maintenance [2], this technology is acknowledged around the world.

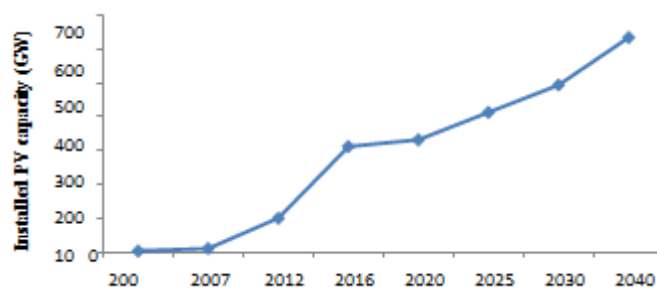


Fig. Global PV installation rate Year

Other advantages of solar PV are increased efficiency and pollution-free energy [3]. The installed capacity of solar PV is increasing day by day worldwide due to its above-mentioned point of interest as shown in Fig. 1.

Banker and Pearce [4] discussed the development of PV technology over the last 2 decades. The PV technology gained popularity due to the decline in the price of a photovoltaic module. This reduction in cost is mainly due to competition among the manufacturers. Different governments in various parts of the world also show interest in emerging PV technology.

Incentives had also been provided to consumers in many parts of the world. Liou [5] discussed different silicon- and non-silicon-based technologies utilized for photovoltaic applications, as depicted in Fig. 2. The crystalline silicon technology is widely accepted as compared to other solar cell technologies because of lower cost and higher performance. In the most recent research, the efficiency of multi-crystalline silicon technology up to 23% is mentioned in the literature [6]. Tiwari et al. [7] reviewed the latest PV generation technologies and their applications. Debberma [8] reviewed the latest research in the area of PV generation and its application buildings. Apart from these traditional PV technologies, a few latest cell technologies are also discussed in the literature. Gallium arsenide (GaAs): GaAs is a composite semi-conductor formed by the combination of gallium and arsenide elements. The efficiency of GaAs can be increased by alloying it with other elements like aluminum, phosphorous, and antimony. This technology is not so popular because of its high fabrication cost [8].

- 1) Dye-sensitized solar cell (DSSc): This technology is discovered by Michael Gretel and Brian Oregano in the year 1991. DSSc is developed from the semiconductor formed by the combination of a photosensitized anode and an electrolyte. This latest technology gained attention due to its lower cost of fabrication, higher efficiency, and its ability to respond at low radiation levels. To enhance the power conversion efficiency (PCE) and stability for commercial applications, some dye-sensitized materials are also identified, such as porphyrin-based dyes and dyes containing polythiophene [9].
- 2) Perovskite solar cells (PSCs): PSCs are developed to achieve higher efficiency and low-cost solar cell. The fabrication of PSCs can be achieved using two different methods: (1) Mesoporous architecture and (2) thin-film architecture. Although the PSCs are prepared using simple chemical approach, it offers very high power conversion efficiency. The highest power conversion efficiency reported from the PSCs was 22.1% [10].
- 3) Organic solar cell: This latest technology is in trend because of its low cost and conversion efficiency of about 9%, but further enhancement in the efficiency is required if it is to be used for commercial applications. Its fabrication involves electron donor and acceptor materials instead of a semiconductor p-n junction [8]. The solar cell market mainly depends upon the crystalline silicon technology, but nowadays, amorphous or thin-film technology is widely accepted commercially for solar PV applications, because its efficiency does not vary much with the change in temperature, which happens with mono-crystalline and poly-crystalline silicon-based PV cells. However, it offers certain disadvantages such as shorter life and less efficiency as compared to crystalline silicon. However, the cost of generation of electricity by PV technology is much higher than the generation of heat energy. Therefore, generating thermal energy from the photovoltaic application creates much interest among the researchers. The current photovoltaic technology has the drawback of net absorbing radiation from the entire spectrum. Therefore, electrical efficiency ( $\eta_{ele}$ ) is low, since a major portion of incident sunlight is wasted as heat. The temperature of the cell increases because of this heat, which results in reduction of  $\eta_{ele}$  of the solar PV system. Therefore, the removal of heat energy associated with the PV cell is important.
- 4) Photovoltaic-thermal (PV/T) is the combination of PV technology and solar thermal technology, which converts the incident radiation into electricity and heat simultaneously, gains popularity. By cooling the PV surface with the help of air/water as a flowing fluid,  $\eta_{ele}$  of the system is significantly improved [11]:

$$\eta_{ele} = \eta_0 [1 - \beta_0 (T_c - T_0)]$$

A PV/T system requires a PV module, a channel, coolant (air/water), DC fan, and collector [12]. The classification of PV/T technology is depicted in Fig. 3. The coolant in the PV/T system is further used for drying of crops, room heating, and water heating [13]. Ibrahim et al. [14] classified the PV/T system based on fluid circulation below the PV such as natural or forced flow. The simplest and economical method used for cooling is the circulation of air by natural means, but at the same time, this method is less efficient in geographical regions where ambient temperature is greater than 20 °C [15].

The performance of hybrid PV/T system is measured in terms of thermal, electrical, and exergy efficiencies of the system. The  $\eta_{ele}$  of the system mainly depends upon the cell temperature, since the material used for the manufacturing of PV cells is sensitive to change in temperature.

The  $\eta_{th}$  of PV/T system changes with the change in air mass flow rate, type of solar collector, modifications in the absorber such as adding fins and TMS in the coolant channel, sheet and tube absorber, roll-bond absorber, and temperature at the inlet and on the basis of fluid flow (single channel/double channel).

In previous studies, most of the researchers discussed the flat-plate collector because of its simple design and control operations [16]. A concentrating collector requires a large number of reflectors and lenses and complex mechanism for sunlight tracking makes the overall system complex and costly [17], but this type of PV collector helps in extracting higher energy as compared to flat-plate PV collector [18].

Therefore, it is preferred in industrial applications.

Another important aspect that makes PV/T a potential application is integrated with buildings to utilize thermal energy and electricity. These systems are known as building- integrated photovoltaic (BIPV) solar systems and building- integrated photovoltaic–thermal (BIPV/T) systems [19].

When the PV/T system is incorporated into the building, it generates heat, light, and electrical energy simultaneously for building use [20]. With the evolution of soft-computing techniques, optimization of parameters becomes quite easier which helps the researchers to understand the dynamics of the system. Since the current technology is in developing phase with the recent research going on, it offers several limitations: (1) higher installation cost as compared to PV and solar thermal system, (2) engineers working in this domain face various technical problems in design, (3) the market potential of PV/T is still very low compared to solar PV systems, and (4) researchers often get confused with the contradictory statements given in earlier reviews. To understand these factors, a review of the current research status of PV/T is needed. Although several reviews on the PV/T technology already exist in the literature, in the present article, the authors have carried out a comprehensive review on PV/T air collector, PV/T water collector, recent advancement in PV/T air and water collector and building-integrated PV/T. However, due to recently emerged soft-computing techniques, the performance prediction of PV/T becomes quite easy. Hence, it has become necessary to discuss the role of soft-computing techniques in PV/T. Furthermore, the present article also includes the role of thermoelectric generator in enhancing the performance of PV/T, solar dryer for rural areas, effect of nano fluids and PCM on the performance of PV/T, recent advancement in thermal absorber design, i.e., roll-bond absorber and PV laminations on roll-bond absorber, PV/T with SAHP and application of PV, and PV/T in buildings.

## II. PHOTOVOLTAIC–THERMAL (PV/T) AIR COLLECTOR

The theory of PV/T was stated by Kern and Russel [21]. The concept of PV/T evolves from the fact that more than half of the sunlight incident on the solar cell is converted into heat. This heat may cause structural damage to the cell if it remains on the PV cell surface for a longer period. The heat recovered from the module can be for numerous applications such as crop drying, floor heating, hairdryer, etc. The layered diagram of PV/T module is shown in Fig. 4.

The PV/T air-collector design varies from each other based on the channel position. The overall efficiency ( $\eta_T$ ) of the PV/T system is the sum of its thermal and electrical efficiencies [22–24]:

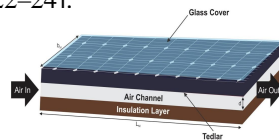


Fig-4. Layer diagram of PV/T air collector [136]

$$\eta_T = \eta_{th} + \eta_{ele} \quad (2)$$

The  $\eta_{th}$  of PV/T collector is calculated as:

$$\eta_{th} = \frac{Q_u}{G_i A_c} \quad (3)$$

Where  $Q_u$  the usable heat is collected which is further calculated as:

$$Q_u = m C_p (T_{out} - T_{in}) \quad (4)$$

The  $\eta_{ele}$  of PVT collector is calculated as:

$$\eta_{ele} = \frac{V_m I_m}{G_i A_c} \quad (5)$$

Energy efficient is also considered as an important Parameter to estimate the PVT system performance.

The expression for the energy efficiency of a single Channel glazed photovoltaic –thermal (SCPVT) System was given by Singh.[25]

$$\eta_{Ex} = \frac{Ex_{OUT}}{Ex_{IN}} \times 100 \quad (6)$$

The general expression for energy balance in a single channel photovoltaic (SCPVT) module is given by Agarwal and Tiwari.[26]

$$\sum Ex_{OUT} = \sum Ex_{TH} + \sum Ex_{ele} \quad (7)$$

where

$$\sum Ex_{TH} = Q_u - mC_p T_0 \cdot \ln \frac{T_{OUT}}{T_{IN}} \quad (8)$$

$$\sum Ex_{ele} = \left[ \frac{\eta A_c G_t}{1000} \right] \quad (9)$$

The generalized expression of input energy from a source is given by Kalogirou et al. [27]:

$$\sum Ex_{IN} = A_c N_c \times G_t \left[ 1 - \left( \frac{4}{3} \right) \left[ \frac{T_0}{T_{SUN}} \right] + \left( \frac{1}{3f} \right) \left[ \frac{T_0^4}{T_{SUN}^4} \right] \right] \quad (10)$$

where  $f$  is the geometric factor that represents the portion of the hemisphere covered by radiation reservoir. The above equation is valid only if geometric factor  $f \geq [T_0^3 / T_{Sun}^3]$ . Petela [28] gives the expression to calculate the input energy for fully concentrated radiation ( $f=1$ ):

$$\sum Ex_{IN} = A_c N_c \times G_t \left[ 1 - \left( \frac{4}{3} \right) \left[ \frac{T_0}{T_{SUN}} \right] + \left( \frac{1}{3} \right) \left[ \frac{T_0^4}{T_{SUN}^4} \right] \right] \quad (11)$$

The performance of the glazed PV/T tile is investigated by Agrawal [29]. The PV/T tile consists of a single solar cell below which a channel is formed in which air flowing using DC fan at the inlet of channel. The experimental setup consists of two PV/T tiles connected in series with each other. The  $\eta_{ele}$  and  $\eta_{th}$  of the proposed experimental setup were found to be 12.4% and 35.7%, respectively. Agrawal and Tiwari [30] investigated the performance of the hybrid micro-channel solar cell thermal (MCSCCT) module, as depicted in Fig. 5. The experimentation shows that the performance of MCSCCT is better as compared to the conventional PV modules of similar ratings. Amori [31] worked upon fat-plate PV/T collector. At a constant air velocity of 0.0991 kg/s, an average reduction of 15.52 °C in cell temperature was observed with a single-pass air channel compared to the PV system

Amori [31] worked upon fat-plate PV/T collector. At a constant air velocity of 0.0991 kg/s, an average reduction of 15.52 °C in cell temperature was observed with a single-pass air channel compared to the PV system without cooling. The  $\eta_{th}$ ,  $\eta_{ele}$ , and  $\eta_T$  of the system were observed as 46%, 9.4%, and 55%, respectively.

The experimental analysis was conducted by Slimani [32] to investigate the effect of glazing and absorber plate on the performance of four different PVT collectors. It has been reported that the  $\eta_T$  of double-pass PV/T air collector with additional glass cover is better as compared to the other three configurations. The advantage of the double-pass design is that it provides uniform cooling of the PV module and hence lowers down its temperature and thereby increasing its  $\eta_{ele}$ . A comparative study is presented by Sopian et al. [33] between the single-channel and double-channel PV/T air collector, and from the experimental study, it has been reported that the double-pass design is efficient than the single-pass design in terms of  $\eta_T$ . The authors also confirmed that the  $\eta_{ele}$  enhances with a rise in the air mass flow rate.

#### A. Impact Of Parameters And Design Modifications On PV/T Air Collector

Packing factor, air mass flow rate, glazing (additional glass cover), wind velocity and temperature of the coolant, etc. are the parameters that have an impact on the PV/T air collector performance. Modifications in the channel like the use of fins, TMS, hexagonal honeycomb heat exchanger, and v-grooved absorber were also adopted by various analysts to improve its overall performance. In this segment, a review of the research work conducted in this direction is presented. Tonui and Tripanagnostopoulos [34] suggested low-cost methods to improve the heat transfer from the PV surface to the flowing fluid through the channel. In the modified system, aluminum fins were added in the air channel, as shown in Fig. 6.

The performance of the modified system is significantly better than the conventional PVT system. Rectangular fins were used in the lower channel to enhance the heat transfer rate from the PV module to air duct. From the experimental investigation, the maximum  $\eta_{th}$  and  $\eta_{ele}$  for the modified system were reported as 56.19% and 13.75%, respectively [35]. Kumar and Rosen [36] presented the comparative study of conventional PV/T air collector with a double-pass PVT air collector with fins in the lower channel, as shown in Fig. 7. It has been observed that by fixing the fins in the lower channel, the  $\eta_{th}$  and  $\eta_{ele}$  of the double-pass PV/T were improved by 15.5% and 10.5%, respectively, as compared to conventional PV/T collector.

Shahsavari and Ameri [37] performed an analysis with TMS suspended in the middle of the air duct. Tripanagnostopoulos [38] suggested that the surface roughness and TMS used in the channel are the cost-effective and simple methods used for removal of heat from the PV panel.

Jin [39] modified the channel with a rectangular tunnel heat exchanger and compared its performance with conventional PV/T air collector. The investigation shows that the  $\eta_{th}$  and  $\eta_{ele}$  for the modified system were 54.70% and 10.02%, respectively. It has been observed that the performance of the system with heat exchanger was significantly better as compared to conventional PV/T. Hussain [40] implemented the honeycomb heat exchanger in the air

Fig.6. Modified PV/T air collector [34]




Fig.7 Double-pass PV/T air collector with fins [36]




Fig.8 PV/T air collector with honeycomb heat exchanger[40] and Fig 9. V- grooved absorber plate[41]

channel, as shown in Fig. 8. From the experimental investigation, a significant improvement in  $\eta_{th}$  of the proposed system was observed. At a solar irradiance level of  $828 \text{ W/m}^2$  and a mass flow rate of  $0.11 \text{ kg/s}$ , the  $\eta_{th}$  of the system was found to be 87%.

Othman [41] talked about the idea of a v-grooved aluminum absorber plate as shown in Fig. 9. From the trial examination, it has been observed that  $\eta_{th}$  and  $\eta_{ele}$  of the system enhanced significantly.

The  $\eta_{ele}$  of the PV module has greatly affected by the change in the packing factor. As the packing factor increase from 0.38 to 0.98, then the  $\eta_{ele}$  of the system increases by about 17% as reported by Kumar and Rosen [36]. A contradictory statement is given by Vats et al. [42] about the relation between the packing factor and the system's efficiency

The study conducted by Wu et al. [43] discussed an irregular behavior of energy efficiency ( $\eta_{Ex}$ ) with the packing factor. The hourly variation of  $\eta_{Ex}$  with different values of the packing factor is depicted in Fig. 10. The lower  $\eta_{Ex}$  is observed at 0.8 packing factor, while higher  $\eta_{Ex}$  is observed at 0.9 packing factor. An experimental investigation was performed at different packing factor by Sopian et al. [44]. A significant increment in  $\eta_{th}$ ,  $\eta_{ele}$  and  $\eta_T$  of the system is observed when the packing factor increases from 0.5 to 0.7. PV/T system with glazing helps in achieving a better  $\eta_{th}$  as compared to an unglazed system. Glazing is used above the PV surface to trap more heat energy which increases the thermal energy output almost double that of unglazed PV/T, but at the same time, slight decrement in  $\eta_{ele}$  is observed [45]. Other effects of glazing are edge shedding and increased temperature which may lead to a reduction in electrical output [46] and increase the sensitivity of the PV module towards reflection losses and lead to the formation of hot spots. The  $\eta_{ele}$  of the PV/T collector is inversely proportional to the amount of glazing [47]. Rajeb [48] discussed the applications of anti-reflective coating which is used to reduce the reflection losses from the upper glazing. Hence, it helps in achieving better  $\eta_{ele}$ .

The performance of a hybrid PV/T air collector is also influenced by the mass flow rate. At a higher mass flow rate, a higher amount of heat can be recovered from the PV panel and helps in reducing the module temperature. Kumar and Rosen [36] reported that for an increase in the air mass flow rate from  $0.03$  to  $0.15 \text{ kg/s}$ , about 20% increment in  $\eta_{ele}$  is observed for the PV/T system.

A lot of research work has been conducted in the field of hybrid PV/T air collector, but still more efforts are required to further improve the  $\eta_{th}$  and  $\eta_{ele}$  of the system. As reported in the literature, a maximum  $\eta_{th}$  of 87% is reported, while the  $\eta_{ele}$  of the system is not much improved as the amount of heat energy pulled by air from the PV module is limited because of low heat capacity of air.

### B. Recent advancement in PV/T air collector

A PV/T system is proficient in producing both thermal energy and electrical energy at the output, but the major portion of energy received at the output is of thermal energy (low-grade energy). A thermoelectric (TE) module is used with PV/T system to convert the low-grade thermal energy into electrical energy (high-grade energy). The working of the thermoelectric is based upon the principle of Seebeck effect and Peltier effects to convert thermal energy into electrical energy [53]. A potential difference is created between the hot and cold junctions due to the temperature difference between the junctions. Babu and Ponnambalam [12] reviewed the performance of the PV system with a thermoelectric generator (TEG), as depicted in Fig. 13.

Various parameters that affect the performance of PV-TEG such as the method of integration of TEG, location, and properties of TEG and its thermal resistance have been discussed in detail.

Dimri [54] worked upon the PVT-TEC model using three different PV modules, viz., opaque, semitransparent, and aluminum-based. The performance of the system with the thermal-based model is then compared with ANN model. From the outcomes, it has been concluded that there is a good agreement in the result between the two models. In another study, Dimri [55] developed the mathematical equations for semitransparent PVT-TEC collector, and compared the performance with PV-TEC and semitransparent PV collector. The outcomes of the analysis show that the  $\eta_{ele}$  of the semitransparent PVT-TEC is significantly higher than PV-TEC and PV collector.

Vorobiev et al. [56] developed a hybrid PVT-TEC model in which a thermoelectric generator is integrated with a PV module. Based on theoretical calculations, 30% of  $\eta_T$  were achieved from the hybrid system.

In rural areas, there is a need for drying the grains to remove the moisture content. If the moisture is not properly removed, then it will affect the productivity of farmers. Tiwari [57] performed an experimental analysis on PV/T air-collector integrated drying system which is useful in preserving the crops, as shown in Fig. 14. From the experimental analysis, it has been observed that for the crops with high moisture content, the performance is better under forced convection mode, while natural convection mode is better for the drying of crops with low moisture content. Singh et al. [58] discussed the benefits of greenhouse solar dryers in terms of energy savings. The mathematical modeling is presented and the performance evaluation has been discussed based on characteristic plots.

Aymen [59] investigated the working of a solar drying system connected with FPC under forced convection mode. The experiments were conducted to extract the moisture from red paper and sultana grapes. It has been observed from the analysis that 7 h had taken to dry red paper, while 17 h had taken to dry sultana grapes. The payback period of the solar drying system was found




Fig.13. PVT with thermoelectric generator [12]

### III. PV/T WATER COLLECTOR

Water is considered as the most vital segment for the presence of living beings on the earth. PV/T water collector satisfies the need of electricity along with hot water. PV/T water collector has almost the similar structure as the PV/T air collector except for the air channel. In the PV/T water collector, water is forced to flow through the tubes beneath the PV module to cool down the PV module which in turn increases the  $\eta_{ele}$  of PV/T water collector. Zondag, discussed various configurations of PV/T water collector based on water-flow patterns below the PV module, as shown in Fig. 15. Chow [60] studied the outcomes of additional glass cover on PV/T water collector. From the experimental analysis, it has been concluded that the thermal energy output is higher for glazed design, while the unglazed module is suitable if energy at the output is of interest. Kiran and Devadiga [61] presented the comparative analysis of PV/T water collector with standalone PV and solar water heater. From the experimental analysis, the  $\eta_{ele}$  and  $\eta_{th}$  of the PV/T system

were found to be 8.26% and 57.90%, respectively, which is significantly higher than individual PV and solar water heater. Daghigh [62] performed simulation using TRANSYS software to analyze the overall performance of the PV/T water collector in Malaysian climatic conditions. Rajput [63] discussed the concept of cylindrical pin finned heat sink to cool the panel to improve its  $\eta_{ele}$ . It has been revealed from the outcomes that the temperature of the rear surface reduces to 58.45 °C from 88.81 °C with the proposed modification.

The demand for clean water is increasing day by day, along with the demand for electrical and thermal energy. Solar distillation is the most economical and commonly used method to convert contaminated water into fresh-water. Integrated PV/T solar still satisfies the demand for clean water along with thermal and electricity [64]. Sotahi et al. [65] investigated the performance of a hybrid PV/T module coupled with solar still to achieve the possibility

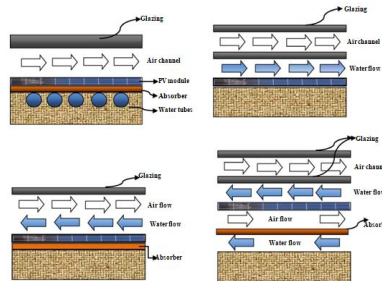


Fig.15. Classification of PV/T water collector based on water-flow pattern [64]

of net-zero energy building. It was reported that solar still coupled with PV/T system earned lots of profit by selling the electricity along with distilled water.

The additional advantage offered by the PV/T water-based system is that the water used as flowing fluid can be further reused in buildings, homes, etc. as hot water. Tripanagnostopoulos [73] did the experimental work to analyze the effect of glazing and a reflective coating on the performance of PV/T water collector. It has been concluded from the experimental study that the use of glazing helps in increasing the thermal output. Tiwari and Gaur [74] reported that a semitransparent module exhibits better efficiency than an opaque based module

#### A. PV/T combi technology

The synchronization of PV/T air-based system and PV/T water-based system led to the development of PV/T combi system which helps in achieving a better efficiency, since water and air both were used as a circulating fluid. The schematic diagram of the PV/T combi collector is shown in Fig. 16. The concept of the PV/T combi system was first introduced by Tripanagnostopoulos [75]. By combining two types of heat collector media, the temperature of PV cells is greatly reduced, and cell efficiency is improved as compared to PV/T water or PV/T air collector.

The experimental setup of the PV/T combi was installed and tested at the solar energy laboratory, Malaysia by Othman et al. [76]. The  $\eta_{th}$  of the PV/T combi collector was calculated according to the relation given by Duffie and Beckman [77]:




Fig.16. PVT combi collector

The PV/T combi system increases the surface area for heat exchange which helps in achieving high  $\eta_{th}$  and  $\eta_{ele}$ . Nasim [78] use a decision tree approach and statistical correlation method to improve the performance of the PV/T combi collector. Thin metallic sheets of various shapes like sinusoidal, triangular, and rectangular were used in the air channel underneath the water tubes to enhance the air heat extraction through the duct. Although PV/T combi system overcomes the disadvantages offered by PV/T air collector and PV/T water collector, the researchers could not appreciate PV/T combi system due to complications in design, high cost, and several maintenance issues.

#### B. Recent Research in PV/T water collector

Recently, the researchers around the globe took an interest in the use of various nanomaterials along with cooling fluid to improve the thermal conductivity and stability of the fluid. When water is used as a cooling fluid in the channel, it absorbs only 13% of incident solar radiation. Therefore, the focus of research shifts towards the use of nanofluids with direct solar absorption collector [79]. The concept of using nanoparticles for cooling was given by Maxwell [80] in the late nineteenth century, but manufacturing techniques were very limited at that time. Therefore, this technique did not gain much attention. However, with the advancement in manufacturing techniques, nanofluid with direct absorption solar collector received much attention because of its capability to harness the thermal energy more efficiently as compared to the conventional solar thermal collectors. Thermal and optical properties are significantly improved when direct absorption solar collectors are incorporated with nanofluids. It has been observed from the facts that the thermal properties of nanoparticles are further enhanced when mixed with little concentration of metals and metal oxides. Tyagi et al.



[81] analyzed the performance of flat-plate PV/T collector and direct absorption solar collector with nanofluid in the channel. It has been observed that nanoparticle increases the absorption of solar radiation as compared to pure water and helps in achieving a better efficiency. The absorption of radiation increases using nano-fluid and it helps in achieving better  $\eta_{th}$  [82]. Yazdanifard [83] discussed the effect of the size of nanoparticles, concentration of nanoparticles, and types of nanoparticles on the overall performance of the PV/T system. It has been reported that the performance of  $Al_2O_3$  nanoparticles with water as a base fluid is better than  $TiO_2$  nanoparticles. Said [84] investigated experimentally the effect of  $Al_2O_3$  nanofluid on the energetic performance of flat-plate PV/T collector. From the investigations, it has been reported that the energetic performance of the system improved significantly by mixing nanofluid with water. Bianco [85] investigated the effect of  $Al_2O_3$  nanofluid on PV/T water collector. From the experiments, it is noticed that the temperature of the front surface and backside of the PV panel reduced by the mixing of nano-fluid with water as a base fluid. This helps in achieving a better PV conversion efficiency of the system. Barode [86] discussed the proficiency of carbon-based nanofluids in improving the  $\eta_{th}$  of four different types of solar collectors. The authors highlighted the impact of the concentration of nanofluid, temperature, and flow rate on the solar collector's performance. The outcome of the experiment shows that at a concentration of 0.3 vol% of carbon nanofluid, the  $\eta_{th}$  of hybrid PV/T, parabolic trough, flat plate, and evacuated-tube solar collectors have been improved up to 97.3%, 74.7%, 95.12%, and 93.43%, respectively. At a very low concentration of 0.01 vol% of carbon nanofluid in the base fluid, an improvement up to 122.7% has been observed in the  $\eta_{th}$  of direct absorption solar collector. It is also worthy to note that carbon nano fluids also work as excellent anti-corrosion additives for the solar collector. Various authors reported increased electrical and thermal efficiency of PV/T collector using different nanoparticles in the channel with water as a base fluid as depicted in Table 1

Author	Year	Base fluid	Type of nano-materials	Electrical efficiency (%)	Thermal efficiency (%)
Shamran et al. [87]	2017	Water	SiO <sub>2</sub>	12.70%	64.40
Saidanabadi and Fard [88]	2016	Water	Al <sub>2</sub> O <sub>3</sub>	23.2%	85
			ZnO	23.5%	110
			Al <sub>2</sub> O <sub>3</sub>	23.3%	105
Ghadini et al. [89]	2015	Water	Fe <sub>3</sub> O <sub>4</sub>	17%	33
Radwan et al. [90]	2016	Water	Al <sub>2</sub> O <sub>3</sub>	19%	62
Alvaehi et al. [91]	2017	Water	SiC	16.5%	49
			Al <sub>2</sub> O <sub>3</sub>	14	37
			CuO	16	38

Table-1 List of references using nano fluid with water in the channel

Recently, phase-change materials (PCM) are used with PV/T module to minimize the temperature of the solar cell. A PCM material swing between its solid and liquid phases when a change in temperature is observed. When the ambient temperature is higher than that of the PCM, heat transfer is observed from the atmosphere to the PCM material, which changes its state from solid to liquid. When the ambient temperature is lower than that of the PCM, heat transfers from the PCM to the surroundings, creating a warming impact and PCM again changes its state to solid [92]. A perfect PCM material must be non-corrosive and it must offer characteristics like high  $L_f$  and  $\lambda$ . An experimental analysis has been carried out by Preet [93] on the PV/T-PCM system with different mass flow rates to observe the impact of PCM on its performance. The PV/T set up with PCM is shown in Fig. 17.

Liang [94] proposed a model in which the graphite layer is used underneath the water channel as shown in Fig. 18 and compared the performance with the conventional PV. The average  $\eta_{ele}$  reported for the proposed PV/T model and conventional PV system was 6.46% and 5.15%, respectively. Ong [95] worked upon an experimental model in which a solar water heater is integrated with the TE module, which is used for the generation of electrical energy with hot water. The performance of the combined system was evaluated at a different fluid flow rate. From the observations, it has been observed that 0.16% of  $\eta_{ele}$  is also achieved along with hot water.

The thermal absorber is the major component in the PV/T system that greatly influences its overall performance. Over the last few years, various changes in design, material, connection methodology, and manufacturing techniques of thermal absorber have been observed. Sheet and tube design is the typical thermal absorber configuration used in PV/T system. The other configurations are roll-bond absorber and fully wetted type absorber. In the roll-bond absorber, channels are embedded between two rolled aluminum sheets, while in conventional sheet and tube design, the channels are welded under the plate. The performance of the flat-plate PV/T collector with roll-bond absorber was investigated by Haurant [96]. The modified system is used for hot water production. The performance of PV/T water collector has been compared based on different roll-bond absorber configurations, i.e., serpentine pipe and harp pipe [97].

The major technological drawback of the PV/T system lies in the connection technology used to combine PV cells with the thermal absorber. The conventional connection methods include fixing of PV cell with thermal absorber with glue (gluing) and package lamination. In the gluing method, air bubbles are trapped between the thermal absorber with PV cell which causes an increase in thermal resistance between the PV cell and absorber along with irregular distribution of cell temperature.

In packing lamination, upper glass, PV cells, and thermal absorber are laminated together in one step to decrease the thermal resistance between the connections. The performance of PV/T system has been compared based on above two connection techniques by Dupeyrat [98], and it has been concluded that a significant improvement in thermal and electrical performance of PV/T system has been observed using lamination method as compared to gluing method.

Ying [99] investigated the performance of PV/T water collector with roll-bond absorber, as shown in Fig. 19. The low-cost thermo-laminating method is used for PV-absorber connection which makes the system suitable for the application in rural areas. The test setup was installed at Sichuan Basin, China. The  $\eta_{ele}$  and  $\eta_{th}$  reported for the installed system were 15% and 85% which ensure the heat transfer capability of the roll-bond absorber plate.

Aste [100] analyzed the performance of covered and uncovered PV/T water collectors coupled with two aluminum roll-bond absorbers. The channel configurations used in covered and uncovered PV/T water collector are shown in Fig. 20. The simulation study carried out based on mathematical modeling and it has been observed that the  $\eta_T$  of uncovered PV/T water collector is higher than the covered PV/T water collector.

Wu [101] presented a critical review of the thermal absorber connection method with PV/T module. EVA lamination method is the best suited for the connection of thermal absorber of PV/T module as compared to another conventional method. The authors further discussed the advantages of the roll-bond absorber, heat pipe array, extruded heat exchanger, and cotton wick design over the conventional thermal absorbers, such as sheet and tube design, rectangular tunnel absorber, fins, and groove absorbers. Song et al. [102] discussed the challenges faced by the PV manufacturing industry during lamination. Based on finite-element modeling, it is found that the back surface of the PV cell suffers from more stress during the lamination. Over the last few decades, coupling of heat pump with PV/T gained a significant attention because of high-energy output and lower power consumption. Ji et al. [103] compared the performance of PV/T-SAHP with the conventional PV/T system. The outcome shows that the  $\eta_{ele}$  of PV/T-SAHP system improved by 13.4% because of the good heat-absorbing capacity of refrigerant as compared to the conventional PV/T system. A significant improvement in  $\eta_{ele}$  of PV/T-SAHP system as compared to PV/T

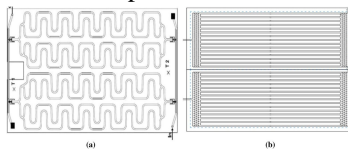


Fig.20. Roll-bond channel configuration used for an uncovered PVT and b covered PVT [100]




Fig.21. Summary of PVT water collector

system was reported by Fang [104]. In another study, Ji [105] presented the mathematical modeling of PV/T-SAHP system. Based on numerical simulation, the performance of the combined system is estimated and the  $\eta_{ele}$  of the PV/T-SAHP was 13.4%. Using direct expansion evaporator, further enhancement in electrical and thermal performance of PV/T-SAHP system was observed [106]. Zhou et al. [107] developed a roll-bond PV/T heat pump system to investigate the tri-generation (cooling/heating/ electricity) operation of the system. The five major parts of the combined system are depicted

The outcomes of the experimental investigation showed that the RB-PV/T heat pump system is capable of supplying the electricity demand of a building with high efficiency along with space heating and cooling. An experimental investigation was performed by Kong et al. [108] to investigate the effect of charge quantity of refrigerant on the COP and efficiency of the direct expansion-solar-assisted heat pump (DX-SAHP) system.


#### IV. BUILDING-INTEGRATED PHOTOVOLTAIC-THERMAL (BIPV/T) APPLICATION

PV/T system must be integrated into a building for room heating, space heating, etc. to improve its electrical and thermal performances. The term ‘Building-integration’ refers to the application of PV or PV/T system into the building envelope with or without the orientation to keep track of sunlight [109].

In BIPV/T the exhausted fluid is utilized for crop drying or surface heating purposes in buildings and hospitals. The BIPV/T system provides better efficiency and occupies less space and requires lesser maintenance as compared to solar thermal and solar PV systems individually. The possible growth and limitation of BIPV are discussed in the report presented by the International Energy Agency [113]. Baljit et al. [19] discussed various building-integrated photovoltaic (BIPV) and BIPV/T technologies and its construction features. One of the configurations was BIPV-Wall/ façade in which the PV panel was installed vertically on the wall of a building with an air gap or installed as a part of the building, as shown in Fig. 23.

#### A. Effect of parameters on the performance of BIPV and BIPV/T

Experimental investigations have been carried out to determine the optimum air gap between the PV module and the wall of the building [114]. The size of the air gap decides the heat flow rate. As the air gap increases, the heat transfer through the gap decreases. The speed of airflow through the gap also affects heat transfer performance. The speed of

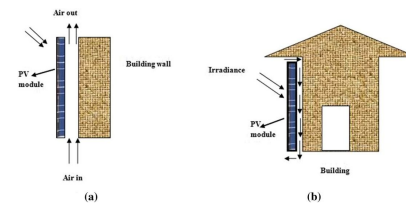

0.6 m/s reduces the PV module temperature by 38 °C, while the speed of 1.2 m/s reduces the temperature by 45.3 °C [115].

Another configuration of this technology is BIPV-roof. This configuration is used where the speed of natural air is higher, i.e., at high rise buildings. The natural flow of air can effectively cool the PV panel, thereby improving efficiency. Several parameters which are taken into consideration, while incorporating PVs into building roof/facades.

Lin et al. [117] discussed the case study of the BIPV/T air-based rooftop system installed on a solar house in Quebec. Al-damook [118] investigated the impact of PAP connected with an unglazed solar air collector for the western Iraq climatic conditions. The experimental and theoretical results show that the use of an unglazed solar air collector is beneficial in terms of economy and thermal performance and PAP helps in achieving lower life cycle costs.

The experimental study shows that the PCM-PVT system can maintain a better output temperature and hence enhanced the  $\eta$ th of the system. Elarga et al. [119] worked on PV/T-PCM model and presented the mathematical modeling of the system. PCM layer helps in achieving better  $\eta$ th and led to a reduction in average cooling demand by 20–30%. With PCM, the  $\eta_{ele}$  of the system has increased by 5–8%.

### V. CONCLUSION AND FUTURE DIRECTION

In the present article, a comprehensive literature review on PV/T technology has been conducted, which will be very effective and useful for the researcher in this field. The current technology shows the application of PV/T in air collector, water collector, buildings, solar-assisted heat pump, and solar drying, with a major focus on the thermal portion. Furthermore, utilization of nanoparticles with water as a base fluid in the channel, the use of thermoelectric, and PCM is a boost to this technology, as these trends improve the PV/T system’s performance. Recently, optimization of parameters using various soft-computing techniques helped to achieve better performance. Moreover, the following observation can be drawn from the present study:

The energy efficiency of PV/T air collector increases by parameter optimization using soft-computing techniques.

The thermal and electrical efficiency of PV/T air collector increases by modification in the channel such as using fins and thin metallic sheets, adding porous media in the air channel.

The thermal efficiency of the PV/T water collector increases by adding nanofluid and PCM in the channel.

The thermal efficiency and electrical efficiency of the PV/T water-collector increase with the roll-bond absorber. An extensive review on PV/T technology has been conducted with certain future scope listed below in the presented research field: The material used for the fabrication of solar cells plays a vital role in the performance of the PV/T system. It has been found from the previous research that, still, there is a wide future scope of research available in other solar cell technologies such as amorphous silicon and gallium arsenide.

The application of roll-bond absorber in the PV/T system may also be an interesting research field.

It is reported by many researchers that the performance of the PV/T system is improved significantly using a single laminated PVT system, but still there is a wide future scope available PV lamination technology.

## REFERENCES

- [1] Basore, P.A., Cole, W.J.: Comparing supply and demand models for future photovoltaic power generation in the USA. *Prog. Photovolt. Res. Appl.* **26**, 414–418 (2018)
- [2] Sharma, A.: A comprehensive study of solar power in India and world. *RSER* **15**, 1767–1776 (2011)
- [3] Bhubaneswari, P., Goicranco, I.S.: A review of solar photovoltaic technologies. *RSER* **15**, 1623–1636 (2011)
- [4] Branker, K., Pearce, J.M.: Financial return for government support of large scale thin-film solar photovoltaic manufacturing in Canada. *Energy Policy* **38**, 4291–4303 (2010)
- [5] Liou, H.M.: Overview of the PV technology status and perspective in Taiwan. *RSER* **14**, 1202–1215 (2010)
- [6] Schindler, F., Schön, J., Michl, B., Riepe, S., Krenckel, P., Benick, J., Feldmann, F., Hermle, M., Glunz, S.W., Warta, W., Schubert, M.C.: How to achieve efficiencies exceeding 22% with multi-crystalline n-type silicon solar cells. *Energy Proced.* **124**, 777–780 (2017)
- [7] Tiwari, G.N., Mishra, R.K., Solanki, S.C.: Photovoltaic modules and their applications: a review on thermal modelling. *Appl. Energy* **88**, 2287–2304 (2011)
- [8] Debberma, M., Sudhakar, K., Baredar, P.: Thermal modeling, exergy analysis, performance of BIPV and BIPVT: a review. *RSER* **73**, 1276–1288 (2017)
- [9] Xie, K., Guo, M., Liu, X., Huang, H.: Enhanced efficiencies in thin and semi-transparent dye-sensitized solar cells under low photon flux conditions using TiO<sub>2</sub> nanotube photonic crystal. *J. Power Source* **293**, 170–177 (2015)
- [10] Shaikh, J.S., Shaikh, N.S., Shaikh, A., Mali, S.S., Kale, A.J., Kanjanaboosb, P., Hong, C.K., Kim, J.K., Patil, P.S.: Perovskite solar cells: in pursuit of efficiency and stability. *Mater. Des.* **136**, 54 (2017). <https://doi.org/10.1016/j.matdes.2017.09.037>
- [11] Good, C., Chen, J., Dai, Y., Grete Hestnes, A.: Hybrid photovoltaic/thermal systems in buildings—a review. *Energy Proced.* **70**, 683–690 (2015)
- [12] Babu, C., Ponnambalam, P.: The role of thermoelectric generators in the hybrid PV/T systems: a review. *Energy Convers. Manag.* **151**, 368–385 (2017)
- [13] Tian, Y., Zhao, C.Y.: A review of solar collectors and thermal energy storage in solar thermal applications. *Appl. Energy* **104**, 538–553 (2013)
- [14] Ibrahim, A., Othman, M.Y., Ruslan, M.H., Mat, S., Sopian, K.: Recent advances in flat plate photovoltaic/thermal (PV/T) solar collectors. *Renew. Sustain. Energy Rev.* **15**, 352–365 (2011)
- [15] Lamnatou, C., Chemisana, D.: Photovoltaic/thermal (PVT) systems: a review with emphasis on environmental issues. *Renew. Energy* **105**, 270–297 (2017)
- [16] Michael, J.J., Iniyani, S., Goic, R.: Flat plate solar photovoltaic-thermal (PV/T) systems: a reference guide. *Renew. Sustain. Energy Rev.* **51**, 62–88 (2015)
- [17] Muhammad, O.L., Sahin, A.Z.: Design, performance and economic analysis of a nano-fluid based photovoltaic/thermal system for residential applications. *Energy Convers. Manag.* **149**, 467–484 (2017)
- [18] Kandilli, C.: Performance analysis of a novel concentrating photovoltaic combined system. *Energy Convers. Manag.* **67**, 186–196 (2013)
- [19] Baljit, S.S.S., Chan, H.Y., Sopian, K.: Review of building integrated applications of photovoltaic and solar thermal systems. *J. Clean. Prod.* **137**, 677–689 (2016)
- [20] Bazilian, M.D., Prasad, D.: Modelling of a photovoltaic heat recovery system and its role in a design decision support tool for building professionals. *Renew. Energy* **27**, 57–68 (2002)
- [21] Kern Jr., E.C., Russell, M.C.: Combined Photovoltaic and Thermal Hybrid Collector Systems. Massachusetts Institute of Technology, Lexington (1978)
- [22] Bhargava, A.K., Garg, H.P., Agarwal, R.K.: Study of a hybrid solar system—solar air heater combined with solar cell. *Sol. Energy* **31**(5), 471–479 (1991)
- [23] Bergene, T., Lovvik, O.M.: Model calculations on a flat-plate solar heat collector with integrated solar cells. *Sol. Energy* **55**, 453–462 (1995)
- [24] Fujisawa, T., Tani, T.: Annual exergy evaluation on photovoltaic-thermal hybrid collector. *Sol. Energy Mater. Sol. Cells* **47**, 135–148 (1997)
- [25] Singh, S., Agrawal, S., Awasti, D.V.: Optimization of design parameters of glazed hybrid photovoltaic-thermal modeling using genetic algorithm. In: *Proceedings of CIPECH 2014* (2014)
- [26] Agrawal, S., Tiwari, G.N.: Energy and exergy analysis of hybrid micro-channel photovoltaic-thermal module. *Sol. Energy* **85**, 356–370 (2011)
- [27] Kalogirou, S.A., Sotirios, K., Konstantinos, B., Camelia, S., Badescu, V.: Exergy energy of solar thermal collectors and processes. *Prog. Energy Combust. Sci.* **56**, 106–137 (2016)
- [28] Petela, R.: Exergy of undiluted thermal radiation. *Sol. Energy* **74**(6), 469–488 (2003)
- [29] Agarwal, S., Tiwari, G.N., Pandey, H.D.: Indoor experimental analysis of glazed hybrid PVT tiles air collector connected in series. *Energy Build.* **53**, 145–151 (2012)
- [30] Agrawal, S., Tiwari, G.N.: Energy and exergy analysis of hybrid micro-channel photovoltaic-thermal module. *Sol. Energy* **85**(2), 356–370 (2011)
- [31] Amori, K.E., Abd-Al Raheem, M.A.: Field study of various air based photovoltaic/thermal hybrid solar collectors. *Renew. Energy* **63**, 402–414 (2014)
- [32] Slimani, M.E.A., Amirat, M., Kurucz, I., Bahria, S., Hamidat, A., Chouch, W.B.: A detailed thermal-electrical model of three photovoltaic/thermal (PV/T) hybrid air collectors and photovoltaic module: comparative study under Algiers climate condition. *Energy Convers. Manag.* **133**, 458–476 (2017)
- [33] Sopian, K., Yigit, K.S., Liu, H.T., Kakac, S., Veziroglu, T.N.: Performance analysis of photovoltaic-thermal air heaters. *Energy Convers. Manag.* **11**, 1657–1670 (1996)
- [34] Tonui, J.K., Tripanagnostopoulos, Y.: Performance improvement of PV/T solar collectors with natural air flow operation. *Sol. Energy* **82**(1), 1–12 (2008)
- [35] Mojumdera, J.C., Chonga, W.T., Onga, H.C., Leong, K.Y., Al-Mamoon, A.: An experimental investigation on performance analysis of air type PV thermal collector system integrated with cooling fins design. *Energy Build.* **130**, 272–285 (2016)
- [36] Kumar, R., Rosen, M.A.: Performance of a double pass PV/T solar air heater with and without fins. *Appl. Therm. Eng.* **31**, 1402–1410 (2011)
- [37] Shahsavari, A., Ameri, M.: Experimental investigation and modeling of a direct coupled PV/T air collector. *Sol. Energy* **84**, 1938–1958 (2010)
- [38] Tripanagnostopoulos, Y., Nousia, T.H., Souliotis, M.: Low cost improvement to building integrated air cooled hybrid PV-thermal systems. In: *Proceedings of 16th European PV Solar Energy conference vol. 2*, pp. 1874–1899 (2000)
- [39] Jin, G.L., Ibrahim, A., Chean, Y.K., Daghigh, R., Ruslan, H., Mat, S., Othman, M.Y., Ibrahim, K., Zaharim, A., Sopian, K.: Evaluation of single-pass photovoltaic-thermal air collector with rectangle tunnel absorber. *Am. J. Appl. Sci.* **7**, 277–282 (2010)
- [40] Hussain, F., Othman, M.Y., Yatim, B., Ruslan, H., Sopian, K., Anuar, Z., Khairuddin, S.: Comparison study of air base photovoltaic/thermal (PV/T) collector with different design of heat exchanger. *WREF* **1**, 189–194 (2012)
- [41] Othman, M.Y., Ruslan, H., Sopian, K., Jin, G.L.: Performance study of photovoltaic-thermal (PV/T) solar collector with v-grooved absorber plate. *Sains Malays.* **38**, 537–541 (2009)

- [42] Vats, K., Tomar, V., Tiwari, G.N.: Effect of packing factor on the performance of a building integrated semitransparent photovol- taic–thermal (BIPVT) system with air duct. *Energy Build.* 53, 159–165 (2012)
- [43] Wu, S.Y., Zhang, Q.L., Xiao, L., Guo, F.H.: A heat pipe photo- voltaic/thermal (PV/T) hybrid system and its performance evalu- ation. *Energy Build.* 43, 3558–3567 (2011)
- [44] Sopian, K., Ooshaksaraei, P., Fudholi, A., Zulkifli, R., Zaidi, S.H., Kazeem, H.A.: Performance characterization of single-path and double-path air-based bifacial photovoltaic–thermal solar collector. In: *Recent Advance Energy, Environment Geology*, pp. 42–47 (2013)
- [45] Zondag, H.A.: Flat plate PV-thermal collectors and systems: a review. *RSER* 12(4), 891–959 (2008)
- [46] Pascal, A., Wolfgang, E., Hubert, F., Matthias, R., Anton, S., Henrick, S.: Roadmap/A European guide for the development and market introduction of PV thermal technology, contract no-502775 (SES6) (2005)
- [47] Chow, T.T., Pei, G., Fong, K.F., Lin, Z., Chan, A.L.S., Ji, J.: Energy and energy analysis of photovoltaic-thermal collector with and without glass cover. *Appl. Energy* 86, 310–316 (2009)
- [48] Rajeb, O., Dhaou, H., Jemmi, A.: Parameters effect analysis of a photovoltaic–thermal collector: case study for climate condi- tions of Monastir, Tunisia. *Energy Convers. Manag.* 89, 409–419
- [49] Lon, E.B.: Cooling, heating, generating power, and recover- ing waste heat with thermoelectric systems. *Science* 321(80), 1457–1461 (2008)
- [50] Dimri, N., Tiwari, A., Tiwari, G.N.: Comparative study of pho- tovoltaic–thermal (PVT) integrated thermoelectric cooler (TEC) fluid collectors. *Renew. Energy* 134, 343 (2018)
- [51] Dimri, N., Tiwari, A., Tiwari, G.N.: Thermal modelling of semi- transparent photovoltaic–thermal (PVT) with thermoelectric cooler (TEC) collector. *Energy Convers. Manag.* 146, 68–77 (2017)
- [52] Vorobiev, Y., González-Hernández, J., Vorobiev, P., Bulat, L.: Thermal-photovoltaic solar hybrid system for efficient solar energy conversion. *Sol. Energy* 80, 170–176 (2006)
- [53] Tiwari, S., Agrawal, S., Tiwari, G.N.: PVT air collector inte- grated green house dryers. *Renew. Sustain. Energy Rev.* 90, 142–159 (2018)
- [54] Chauhan, P.S., Kumar, A., Gupta, B.: A review on thermal models for greenhouse dryers. *Renew. Sustain. Energy Rev.* 275, 548–558 (2017)
- [55] Aymen, E., Kooli, S., Ilhem, H., Abdelhamid, F.: Experimental investigation and economic evaluation of a new mixed mode solar greenhouse dryer for drying of red pepper and grape. *Renew. Energy* 77, 1–8 (2015)
- [56] Lammle, M., Thomas, K., Stefan, Fortuin, Wiese, M., Her- mann, M.: Development and modelling of highly-efficient PVT collectors with low-emissivity coatings. *Sol. Energy* 130, 161–173 (2016)
- [57] Singh, C.P., Kumar, A.: Heat transfer analysis of north wall insulated greenhouse dryer under natural convection mode. *Energy* 118, 1264–1274 (2017)
- [58] Eltawil, M.A., Azam, M.M., Alghannam, A.O.: Solar PV pow- ered mixed-mode tunnel dryer for drying potato chips. *Renew. Energy* (2017). <https://doi.org/10.1016/j.renene.2017.10.007>
- [59] Singh, P.S., Aayush, J., Arvind, S., Swati, A.: Influence of absorber plate shape factor and mass flow rate on the perfor- mance of PVT system. *Appl. Therm. Eng.* 156, 692 (2019)
- [60] Daghigh, R., Ruslan, M.H., Zaharim, A., Sopian, K.: Monthly performance of a PV thermal (PV/T) water heating system. In: *Recent Research Energy Environment*, pp. 298–303 (2015)
- [61] Rajput, U.J., Yang, J.: Comparison of heat sink and water type PV/T collector for polycrystalline photovoltaic panel cooling. *Renew. Energy* 116, 479 (2017) 70. Monakar, A.M., Winston, D.P., Kabeel, A.E., El-Agouz, S.A., Sathyamurty, R., Arunkumar, T., Madhu, B., Ahsan, A.: Integrated PV/T solar still: a mini-review. *Desalination* 435, 259–267 (2017)
- [62] Sotehi, O., Chaker, A., Maalouf, C.: Hybrid PV/T solar col- lector net zero energy building and fresh water production: a theoretical approach. *Desalination* 385, 1–11 (2016)
- [63] Tripanagnostopoulos, Y., Tselepis, S., Souliotis, M., Tonui, J.K.: Design aspect of hybrid PV/T water solar systems. In: *19th European solar Energy Conference and Exhibition, Paris, France* (2004)
- [64] Tiwari, G.N., Gaur, A.: Photovoltaic–thermal (PV/T) systems and its applications. In: *2nd International Conference on Green Energy and Technology*, pp. 132–138 (2014)
- [65] Tripanagnostopolous, Y., Nousia, T., Souliotis, M.: In: *Pro- ceeding of the 17th European PV solar energy conference, Munich, Germany 2001*, pp. 2515–2518 (2002)
- [66] Othman, M.Y., Hamid, S.A., Tabook, M.A.S., Sopian, K., Roslan, M.H., Ibrahim, Z.: Performance analysis of PV/T combi with water and air heating system. *Renew. Energy* 86, 716–722 (2016)
- [67] Chamsa-ard, W., Brundavanam, S., Fung, C.C., Fawcett, D., Poinern, G.: Nanofluids types, their synthesis, properties and their incorporation in direct solar thermal collectors: a review. *Nanomaterials* 7, 1–31 (2017)
- [68] Maxwell, J.C.: *Electricity and Magnetism*. Clarendon Press, Oxford (1873)
- [69] Tyagi, H., Phelan, P., Prasher, R.: Predicted efficiency of a low- temperature nano fluid-based direct absorption solar collector. *J. Sol. Energy Eng. Trans. ASME* 131(4), 41–47 (2009)
- [70] Yousefia, T., Veysia, F., Shojaeizadeha, E., Zinadini, S.: An experimental investigation on the effect of Al<sub>2</sub>O<sub>3</sub>–H<sub>2</sub>O nano- fluid on the efficiency of flat- plate solar collectors. *Renew. Energy* 39, 293–298 (2012)
- [71] Yazdanifard, F., Ameri, M., Ebrahimi-Bajestan, E.: Per- formance of nanofluid-based photovoltaic/thermal systems: a review. *Renew. Sustain. Energy Rev.* 2017(76), 323–352 (2017)
- [72] Said, Z., Saidur, R., Rahim, N.A.: Energy and exergy analysis of a flat plate solar collector using different sizes of aluminium oxide based nanofluid. *J. Clean. Prod.* 133, 518–530 (2016)
- [73] Bianco, V., Scarpa, F., Tagliafico, L.A.: Numerical analysis of Al<sub>2</sub>O<sub>3</sub>–water nanofluid forced laminar convection in an asym- metric heated channel for application in flat plate PV/T collector. *Renew. Energy* 116, 9–21 (2018)
- [74] Borode, A., Ahmed, N., Olubambi, P.: A review of solar collec- tors using carbon-based nanofluids. *J. Clean. Prod.* (2019). <https://doi.org/10.1016/j.jclepro.2019.118311>
- [75] Al-Shamani, A.N., Alghoul, M.A., Elbreki, A.M., Ammar, A.A., Abid, A.M., Sopian, K.: Mathematical and experimental evalua- tion of thermal and

- electrical efficiency of PV/T collector using different water based nano-fluids. *Energy* 145, 119 (2018)
- [76] Sardarabadi, M., Farad, M.P.: Experimental and numerical study of metal-oxides/water nanofluids as coolant in photovoltaic-thermal systems (PVT). *Sol. Energy Mater. Sol. Cells* 157, 533–542 (2016)
- [77] Ghadiri, M., Sardarabadi, M., Fard, M.P., Moghadam, A.J.: Experimental investigation of a PVT system performance using nano ferrofluids. *Energy Convers. Manag.* 103, 468–476 (2015) Radwan, A., Ahmed, M., Ookawara, S.: Performance enhancement of concentrated photovoltaic systems using a microchannel heat sink with nanofluids. *Energy Convers. Manag.* 119, 289–303 (2016)
- [78] Al-Waeli, A.H.A., Chaichan, M.T., Kazem, H.A., Sopian, K.: Comparative study to use nano-(Al<sub>2</sub>O<sub>3</sub>, CuO and SiC) with water to enhance photovoltaic-thermal PV/T collectors. *Energy Convers. Manag.* 148, 963–973 (2017)
- [79] Gunther, E., Hiebler, S., Mehling, H., Redlich, R.: Enthalpy of phase change materials as a function of temperature: required accuracy and suitable measurement methods. *Int. J. Thermophys.* 30, 1257–1269 (2009)
- [80] Preet, S., Bhusan, B., Mahagan, T.: Experimental investigation of water based photovoltaic/thermal PV/T system with and without phase change material. *Sol. Energy* 155, 1104–1120 (2017)
- [81] Liang, R., Zhang, J., Ma, L., Li, Y.: Performance evaluation of new type hybrid photovoltaic/thermal solar collector by experimental study. *Appl. Therm. Eng.* 75, 487–492 (2015)
- [82] Ong, K.S., Naghavi, M.S., Lim, C.: Thermal and electrical performance of a hybrid design of a solar thermoelectric system. *Energy Convers. Manag.* 133, 31–40 (2017)
- [83] Haurant, P., Menezo, C., Dupeyrat, P.: The PHOTOTHERM project: full scale experimentation and modelling of a photovoltaic-thermal (PV-T) hybrid system for domestic hot water applications. *Energy Proced.* 48, 581–587 (2014)
- [84] Aste, N., Del Pero, C., Leonforte, F.: Thermal-electrical optimization of the configuration a liquid PVT collector. *Energy Proced.* 30, 1–7 (2012)
- [85] Dupeyrat, P., Menezo, C., Wirth, H., Rammil, M.: Improvement of PV module optical properties for PV-thermal hybrid collector applications. *Sol. Energy Mater. Sol. Cells* 95, 2028–2036 (2011)
- [86] Fang, G., Hu, H., Liu, X.: Experimental investigation on the photovoltaic-thermal solar heat pump air-conditioning system on water-heating mode. *Exp. Therm. Fluid Sci.* 2010(34), 736–743 (2010)
- [87] Ji, J., Liu, K., Chow, T., Pei, G., He, W., He, H.: Performance analysis of a photovoltaic heat pump. *Appl. Energy* 85, 680–693 (2008)
- [88] Ji, J., He, H., Chow, T., Pei, G., He, W., Liu, K.: Distributed dynamic modeling and experimental study of PV evaporator in a PV/T solar-assisted heat pump. *Int. J. Heat Mass Transf.* 52, 1365–1373 (2009)
- [89] Zhou, C., Liang, R., Riaz, A., Zhang, J., Chen, J.: Experimental investigation on the tri-generation performance of roll-bond photovoltaic-thermal heat pump system during summer. *Energy Convers. Manag.* 184, 91–106 (2019)
- [90] Kong, X.Q., Li, Y., Lin, L., Yang, Y.G.: Modeling evaluation of a direct-expansion solar assisted heat pump water heater using R410A. *Int. J. Refrig.* 76, 136–146 (2017)
- [91] Zhang, X., Zhao, X., Xu, J., Yu, X.: Characterization of a solar photovoltaic/loop-heat pipe heat pump water heating system. *Appl. Energy* 102, 1229–1245 (2013)
- [92] Zhang, X., Zhao, X., Shen, J., Xu, J., Yu, X.: Dynamic performance of a novel solar photovoltaic/loop-heat-pipe heat pump system. *Appl. Energy* 114, 335–352 (2014)
- [93] Zarrella, A., Emmi, G., Vivian, J., Croci, L., Besagni, G.: The validation of a novel lumped parameter model for photovoltaic-thermal hybrid solar collectors: a new TRANSYS type. *Energy Convers. Manag.* 188, 414–428 (2019)
- [94] Gan, G.: Effect of air gap on the performance of building integrated photovoltaic's. *Energy* 34, 913–921 (2009)
- [95] Jakica, N., et al.: BIPV design and performance modeling: tools and methods. In: IEA-PVPS Programme. IEA-PVPS Task 15 (2019)
- [96] Kalogirou, S.A., Aresti, L., Christodoulides, P., Florides, G.: Effect of air flow on a building integrated PV-panel. *Proced. IUTAM* 11, 89–97 (2014)
- [97] Kim, J.H., Kim, J.T.: A simulation study of air type building integrated photovoltaic-thermal system. *Energy Proced.* 30, 1016–1024 (2012)
- [98] Bloem, J.J., Lodi, C., Cipriano, J., Chemisana, D.: An outdoor test reference environment for double skin applications of building integrated photovoltaic systems. *Energy Build.* 50, 63–73 (2012)
- [99] Yang, T., Athienitis, A.K.: A study of design options for a building integrated photovoltaic/thermal (BIPV/T) system with glazed air collector with multiple inlets. *Energy Proced.* 30, 177–186 (2012)
- [100] Agrawal, B., Tiwari, G.N.: Life cycle cost assessment of building integrated PV thermal (BIPVT) systems. *Energy Build.* 42(9), 1472–1481 (2010)
- [101] Lin, W., Ma, Z., Sohel, M.I., Cooper, P.: Development and evaluation of ceiling ventilation system enhanced by solar PVT collectors and phase change materials. *Energy Convers. Manag.* 88, 218–230 (2014)
- [102] Al-damook, A.: Experimental evaluation for an unglazed solar air collector for building space heating in Iraq. *Renew. Energy* 112, 8814 (2018)
- [103] Elarga, H., Goia, F., Zarrella, A., Monte, A.D., Benini, E.: Thermal and electrical performance of an integrated PV-PCM system in double skin facades. A numerical study. *Sol. Energy* 136, 112–124 (2016)
- [104] Mengjie, S., Fuxin, N., Ning, M., Yanxin, H., Shiming, D.: Review on building energy performance using phase change materials. *Energy Build.* 158, 776–793 (2018)

#### Abbreviations

ANN	Artificial neural network
COP	Coefficient of performance
ELM	Extreme learning machine
EVA	Ethylene-vinyl acetate
FPC	Flat-plate collector
HASS	Hybrid active solar still
GSA	Gravitational search algorithm



GA	Genetic algorithm
MPP	Maximum power point
NN	Neural network
PAP	Perforated absorber plate
PCM	Phase change material
PSS	Passive solar still
TMS	Thin metallic sheets
SVM	Support vector machine
TEG	Thermoelectric generator
STD	Solar tunnel dryer
SAHP	Solar-assisted heat pump
WOA	Whale optimization algorithm



10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)