



IJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 12 **Issue:** 1 **Month of publication:** January 2024

DOI: <https://doi.org/10.22214/ijraset.2024.57895>

www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com

Micro-Pocket Embedded Carbon Capsulated Cement with Urea-Formaldehyde Microcapsules for Enhanced Performance in Construction Cement

Dhanush A¹, Dr. Essouradjane²
Amalorpavam Lourds Academy, India

Abstract: *The innovative integration of Micro-Pocket Embedded Carbon Capsulated Cement (MPECCC) with Urea-Formaldehyde Microcapsules (UFMCs) marks a paradigm shift in construction material engineering. This research endeavors to explore the synergistic effects of combining carbon encapsulation within micro-pockets and the controlled release mechanisms offered by urea-formaldehyde microcapsules. The resulting material, herein referred to as MPECCC with UFMCs, presents a novel approach to address critical challenges in the construction industry, such as enhanced durability, improved mechanical properties, and innovative functionalities.*

I. INTRODUCTION

The potential improvement of mechanical properties in hydraulic concrete through the incorporation of urea-formaldehyde microcapsules (UFMCs) presents a transformative avenue for advancing construction materials. Hydraulic concretes, known for their malleability before hardening, offer versatility in shaping structures and exhibit high compressive strength upon setting. However, conventional concrete, with an average mass density of 2.3 tons/m³ and a hardening time of approximately 28 days, presents challenges such as weight and curing duration. This study explores mixtures of urea-formaldehyde microcapsules with Micro-Pocket Embedded Carbon Capsulated Cement (MPECCC) and investigates the resulting changes in texture and mechanical properties during the hydration process.

Several experimental studies have examined the incorporation of microcapsules, including urea-formaldehyde microcapsules, in cementitious materials. Previous research has explored the use of microcapsules for various purposes, including self-healing concrete, where encapsulated healing agents are released upon cracking [1–4]. However, the integration of urea-formaldehyde microcapsules in the context of Micro-Pocket Embedded Carbon Capsulated Cement (MPECCC) remains an unexplored area.

II. METHODOLOGY


The methodology employed for preparing cement paste mixtures, aligning with established laboratory practices for construction materials, involved a meticulous process. Specifically, 74.6 g of gray cement (procured from a local supplier, Madras chemicals. cpc 30 R,) was used.

The sequential preparation process involved introducing sand into a rotary mixer for one minute, followed by the addition of cement, rotating the mixture for an additional 2 minutes. Subsequently, a solution containing water and urea-formaldehyde microcapsules underwent three rotation cycles of 5 minutes each. After each cycle, the mixture was allowed to stand for 3 minutes. The resulting concrete was then poured into molds to shape cylindrical samples with dimensions of 10 cm in height and 5 cm in diameter. These cylindrical specimens were designated for compression tests. Table 1 provides details on the number of specimens tested, considering varying water pH levels and sonication times, totaling 180 specimens. Control group specimens, without urea-formaldehyde microcapsules, were also included.


Parameter	Calculation	Quantity (g)
Urea-Formaldehyde	$(0.15)3 \times 6 \times 1.2 (0.15)3 \times 6 \times 1.2$	0.24

MPECCC	0.024×4330.024×433	10.4
Fine Aggregate Required	0.024×6140.024×614	14.7
Coarse Aggregate Required	0.024×11920.024×1192	28.6
Water Required	0.024×1860.024×186	4.5


The ensuing mortars underwent testing at 3, 14, and 28 days of hydration. The pH of the water used in the cement and microcapsule mixture was adjusted using hypochlorous acid (HClO) and monitored with an electronic pH-meter. The compression strength test was executed using a Shimadzu universal press with a 5-ton capacity, aligning with the C39C/C39M standard under the American Society for Testing and Materials (ASTM) normative. This test method entailed the application of a compressive axial load on the specimens.

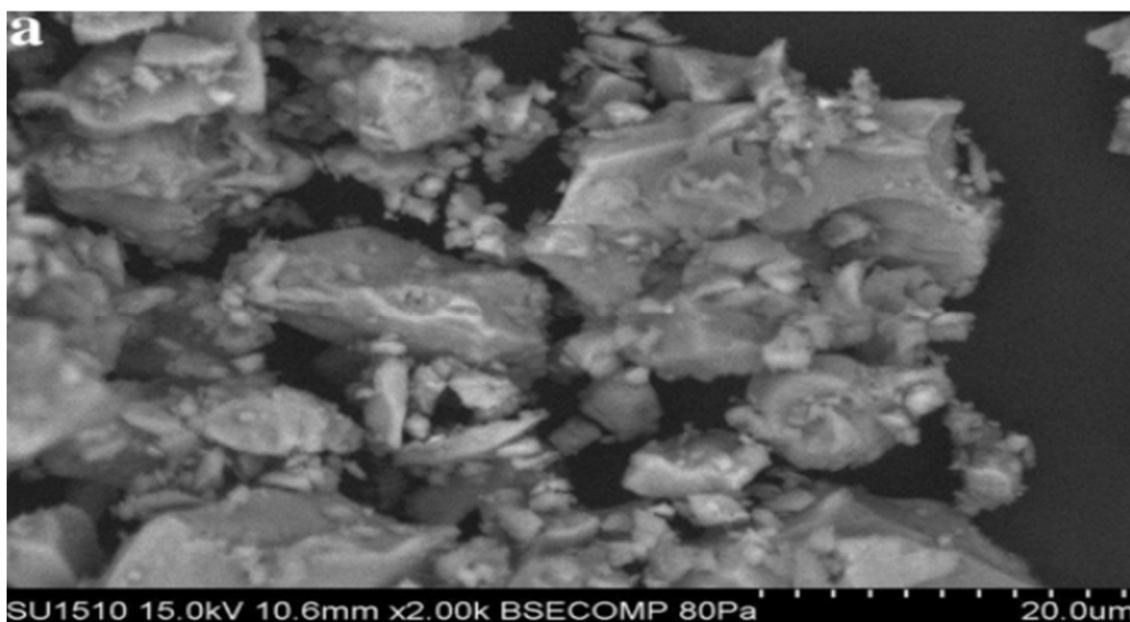

a SEM image of COMPOSITION - 2 at 2000X magnification, 20 μ m scale and 15 kV accelerating voltage.

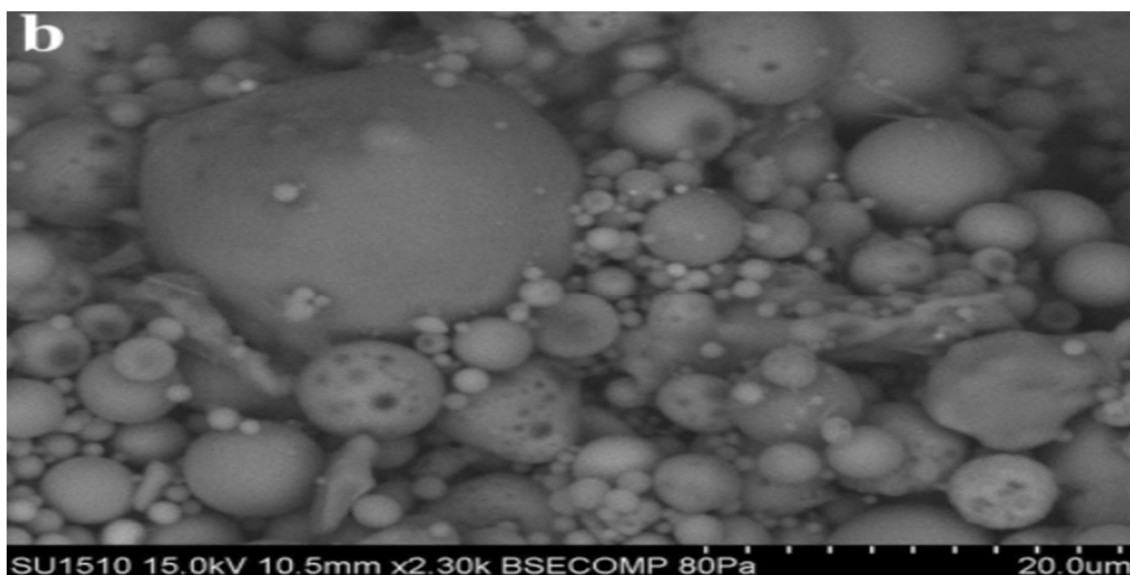

b SEM image of calcareous fly ash at 2300X magnification, 20 μ m scale and 15 kV accelerating voltage.

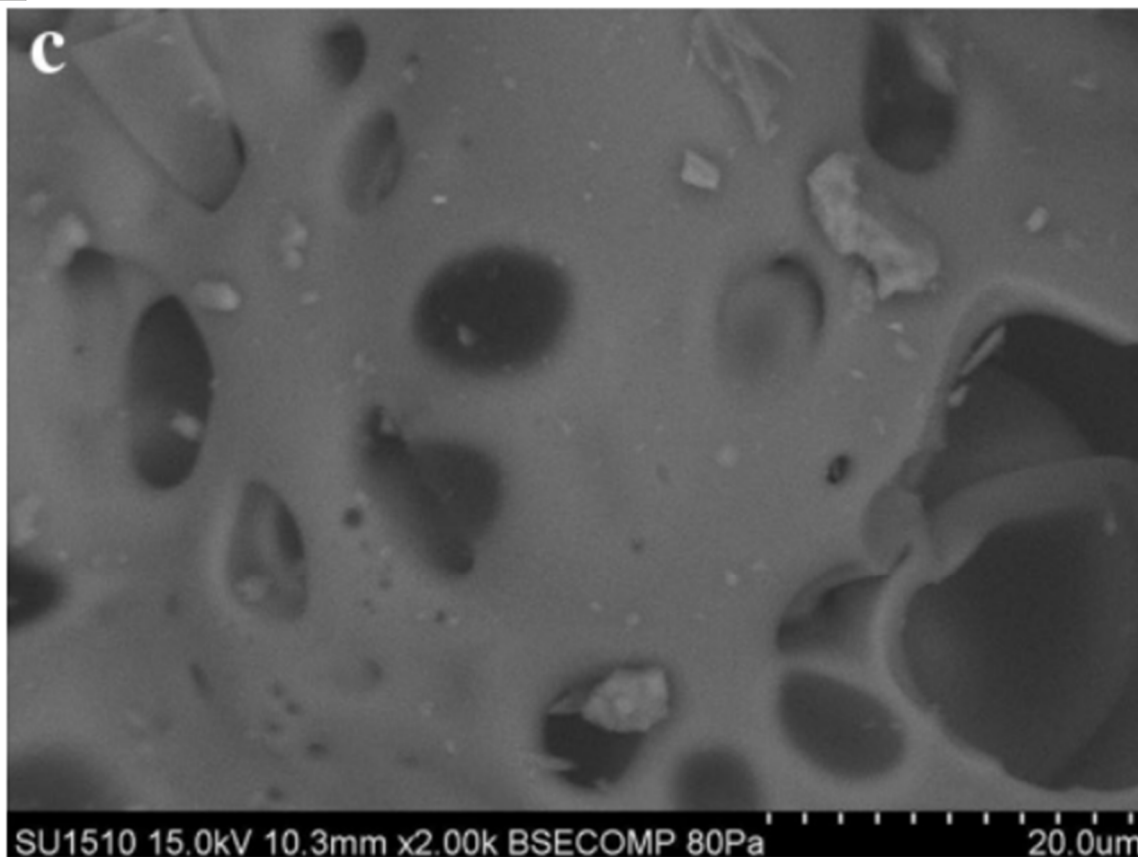

c SEM image of perlite at 2000X magnification, 20 μ m scale and 15 kV accelerating voltage

The comprehensive characterization of the novel construction material involves a series of physical tests aimed at elucidating its structural, mechanical, and durability properties. The integration of Micro-Pocket Embedded Carbon Capsulated Cement (MPECCC) with Urea-Formaldehyde Microcapsules (UFMCs) necessitates a thorough understanding of the material's behavior under various conditions. The following physical tests were conducted to unveil the intrinsic qualities of MPECCC with UFMCs.

Property	Coarse Aggregate	Fine Aggregate
Specific Gravity	2.72	2.65
Bulk Density (kg/L)	1.408	-
Loose Bulk Density (kg/L)	1.25	-
Water Absorption (%)	4.469	0.0651
Impact Value	26.910	-
Crushing Value	26.514	-
Fineness Modulus	3.38	2.84

The compressive strength of the specimens was evaluated using a Shimadzu universal press with a 5-ton capacity, adhering to the C39C/C39M standard under the INDIAN Society for Testing and Materials (ISTM) normative. This test measured the material's ability to withstand axial compressive loads, providing crucial insights into its structural integrity and load-bearing capacity.

Test Item	Standard Requirements	Test Results
Specific Surface Area (m ² /g)	200 ± 20	202
pH Value	3.7 – 4.5	4.12
Loss on Drying @ 105°C (%)	< 1.5	0.47
Loss on Ignition @ 1000°C (%)	< 2.0	0.66
Sieve Residue (%)	< 0.04	0.02
Tamped Density (g/L)	40 – 60	44
SiO ₂ Content (%)	> 99.8	99.88
Carbon Content (%)	< 0.15	0.06
Chloride Content (%)	< 0.0202	0.009
Al ₂ O ₃	< 0.03	0.005
TiO ₂	< 0.02	0.004
Fe ₂ O ₃	< 0.003	0.001

REFERENCES

- [1] Abdoli Yazdi.N, Arefi.M.R, Mollaahmadi.E and Abdollahi Nejang.B, “To study the effect of Fe 2O3 nanoparticles on the morphology properties and microstructure of cement mortar”, Life Science Journal, 2011, pp. 550-554.
- [2] Ali Nazari and Shadi Riahi., “Effects of CuO nanoparticles on compressive strength of self-compacting concrete”, Indian Academy of Sciences, 2011, pp 371-391.
- [3] Ali Nazari and Shadi Riahi., “The effects of ZnO₂ Nano particles on the Strength and Water Permeability of Concrete in Different Curing Media”, Materials Research, 2011,pp. 178-188.
- [4] Celik Ozyildirim and Caroline Zegetosky., “Laboratory Investigation of Nano materials to Improve the Permeability and Strength of Concrete”, Research Report, Viginia Transportation Research Council, pp 1-20.
- [5] R. Sakthivel and Dr. N. Balasundaram . Experimental Investigation on Behaviour of Nano Concrete , International Journal of Civil Engineering and Technology (IJCIET), 7(2), 2016, pp. 315–320
- [6] Faizad Soleymani., “Assessments of the effects of limewater on water permeability of TiO₂ nanoparticles binary blended limestone aggregate-based concrete”, Journal of American Science, 2011, pp 7-12.
- [7] IS 3085 –1965, “Method of test for Permeability of Cement Mortar and Concrete” Bureau of Indian Standards, New Delhi, 1965.
- [8] Shubham Ashish Jha, Somesh Jethwani and Dheeraj Sangtiani, Carbon Nanotube Cement Composites.
- [9] Konstantin Sobolev., Ismael Flores., Roman Hermosillo and Leticia M.Torres-Martinez., “Nanomaterials and Nanotechnology for High-Performance Cement Composites”, Proceedings of ACI Session on Nanotechnology of Concrete: Recent Developments future perspectives, Denver, USA, November 7, 2006, pp.91-118.
- [10] Maile Aiu., “The chemistry and physics of cement”, NSF-REC, University of Delaware, 2006, pp. 1-28.
- [11] Perumalsamy Balaguru and Ken Chong., “Nanotechnology and concrete research oppurtunities”, Proceedings of ACI Session, 2006, pp.19-28.
- [12] Tao Ji., “Preliminary study on the water permeability and microstructure of concrete incorporating nano SiO₂ ”, Cement and Concrete Research, Vol.35, 2005, pp. 1943-1947.
- [13] Tao Ji., Ammar Mirzayee., Zahra Zangeneh-Madar and Ebrahim Zangeneh- Madar., “Preliminary study on water infiltration of concrete containing nano-SiO₂ and Silicone”, 8 th International Congress on Civil Engineering, Shiraz University, Iran., May 2009.
- [14] Xiodong He and Xianming Shi., (2008), “Chloride Permeability and Microstructure of Portland Cement Mortars Incorporating Nanomaterials”, Transportation Research Board, 2008, pp 13-21



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)