



# **iJRASET**

International Journal For Research in  
Applied Science and Engineering Technology



---

# **INTERNATIONAL JOURNAL FOR RESEARCH**

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume: 11    Issue: 1    Month of publication: January 2023**

**DOI: <https://doi.org/10.22214/ijraset.2023.48640>**

**[www.ijraset.com](http://www.ijraset.com)**

**Call:  08813907089**

**E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)**

# Solar Air Dryer Performance Evaluation Using Locally Available Materials

R. Mani<sup>1</sup>, S. Hariharan<sup>2</sup>, M. Gowtham<sup>3</sup>, P. Srinivasan<sup>4</sup>, P. Manikandan<sup>5</sup>, N. Harish<sup>6</sup>, G. Balasubramanian<sup>7</sup>

<sup>1</sup>Principal & Head of the Department of Mechanical Engineering, Muthayammal Polytechnic institution, Rasipuram, Namakkal

<sup>2, 4, 5</sup>Assistant Professor, <sup>6, 7</sup>Under Graduate Student, Department of Mechanical Engineering, VSB College of Engineering Technical Campus.

<sup>3</sup>Assistant Professor SNS College of Technology, Coimbatore

**Abstract:** Along with water and air, grub is a basic requirement for all living things. The grub issue occurs in the majority of developing countries, primarily as a result of unpreserved food. As a result, the solar drying system makes use of the solar energy is used to heat the air and dry any agricultural produce that is loaded, thereby lowering the cost. Agriculture reduces food waste while also preserving it. And dried produce (Ginger) is easily transported. And promotes the health and well-being of all living things. There are a lot of agricultural lands in India. Because of various factors Due to climate change, many agricultural products are thrown away. To reduce such waste, solar dryers are used to dry agricultural produce. Wood, glass, net, pipes, anemometer, blower, and basic carpentry work are used to build the solar dryer and drying chamber. The fabrication of dryer and drying chamber is construct with basic carpentry work. The blower forced the air inside the heater area the air will be heated with the solar radiation and the heat air forced with the drying chamber. The drying chamber has a surface area of (40\*40) cm. The ginger (1/2 kg) drying three specific periods of time, and the reading will notice with specific time. After the moisture content will removed to compare the produces life with open sun drying and solar drying method.

**Keywords:** Solar Air Collector, Drying Chamber, Ginger, Moisture Content, Drying Models, Efficiency of dryer.

## I. INTRODUCTION

One of the most common methods for preserving agricultural products is solar drying. In comparison to the solar drying system, the open sun drying system encountered a number of issues. The open sun drying system has issues with unprotected rain, wind-borne dirt and dust, infestation, insects and animals, and so on. As a result, the solar drying system was used to protect the agro product from the aforementioned issues. In comparison to open drying systems, solar drying systems will be much more effective and useful. Because the solar drying system will be simple to build, less money will be spent on dryer construction. The primary function of a dryer is to remove water in order to prevent microorganisms from growing. The three basic drying methods are I naturally drying, (ii) hot air drying, and (iii) freeze drying. The dryer constructs a second method for hot air here. The collector glass absorbs radiation after the hot air is forced inside the dryer using the method described above. And hot air will be forced to circulate through the drying chamber. The main issue for the process is heat loss, so heat loss energy will be calculated based on daily average radiation. The main goal of this paper is to reduce heat loss from the dryer and improve dryer performance. In this solar drying system we take the agricultural produce is ginger. The initial moisture content of the ginger is 85% constant. And the final moisture content is 15%. India, the largest producers of ginger, has an annual ginger production of around 385 thousand tonnes, according to Ministry of Agriculture. The ginger plant is a popular kitchen plant in every household in India. It belongs to the genus (*Zingier officinal*).The fruit amassed can be used directly for the day to day household cooking endeavours or can be dried to reduce moisture content to less than 10% and then, exported. The primary target for drying is the reduction of moisture content. Materials with high moisture content can lead to various adverse concerns when stored for later use like bacteria, dust, pets and viruses. Drying also makes it easier to wrap up, store and ship the materials has to be maintained at the least for the best results. The southern states of India stretched out close to the equator and is blessed through the year with a sunny and relatively dry climate especially, Tamil Nadu and hence it is suitable for the use of solar energy reduces the capital investment for any industry set up and it is non-polluting, renewable and infinite.

## II. MATERIALS AND METHODS

The most common method for the types are of cabinet form or wooden boxes with glass or flat plate collector cover. The dryer design construct with, the greenhouse effect, because the hot air increased inside the solar drying chamber and the air is forced circulated to the drying trays and around the produce, remove the moisture content and exits through the air outlet.

The hot air medium is used to drying, it remove the moisture from the produce to the atmosphere under natural convection. The dryer system consist of major two components one is drying air heater and another one is drying chamber. The following material are used to construct the solar dryer: Wood- it is the major part of dryer because full system made up of with wood including heater and drying chamber. The wood material is very cheaper and easily available than metals. Glass or Flat plate collector- it is absorbed the radiation and allow the solar radiation inside the heater surface but withstand the flow of heat energy out of the system. Sheet metal (1mm thickness) - is tightly fixed with the wooden box sides to reduce the air loss and also absorb the heat. Net and wooden frames used to construct the drying layers no of required. Pins and gum and screws and adhesives.

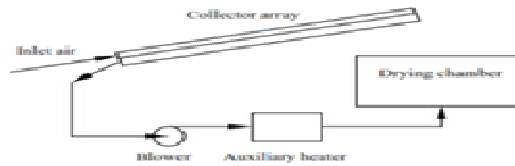


Fig.1.Schematic of experimental setup

The figure shows the full experimental model the solar system made up of with certain design parameters and locally available components the main components are blower, a solar collector, and a drying chamber. The fabrication is done as per design values and available material is in mechanical and welding workshop. The temperature is main consideration for dryer because each produces are drying with particular temperature. So in the project we need minimum temperature of 300 C and the maximum temperature is 600 C. We get 470 C temperature. The hot climate passive solar dryers, need air gap. In this drying system 5cm air gap is created. In this solar drying system the air heater was covered with 5mm thickness glass and 1mm sheet metal cover. Used to absorb the solar radiation. The glass or collector cover with area of the heater is 98×68 cm<sup>2</sup>.

The Air heater is constructed with the dimensions of 98×68×33 cm<sup>2</sup> .made with wood tightly closed for insulation. And the drying chamber is calculated with 40×40 cm<sup>2</sup> with two layer made with net.

### III. SOLAR ENERGY CALCULATION FOR THE REGION

1) Angle of Tilt ( $\beta$ ) of solar collector/ Air Heater. It state that the angle of tilt ( $\beta$ ) of the solar collector should be  $\beta = 10^\circ + \text{lat } \phi$ ----- (1)

Were  $\text{lat } \phi$  is the latitude of the collector location, the latitude of Coimbatore where the dryer was designed is latitude 11.35° N.

Hence, the suitable value of  $\beta$  use for the collector:  $\beta = 10 + 11.35 = 21.35$ .

2) Insolation on the collector surface Area. A research obtained the value of insolation for Coimbatore i.e. average daily radiation H on horizontal surface as;  $H = 999\text{W/m}^2$ .

3) And average effective ratio of solar energy on tilted surface to that on the horizontal surface R as;  $R = 1.34$  Thus, insulation on the collector surface was obtained as  $IC = HT = HR = 999 \times 1.34 = 1338.66\text{W/m}^2$ .

3. Determiration of Collector Area and Dimension. The mass flow rate of air  $M_a$  was determined by taking the average air speed  $V_a = 0.2\text{m/s}$ . The air gap height was taken as 5cm = 0.05m and the width of the collection assumed to be 50cm = 0.5m. Thus, volumetric flow rate of air

$$V'a = V_a \times 0.05 \times 0.6$$

$$V'a = 0.2 \times 0.05 \times 0.5 = 5 \times 10^{-3}\text{m}^3/\text{s}$$

Thus mass flow rate of air  $M_a = \text{vapa Density of air } \rho_a$  is taken as  $1.28\text{kg/m}^3$   $M_a = 5 \times 10^{-3} \times 1.28 = 6.4 \times 10^{-3} \text{kg/s}$  Therefore, area of the collector AC  $AC = (6.4 \times 10^{-3} \times 1005 \times 30) / (0.5 \times 1338.66) = 0.288\text{m}^2$ .

The length of the solar collector (L) was taken as;  $L = Ac/B = 0.288/0.6 = 0.46\text{m}$  Thus, the length of the solar collector was taken approximately as 1m. Therefore, collector area was taken as  $(1 \times 0.6) = 0.6\text{m}^2$ .

4) Determiration of the Base Insulator Thickness for the Collector. The rate of heat loss from air is equal to rate of heat conduction through the insulation. The following equation hold for the purpose of the design.

$$FmC_p(T_0 - T_i) = K_a A_c(T_0 - T_a) / tb \quad K = 0.04\text{Wm}^{-1}\text{K}^{-1}$$

which is the approximate thermal conductivity for glass wool insulation.  
 $F = 10\% = 0.1$

$$T_0 = 65^\circ\text{C} \text{ and } T_i = T_a = 35^\circ\text{C} \text{ approximately } m_a = 6.4 \times 10^{-3}\text{Kgs}^{-1} \quad C_p = 1005\text{JKg}^{-1}\text{K}^{-1} \text{ and } A_c = 0.288\text{m}^2 \quad tb = [0.04 \times 0.288 \times (60 - 30)] / [0.1 \times 6.4 \times 10^{-3} \times 1005 \times (60 - 30)] = 0.017910 = 1.791\text{cm}.$$

For the design, the thickness of the insulator was taken as 7cm. The side of the collector was made of wood, the loss through the side of the collector was considered negligible.

5) Calculation of Heat Losses from the Solar Collector (Air Heater).

Total energy transmitted and absorbed is given by

$$I_c A_c \tau \alpha = Q_u + Q_L + Q_s$$

where  $Q_s$  is the energy stored which is considered negligible therefore

$$I_c A_c \tau \alpha = Q_u + Q_L$$

Thus  $Q_L$  the heat energy losses

$$Q_L = I_c A_c \tau \alpha - Q_u$$

Since

$Q_u = m a C_p (T_0 - T_i) = m a C_p \Delta T$   $Q_L = U L A_c \Delta T$  then  $U L A_c \Delta T = I_c A_c \tau \alpha - m a C_p \Delta T$   $U L = (I_c A_c \tau \alpha - m a C_p \Delta T) / (A_c \Delta T)$   $\alpha$  was taken as 0.9 and  $\tau = 0.86$   $T_a = 0.774$

$$U L = (1338.66 \times 0.288 \times 0.774 - 6.4 \times 10^{-3} \times 1005 \times 30) / (0.288 \times 30) = (298 - 192.96) / 8.64$$
  $U L = 12.15 \text{ W/m}^2 \text{ }^\circ\text{C}$

Therefore,  $Q_L = 12.15 \times 0.288 \times 30 = 104 \text{ W}$  This heat loss includes the heat loss through the insulation from the sides and the cover glass.

**IV. RESULT AND DISSCUSSION**



Fig 2: Before drying

The results obtained from the solar dryer is following conditions with assumed the result was calculated with minimum six hours per day drying with 1 kg ginger. The various air flow rate the hot air flow rate was changed and the result will plotted with graphs. The values are taken with every one hour and the moisture content will find with every one hour. So the values are tabulated with variation of solar intensity.

S.no	Parameters	Conditions and assumptions
1	Location	(Latitude 110 .770 N)
2	Crop	Ginger
3	During Period	February to march
4	Drying batch(1 batch/day)	1 Kg
5	Initial moisture content $M_i$	14%
6	Final moisture content $M_f$	86%
7	Ambient relative temperature, $RH_{am}$	Discussions
8	Maximum allowable temperature $T_{max}$	350 C

Table 1: Design conditions assume



The experimental were conducted for four number of days weight, weight of ginger is measured hourly by using electronic weighing machine and is plotted against time also solar intensity was measured by using solar meter and plotted against time. After the moisture content will be remove with solar intensity with six hours per day with single batch.

Time (hr)	Drying time in hr	Solar intensity(w/m <sup>2</sup> )	Weight of ginger (g)
10 am	0	312	1000
11 am	1	654	1000
12 pm	2	870	1000
1 pm	3	912	991
2 pm	4	999	985
3 pm	5	914	980
4 pm	6	876	976

Table 2: Weight reduced by various intensity

After the result the basic calculations will be calculated with the moisture content with initial and final moisture content.



Fig 3: After drying

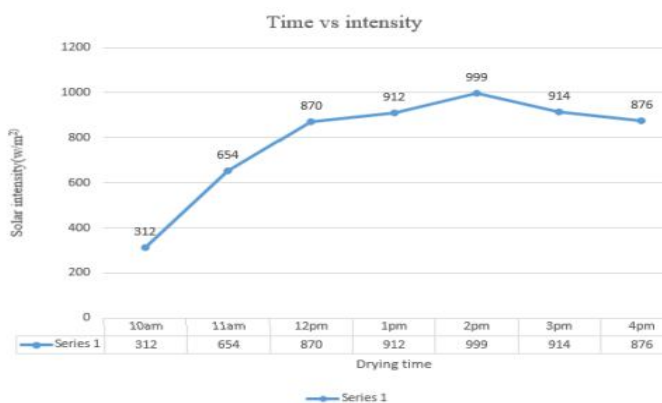


Fig 4: Time vs Intensity

### V. CONCLUSION

The solar dryer was made up of locally available material. So simple materials like wood, glass, pipe, etc. In this is solar drying very useful for formers to dry and prevent the agricultural produces. Compared to open drying method the solar drying method is very efficient because the performance will high compare to open dry method. The graph was explained with the amount of weight reduced particular time with solar intensity. The graph explain with the intensity will gradually increase at the same time the amount of water will be removed with the ginger. So the solar drying system is very useful for drying purpose for the all agricultural products.

## REFERENCES

- [1] Karthikeyan, R., Kumar, R.A., Manikandan, P. and Senthilnathan, A.K., 2021. Investigation of solar air heater with phase change materials using packed bed absorber plate. *Materials Today: Proceedings*, 45, pp.1360-1365. <https://doi.org/10.1016/j.matpr.2020.06.236>
- [2] Karthik, R., Mani, R. and Manikandan, P., 2021. Tribological studies of Ni-SiC and Ni-Al<sub>2</sub>O<sub>3</sub> composite coatings by Pulsed Electrodeposition. *Materials Today: Proceedings*, 37, pp.701-706. <https://doi.org/10.1016/j.matpr.2020.05.717>
- [3] Mani, R., Manikandan, P., Harish, N. and Subramanian, G.B., Tribological Studies of Pin Fin type Forced Convection Solar Air Dryer with Help of PCM as a Thermal Storage Medium. Volume, 10, pp.500-504. <https://doi.org/10.22214/ijraset.2022.47024>
- [4] Srinivasan, P., Hariharan, S., Manikandan, P., NaveenKumar, S., Harish, N. and Balasubramanian, G., 2022. Tribological Studies of Shrinkage Defect and Effective Yield Upgrade of Grey Cast-Iron Castings. <https://doi.org/10.22214/ijraset.2022.47196>
- [5] Hariharan, S., Manikandan, P., Srinivasan, P. and Kannarasu, V., Design and Implement a Semi-Automatic Clutch System for Automobiles Using DCV and the Link Mechanism to Reduce Human Effort While Increasing Process Reliability and Accuracy. <https://doi.org/10.22214/ijraset.2022.47526>
- [6] Nallusamy, S., Narayanan, M.R. and Hariharan, S., 2017. SYNTHESIS AND CHARACTERIZATION OF TiN, TiAlN AND TiAlN/Si<sub>3</sub>N<sub>4</sub> CHEMICAL NANOCOMPOSITE. <http://dx.doi.org/10.7324/RJC.2017.1041909>
- [7] Mani R, Hariharan S, Srinivasan P, EdisonThangaraj J, Arunkrishnan M, Bala Subramanian G, Harish N."Investigation of Mechanical Characteristic of Al<sub>2</sub>O<sub>3</sub> and Silicon Carbide Microparticles Reinforced with Aluminum LM6", Volume 10, Issue XI, International Journal for Research in Applied Science and Engineering Technology (IJRASET) Page No: 1627-1631, ISSN : 2321-9653, <https://doi.org/10.22214/ijraset.2022.47679>



10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)