



# IJRASET

International Journal For Research in  
Applied Science and Engineering Technology



---

# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume:** 10    **Issue:** 1    **Month of publication:** January 2022

**DOI:** <https://doi.org/10.22214/ijraset.2022.40085>

[www.ijraset.com](http://www.ijraset.com)

Call:  08813907089

E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)

# Yard Management System for Efficient Trailer Dispatches

Asutosh Gopinath<sup>1</sup>, Gaurav Lal<sup>2</sup>, Sanjeev Kumar<sup>3</sup>

<sup>1</sup>Sr. Technologist Automation Division, Tata Steel, Jamshedpur, India

<sup>2</sup>Technologist Automation Division, Tata Steel, Jamshedpur, India

<sup>3</sup>Head, Automation Division, Tata Steel, Jamshedpur, India

**Abstract:** This paper talks about digitalization of trailer dispatch process at coil yard of an integrated iron and steel plant. The system enables users to prepare trailer loading plans and helps monitor the progress in real-time. The application has built in interface with SAP system to automate the generation of dispatch related documents. It offers visibility to all the agencies engaged in trailer dispatch activities to enable efficient movement of trailers in and out of yards. It helps boost efficiency by automating delivery and invoice documents creation.

**Keywords:** Sequence diagram, SAP, STO, Web service.

## I. INTRODUCTION

In a year over 75000 trailer trips are made for transporting coils from yards to various outbound customer locations. Hot Strip Mill (HSM) has three coil yards viz. C1, C2 and C3. Each yard has loading positions shown in **Figure 1**, where trailers are required to reach for loading the coils. According to the capacity of trailer and weight of coil a trailer is loaded with 1, 2 or more coils. In rare cases, coils to be loaded are distributed in two yards and accordingly a trailer must move to next yard for loading remaining coil(s).

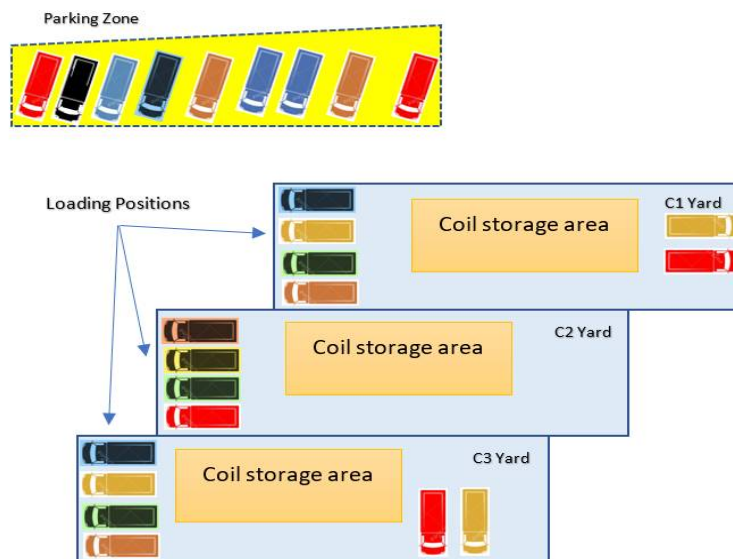


Figure 1: HSM yard layout showing trailer loading positions.

Trailer operators are not aware of the yard from which the coil(s) would be loaded and the loading sequence. If coils to be loaded are in two yards, the trailer operator does not know beforehand which yard to enter first and availability of loading point there. A trailer reaching the yard entrance out of its turn or without prior information on the availability of loading position holds the risk of introducing bottlenecks in the dispatch process [1]. To control the movement of trailers in the yard, a digitalized Yard Management System (YMS) needs to be developed to automate the dispatch related activities from planning till invoice generation. All the necessary information regarding the loading sequence and occupancy status of loading points to be made available to trailer operators at a central trailer registration window in digital format. The trailers will leave the parking zone and proceed towards its loading position only when its status becomes “free”.

Currently there is a lot of manual interventions at each stage of dispatch activities, most of the manpower is involved in preparation and record keeping of documents [2]. This results in high cycle time in information flow, no provision for real time tracking of dispatches, high use of paper and inaccuracies in information flow. YMS can simplify planning, loading and help tracking of all dispatch activities to reduce cycle time, faster and error free customer service, improvement in Vehicle-In Vehicle-out (VIVO) time of trailers and improvement in productivity. To automate dispatch documentation YMS will have data interface with existing SAP system. Transporter supervisors are not aware of the capacities of trailers before deployment. Frequently trailers get overloaded at HSM, which leads to held up of trailers after loading. The overloaded trailers are then unloaded and reloaded with coil(s) according to the allowed capacity of the trailers. YMS will also have data interface with existing RFID based Vehicle Tracking System (VTS) to capture capacity of trailers and implement adequate controls to ensure load planning of trailers is within allowed tolerance limits. It will improve safety by loading of trailers within their carrying capacity, reduce cost of trailer re-unitization, improve efficiency by preventing unloading and re-loading of trailers. See **Figure-2** for proposed data interface between YMS and existing VTS and SAP systems. Moreover, due to COVID-19 pandemic there is an urgent need to enhance operational capabilities by promoting social distancing. YMS will improve safety by reducing the requirement of manpower movement in yards and boost their morale due to reduced workload.

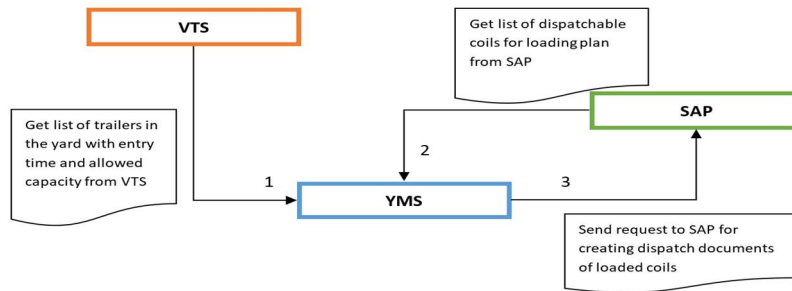


Figure 2: Proposed data interface of YMS with existing VTS and SAP systems for automation of load planning and dispatch documentation.

## II. IMPLEMENTATION

### A. FIFO Trailer Loading Plan

To ensure optimum movement of trucks from parking zone to the loading yard, a First-In-First-Out (FIFO) based logic is developed. In this method the trailer check-in timestamp is captured from VTS and displayed in the YMS planning web page. The planning in-charge can prepare the loading plan for trailers strictly on first come first serve basis and registers the plan in YMS. The FIFO system allows sequential and smooth movement of trailers in and out of the coil yard area. The coils to be loaded on a particular trailer are fetched from the SAP system according to the Stock Transport Order (STO). The in-charge then selects the loading point where the trailer will be loaded and confirms the plan. Unified Modelling Language (UML) [3] sequence diagram in **Figure-3** depicts the planning process implemented in YMS.

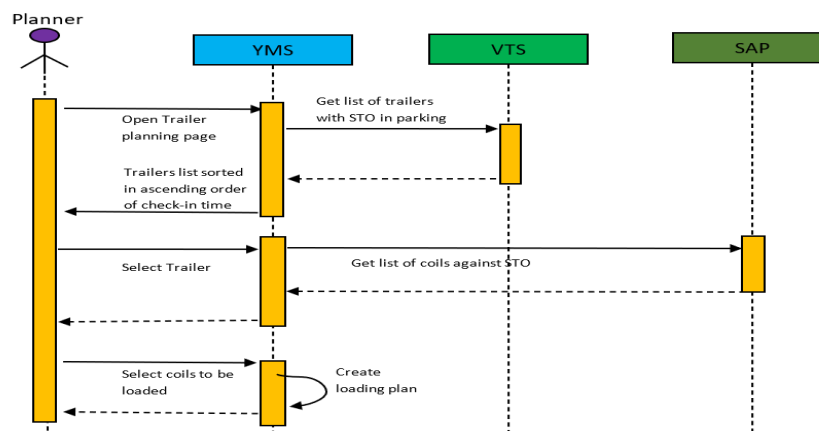


Figure 3: Sequence Diagram of trailer planning process showing interaction of YMS with VTS and SAP systems.

**B. Automated Dispatch Documentation**

After the loading plan of a trailer is confirmed the system then prepares loading sequence or priority of the trailer. The system ensures that loading priorities of trailers are assigned to support FIFO. The loading priority of planned trailers is flashed on the display board installed at the parking zone. Trailers having loading priority number of *one* can proceed from parking area to the loading position of the respective yard. The process of loading the coils starts after the trailer is parked at the loading position. According to the plan YMS sends a work order to the crane for retrieving coil from the yard and laying it down on the trailer. The process is repeated for loading subsequent coil(s) in the plan. After the coils are loaded and lashed to the trailer, loading in-charge inspects the coils and scans the barcode label pasted on the coil using a handheld scanning device. The barcode scanner sends the information of the loaded coils to the YMS web service through Wi-Fi network. The web service then forwards the required details to SAP system for delivery creation and invoice generation as shown in **Figure 4**.

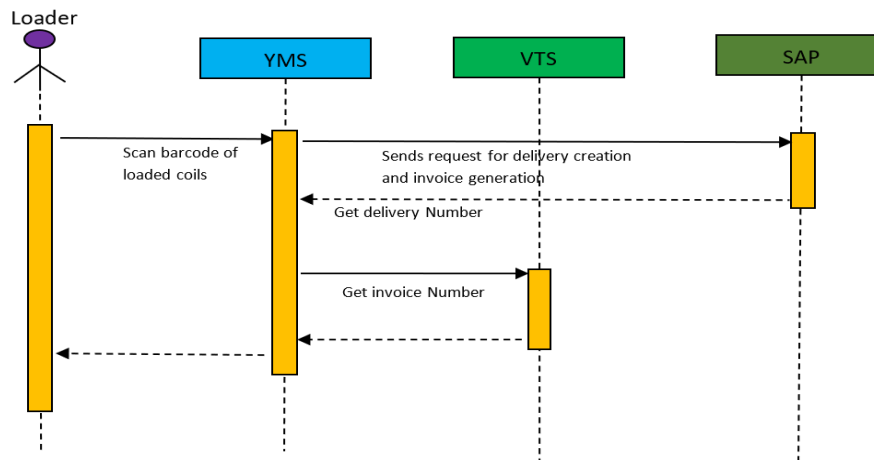


Figure 4: Sequence Diagram showing interaction of YMS with VTS and SAP systems for automated documents generation.

Trailers pass through *checked-in, registered, assigned, and evacuated* states while in the yard area. When a trailer enters parking area its status is shown as “checked-in”. After the loading plan is created the trailer status is changed to “registered”. When it reaches its loading position the loading in-charge changes its status to “assigned”, and finally when the loaded coils are scanned the status is changed to “evacuated”. After a trailer is evacuated the loading position becomes vacant and system automatically increments the loading priority of queued up registered trailers by one. Trailer with the loading priority “one” can now proceeds to the vacant loading position assigned by loading in-charge. Once assigned the system sends work order to crane to retrieve the planned coils from the storage area and load them on the trailer. **Figure 5** shows change in status of registered trailers planned to be loaded at loading position 1TRE11.

| Trailer | Status     | Loading Position | Loading Priority | Remarks                |
|---------|------------|------------------|------------------|------------------------|
| NL07A   | ASSIGNED   | 1TRE11           |                  | Loading in progress    |
| NL01K9  | REGISTERED |                  | 1                | Waiting to be assigned |
| NL02Q69 | REGISTERED |                  | 2                |                        |
| NL01L5  | REGISTERED |                  | 3                |                        |

| Trailer | Status     | Loading Position | Loading Priority | Remarks                                      |
|---------|------------|------------------|------------------|--|
| NL07A   | EVACUATED  |                  |                  | Loading completed                            |
| NL01K9  | ASSIGNED   | 1TRE11           |                  | Loading in progress                          |
| NL02Q69 | REGISTERED |                  | 1                | Priority incremented. Waiting to be assigned |
| NL01L5  | REGISTERED |                  | 2                | Priority incremented                         |

Figure 5: YMS automatically increments loading priorities of registered trailers.

C. Hardware and Software

- 1) *Backend*: Microsoft Visual Studio IDE was used for development of web services hosted on IIS. Data related to trailer loading stored in Oracle 19c database tables, see Table 1.
- 2) *Frontend*: Microsoft Visual Studio IDE was used for development of HTML web pages for visualizing the real-time status of trailers and hosted on IIS web server, see screenshots Figure 6 to Figure 9.

Table 1: Available hardware and software environment

|                         |   |
|-------------------------|---|
| Server Specifications   | CPU: Intel Gold 5217, RAM: 64GB               |
| Operating System        | Windows 2019 Server                           |
| Development Environment | MS Visual Studio 2010                         |
| Programming Language    | C# .Net, HTML, JavaScript                     |
| Web Server              | IIS 10  |
| Database                | Oracle 19c                                    |
| Client Desktop Computer | Windows 10, Internet Explorer, Chrome Browser |

D. Screenshots

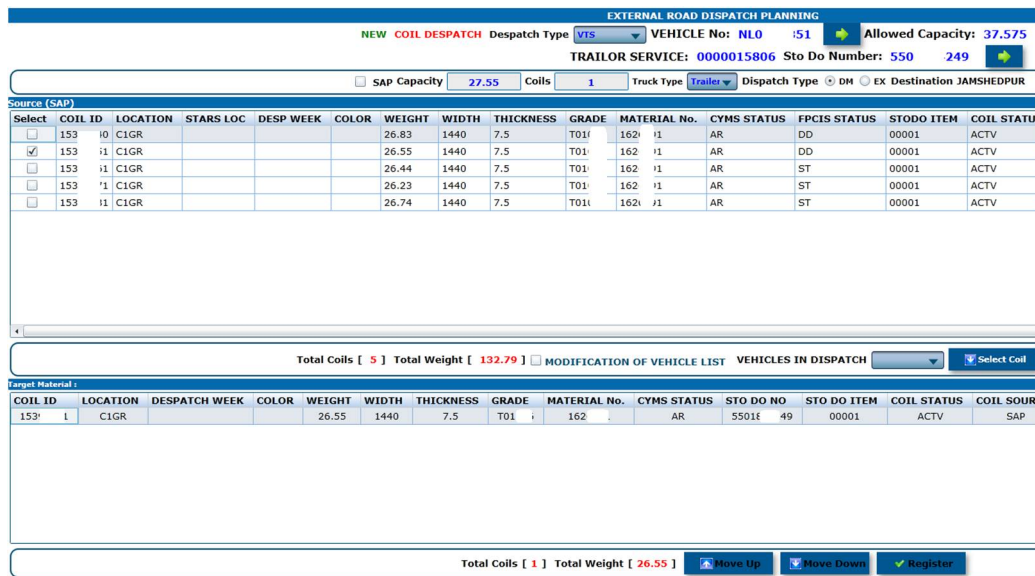


Figure 6: Trailer planning page for trailer registration.

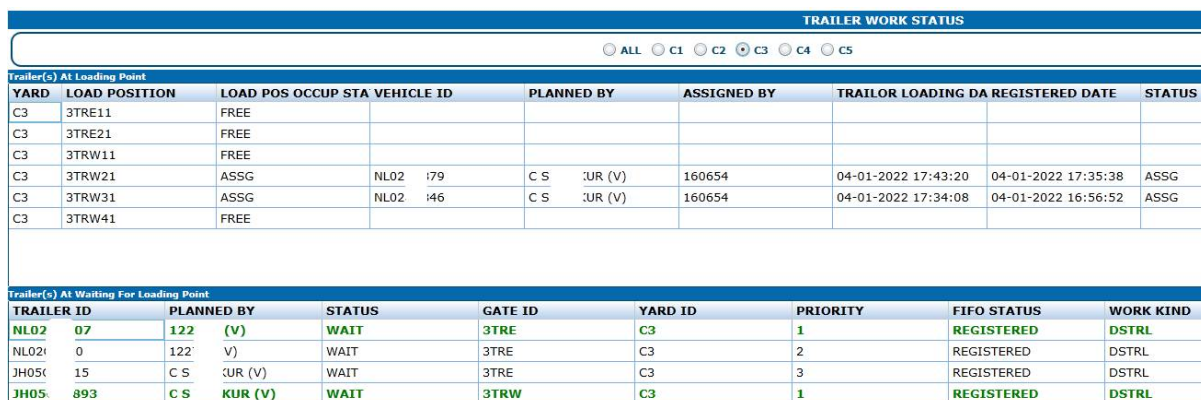


Figure 7: Loading position assignment page for registered trailers.

| Delivery Status Details    |          |             |               |           |                |         |             |              |          |   |   |       |
|----------------------------|----------|-------------|---------------|-----------|----------------|---------|-------------|--------------|----------|---|---|-------|
| TIME STAMP                 | TRUCK NO | DELIVERY NO | DESPACTH TYPE | STO DO NO | STO DO ITEM NO | COIL ID | SCAN STATUS | NO OF PIECES | QUANTITY |   |   |       |
| 2022-01-04-18.01.45.884542 | NL02C    | 3 0901C     | 95            | DM        | 55018          | 53      | 00001       | 186          | 1        | Y | 1 | 23.94 |
| 2022-01-04-18.00.45.884532 | JH05E    | 38 0901     | 93            | DM        | 55018          | 35      | 00001       | 185          | 1        | Y | 1 | 23.97 |
| 2022-01-04-17.43.44.884492 | NL01     | 19 0901     | 79            | DM        | 5501E          | 75      | 00001       | 185          | 0        | Y | 1 | 22.59 |
| 2022-01-04-17.43.44.884492 | NL01     | 95 0901     | 74            | DM        | 5501E          | 37      | 00001       | 186          | 2        | Y | 1 | 25.43 |
| 2022-01-04-17.37.43.884472 | JH05C    | 19 0901     | 88            | DM        | 5501E          | 53      | 00001       | 185          | 1        | Y | 1 | 23.53 |
| 2022-01-04-17.23.42.884432 | NL02     | 4 0901      | 98            | DM        | 5501E          | 75      | 00001       | 176          | 1        | Y | 1 | 27.2  |
| 2022-01-04-17.15.41.884413 | NL01     | 39 0901     | 17            | DM        | 5501E          | 39      | 00002       | 172          | 1        | Y | 1 | 18.93 |
| 2022-01-04-17.15.41.884412 | NL01     | 59 0901     | 17            | DM        | 5501E          | 39      | 00001       | 156          | 0        | Y | 1 | 22    |
| 2022-01-04-17.13.41.884402 | NL02     | 2 0901      | 15            | DM        | 5501E          | 77      | 00001       | 176          | 1        | Y | 1 | 27.17 |
| 2022-01-04-17.08.40.884392 | NL02     | 3 0901      | 79            | DM        | 5501E          | 18      | 00001       | 185          | 0        | Y | 1 | 24.04 |
| 2022-01-04-16.56.39.884362 | NL02     | 4 0901      | 53            | DM        | 5501E          | 79      | 00001       | 175          | 1        | Y | 1 | 24.11 |
| 2022-01-04-16.23.36.884272 | JH05A    | 39 0901     | 26            | DM        | 5501E          | 17      | 00001       | 186          | 1        | Y | 1 | 24.77 |
| 2022-01-04-16.02.34.884222 | NL02C    | 4 0901      | 92            | DM        | 55018          | 35      | 00001       | 170          | 2        | Y | 1 | 24.11 |
| 2022-01-04-16.01.34.884222 | JH05E    | 31 0901     | 21            | DM        | 95158          | 37      | 00001       | 178          | 9        | Y | 1 | 13.3  |
| 2022-01-04-16.00.34.884212 | JH05C    | 72 0901     | 17            | DM        | 55018          | 47      | 00001       | 185          | 0        | Y | 1 | 18.45 |

Figure 8: Delivery status page showing delivery and invoice details in SAP.

| HOT STRIP MILL<br>COIL YARD MANAGEMENT SYSTEM<br>DAILY DESPATCH REPORT |            |          |                  |                     |     |          |            |          |      |    |
|--|------------|----------|------------------|---------------------|-----|----------|------------|----------|------|----|
| 1/4/2022   |            |          |                  |                     |     |          |            |          |      |    |
| Arrival  | 04-01-2022 | 09:06:23 | Vehicle          | NL0:                | 93  | Despatch | 04-01-2022 | 10:12:56 | Yard | C1 |
| Delivery No.   |            |          | Transporter Name | ENTERPRISES         |     |          |            |          |      |    |
|  | 1831       | 1        |                  | 24.43               | 8   |          |            |          |      |    |
| No. Of Coils   | 1          |          | Weight:          | 24.43               |     |          |            |          |      |    |
| Arrival  | 04-01-2022 | 09:10:42 | Vehicle          | NL01A               | 99  | Despatch | 04-01-2022 | 10:34:25 | Yard | C1 |
| Delivery No.   |            |          | Transporter Name | TRANSPORT PVT. LTD. |     |          |            |          |      |    |
|  | 1863       | 1        |                  | 23.69               | 2   |          |            |          |      |    |
| No. Of Coils   | 1          |          | Weight:          | 23.69               |     |          |            |          |      |    |
| Arrival  | 04-01-2022 | 09:12:51 | Vehicle          | JH05C               | 65  | Despatch | 04-01-2022 | 11:05:46 | Yard | C1 |
| Delivery No.   |            |          | Transporter Name | CARGO MOVERS        |     |          |            |          |      |    |
|  | 1863       | 0        |                  | 23.98               | 2   |          |            |          |      |    |
| No. Of Coils   | 1          |          | Weight:          | 23.98               |     |          |            |          |      |    |
| CRM  |            |          |                  |                     |     |          |            |          |      |    |
| Arrival  | 04-01-2022 | 05:34:31 | Vehicle          | NL0                 | 17  | Despatch | 04-01-2022 | 07:09:43 | Yard | C2 |
| Delivery No.   |            |          | Transporter Name | TRANSPORT CO        |     |          |            |          |      |    |
|  | 1830       | 0        |                  | 23.99               | 5.5 |          |            |          |      |    |
| No. Of Coils   | 1          |          | Weight:          | 23.99               |     |          |            |          |      |    |
| Arrival  | 04-01-2022 | 06:56:58 | Vehicle          | JH05B               | 1   | Despatch | 04-01-2022 | 07:23:03 | Yard | C3 |
| Delivery No.   |            |          | Transporter Name | Transport           |     |          |            |          |      |    |
|  | 1855       | 1        |                  | 23.79               | 2.5 |          |            |          |      |    |
| No. Of Coils   | 1          |          | Weight:          | 23.79               |     |          |            |          |      |    |

Figure 9: Dispatch report generated by the system.

### III. CONCLUSION

Yard Management System addresses the inefficiencies during loading and dispatch documentation stages. It brings uniformity in yard management operations by systemically introducing controls during the load planning phase. It addresses safety concerns and unnecessary delays by regulating movements of trailers in and out of the yard by providing real-time information to the operators. It boosts productivity by eliminating manual document creation which is tedious and prone to mistakes. Further studies need to be conducted to measure the impact of the system in improving overall turnaround time of trailers.

### REFERENCES

- [1] Soumalya Chakraborty, Binay Kumar, Akhilesh Malguri. (2016, September). Reducing the Truck Turnaround Time inside a Heavy Manufacturing Industry through Makigami Analysis. IJAIST, pp. 39-45.
- [2] Kautuk Timane, Puneet Gusain, Dr. Prashant Barge (2021). To reduce the Turn Around Time (TAT) of trucks and improve in-plant logistics. Psychology and Education Journal, 57(9), pp. 6179–6189.
- [3] R. Miles and K. Hamilton, Learning UML 2.0, 1st Edition, O'Reilly Media, 2006.



10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)