



# **iJRASET**

International Journal For Research in  
Applied Science and Engineering Technology



---

# **INTERNATIONAL JOURNAL FOR RESEARCH**

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume: 5      Issue: X      Month of publication:      October 2017**

**DOI:      <http://doi.org/10.22214/ijraset.2017.10086>**

**[www.ijraset.com](http://www.ijraset.com)**

**Call:       08813907089**

**E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)**

# Routing Protocol for Multipath Manet to Enhanced Consistency in Unreliable Communication

Mr M.V. Korade<sup>1</sup>; M r: Bhupendra Jire<sup>2</sup>; M r: Veenus Thakkar<sup>3</sup>; M r: Rakesh Singh<sup>4</sup>

<sup>1, 2, 3, 4</sup> Sandip Institute of Engineering And Management

**Abstract:** The Session Initiation Protocol (SIP) server cluster receives a huge load of SIP request from the client but the need for an efficient load balancer remains a challenge in terms of response time and load balancer capacity. For distributing Session Initiation Protocol a cluster of SIP server that receives the request from several load balancing server. The different load balancing algorithm is used such as a novel hybrid load techniques are supported by a proposed system. It introducing details of the SIP, recognizing a difference in call length, dynamic estimates of back-end server load for different SIP transactions. Propose Transaction novel algorithm achieves its performance by integrating several features knowledge of the SIP protocol, dynamic estimates of back-end server load, distinguishing activity from calls, find out the variability in call length, and handle differences in processing costs for different SIP negotiation Distributing the requests across the cluster more evenly minimizes the occupancy and the corresponding amount of time a particular request waits behind others for service and throughput as compared to the novel algorithms. The proposed system is expected to significantly reduce response time which will be confirmed through a detailed analysis of occupancy and also the server capacity to load balancing.

**Keywords** Session Initiation Protocol (SIP), IMS, ISP

## I. INTRODUCTION

The Session Initiation Protocol, (SIP), is used for negotiating sessions between two or more parties that want to interact or communicate. SIP is used for Voice over IP (VoIP) and instant messaging applications to connect parties that want to exchange data packets. rather than using centralized control. SIP differs from other approaches to session negotiation moving the control handshaking to the end point, because it is decentralized, This makes it extensible, scalable, and useful for mobile applications. SIP is becoming ubiquitous. Recently, application servers have been developed which allow both the HTTP and SIP protocols for the same application. It is expected that the next generation of web based applications will be of this fashion.

The Session Initiation Protocol (SIP) is a signaling protocol build to support a super set of the call processing functions but within an Internet Protocol communications network in the public switched telephone network These functions include the set up, modification, and tear down of voice and video calls over the Internet. Once a session is established, other protocols such as the Real-time Transport Protocol (RTP) are used to carry the actual content.[12] SIP is a protocol normally uses in instant messaging, IPTV, Voice over IP, voice and video conferencing. Wireless network providers are standardizing on SIP as the basis for the IP Multimedia System (IMS) standard for the Third Generation Partnership Project. For digital voice offerings from existing legacy Telecommunications Company as well as their cable competitor VoIP providers use SIP.

A single server may be able to support hundreds or even thousands of users and millions of customer are supported by ISP. A central component to providing any large scale service is the ability to provide with increasing load and client requests. A frequently used mechanism to scale a service is to use some form of a load-balancing dispatcher that distributes requests across servers of a cluster. However, almost all research done in this area has been in the context of either the web service. SIP is used to create, modify and terminate sessions between users. Sessions can either be internet telephone calls, conference calls, video calls, etc. But SIP is not the only protocol needed to make an internet phone call, SIP is only used to make the communication possible, the real media will be sent using another protocol. The SIP protocol is that different transaction such as INVITE and BYE. In addition, the best-performing algorithm takes difference of call lengths, different transactions.

- A. Call Join Shortest Queue: Tracks the number of calls allocated to each back-end server and allocate new SIP calls to the node.
- B. Transaction-Join-Shortest-Queue: Routes a new call to the server that has the few active transactions.

C. Transaction-Least-Work-Left: Routes a new call to server that has the least work.

SIP can also invite participants to already existing sessions, such as multicast conferences. Media can be added to (and removed from) an existing session. SIP transparently supports name mapping and redirection services, which supports personal mobility users can maintain a single externally visible identifier regardless of their network location. SIP supports five facets of establishing and terminating multimedia communications: User location:Determination of the end system to be used for communication. User availability:Determination of the willingness of the called party to engage in communications. User capabilities:Determination of the media and media parameters to be used. Session setup:Ringing establishment of session parameters at both called and calling party. SIP does not provide services. SIP rather provides primitives that can be used to implement different services. For example, SIP can locate a user and deliver an opaque object to his current location. the endpoints can agree on the parameters of a session. If this primitive is used to deliver a session description written in SDP for instance If the same primitive is used to deliver a photo of the caller as well as the session description, a caller ID service can be easily implemented. As this example shows, a single primitive is typically used to provide several different services. SIP does not offer conference control services such as floor control or voting and does not prescribe how a conference is to be managed. SIP can be used to initiate a session that uses some other conference control protocol. Since SIP messages and the sessions it establishes can pass through a entire different kind of networks and SIP can not and does not provide network resource reservation capability. The nature of the services provided make security particularly important. To that end, SIP provides a suite of security services, which include denial-of-service prevention, authentication (both user to user and proxy to user), integrity protection, and encryption and privacy services. SIP works with both IPv4 and IPv6.

## II. LITERATURE SURVEY

Mobile ad-hoc network is a temporary network set up by mobile computers (or nodes) moving arbitrary in the places that have no network infrastructure. Since the nodes communicate with each other, they cooperate by forwarding data packets to other nodes in the network. Thus the nodes find a path to the destination node using routing protocols. However, due to security vulnerabilities of the routing protocols, mobile ad-hoc networks are unprotected to attacks of the malicious nodes. One of these attacks is the Black Hole Attack against network integrity absorbing all data packets in the network. Since the data packets do not reach the destination node on account of this attack, data loss will occur. There are lots of detection and defense mechanisms to eliminate the intruder that carry out the black hole attack. We simulated the black hole attack in various mobile ad-hoc network scenarios and have tried to find a response system in simulations.[14]

In SAODVABH, we have used a very simple and effective way of providing security in AODV against black hole attack. As from the graphs as well as simulation results we illustrated in results we can easily infer that the performance of the normal AODV drops under the presence of black hole attack. Our prevention scheme detects the malicious nodes and isolates it from the active data forwarding and routing and reacts by sending signal to its neighbors. Our solution: SAODVABH increases PDR with minimum increase in Average-End-to end Delay and normalized Routing Overhead. There are some drawbacks which should be improved and some of them are given below:

- A. Find out and block an authenticated user, which start miss behaving inside the network.
- B. Scalability still remains largely unexplored.
- C. Energy consumption.
- D. Lacks of effective analytical tools especially in case of large scale wireless network setting.
- E. Computation complexity

The multi-path routing mechanism has not been explored thoroughly in the domain of Ad hoc networks. They are proposing that the path selection criteria and QOLSR multi-path calculation based on bandwidth and delay. When there is no path in QOLSR that satisfies the bandwidth and delay parameters, they disperse the data traffic along different paths to increase end-to-end throughput. They have a proposed a multipath for the QOLSR protocol and an algorithm to minimize interference between those paths to achieve better QoS guarantees to applications and improve network resource utilization.[7]

Mobile ad hoc networks (MANETs) consist of a collection of wireless mobile nodes which dynamically exchange data without reliance on a fixed base station or a wired backbone network, which makes routing a crucial issue for the design of ad hoc networks. A hybrid multipath routing protocol named MP-OLSR. It is based on the link state algorithm and employs periodic exchange of messages to maintain topology information of the networks. In the meantime, it updates the routing table in an on-demand scheme and forwards the packets in multiple paths which have been determined at the source. The simulation in NS2 shows that the new



protocol can effectively improve the performance of the networks. Here they uses Multipath Dijkstra algorithm, with the algorithm, we can get node disjoint routes or path-disjoint routes using semi-source routing mechanism. To meet the requirement for a reliable transmission, the multiple routes are exploited by a multiple description coding based on Mojette Transform. The future research includes refining the incremental functions of  $f_p$  and  $f_e$  to make them adaptive to the specific network and optimize the redundancy allocation for MDC in the data transmission.[4] Multipath routing protocols for Mobile Ad hoc Network (MANET) address the problem of scalability, security (confidentiality and integrity), lifetime of networks, instability of wireless transmissions, and their adaptation to applications. Our protocol, called Multipath OLSR (MP-OLSR), is a multipath routing protocol based on OLSR. The Multipath Dijkstra Algorithm is proposed to obtain multiple paths. The algorithm gains great flexibility and extensibility by employing different link metrics and cost functions. In addition, route recovery and loop. [2] Mobile ad hoc networks (MANETs) consist of a collection of wireless mobile nodes which dynamically exchange data among themselves without the need of fixed infrastructure or a wired backbone network. Due to limited transmission range of wireless network nodes, multiple hops are usually needed for a node to exchange information with any other node in the network. Thus routing is a crucial issue in the design of MANET. On-demand routing protocols for mobile ad hoc networks discover and maintain only the needed routes to reduce routing overheads. They use a flood-based discovery mechanism to find routes when required. Since each route discovery incurs high overhead and latency, the frequency of route discoveries must be kept low for on demand protocols to be effective. The wide availability of wireless devices requires the routing protocol should be scalable. But, as the size of the network increases the on demand routing protocols produce poor performance due to large routing overhead generated while repairing route breaks. The proposed multipath routing scheme provides better performance and scalability by computing multiple routes in a single route discovery. Also, it reduces the routing overhead by using secondary paths. This scheme computes combination of the node-disjoint path and fail-safe paths for multiple routes and provides all the intermediate nodes of the primary path with multiple routes to destination.[3] In recent years, routing has been the most focused area in ad hoc networks research, because of its effectiveness and efficiency is widely developed in bandwidth constrained mobile wireless ad-hoc networks. Whenever there is a link disconnection on the active route, the routing protocol must perform a route recovery process. In QoS routing for wired networks, multiple path routing is popularly used, but they propose an on-demand routing scheme called Split Multipath Routing (SMR) that establishes and utilizes multiple routes of maximally disjoint paths. They believe providing multiple routes are beneficial in network communications, particularly in mobile wireless networks where routes are disconnected frequently because of mobility and poor wireless link quality.[11]

F. Route Discovery

G. Route Selection Method

### III. EXISTING SYSTEM

#### A. MP-OLSR

MP-OLSR based on OLSR to provide fault-tolerance, higher aggregate bandwidth and load balancing. It exchanges control messages periodically as OLSR to get the topology information of the whole networks. Based on this topology information, our Multipath Dijkstra algorithm is used to obtain the multiple paths for the routing. With the algorithm, we can get node-disjoint routes or path-disjoint routes as necessary by adjusting distinct cost functions. In the network, the packets are forwarded from the source to the destination by employing a semi-source routing mechanism (source routing with route recovery). In addition, to meet the need for the reliable transmission, multiple description coding strategy is used in the data transmission. MP-OLSR does not always keep a routing table. It only computes the routes when there are data packets need to be sent out. The core functioning of MP-OLSR has two main parts: topology sensing and routes computation.[2]

#### B. QOLSR

QOLSR multi-path calculation based on bandwidth and delay. The resulting protocol computes multiple loop-free and node-disjoint paths. The Loop-free property is guaranteed by using the shortest-widest path algorithm. Node-disjoint of multiple paths is achieved using our proposed algorithm. We also present evaluation comparison of QOLSR multipath routing vs. QOLSR single-path routing using a scalable simulation model.[7] An algorithm to minimize the interference between those path to achieve better QoS guarantees to application and improve network resource utilization.

#### C. Aodv

Ad hoc On-Demand Distance Vector (AODV) Routing is a routing protocol for mobile ad hoc networks (MANETs) and other wireless ad hoc networks. It was jointly developed on July 2003 in Nokia Research Center, University of California, Santa Barbara and University of Cincinnati by C. Perkins, E. Belding-Royer and S. Das.

In AODV, the route which spends less energy and owns larger capacity is selected by synthetic analysis [9]. It also responds to the topological changes that affects the active routes. AODV performs better for longer duration of traffic than other protocols [10].

*D. Smr*

Split Multipath Routing (SMR) protocol that builds maximally disjoint paths. Multiple routes, of which one is the shortest delay path, are discovered on demand. Established routes are not necessarily of equal length. Data traffic is split into multiple routes to avoid congestion and to use network resources efficiently. We believe providing multiple routes is beneficial in network communications, particularly in mobile wireless networks where routes are disconnected frequently because of mobility and poor wireless link quality. Route Discovery Split Multipath Routing (SMR) is an on-demand routing protocol that builds multiple routes using request cycles. When the source needs a route to the destination but no route information is known, it floods the ROUTER REQUEST (RREQ) message to the entire network. Because this packet is flooded, several duplicates that traversed through different routes reach the destination. The destination node selects multiple disjoint routes and sends ROUTE REPLY (RREP) packets back to the source via the chosen routes.[11]

*E. Sip*

The Session Initiation Protocol (SIP) is a communications protocol for signaling and controlling multimedia communication sessions in applications of Internet telephony for voice and video calls, in private IP telephone systems, as well as in instant messaging over Internet Protocol (IP) networks. The protocol defines the methodology of SIP communications and the specific format of messages exchanged for cooperation of the participants in multimedia sessions. A call established with SIP may consist of multiple media streams.[12]

**IV. PROPOSED SYSTEM**

*A. System Architecture*

User Agent Clients send SIP requests (e.g., INVITE, BYE) to our load balancer, which then selects a SIP server to handle each request. The distinction between the various load-balancing algorithms presented in this paper is how they choose which SIP server to handle a request. Servers send SIP responses to the load balancer, which then forwards the response to the client. SIP is used to establish, alter, or terminate media sessions. Once a session has been established, the parties participating in the session would typically communicate directly with each other using a different protocol for the media transfer, which would not go through our SIP load balancer. The Figure 1 shows the system architecture.

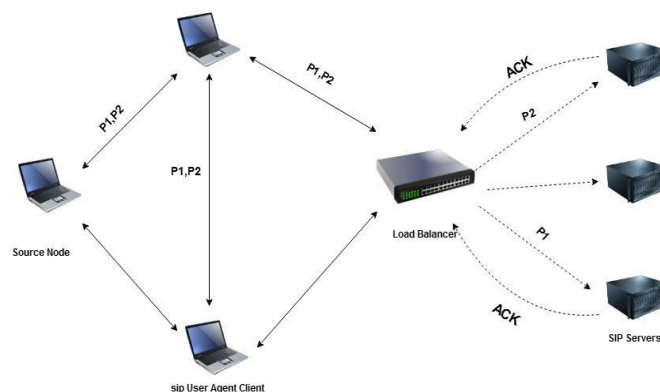


Fig 1

*B. Algorithms*

Load Balancing Algorithm (Novel Algorithms)

The steps of novel algorithm is show below:

- 1) Load balancer check the request coming from client and assign to back end server. The load balancer has the freedom to pick a server only on the first request of a call.
- 2) All subsequent requests are assign to any back end server. This allows all requests corresponding different client at different time.
- 3) The load-balancing algorithms are based on assigning load to servers by picking the server with the (es-timated) least amount of work assigned but not yet completed.
- 4) While the concept of assigning work to servers with the least amount of work left to do has been applied in other contexts the specifics of how to do this efficiently for a real application are often not at all obvious.
- 5) The system needs some method to reliably estimate the amount of work that a server has left to do at the time load balancing decisions are made.
- 6) The load balancer can estimate the work assigned to a server based on the requests it has assigned to the server and the responses it has received from the server.
- 7) All responses from servers to clients first go through the load balancer, which forwards the responses to the appropriate clients.
- 8) By onitoring these responses, the load balancer can determine when a server has finished processing a request and update the estimates it is maintaining for the work assigned to the server.
- 9) display the the response time between transaction.

### C. Hybrid Algorithms

The algorithm working based on the load value and memory details.

- 1) Using this algorithm load balancer collect the load details of all back end server.
- 2) Estimate the average load of each back end server.
- 3) Compare average load of each server to other find least work system.
- 4) Estimate the memory utilization of of each back end server.
- 5) Compare memory of each server to other find least used memory.
- 6) Decision is based on least load and memory on those system is selected.
- 7) Assign load to decided back end server.

## V. MATHEMATICAL MODEL

Mathematical model is represented in terms of set theory with various sets of component are define in this section.

Here  $S = \{ I, O, F \}$

$I = \{ I_1, I_2, I_3, \dots, I_n \}$  are set of inputs

Where,

$I_1 =$  Packet 1 from client 1

$I_2 =$  Packet 2 from client 2

$I_3 =$  Packet 3 from client 3

-  $F = \{ F_1, F_2, F_3, \dots, F_n \}$  are set of Functions

Were,

$F_1 =$  Accept Requests

$F_2 =$  Shortest Path Finding

$F_3 =$  Registry of IP information

$F_4 =$  Load balancing

$F_5 =$  Check packet and forward

-  $O = \{ R \}$

Where,

$R =$  Report

### A. Venn Diagram

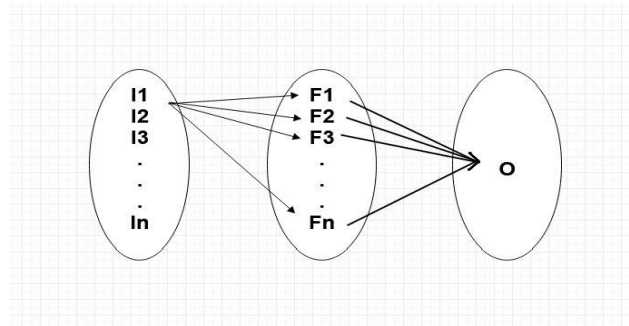


Fig 2

## VI. CONCLUSION

A system is implemented using novel, round robin, hybrid algorithm. By using these algorithm response time, throughput occupancy, memory utilization and load balancer capacity is compare with each other. It is found that, multipath routing has many benefits, such as higher throughput, lower end-to-end delay, higher network lifetime etc. It improves energy efficiency and reliability of networks. All paths may transfer the entire trace or some paths used alternately to minimize path discovery. And load Sharing of Packets are done for devices.

## REFERENCES

- [1] K. Anwar, R. Datta, A. Festag, G. Fettweis, G. Del Galdo, S. Gurgul, M. Juntti, H. Khalife, P. Komulainen, Y. Ma, F. Mariani, M. Matthe, T. Natsumoto, M. Natkanien, S. C. S. Szott, R. Tafazolli, R. Thoma, J. Wszolek, P. Xiao, and N. Yi, Rescue: Links-on-the-fly technology for robust, efficient and smart communication in unpredictable environments, in EuCNC, Bologna, June 2014
- [2] J. Yi, A. Adnane, S. David, and B. Parrein, Multipath optimized link state routing for mobile ad hoc networks, Ad Hoc Netw., vol. 9, no. 1, pp. 2847, Jan. 2011. [Online]. Available: <http://dx.doi.org/10.1016/j.adhoc.2010.04.007>
- [3] <http://dx.doi.org/10.1016/j.adhoc.2010.04.007>
- [4] N. Jaisankar and R. Saravanan, An extended aodv pro-protocol for multipath routing in manets, in International Journal of Engineering and Technology, vol. 2, no. 4, Aug 2010, pp. 394400.
- [5] J. Yi, E. Cizeron, S. Hamma, and B. Parrein, Simulation and performance analysis of mp-olsr for mobile ad hoc networks, in Wireless Communications and Networking Conference, 2008. WCNC 2008. IEEE, March 2008, pp. 22352240.
- [6] M. Kun, Y. Jingdong, and R. Zhi, The research and simulation of multipath-olsr for mobile ad hoc network, in Communications and Information Technology, 2005. ISCIT 2005. IEEE International Symposium on, vol. 1, Oct 2005, pp. 540543
- [7] X. Zhou, Y. Lu, and B. Xi, A novel routing protocol for ad hoc sensor networks using multiple disjoint paths, in Broadband Networks, 2005. BroadNets 2005. 2nd International Conference on, Oct 2005, pp. 944 948 Vol. 2.
- [8] H. Badis and K. Al Agha, Qolsr multi-path routing for mobile ad hoc networks based on multiple metrics: bandwidth and delay, in Vehicular Technology Conference, 2004. VTC 2004-Spring. 2004 IEEE 59th, vol. 4, May 2004, pp. 21812184 Vol.4
- [9] T. Clausen and P. Jacquet, Rfc3626: The opti-mized link state routing protocol, The Internet En-gineering Task Force,2003.[Online].Available: <http://www.ietf.org/html.charters/manet-charter.html>
- [10] Annapurna P Patil, Dr K Rajani kanth , BatheySha-ranya, M P Dinesh Kumar, Malavika J, Design of an Energy Efficient Routing Protocol for MANETs based on AODV Vol. 8, Issue 4, No 1, July 2011.
- [11] Anu Kumari Arvind Kumar Akhil Sharma, Survey Paper on Energy Efficient Routing Protocol in MANET Volume 3, Issue 3, March 2013 ISSN: 2277 128X.
- [12] S.-J. Lee and M. Gerla, Split multipath routing with maximally disjoint paths in ad hoc networks, in Com-munications, 2001. ICC 2001. IEEE International Con-ference on, vol. 10, 2001, pp. 32013205 vol.10.
- [13] J.Rosenberg, H.Schulzrinne, G.Camarillo, A.Johnston, J.Peterson, R.Sparks, M.Handley, E.Schooler, "SIP: Session Initiation Protocol", RFC3261, Jun. 2002.
- [14] Y.Zhang, "SIP based VOIP Network and its inter-working with th PSTN", Electronics Communication Engineering Journal, Dec.2002, pp.273-282.
- [15] C. Perkins, E. Belding-Royer, and S. Das, Ad hoc On-Demand Distance Vector (AODV) Rout-ing, RFC 3561 (Experimental), Internet Engineer-ing Task Force, July 2003.[Online].Available: <http://www.ietf.org/rfc/rfc3561.txt>
- [16] Deore Suvarna, Erande Pallavi, Lahane Sumitra, Dha-trak Chhaya, "Acknowledgement security for MANET using EAACK" .2015 International Conference on Green Computing and Internet of Things (ICGCIoT)" IEEE, 2015





10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)