



# **iJRASET**

International Journal For Research in  
Applied Science and Engineering Technology



---

# **INTERNATIONAL JOURNAL FOR RESEARCH**

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume: 6      Issue: 1      Month of publication: January 2018**

**DOI: <http://doi.org/10.22214/ijraset.2018.1192>**

**[www.ijraset.com](http://www.ijraset.com)**

**Call:  08813907089**

**E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)**

# Steady MHD Three Dimensional Flow of Jeffrey Fluid over an Exponentially Stretching Sheet with Slip Conditions

M. Krishna Murthy<sup>1</sup>, S. Sreenadh<sup>2</sup>

<sup>1,2</sup>Department of Mathematics, Sri Venkateswara University, Tirupati, A.P., INDIA

**Abstract:** MHD three dimensional flow of Jeffrey fluid over an exponentially stretching surface with slip conditions are examined. The similarity transformations are used to convert the governing equations into a set of nonlinear ordinary differential equations and are solved numerically using fourth order Runge-Kutta method along with shooting technique. The effects of Jeffrey parameter, Hartmann number, temperature exponent, concentration exponent, heat source/sink, chemical reaction, Soret, Dufour and slip factors on velocity, temperature and concentration are shown graphically. The skin friction coefficient and the Nusselt number are examined numerically.

**Key words:** MHD, Jeffrey parameter, three dimensional flow, slip factors

## I. INTRODUCTION

The MHD Boundary layer flow over a stretching sheet has gained considerable attention because of its applications in industry and manufacturing process such as MHD power generators, petroleum industries, plasma studies, geothermal energy extraction, the boundary layer control in the field of aerodynamics etc. The study of non Newtonian fluids is increasing substantially in the recent years. Many materials in nature like tomato paste, apple sauce, sugar solution, mud, emulsion, melts, shampoos, soaps, personal care products, blood at low shear rate, chyme etc., do not obey Newton's law of viscosity. Such materials come under the category of non-Newtonian fluids. Hayat et al. [1] developed MHD three dimensional flow of Jeffrey fluid with Newtonian heating. Shafie et al. [2] discussed effects of soret and dufour on unsteady MHD flow by mixed convection over a vertical surface in porous media with internal heat generation, chemical reaction and hall current. Ahmad et al. [3] investigated mixed convection Jeffrey fluid flow over an exponentially stretching sheet with magneto hydrodynamic effect. Hayat et al. [4] discussed impacts of constructive and destructive chemical reactions in magneto hydrodynamic flow of Jeffrey liquid due to nonlinear radially stretched surface. Hayat et al. [5] studied unsteady MHD flow over an exponentially stretching sheet with slip conditions. Hayat et al. [6] investigated soret and dufour effects in three dimensional flow over an exponentially stretching surface with porous medium, chemical reaction and heat source/sink. Hayat et al. [7] discovered thermally stratified point flow of Casson fluid with slip conditions. Hayat et al. [8] developed MHD flow of Jeffrey fluid due to nonlinear radially stretched sheet in presence of Newtonian heating. Bhattacharyya et al. [9] reported slip effects on diffusion of chemically reactive species in boundary layer flow due to a vertical stretching sheet with suction or blowing. Shehzad et al. [10] developed soret and dufour effects on the stagnation point flow of Jeffrey fluid with convective boundary conditions. Makinde [11] studied computational modelling of MHD unsteady flow and heat transfer towards a flat plate with Navier slip and Newtonian heating. Satya Narayana et al. [12] developed numerical study of MHD heat and mass transfer of a Jeffrey fluid over a stretching sheet with chemical reaction and thermal radiation. Kalidas Das et al. [13] investigated radiative flow of MHD Jeffrey fluid past a stretching sheet with surface slip and melting heat transfer. Liu et al. [14] discovered flow and heat transfer for three dimensional flow over an exponentially stretching sheet. Magyari et al. [15] studied heat and mass transfer in the boundary layers on an exponentially stretching continuous surface. Hayat et al. [16] discussed radiative hydrodynamic flow of Jeffrey nanofluid by an exponentially stretching sheet. Hayat et al. [17] reported MHD three dimensional flow by an exponentially stretching surface with convective boundary condition. MHD stagnation point flow of Jeffrey fluid by a radially stretching surface with viscous dissipation and Joule heating was developed by Hayat et al. [18]. Swatimukhopadyay [19] investigated slip effects on MHD boundary layer flow over an exponentially stretching sheet with suction/blowing and thermal radiation. Soret and Dufour effects on MHD radiative heat and mass transfer flow of a Jeffrey fluid over a stretching sheet and Joule heating effects on MHD mixed convection of a Jeffrey fluid over a stretching surface with power law heat flux were discussed by Satyanarayana et al. [20,21]. Gireesha et al. [22] studied influence of nonlinear thermal radiation and viscous dissipation on three dimensional flow of Jeffrey nanofluid over a stretching sheet in the presence of Joule heating. Gireesha et al. [23] developed

combined effect of joule heating and viscous dissipation on MHD three dimensional flow of a Jeffrey nanofluid. Gireesha et al. [24] analyzed nonlinear thermal convection in Jeffrey liquid flow with cross diffusion effects past a stretched surface.

In the present study MHD three dimensional flow of Jeffrey fluid over an exponentially stretching surface with slip conditions is examined. The governing equations are solved numerically using fourth order Runge-Kutta method along with shooting technique. The effects of governing parameters on velocity, temperature and concentration are obtained graphically. The skin friction coefficient and Nusselt number are examined numerically.

## II. MATHEMATICAL FORMULATION OF THE PROBLEM

Consider the steady MHD three dimensional flow of an incompressible Jeffrey fluid over an exponentially stretching surface. The sheet is stretched along the  $xy$ -plane while fluid is placed along the  $z$ -axis. Moreover the constant magnetic field is applied normal to the fluid flow and the induced magnetic field assumed to be negligible. The sheet at  $z = 0$  is stretched in the  $x$ - and  $y$ -directions with velocities  $U_w$  and  $V_w$  respectively. The governing boundary layer flow equations are

$$\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} + \frac{\partial w}{\partial z} = 0 \tag{1}$$

$$u \frac{\partial u}{\partial x} + v \frac{\partial u}{\partial y} + w \frac{\partial u}{\partial z} = \frac{\nu}{1 + \lambda_1} \frac{\partial^2 u}{\partial z^2} - \frac{\sigma B_0^2}{\rho} u \tag{2}$$

$$u \frac{\partial v}{\partial x} + v \frac{\partial v}{\partial y} + w \frac{\partial v}{\partial z} = \frac{\nu}{1 + \lambda_1} \frac{\partial^2 v}{\partial z^2} - \frac{\sigma B_0^2}{\rho} v \tag{3}$$

$$u \frac{\partial T}{\partial x} + v \frac{\partial T}{\partial y} + w \frac{\partial T}{\partial z} = \alpha_m \frac{\partial^2 T}{\partial z^2} + \frac{Dk_T}{c_s c_p} \frac{\partial^2 C}{\partial z^2} + \frac{Q}{\rho c_p} (T - T_\infty) \tag{4}$$

$$u \frac{\partial C}{\partial x} + v \frac{\partial C}{\partial y} + w \frac{\partial C}{\partial z} = D \frac{\partial^2 C}{\partial z^2} + \frac{Dk_T}{T_m} \frac{\partial^2 T}{\partial z^2} - K_1 (C - C_\infty) \tag{5}$$

where  $u, v$  and  $w$  are the velocity components corresponding to  $x$ -,  $y$ - and  $z$ - directions respectively.  $\rho$  is the fluid density,  $B_0$  is the magnetic field strength,  $\nu$  is the kinematic viscosity,  $\lambda_1$  is the Jeffrey parameter,  $\sigma$  is the electrical conductivity of fluid,  $\alpha_m$  is the thermal diffusivity,  $k_T$  is the thermal diffusion,  $T_m$  is the fluid mean temperature,  $Q$  is the heat generation/absorption parameter,  $c_p$  is the specific heat,  $c_s$  is the concentration susceptibility,  $T$  is represents the temperature of fluid,  $D$  is the diffusion coefficient,  $C$  is the concentration,  $K_1$  is the reaction rate,  $C_\infty$  is the concentration far away from the surface and  $T_\infty$  is the is the temperature far away from the surface.

The associated with boundary conditions of equations (2)-(6) at the wall can be expressed as

$$\left. \begin{aligned} u = U_w = U_0 e^{\frac{x+y}{L}} + \alpha_1 \frac{\partial u}{\partial z}, v = V_w = V_0 e^{\frac{x+y}{L}} + \alpha_2 \frac{\partial v}{\partial z} \\ w = 0, T = T_w = T_\infty + T_0 e^{A\left(\frac{x+y}{2L}\right)} + \alpha_3 \frac{\partial T}{\partial z}, C = C_w = C_\infty + C_0 e^{B\left(\frac{x+y}{2L}\right)} + \alpha_4 \frac{\partial C}{\partial z} \end{aligned} \right\} \text{at } z = 0 \tag{6a}$$

$$u = 0, v = 0, T \rightarrow T_\infty, C \rightarrow C_\infty \text{ as } z \rightarrow \infty \tag{6b}$$

where  $U_w$  and  $V_w$  are the stretching velocities,  $U_0, T_0, C_0$  and  $V_0$  are constants,  $A$  and  $B$  are the temperature and concentration exponents,  $T_w$  is the surface temperature,  $T_0$  is the reference temperature,  $T_\infty$  is the ambient temperature,  $L_1$  and  $L_2$  are temperature and concentration slip factors and  $L$  is the reference length.

In order to transform equations (2)-(6) to the dimensionless form, the following transforms are applied

$$\left. \begin{aligned} u = U_0 e^{\frac{x+y}{L}} f'(\eta), v = V_0 e^{\frac{x+y}{L}} g'(\eta), w = -\left(\frac{\nu U_0}{2L}\right)^{\frac{1}{2}} e^{\frac{x+y}{L}} (f + \eta f' + g + \eta g') \\ \theta(\eta) = \frac{T - T_\infty}{T_0 e^{\frac{A(x+y)}{2L}}}, \phi(\eta) = \frac{C - C_\infty}{C_0 e^{\frac{B(x+y)}{2L}}}, \eta = \left(\frac{U_0}{2\nu L}\right)^{\frac{1}{2}} e^{\frac{x+y}{2L}} z \end{aligned} \right\} (7)$$

where  $\eta$  is the similarity variable. Substituting equation (7) in (2)-(6), equation (1) is satisfied automatically and equations (2)-(6) are reduced to the following nonlinear ordinary differential equations

$$\frac{f'''}{1 + \lambda_1} - 2(f' + g')f' + (f + g)f'' - M^2 f' = 0 \quad (8)$$

$$\frac{g'''}{1 + \lambda_1} - 2(f' + g')g' + (f + g)g'' - M^2 g' = 0 \quad (9)$$

$$\theta'' + Pr[(f + g)\theta' - A(f' + g')\theta + S\theta + Df\phi''] = 0 \quad (10)$$

$$\phi'' + Sc[(f + g)\phi' - B(f' + g')\phi - \gamma\phi + Sr\theta''] = 0 \quad (11)$$

The transformed boundary conditions can be written as

$$\left. \begin{aligned} f(0) = 0, f'(0) = 1 + \gamma_1 f''(0), g(0) = 0, g'(0) = \beta + \gamma_2 g''(0), \theta(0) = 1 + \gamma_3 \theta'(0), \phi(0) = 1 + \gamma_4 \phi'(0) \\ f'(\infty) \rightarrow 0, g'(\infty) \rightarrow 0, \theta(\infty) \rightarrow 0, \phi(\infty) \rightarrow 0 \end{aligned} \right\} (12)$$

where prime denotes the differentiation with respect to the similarity variable  $\eta$ ,  $M = \frac{2\sigma B_0^2 L}{\rho U_w}$  is the Hartmann number,  $Sc = \frac{\nu}{D}$

is the Schmidt number,  $\gamma = \frac{2K_1 L}{U_w}$  is the chemical reaction parameters,  $Df = \frac{Dk_T (C_w - C_\infty)}{c_s c_p (T_w - T_\infty) \nu}$  is the Dufour parameter,

$Sr = \frac{Dk_T (T_w - T_\infty)}{T_m (C_w - C_\infty) \nu}$  is the Soret number,  $S = \frac{2QL}{U_w \rho c_p}$  is the heat source/sink parameter,  $A$  and  $B$  are the temperature and

concentration exponent  $Pr = \frac{\nu}{\alpha_m}$  is the Prandtl number,  $\beta = \frac{V_0}{U_0}$  is the ratio parameter,  $\gamma_1 = \alpha_1 \left(\frac{U_0 e^x}{\nu L}\right)^{1/2}$  and

$\gamma_2 = \alpha_2 \left(\frac{U_0 e^x}{\nu L}\right)^{1/2}$  are the velocity slip parameters,  $\gamma_3 = \alpha_3 \left(\frac{U_0 e^x}{\nu L}\right)^{1/2}$  and  $\gamma_4 = \alpha_4 \left(\frac{U_0 e^x}{\nu L}\right)^{1/2}$  are the temperature slip

parameter and the concentration slip parameter and  $\lambda_1$  is the Jeffrey parameter.

The physical quantities of interest are the skin friction coefficients along the  $x$  - and  $y$  -directions are given by

$$C_{fx} = \frac{\mu}{1 + \lambda_1} \left(\frac{\partial u}{\partial z}\right)_{z=0} \quad \text{and} \quad C_{fy} = \frac{\mu}{1 + \lambda_1} \left(\frac{\partial v}{\partial z}\right)_{z=0} \quad (13)$$

$$\frac{1}{2} \rho U_w^2 \quad \text{and} \quad \frac{1}{2} \rho U_w^2$$

the skin friction coefficients in dimensionless form are



$$C_{fx} = \left(\frac{\text{Re}_{xy}}{2}\right)^{-1/2} e^{\frac{3(x+y)}{2L}} \frac{f''(0)}{1 + \lambda_1} \text{ and } C_{fy} = \left(\frac{\text{Re}_{xy}}{2}\right)^{-1/2} e^{\frac{3(x+y)}{2L}} \frac{g''(0)}{1 + \lambda_1} \quad (14)$$

The local Nusselt number  $Nu_x$  and local Sherwood number  $Sh_x$  are defined as

$$Nu_x = -\frac{x}{T_w - T_\infty} \frac{\partial T}{\partial z} \Big|_{z=0} = -\frac{x}{L} \left(\frac{\text{Re}_{xy}}{2}\right)^{1/2} e^{\frac{(x+y)}{2L}} \theta'(0) \quad (15)$$

$$Sh_x = -\frac{x}{C_w - C_\infty} \frac{\partial C}{\partial z} \Big|_{z=0} = -\frac{x}{L} \left(\frac{\text{Re}_{xy}}{2}\right)^{1/2} e^{\frac{(x+y)}{2L}} \phi'(0) \quad (16)$$

where  $\text{Re}_{xy}$  is the Reynolds number defined by  $\text{Re}_{xy} = \frac{U_w L}{\nu}$ .

### III. RESULTS AND DISCUSSIONS

The present chapter deals with MHD three dimensional flow of Jeffrey fluid over an exponentially stretching surface with slip conditions. The effects of pertinent governing parameters such as Jeffrey parameter  $\lambda_1$ , Hartmann number  $M$ , heat source/sink  $S$ , chemical reaction  $\gamma$ , Soret  $Sr$ , ratio parameter  $\beta$ , Dufour  $Df$ , velocity slip factors  $\gamma_1$  and  $\gamma_2$ , temperature exponent  $A$ , concentration exponent  $B$ , temperature slip factor  $\gamma_3$  and concentration slip factor  $\gamma_4$  on flow velocity, temperature and concentration are depicted graphically.

The variation of Hartmann number  $M$  on velocity profiles  $f'(\eta)$ ,  $g'(\eta)$  are shown in Figure 1. It is observed that the velocity and the momentum boundary layer thickness reduce for enhancing Hartmann number. Hartmann number depends on Lorentz force and Lorentz force is an agent which resists the flow. When we increase the Hartmann number then Lorentz force increases which leads to a decrease in velocity of the fluid. Figure 2 depicts the influence of Jeffrey parameter  $\lambda_1$  on velocity profiles  $f'(\eta)$ ,  $g'(\eta)$ . We have seen that the velocity and the momentum boundary layer thickness decays with increasing  $\lambda_1$ . Figure 3 illustrates the behaviour of ratio parameter  $\beta$  on the velocity components  $f'(\eta)$ ,  $g'(\eta)$ . We observed that the velocity  $f'(\eta)$  and the momentum boundary layer thickness reduce for higher values of  $\beta$ . It is noticed that an increment in  $\beta$  measures the stretching velocity in the  $y$ -direction has higher impact that the reference velocity in the  $x$ -direction and the opposite behaviour in the velocity  $g'(\eta)$ . The effect of velocity slip parameter  $\gamma_1$  on velocity profiles  $f'(\eta)$ ,  $g'(\eta)$  are shown in Figure 4. We have seen that the velocity  $f'(\eta)$  and the momentum boundary layer thickness reduce with increasing  $\gamma_1$ . In fact that the higher values of  $\gamma_1$  the stretching velocity is partially transferred to the fluid and the opposite nature in the another velocity  $g'(\eta)$ . The impact of velocity slip parameter  $\gamma_2$  on velocity profiles  $f'(\eta)$ ,  $g'(\eta)$  are demonstrated in Figure 5. The velocity  $g'(\eta)$  and thickness of the boundary layer are decreased with increasing values of  $\gamma_2$  and the opposite behaviour on another velocity  $f'(\eta)$ .

Figure 6 illustrates the ratio parameter  $\beta$  on temperature  $\theta(\eta)$ . We have seen that the temperature  $\theta(\eta)$  and the thermal boundary layer thickness are reduces with increasing values of ratio parameter  $\beta$ . The impact of Prandtl number  $Pr$  on temperature  $\theta(\eta)$  is displayed in Figure 7. We noticed that temperature  $\theta(\eta)$  increases with increasing values of  $Pr$ . This causes when  $Pr$  increases then the thermal diffusivity decreases further thickness of the thermal boundary layer decrease. Influence of heat source/sink  $S$  parameter on temperature  $\theta(\eta)$  is shown in Figure 8. Here  $S > 0$  is for heat source and  $S < 0$  for heat sink. We observed that the

temperature and thermal boundary layer thickness enhanced in the case of heat source when compare it with heat sink. The variation of Dufour effect  $Df$  on temperature distribution is displayed in Figure 9. It reveals that the temperature and thermal boundary layer enhanced with increasing  $Df$ . Figures 10 and 11 elucidate that an increase in temperature exponent  $A$  and temperature slip factor  $\gamma_3$  on temperature distribution  $\theta(\eta)$ . We have seen that the temperature and thermal boundary layer are reduces for higher values of  $A$  and temperature slip factor  $\gamma_3$ .

The effects of Schmidt number  $Sc$ , Chemical reaction parameter  $\gamma$ , concentration exponent  $B$  and concentration slip factor  $\gamma_4$  on concentration  $\phi(\eta)$  are shown in Figures 12-15. From Figure 12 we have seen that the concentration and concentration boundary layer thickness reduces with increasing Schmidt number. In fact Schmidt number is inversely proportional to the diffusion coefficient. Hence an increase in Schmidt number corresponds to smaller diffusion coefficient. The concentration and concentration boundary layer thickness are decreases for higher values of chemical reaction parameter, concentration exponent and concentration slip factor are displayed in Figures 13-15. The effect of Soret parameter  $Sr$  on concentration  $\phi(\eta)$  is shown in Figure 16. It is reveals that the concentration enhances with increasing Soret number.

The numerical values of the skin friction coefficients  $-\frac{f''(0)}{1+\lambda_1}$  and  $-\frac{g''(0)}{1+\lambda_1}$  are displayed in Table 1. We have seen that the skin friction coefficients are increasing for higher values of velocity ration parameter  $\beta$ . The rate of heat transfer  $\theta'(0)$  is shown in table 2. It is decays via increasing in Prandtl number  $Pr$ . Table 1 and Table 2 illustrate the comparison of the present work with existing available results in limiting cases. These tables are confirming have been good agreement with the previous available results.

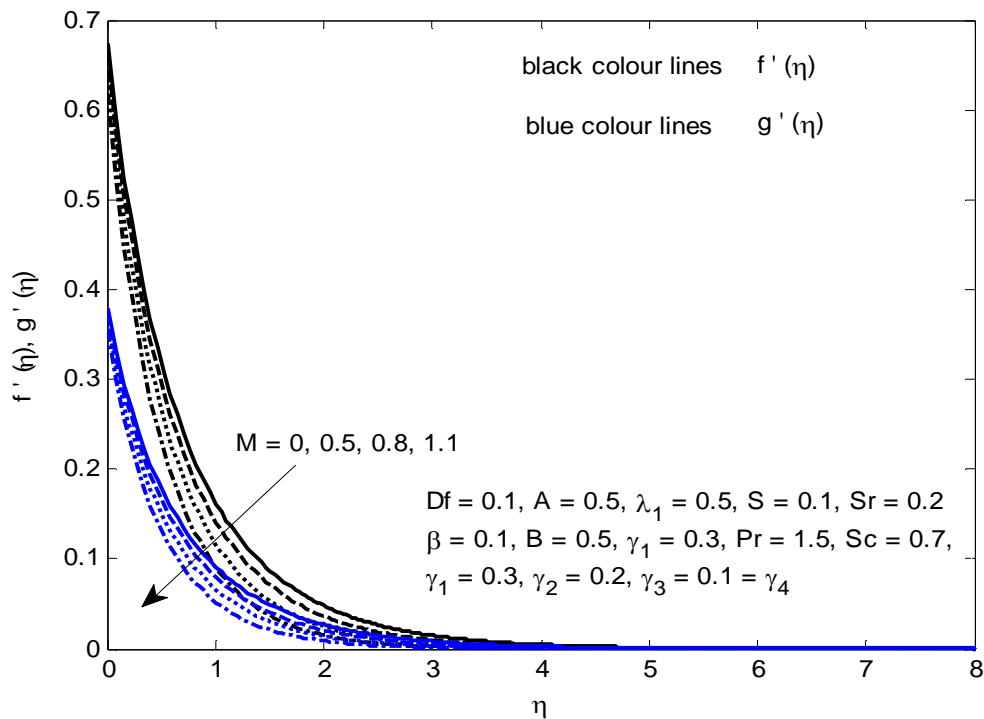


Figure 1. Velocity profiles  $f'(\eta)$ ,  $g'(\eta)$  for different values of  $M$

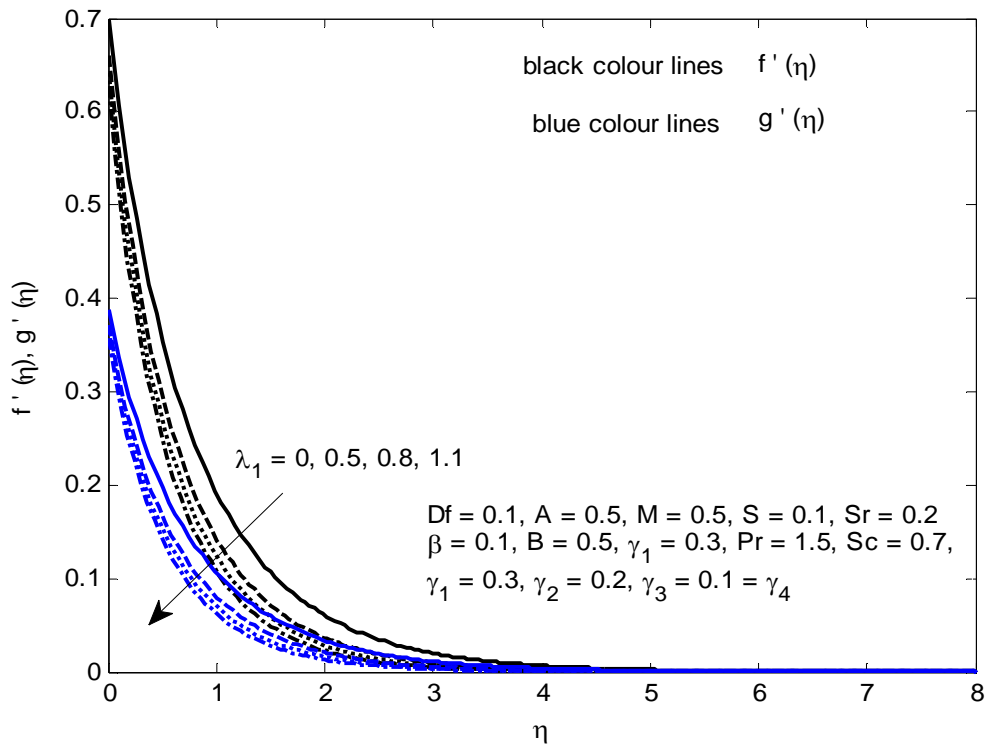


Figure 2. Velocity profiles  $f'(\eta), g'(\eta)$  for different values of  $\lambda_1$

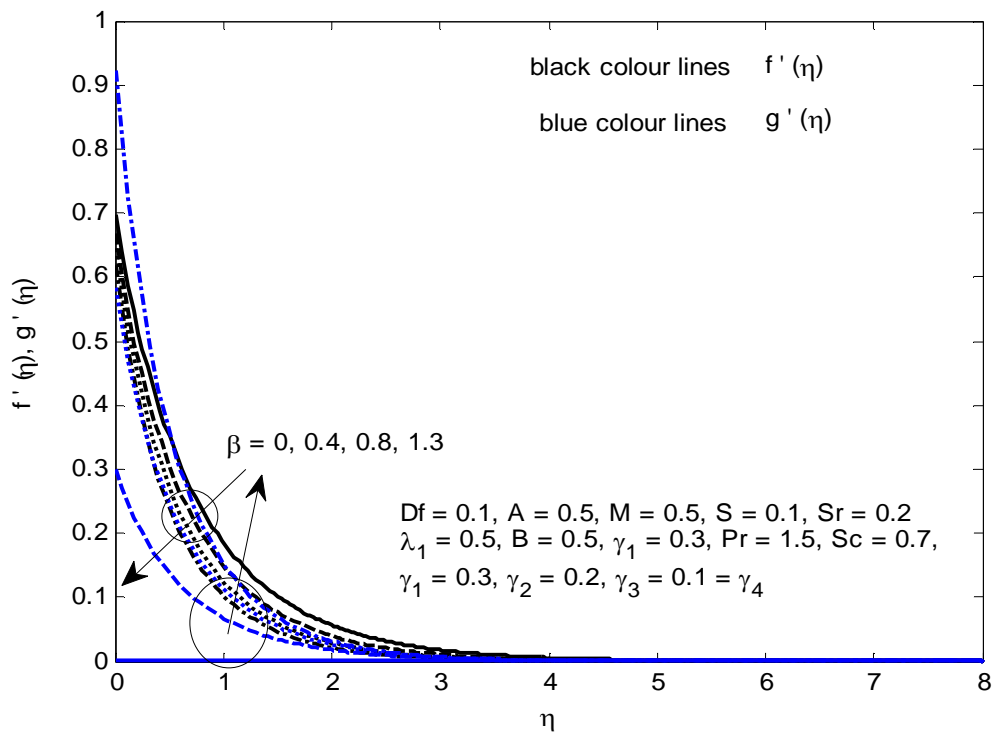


Figure 3. Velocity profiles  $f'(\eta), g'(\eta)$  for different values of  $\beta$

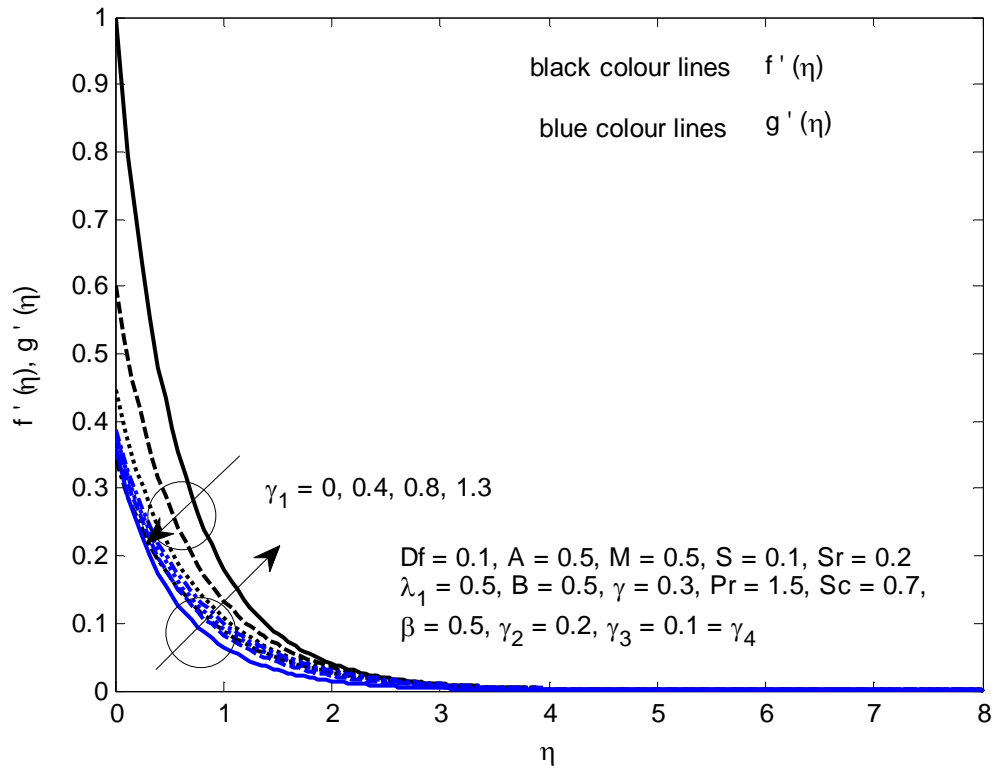


Figure 4. Velocity profiles  $f'(\eta)$ ,  $g'(\eta)$  for different values of  $\gamma_1$

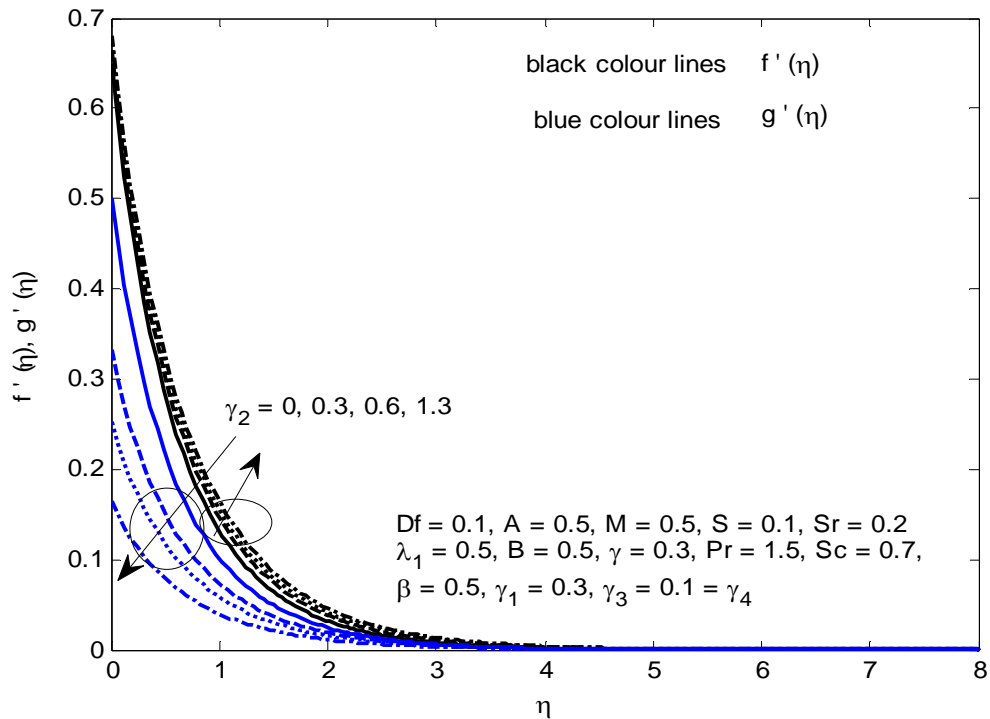


Figure 5. Velocity profiles  $f'(\eta)$ ,  $g'(\eta)$  for different values of  $\gamma_2$



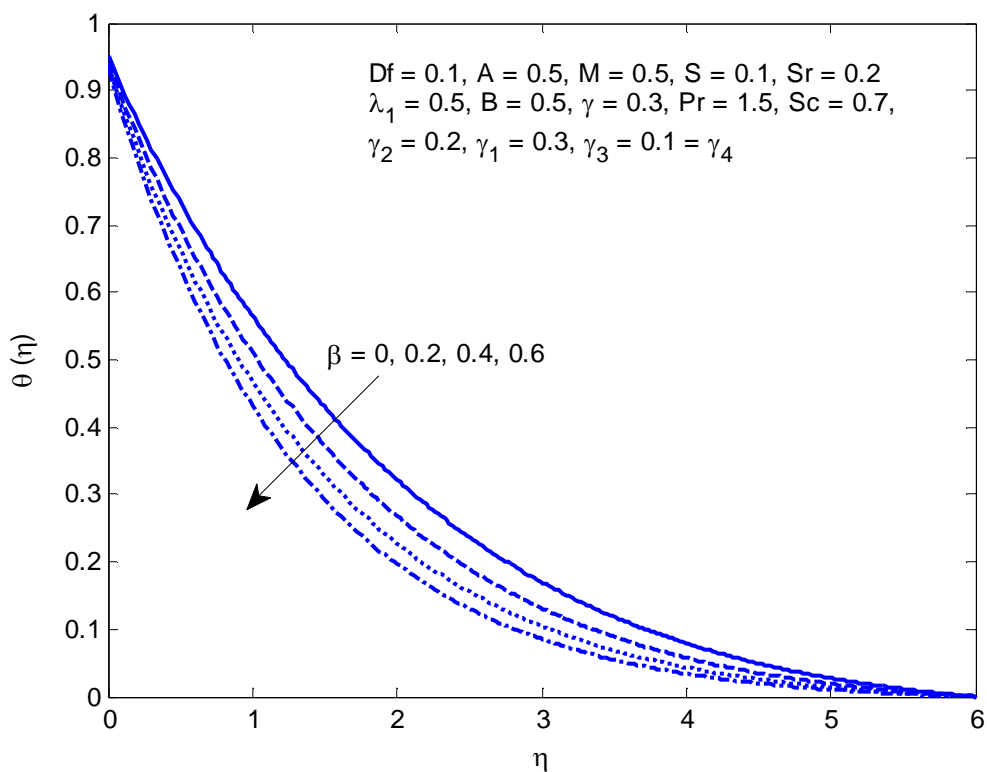


Figure 6. Temperature distribution  $\theta(\eta)$  for different values of  $\beta$

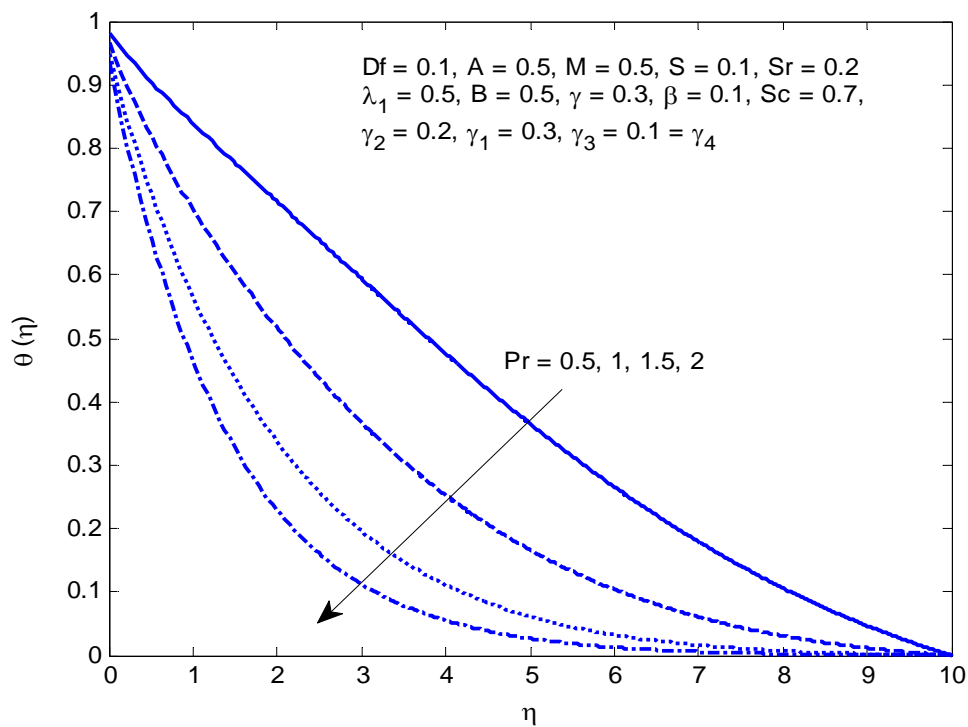


Figure 7. Temperature distribution  $\theta(\eta)$  for different values of  $Pr$

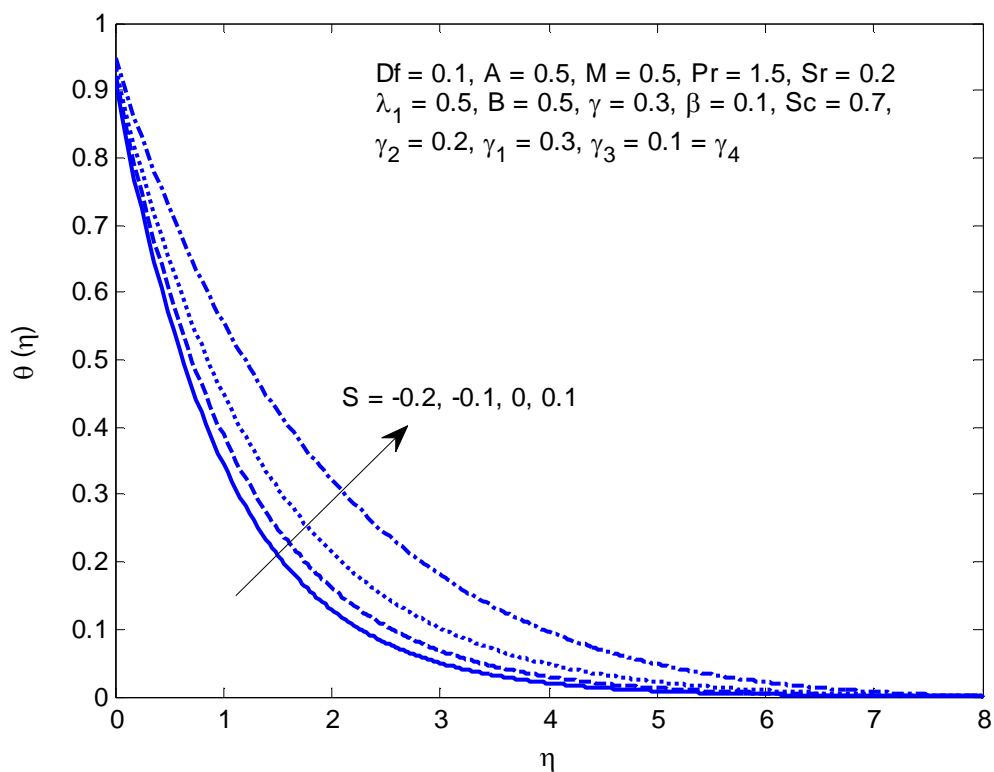


Figure 8. Temperature distribution  $\theta(\eta)$  for different values of  $S$

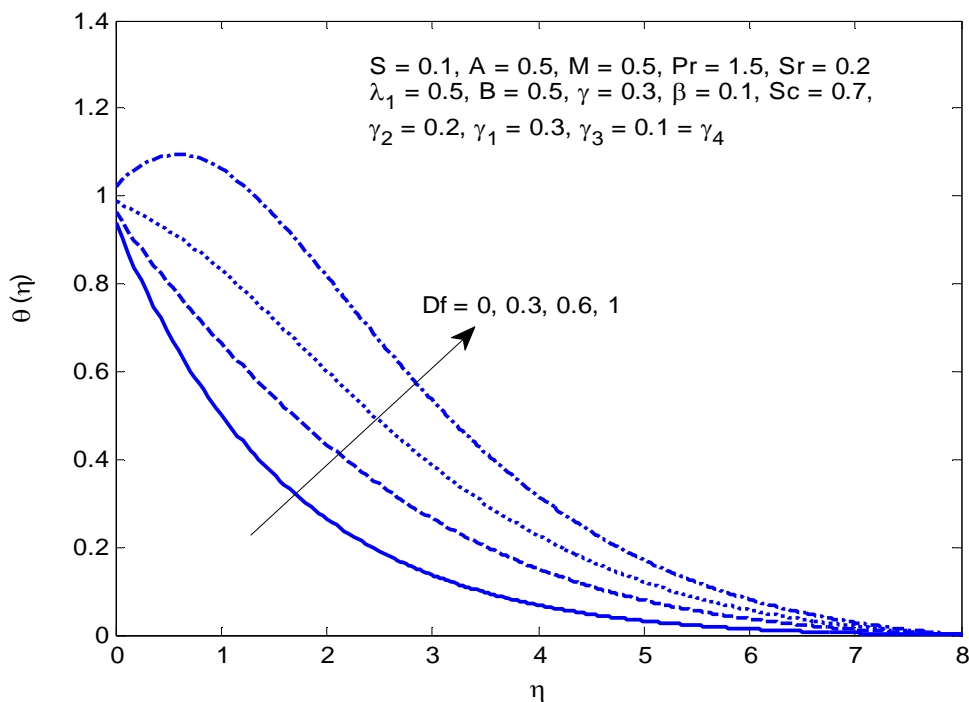


Figure 9. Temperature distribution  $\theta(\eta)$  for different values of  $Df$

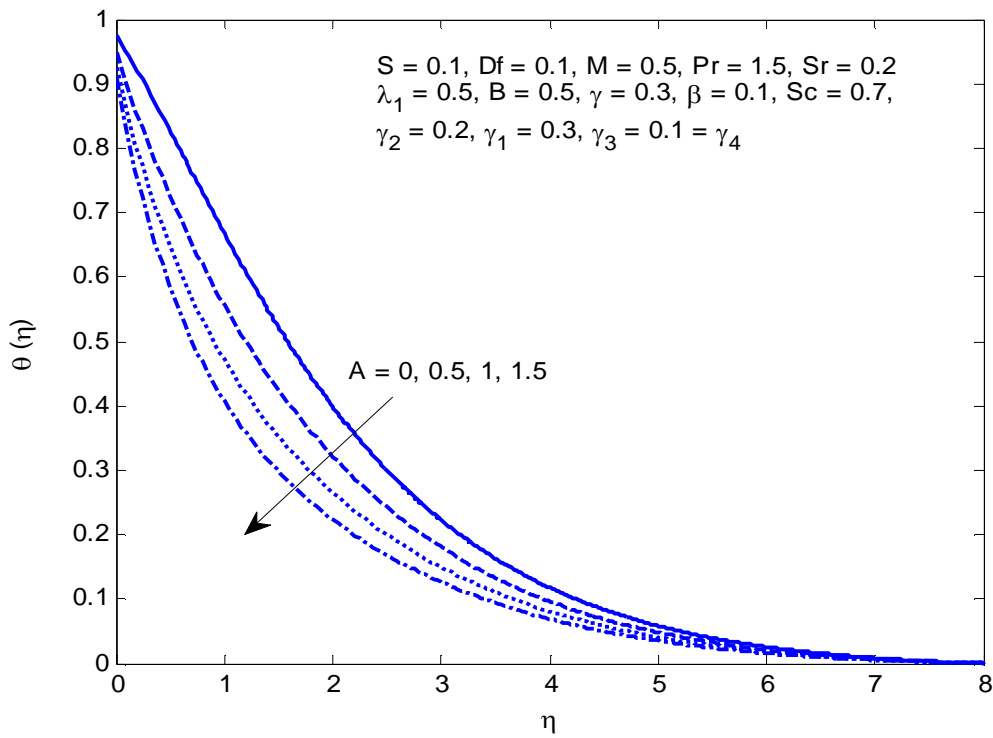


Figure 10. Temperature distribution  $\theta(\eta)$  for different values of  $A$

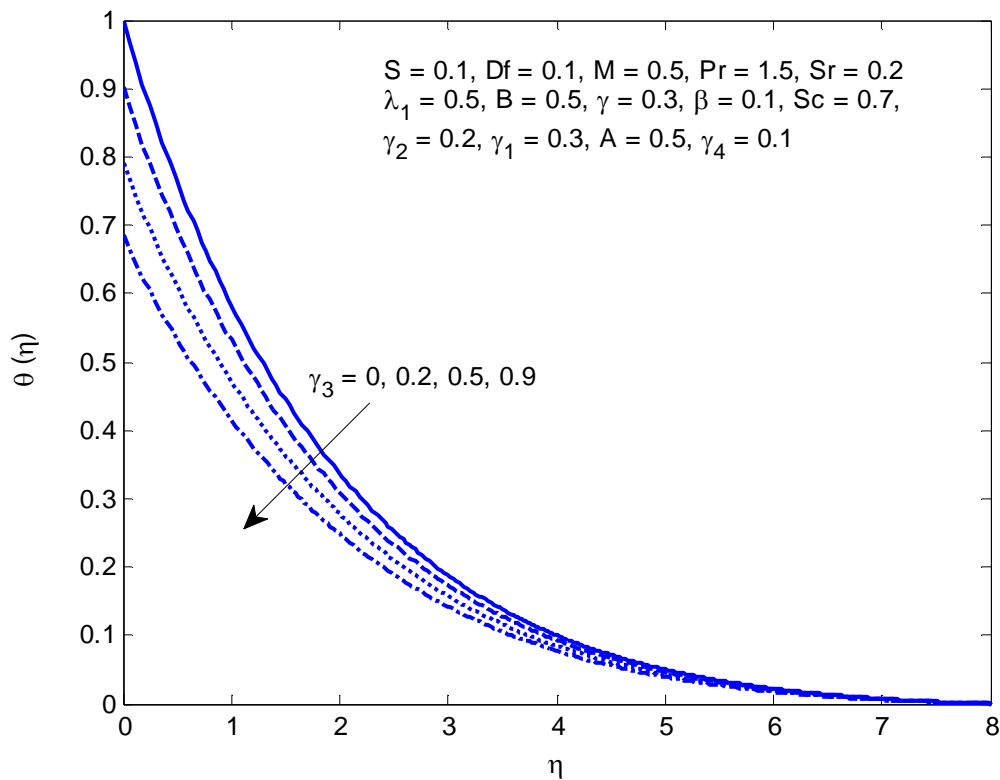


Figure 11. Temperature distribution  $\theta(\eta)$  for different values of  $\gamma_3$

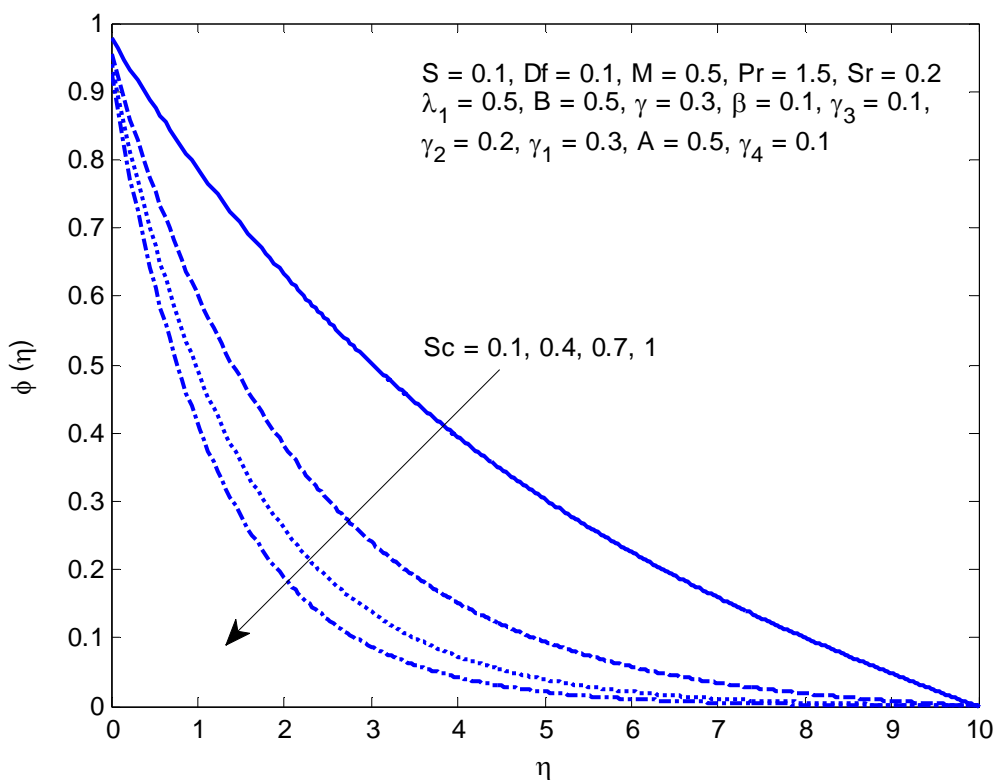


Figure 12. Concentration  $\phi(\eta)$  for different values of  $Sc$

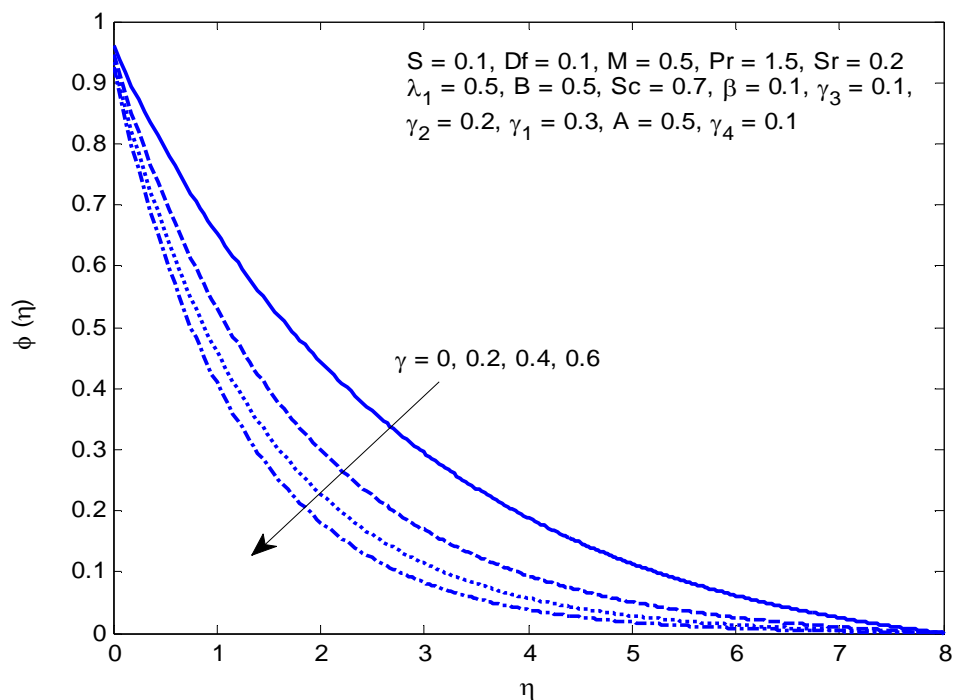


Figure 13. Concentration  $\phi(\eta)$  for different values of  $\gamma$

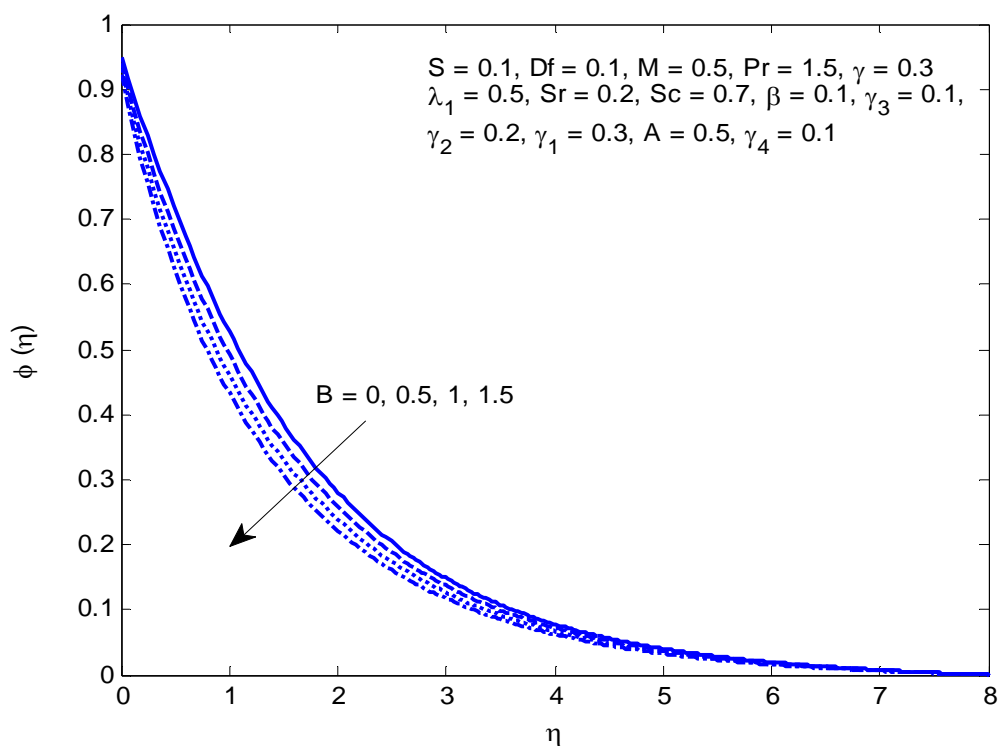


Figure 14. Concentration  $\phi(\eta)$  for different values of  $B$

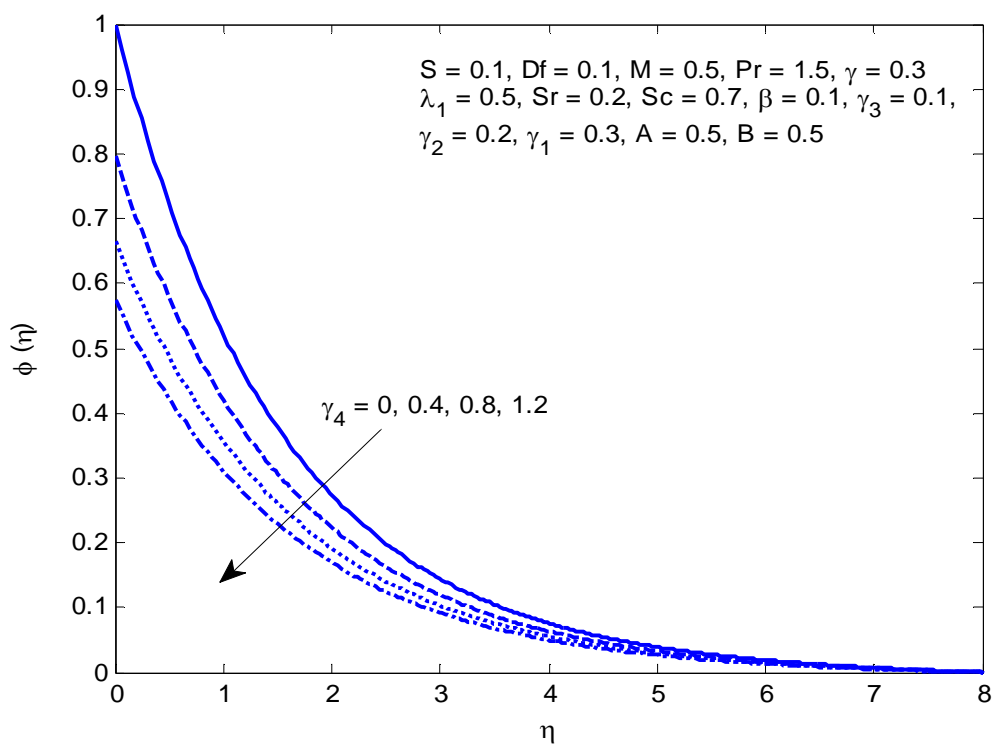


Figure 15. Concentration  $\phi(\eta)$  for different values of  $\gamma_4$



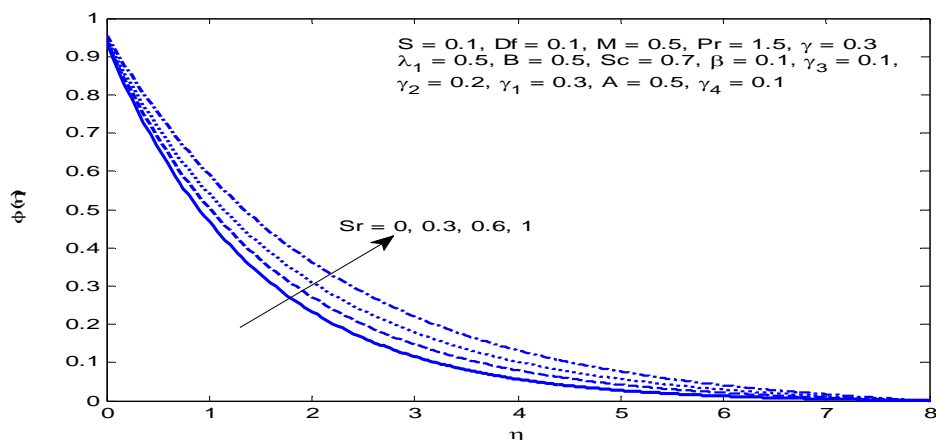


Figure 16. Concentration  $\phi(\eta)$  for different values of  $Sr$

Table 1: comparative table values of  $-\frac{f''(0)}{1+\lambda_1}$  and  $-\frac{g''(0)}{1+\lambda_1}$  for distinct values of  $\beta$  with

$Pr = 0.7, A = -2$  when  $\lambda_1 = \gamma = Sr = Df = \gamma_1 = \gamma_2 = \gamma_3 = \gamma_4 = M = 0$

$\beta$	Liu <i>et al</i> [14], Hayat <i>et al.</i> [6]		Present results	
	$-f''(0)$	$-g''(0)$	$-f''(0)$	$-g''(0)$
0	1.28180856	0	1.2818114	0
0.5	1.56988846	0.78494423	1.5699104	0.7849552
1.0	1.81275105	1.81275105	1.8127654	1.8127654

Table 2: comparison of  $\theta'(0)$  of Magyari and Keller [15], Liu *et al.* [16] and Hayat *et al.* [6]

with the present study for  $\lambda_1 = \gamma = Sr = Df = \gamma_1 = \gamma_2 = \gamma_3 = \gamma_4 = M = \beta = 0$

Pr	A	$\theta'(0)$		
		Magyari & Keller [15] Hayat <i>et al.</i> [6]	Liu <i>et al.</i> [14], Hayat <i>et al.</i> [6]	Present study
1	-1.5	0.377413	0.37741256	0.3774106
	0	-0.549643	-0.54964375	-0.5496460
	1	-0.954782	-0.95478270	-0.9547852
5	3	-1.560294	-1.56029540	-1.5603044
	-1.5	1.353240	1.35324050	1.3532396
	0	-1.521243	-1.52123900	-1.5212381
10	1	-2.500135	-2.50013157	-2.500704
	3	-3.886555	-3.88655510	-3.8865583
	-1.5	2.200000	2.20002816	2.2000298
	0	-2.257429	-2.25742372	-2.2574288
	1	-3.660379	-3.66037218	-3.6603259
	3	-5.635369	-5.62819631	-5.6281349

**REFERENCES**

- [1] Shehzad S A, Hayat T, Alhuthali M S and Asghar S, MHD three dimensional flow of Jeffrey fluid with Newtonian heating, J.Cent. South Univ., Vol. 21, pp. 1428-1433, 2014.
- [2] Aurangzaib and Shafie S, Effects of sores and dufour on unsteady MHD flow by mixed convection over a vertical surface in porous media with internal heat generation, chemical reaction and hall current, Canadian Journal of Science and Engineering, Vol.2, pp. 153-162, 2011.
- [3] Kartini Ahmad, Zahir Hanouf and Anuar Ishak, mixed convection Jeffrey fluid flow over an exponentially stretching sheet with magneto hydrodynamic effect, AIP Advances, Vol. 6, pp. 035024-035026, 2016.
- [4] Hayat T, Waqas M, Ijaz Khan M and Alsaedi A, Impacts of constructive and destructive chemical reactions in magnetohydrodynamic flow of Jeffrey liquid due to nonlinear radially stretched surface, Journal of Molecular Liquids, Vol. 225, pp. 302-310, 2017.
- [5] Hayat T, Shafiq A, Alsaedi A and Shahzad S A, Unsteady MHD flow over an exponentially stretching sheet with slip conditions, Appl. Math. Mech.- Engl. Ed., Vol. 37, pp. 193-208, 2016.
- [6] Hayat T, Muhammad T and Alsaedi A, sores and dufour effects in three dimensional flow over an exponentially stretching surface with porous medium, chemical reaction and heat source/sink, International Journal of Numerical Methods for Heat & Fluid Flow, Vol. 25, pp. 762-781, 2015.
- [7] Hayat T, Farooq M and Alsaedi A, Thermally stratified point flow of Casson fluid with slip conditions, International Journal of Numerical Methods for Heat & Fluid Flow, Vol. 25, pp. 724-748, 2015.
- [8] Hayat T, Gulnaz Bashir, Waqas M and Alsaedi A, MHD flow of Jeffrey fluid due to nonlinear radially stretched sheet in presence of Newtonian heating, Results in Physics, Vol. 6, pp. 817-823, 2016
- [9] Bhattacharyya K and Layek G C, Slip effects on diffusion of chemically reactive species in boundary layer flow due to a vertical stretching sheet with suction or blowing, Chem. Eng. Commun., Vol. 198, pp. 1354-1365, 2011.
- [10] Shehzad S A, Alsaedi F E, Monaquel S J and Hayat T, Sores and Dufour effects on the stagnation point flow of Jeffrey fluid with convective boundary conditions, Eur. Phys. J. Plus, Vol. 128, pp.56, 2013.
- [11] Makinde O D, Computational modelling of MHD unsteady flow and heat transfer toward a flat plate with navier slip and Newtonian heating, Braz. J. Chem. Eng., Vol. 29, pp. 159-166, 2012
- [12] Satya Narayana P V and Haish babu D, Numerical study of MHD heat and mass transfer of a Jeffrey fluid over a stretching sheet with chemical reaction and thermal radiation, Journal of the Taiwan Institute Chemical of Engineers, Article in Press, 2015.
- [13] Kalidas Das, Aharya N and Kundu, radiative flow of MHD Jeffrey fluid past a stretching sheet with surface slip and melting heat transfer, Alexandria Engineering Journal, Vol. 54, pp. 815-821, 2015.
- [14] Chung Liu I, Hung Hsun Wang and Yih Ferng Peng, flow and heat transfer for three dimensional flow over an exponentially stretching sheet, Chemical Engineering Communications, Vol. 200, pp. 253-268, 2013.
- [15] Magyari E and Keller B, Heat and mass transfer in the boundary layers on an exponentially stretching continuous surface, J.Phys. D: Appl.Phys., Vol. 32, pp. 577-585, 1999.
- [16] Tariq Hussain, Sabir Ali Shehzad, Hayat T, Radiative hydrodynamic flow of Jeffrey nanofluid by an exponentially stretching sheet, Plos One, 2014.
- [17] Hayat T, Shehzad S A and Alsaedi A, MHD three dimensional flow by an exponentially stretching surface with convective boundary condition, Journal of Aerospace Engineering, Vol.27, pp.04014011-8, 2014
- [18] Hayat T, Waqas M, Alsaedi A, MHD stagnation point flow of Jeffrey fluid by a radially stretching surface with viscous dissipation and Joule heating, J. Hydrol.Hydromech, Vol. 63, pp. 311-317, 2015.
- [19] Swatimukhopadhyay, slip effects on MHD boundary layer flow over an exponentially stretching sheet with suction/blowing and thermal radiation, Ain Shams Engineering Journal, Vol.4, pp. 485-491, 2013.
- [20] Harish Babu D, Venkateswarlu B and Satya Naraya P V, Sores and Dufour effects on MHD radiative heat and mass transfer flow of a Jeffrey fluid over a stretching sheet, Frontiers in Heat and Mass Transfer, Vol.8, pp.1-9, 2017.
- [21] Harish Babu D and Satya Narayana P V, Joule heating effects on MHD mixed convection of a Jeffrey fluid over a stretching surface with power law heat flux: A Numerical study, Journal of Magnetism and Magnetic Materials, Accepted Manuscript, 2016.
- [22] Gireesha B J, Ganesh Kumar K, Rudraswamy N G, Influence of nonlinear thermal radiation and viscous dissipation on three dimensional flow of Jeffrey nanofluid over a stretching sheet in the presence of Joule heating, Nonlinear Engineering Modeling and Application, Vol.6, pp.1-13, 2017.
- [23] Gireesha B J, Rudraswamy N G, Kumar K, combined effect of joule heating and viscous dissipation on MHD three dimensional flow of a Jeffrey nanofluid, Journal of Nanofluid, Vol. 6, pp. 300-310, 2017.
- [24] Gireesha B J, Sampath Kumar, Rama Subbareddy, Nonlinear thermal convection in Jeffrey liquid flow with cross diffusion effects past a stretched surface, Diffusion Foundations, Vol. 11, pp. 84-98, 2017.



10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)