



IJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 6

Issue: II

Month of publication: February 2018

DOI:

www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com

Design and Development of a Motorized Coconut Dehusking Machine

Engr. John Paul D. Galvan¹, Engr. Shirley O. Agcaoili², Engr. Marvin D. Adorio³, Mhell Ruth Ann B. Cabutaje⁴, Engr. George M. Curammeng Jr⁵.

^{1,2,3,4}Researcher, Faculty, Department of Agricultural Engineering, College of Agriculture, Cagayan State University, Sanchez Mira, Cagayan

⁵Researcher, Department of Agricultural Engineering, College of Agriculture, Cagayan State University, Sanchez Mira, Cagayan

Abstract: *The motorized coconut dehusking machine was designed using AutoCAD and made of locally available materials using local manufacturing technology and tested to evaluate its performance in terms of dehusking capacity, de-husking efficiency, percent nut damage and energy consumption at different angular speed of dehusking rollers and nominal diameter of nuts; three levels of dehusking roller's angular speeds (50 rpm, 60 rpm and 70 rpm) and three levels of nuts' nominal diameters (178 mm, 212 mm and 248 mm) were used. The study was laid-out in two-factorial experiment in randomized complete block design.*

The performance evaluated in terms of dehusking capacity, de-husking efficiency, percent nut damage and energy consumption at different angular speeds of dehusking rollers and different nominal diameters of nuts indicated that the dehusking capacity was dependent on the angular speed and nominal diameter of coconut as well as their interaction. A dehusking capacity of 271 nuts per hour was obtained at an angular speed of 60 rpm. A dehusking efficiency of 100% was obtained when the machine was operated at angular speed of 50 rpm and 70 rpm using different nominal diameter of nuts ranging from 212 mm to 248 mm and 248 mm, respectively. The dehusking efficiency decreased to 67% when the machine was operated 60 rpm using nuts with nominal diameter of 178 mm. the percent nut damage was dependent on the nominal diameter of coconuts. There was no damage nuts obtained when the machine was operated at dehusking rollers' angular speed ranging from 50 rpm to 70 rpm using different nominal diameters of coconut ranging from 178mm to 248mm. The highest energy consumption of 0.02506 kW-hours was obtained at an angular speed of 70 rpm using coconut nominal diameter of 248 mm.

The cost analysis showed that the total cost of the machine was Php16, 911.70 with an operating cost of Php139, 867.65 per year. The benefit cost analysis showed that the total fixed cost and total variable cost were estimated with a value of Php5, 158.05 per year and Php134, 709.6 per year, respectively. The annual net income was Php420, 212.35. The benefit cost ratio was 3:1 which shows that the utilization of the unit is economically variable.

Keywords: *motorized coconut dehusking machine, design, development, angular speed, capacity, efficiency, and nut damaged and fuel consumption.*

I. INTRODUCTION

The coconut palm (*Cocos nucifera*) is found all over the globe most especially on tropical climate countries. It is so called "tree of life", as all of its parts, from leaves to trunk can utilized by man. It can be used as food, drink, fire woods, medicines, fuel and domestic utensils (Varghese, 2014). With the value and benefit that coconut palm provides, there is a great need for it. In fact, in the Philippines alone, it exports an average of 2.56 million metric tons (MT) of copra in the year 2010-2013 (PCA, 2013). Based from the survey of the provincial agriculturist office of Cagayan, Sanchez Mira is found to have the most number of coconut trees planted. In addition, Sanchez Mira celebrates Coco Festival that highlights the coconut product such as geo-textile production, vinegar-making and coco-based organic fertilizer in an agro-industrial trade fair and other activities (Greedy 2014).

The work involved in postharvest production operations were harvesting, de-husking, de-shelling, transporting and storing. De-husking operation can do manually and mechanically, which is the most difficult postharvest operations pertaining to coconut production. Traditionally, the entire de-husking is done manually using either a chopping knives or machete and crowbar, and it involves much human drudgery, skill, training, effort and endurance (Varghese, 2014). De-husking of coconut is a very tedious job and many of the laborers show reluctance for this work as it causes injury to them by following traditional method (Ghosal, 2011). There are lots of machines invented all over the world to mechanize this operation, but only a few of them are available in market, sadly, some of them have vanished from the market due to its un affordability to the small scale farmers (Varghese, 2014).

At present, Sanchez Mira, Cagayan uses traditional way in de-husking coconut which was observed to be time consuming task that involves much of manpower to accomplish the operation. Hence, this study.

II. OBJECTIVES OF THE STUDY

A. Generally, this study designed and developed a motorized coconut de-husking machine.

- 1) Specifically, it aimed:
- 2) to evaluate the performance of the coconut de-husker in terms of
- 3) De-husking capacity
- 4) De-husking efficiency
- 5) Percent nut damage, an
- 6) Energy consumption
- 7) prepare a cost analysis for the machine
- 8) Benefit Cost Ratio (BCR)

III. METHODS

A. Design of the Motorized Coconut Dehusking Machine

The coconut de-husker machine as shown in figure 1, was constructed using galvanized iron sheets, common construction materials such as angle bars, flat bar and with a total dimension of 60 cm x 47 cm x 115 cm (L x W x H). The machine consist three major components, namely: the frame (14), the de-husking unit/working chamber (15) and the prime mover (1). The frame (14) which was made up of 1 ½ in x 1 ½ in x ¼ in steel angle bars. It serves as a support for the de-husking unit (15) and other components of the machine. The prime mover (1) was the source of mechanical power for the whole system or machine. It has a rated capacity of 1.5 horsepower and rated speed of 1740 rpm. The de-husking unit (15) which consists two rotating rollers (5 & 6), rotating in the opposite direction, was fixed using bearings on both side of the frames, and was made up of upper roller (6) of 7 teeth in a straight line and lower roller (5) of 4 teeth in a straight line at 6 points on the circumference. The teeth are of different height that corresponds to the shape of the coconut. The purpose of which is to penetrate the husk and pull it apart and to facilitate the de-husking of different size of coconut. The design of the adjustable tension lever (9) is a concave-like shape with a diameter of 30 cm and an inward curve of 10 cm diameter to prevent the coconut from falling, which pushed by springs (10). The fixed roller and adjustable tension lever (9) units are apart in such a way as to prevent different size of coconut to drop down.

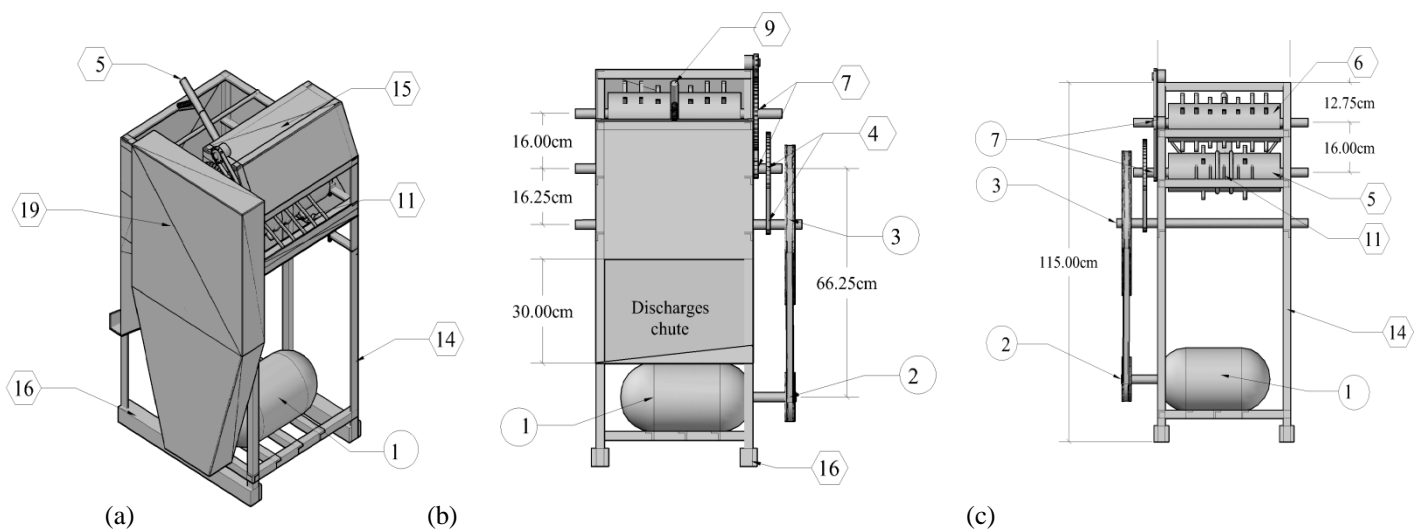


Figure 1. Component parts of the motorized coconut dehusking machine in different views, (a) perspective view; (b) rear view and (c) front view.

B. Principles of Operation

As shown in appendix A, the power produced by the prime mover (1) is transmitted to the system through a series of belts and pulleys (2) & (3), and sprockets and chains (4). The power transmitted into the lower roller (5) was transmitted to the upper roller (6) through a sprocket-chain connection (7). The fixed rollers has spikes (8) designed to penetrate into the husk and pull it apart.

And to facilitate de-husking of different size of coconut an adjustable tension lever (9) will push the nuts through springs (10) which are attached adjacent to the two rollers. The husk is stopped by spikes (11) that are connected to the frame and the husk is discharged outside the machine or in front of the operator and the de-husked coconut falls down to the discharge chute (12) and if the de-husked coconut does not fall freely an adjustable lever (3) is provided to facilitate discharging.

C. Design Calculations and Performance Evaluations

The following formulas and equations were used in the conduct of the study.

- 1) *De-husking capacity.* It is the ratio between the numbers of de-husked nuts and the duration of operation. It is expressed in number of nuts per hour.

$$C_d = \frac{D_n}{T_o}$$

Where:

- C_d = de-husking Capacity (no. of nuts/ h)
- D_n = de-husked nuts
- T_o = time of operation (h)

- 2) *De-husking efficiency.* It is the ratio of the husked coconut and the total number of coconut input expressed in percent (%).

$$D_e = \frac{D_c}{T_i} \times 100$$

Where:

- D_e = De-husking Efficiency (%)
- D_c = Number of de-husked coconut
- T_i = Total number of coconut input

- 3) *Percent nut damaged.* It is the ratio of the number of nuts damaged and the total number of nuts input expressed in percent (%).

$$P_{nd} = \frac{N_d}{T_i} \times 100$$

Where:

- P_{nd} = percent nuts damaged, %
- N_d = Number of Damaged nuts
- T_i = Total number of coconut input

- 4) *Energy Consumption.* It is the energy consumed by the coconut de-husker in kilowatts-hour.

$$E_c = P(T_o)$$

Where:

- E_c = Energy consumption, (kW-h).
- P = Power rating of the motor, kW
- T_o = time of operation (h)

- 5) *Design of revolution per minute and pulley diameter.* The approximate revolution per minute and diameter for a pulley can be calculated using the formula;

$$\frac{D_s}{D_L} = \frac{N_L}{N_S}$$

Where:

- D_L = pitch diameter of the large pulley, mm
- D_s = pitch diameter of the small pulley, mm
- N_L = number of revolutions of the large pulley, rpm

N_s = number of revolutions of the small pulley, rpm

6) *Design of belt length.* The approximate belt length for a two-pulley drive can be calculated using the formula.

$$L = 2C + \frac{\pi}{2}(D_L + D_S) + \frac{(D_L - D_S)^2}{4C}$$

Where:

L = length of the belt (mm)

C = distance between centers of pulleys (mm)

DL = pitch diameter of the large pulley (mm)

DS = pitch diameter of the small pulley (mm)

7) *Design of sprocket size.* The approximate revolution per minute and number of teeth for a sprocket can be calculated using the formula.

$$T_1 N_1 = T_2 N_2$$

Where:

T_1 = no. of teeth of driver sprocket (no. of teeth)

T_2 = no. of teeth of driven sprocket (no. of teeth)

N_2 = reduction speed (rpm)

N_3 = required speed (rpm)

8) *Determination of power requirement.* To meet the required power of the prime mover, the formula to be used is:

$$P_T = \frac{TN}{9.554}$$

$$P_T = P_{dsw} + P_{dsf}$$

$$P_{dsw} = \frac{TN}{9.554}; P_{dsf} = \frac{TN}{9.554}$$

$$T = F(r); F = m\omega^2 r$$

Where:

T = torque (joules)

P_T = power required

P_{dsw} = power due to the self-weight of the roller (watts)

P_{dsf} = power due to the maximum shear force required (watts)

N = revolution per minute (rpm)

F = force (newton)

m = mass of the roller (kg) = ρ_{steel} (vol. of the dehusking roller)

ω = angular velocity (rad/sec)

r = radius of the de-husking roller (meter)

9) *Rotating shaft design.* The diameter of the shaft can be determined by:

$$D = \sqrt[3]{\frac{16T_E}{\pi S_s}}$$

$$T_E = \sqrt{(M_{max})^2 + T^2}$$

Where:

S_s = Permissible Shear Stress of the Shaft Material (MPa)

D = Diameter of Shaft (m)

M_{max} = maximum moment

T_E = equivalent twist moment (kN-m)

10) *functionality and Field Testing*

The motorized coconut dehusking machine was subjected to preliminary testing to determine its functionality, the possible problems encountered during the operation and the adjustments deemed necessary. After which, a series of actual dehusking operation of the machine was conducted to assess its performance. Figure 2, shows actual dehusking operation of the machine during final testing.



Figure 2. Actual dehusking operations of the machine during the final tests conducted by the researchers

IV. RESULTS AND DISCUSSIONS

A. De-husking Capacity (nut/hour)

Table 1 shows the de-husking capacity of the electric motor driven coconut de-husker at varying ranges of angular speed and nominal diameter of coconut with a grand mean of 263 nuts per hour. The analysis of variance revealed that the de-husking capacity of the electric motor driven coconut de-husker as influenced by the nominal diameter was significantly affected the machine's de-husking capacity at 5% level. Table 1b shows the de-husking capacity for the different levels of Factor B (nominal diameter). B₁, B₂, and B₃ had means of 251.33nut/hour, 278nut/hour and 259nut/hour, respectively. Comparison of means using LSD revealed that the de-husking capacity was greater when it was operated at 212 mm and 248 mm nominal diameter and least when it was operated at 178 mm nominal diameter. These means that bigger the nominal diameter, the higher the de-husking capacity.

Table 1. Interaction on De-husking Capacity on Table of angular speed and nominal diameter of coconut (nut/hour).

Angular Speed	Nominal diameter of coconut			Total	Mean
	B1	B2	B3		
A1	226	270	255	2401	267
A2	263	285	266	2442	271
A3	265	279	256	2256	251
Total	754	834	777		
Mean	251.33 ^b	278 ^a	259 ^a		263

*means carrying the same letter are significantly different at 5% level

B. Percentage of damaged nuts (%)

The percent nut damage during the operation of the electric motor driven coconut de-husker at varying ranges of angular speed and nominal diameter of coconut is presented in Table 2 with a grand mean of 8.15%.

The analysis of variance revealed that the percent nut damage of the electric motor driven coconut de-husker as influenced by the interaction of the nominal diameter and angular speed was significantly affected the machine's percent nut damage at 5% level. Comparison of means showed that the low percent nut damage was attained when the coconut de-husker was operated at 50 rpm angular speed and at 248 mm nominal diameter, 60 rpm angular speed and at 178 mm nominal diameter, and 70 rpm angular speed and at 212 mm nominal diameter with a mean of zero (0) percent nut damage. In addition, the high percent nut damage was attained when the machine was operated at 70 rpm angular speed at 178 mm nominal diameter with a mean of 20%.

Table 2. Interaction Table on Percent Nut Damage of angular speed and nominal diameter of coconut (%)

Angular Speed	Nominal Diameter of Coconut			Total	Mean
	B1	B2	B3		
A1	13.33 ^{ab}	6.67 ^a	0 ^a	20	6.67
A2	0 ^b	13.33 ^a	6.67 ^a	20	6.67
A3	20 ^a	0 ^a	13.33 ^a	60	6.67
Total	100	60	60 ^a		
Mean	11.11	6.67	6.67		8.15

C. Dehusking Efficiency

Table 3 shows the de-husking efficiency of the motorized coconut de-husking machine at varying ranges of angular speed and nominal diameter of coconut with a grand mean of 87.41%. The analysis of variance revealed that the de-husking efficiency of the electric motor driven coconut de-husker as influenced by the nominal diameter was highly significantly affected the machine’s de-husking efficiency at 1% level. Table 1b shows the de-husking efficiency for the different levels of Factor B (nominal diameter). B1, B2, and B3 had means of 73.33%, 88.89% and 100%, respectively. Comparison of means using LSD revealed that the highest de-husking efficiency was when operated at 50 rpm, 60 rpm and 70 rpm angular speed and at 248 mm nominal diameter, and 50 rpm angular speed and at 212 mm nominal diameter with a mean of 100%. In addition, the lowest de-husking efficiency was attained when the machine was operated at 60 rpm angular speed at 178 mm nominal diameter with a mean of 66.67%. It means that de-husking a bigger nominal diameter at different angular speed gives the higher de-husking efficiency.

Table 3. Interaction on De-husking Efficiency table of angular speed and nominal diameter of coconut (%).

Angular Speed	Nominal diameter of Coconut			Total	Mean
	B1	B2	B3		
A1	80	100	100	280	93.33
A2	66.67	86.67	100	253.34	84.45
A3	73.33	80	100	253.34	84.45
Total	253.34	266.68	266.67		
Mean	73.33 ^b	88.89 ^a	100 ^a		87.41

*means carrying the same letter are significantly different at 5% level

D. Energy Consumption

The energy consumption during the operation of the electric motor driven coconut de-husker at varying ranges of angular speed and nominal diameter of coconut is presented in Table 4 with a grand mean of 0.0215 kW-hour.

The analysis of variance revealed that the energy consumption of the electric motor driven coconut de-husker as influenced by the nominal diameter was significantly affected the machine’s energy consumption at 5% level. Comparison of means showed that the energy consumption was least when the coconut de-husker was operated at 60 rpm angular speed and at 212 mm nominal diameter with a mean of 0.0197 kW-hour. In addition, energy consumption is greater when the machine was operated at 50 rpm angular speed at 178 mm nominal diameter with a mean of 0.02506 kW-hour. It means that operating the machine at lower speed and smaller nominal diameter resulted to higher energy consumptions.

Table 4. Interaction Table on Percent Nut Damage of angular speed and nominal diameter of coconut

Angular Speed	Nominal Diameter			Total	Mean
	B1	B2	B3		
A1	0.02506	0.02075	0.02195	0.19042	0.02116
A2	0.02132	0.0197	0.021	0.18604	0.02067

A3	0.0213	0.02015	0.02203	0.20327	0.02259
Total	0.06768	0.0606	0.06498		
Mean	0.02256 ^a	0.0202 ^b	0.02166 ^{ab}		0.0215

*means carrying the same letter are significantly different at 5% level

V. SUMMARY, CONCLUSIONS AND RECOMMENDATIONS

A. Summary

This research focused on the post-production of the coconut palm, especially on the de-husking process. It aimed to develop an electric motor driven coconut de-husker. Specifically, it aimed to test the machine in terms of de-husking capacity, de-husking efficiency, percent nut damage, and energy consumption. It is also aimed to analyze the economic performance of the de-husker in terms of benefit cost ratio, payback period, net present value, and internal rate return.

The machine was fabricated and evaluated its technical performance using the Analysis of variance two-factorial Experiment in Randomized Complete Block Design (RCBD) with different angular speed and matured coconut with nominal diameter of (178 mm, 212 mm, and 248 mm) as the factor, and is replicated three (3) times. The results of the study showed that the de-husking capacity was dependent on the angular speed and nominal diameter of the coconut as well as their interaction. The 60 revolution per minute speed of the roller resulted to a high de-husking capacity of 271 nuts per hour. The de-husking efficiency was dependent on the nominal diameter of the coconut. The bigger the nominal diameter would result to higher de-husking efficiency. The percent nut damage was dependent on the nominal diameter of the coconut. The bigger the nominal diameter would result to lower the percent nut damage. The energy consumption of the machine is higher when de-husking a small nominal diameter of coconut.

The cost analysis showed that the total cost of the machine was P 16,911.70. The depreciation cost per year was P 3,044.1 per year with an estimated machine life span of five (5) years. The salvage value was assumed to be ten percent (10%) of the machine cost. The interest of investment was P 930.14 per year with an annual interest of 10%. The repair and maintenance was P 845.58/year with a total fixes cost of P 5,158.05 per year. The total variable cost was P 139,709.6/year. The benefit cost ratio was 3 which show that the machine utilization is economically viable for small livestock raisers to use and operate. The annual net income was P 420,212.35 per year. This implies that the farmer who owns the machine would be recover this expense for 15 day continues operation of the machine for six (6) hours per day to payback the investment and the cost of the machine with an internal rate of return of 75%. The net present value was P 280,344.70 /year.

VI. CONCLUSIONS

Based on the result of the study, the following conclusions were drawn:

A. De-husking Capacity, nut/hour

Operating the machine at higher angular speed corresponds to higher de-husking capacity of the machine. The 60 revolutions per minute resulted to a high de-husking capacity of 271 nut/hour. On the other hand, 212 mm nominal diameter of coconut gave the highest rate of de-husking capacity of 278 nuts/hour. The best combination in the de-husking capacity of the machine was when it was operated at 60 revolutions per minute angular speed and 212 mm nominal diameter of coconut gave 285 nuts/hour.

B. De-husking Efficiency, %

The De-husking Efficiency was high when it was operated at 50 revolutions per minute angular speed with the 93.33%. A 248 mm nominal diameter of coconut gave the highest de-husking efficiency of 100%. In addition, the best combination that gave the highest de-husking efficiency was when the coconut de-husker was operated at an angular speed of 50 revolution per minute and 212 mm, 248 mm nominal diameter of coconut and an angular speed of 60 and 70 revolution per minute and 248 mm nominal diameter of coconut with a mean de-husking efficiency of 100%.

C. Percent Nut Damage, %

Per cent nut damage of the machine was low when operated at an angular speed of 50 and 60 revolution per minute of 6.67%. A nominal diameter of 212 mm and 248 mm gave the lowest percent nut damage of 6.67%. Operating the machine at an angular speed of 70 revolution per minute and 212 mm nominal diameter of coconut; an angular speed of 50 revolution per minute and 248 mm



nominal diameter of coconut, and an angular speed of 60 revolution per minute and 178 mm nominal diameter of coconut gave zero (0) percent nut damage.

D. Energy Consumption, kW-hour

Operating the machine at higher roller speed would result to higher energy consumption. A 212 mm nominal diameter of coconut has the lowest energy consumption. Energy consumption was higher when it was operated at 50 revolutions per minute roller speed and 178 mm nominal diameter of the coconut.

E. Cost Analysis

The total operating cost was P 139,867.65 per year with annual net income of P 420,212.35 per year.

It has benefit cost ratio of 3 with a payback period of 15 days and internal rate of return of 75%. Net present value was P 280,344.70 per year.

F. Recommendations

Based on the results, the following recommendations were drawn by the researcher:

G. For operation,

To attain the highest de-husking capacity of the de-husker, operate the machine at angular speed of approximately 60 revolutions per minute. Use the smaller coconut holder when de-husking a small coconut. There must be at least two (2) operators to operate the machine.

REFERENCES

- [1] Aragon, C. (2000). Coconut Program Area Research Planning and Prioritization, p. 74-79. Baleza, A. (2014.) I-SUPPORT InfoACE Unit, DA-RAFID 5.
- [2] Bohol Agriculture Master Plan (BAMP) C.Y. 2006-2026. Volume II, Part III Programs and Projects.
- [3] Dinanath, Chaguanas, Trinidad and Tobago, coconut de-husking machine, US patent No 4,708,056, November. 24, 1987 Ghosal, M.K. and Mohanty, S.K. (2011).
- [4] Ergonomical study and performance evaluation of different types of coconut de-huskers, Internat. J. Agric. Engg., p. 45-51.
- [5] DA- Philippine Coconut Authority to intensify exports of coco fiber, peat, or dust, April 1, 2011, (<http://www.gov.ph/2011/04/01/da-philippine-coconut-authority-to-intensify-exports-of-coco-fiber-peat-or-duct/>) Provincial Government of Bohol EXECUTIVE LEGISLATIVE AGENDA (ELA), 2011-2013
- [6] Varghese A., Jippu J. (2014) International Journal of Design and Manufacturing Technology: Proceedings of the International Conference on Emerging Trends in Engineering and Management (ICETEM14) 30-31, December, 2014, Ernakulam, India.
- [7] Venkataramanan S, Abhinav Ram B, Rahul R. International Journal of Sciences: Basic and Applied Research (IJSBAR) (2014) Volume 13, No 2, p. 183-219
- [8] (<http://www.daprdp.net/coconut-shell-charcoal-eyed-for-prdp-investments-in-masbate/>), retrieved: November 2017.



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)