



# **iJRASET**

International Journal For Research in  
Applied Science and Engineering Technology



---

# **INTERNATIONAL JOURNAL FOR RESEARCH**

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume: 6      Issue: IV      Month of publication: April 2018**

**DOI: <http://doi.org/10.22214/ijraset.2018.4670>**

**[www.ijraset.com](http://www.ijraset.com)**

**Call:  08813907089**

**E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)**

# A Modern QoS- Based Routing protocols for WSCN : A Survey

Lt. D. Antony Arul Raj<sup>1</sup>, Dr. P. Sumathi<sup>2</sup>

<sup>1</sup>Assistant Professor, Department of IT & CT, VLB Janakiammal college of Arts and Science,

<sup>2</sup>Assistant Professor, PG & Research Department of Computer Science, Government Arts College Coimbatore

**Abstract:** The Applications of wireless sensor communication network (WSCNs) technology has provided the accessibility of small and low-cost sensor nodes with potential of sensing different types of material and environmental conditions, data processing, and wireless communication. Mixture of sensing competence results in large amount of application areas. However, the characteristics of wireless sensor networks require more effective methods for routing. In WSCNs, the sensor nodes have a limited transmission range, and their processing and storage capabilities as well as their energy resources are also limited. Routing protocols for wireless sensor networks are accountable for maintaining the routes in the network and have to make sure reliable multi-hop communication under these conditions. In this paper, we presented a survey on QoS Based routing protocols for Wireless Sensor Communication Networks and compared their strengths and limitations.

**Keywords:** WSCNs, Routing, QoS, Lifetime, Energy Efficiency.

## I. INTRODUCTION


Wireless Sensor Communications Network (WSCNs) consists of several sensor nodes. These sensors have the ability to communicate either among each other or openly to an external base-station (BS). Fig.1. A larger number of sensors allows for sensing over larger environmental area with better accuracy<sup>[1]</sup> Quality of service (QoS) is that the description or dimension of the performance of a service preponderantly the performance seen by the users of the network. to measure the standard of service, many connected characteristics of the network service square measure oftentimes thought of packet loss, bit rate, throughput, transmission delay, availability, jitter, etc.

## II. TERMS OF QOS

Packet loss happens once one or additional packets fail to achieve their destination. Packet loss is typically happened by network electronic jamming. Packet loss is measured as a share of packets lost with relation to packets sent.

Transmission management Protocol (TCP) detects packet loss and performs retransmissions to form certain consistent electronic messaging. Packet loss in an exceedingly communications protocol association is additionally wont to avoid electronic jamming and so produces a advisedly condensed outturn for the association.

### WSN ARCHITECTURE

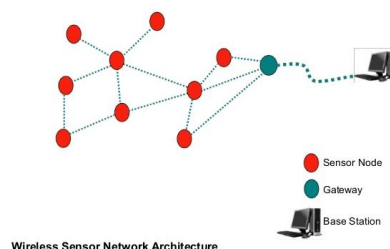

Wireless Sensor Network Architecture

Fig.1

Bit rate is that the quantity of bits that are processed per unit of time[2]. The non-standard abbreviation "bps" is commonly wont to replace the quality image "bit/s", so that, for instance, "1 Mbps" is employed to denote one thousand bits for every second. One byte per second (1 B/s) corresponds to 8 bit/s. Throughput could be alive of however many units of knowledge a system will method during a bound amount of your time. it's much giant to systems starting from totally different aspects of laptop and network systems to organization. Associated measures of system productivity contain[3], the speed with that some actual work are often completed. In a network supported packet change, transmission delay is that the amount of your time necessary to push all the packet's bits into the wire. In extra, this is often the holdup caused by the data-rate of the linkage.

Transmission delay could be a purpose of the packet's length and has zilch to try to by means that of the gap between the 2 nodes. This delay is proportional to the packet's length in bits.

Jitter is outlined as a distinction within the delay of received packets [4]. The causation aspect transmits packets during a permanent stream and areas them uniformly apart. owing to network jam, unacceptable queuing, or configuration errors, the delay between packets will take issue rather than remaining constant. This distinction causes issues for audio playback at the receiving finish. Playback could considerate gaps whereas watching for the arrival of uneven delayed packets.

### III. QOS FEATURES

Particularly in wireless sensing element network, varied QoS based mostly routing protocols are planned however they sometimes create their most significant metrics to energy consumption, and that they will be sorted on the premise of the problem they resolve the matter like:

#### A. *Prioritization*

Distinguish services on the premise of the classification of module of traffic [5].

#### B. *Timliness*

Assurance rescue in an exceedingly given time, information relay in hierarchical WSCNs [6].

#### C. *Reliability*

Support likelihood of delivery [7].

#### D. *Network Processing*

Develop the performance of the network by process information next to the pathway from the supply to the destination [8].

#### E. *Scheduling*

Synchronize sensors in accessing channel or sensing the surroundings, foretelling with Quality of observation QoS reliability of Hierarchical [9] Clustered WSCNs.

#### F. *Node relocation*

rework node[10] location so as to maximize potency.

#### G. *Generic Metric Minimization*

Improve the performance of the network with respect to some cost function (Energy-Aware QoS Routing, Dynamic Routing Designing of Energy aware Quality of Service (QoS) based routing protocol for Efficiency Improvement in Wireless Sensor Network (WSCNs). As sensor network have some specific applications like Military and health<sup>[11]</sup>, where very high precision is required otherwise the complete application becomes useless and all the above work is not fully fulfilling its requirement<sup>[12]</sup>.

WSCNs networks Characteristics such as loose network state information, dynamically varying network topology unrestricted mobility of hosts<sup>[13]</sup>, unrestricted mobility of hosts, limited availability of bandwidth, and battery power make QoS very demanding.

### IV. APPLICATIONS OF WSCN

#### A. *Area Observation*

Area observation could be a general purpose of WSCNs [14]. In space observation, the WSN is deployed in more than a district wherever some development is to be monitored. A military example is that the use of sensors discover enemy intrusion [15]; a person example is that the geo-fencing of gas or oil pipelines.

#### B. *Health Care Observation*

The device networks for medical applications are of variety of types: fastened, wearable, and environment-embedded [16]. The implantable medical devices square measure those who square measure inserted inside physical structure. Wearable devices square measure worn on the body surface of an individual's or simply at shut proximity of the user[17]. Environment-embedded systems utilize sensors in conjunction with this within the environment [18]. Potential applications contains body position activity, position of persons, generally observation of unwell patients in hospitals and at homes[19]. Devices embedded within the surroundings track the physical state of an individual for constant health diagnosing, exploitation as input the info from a network of depth cameras, a sensing floor, or different similar devices. Body-area networks will collect data regarding a person's health, fitness, and energy expenditure [20]. In health care applications the privacy and credibility of user information has primary importance. Significantly

thanks to the mixing of device networks, with IoT, the authentication of user become additional challenging; but, an answer is accessible in recent work[21].

### C. Environmental/Earth sensing

There square measure several applications offered in observation environmental parameters[22], some examples involve sharing the more challenges of harsh environments and reduced power provide.



### D. Forest fire Detection

A network of sensing element Nodes are often put in an exceedingly forest to sense once a fireplace has started. The nodes are often ready with sensors to live temperature, humidness and gases that are created by fireplace within the trees or vegetation. The first detection is important for a palmy action of the firefighters.

### E. Landslide Detection

A landslide discovery system makes use of a wireless detector network to notice the slight movements of soil and changes in varied parameters that will occur before or throughout a landslide. Through the info gathered it should be attainable to understand the approaching happening of landslides long before it truly happens.

### F. Water Quality Monitoring

Water quality observation involves analyzing water properties in dams, rivers, lakes and oceans, furthermore as underground water reserves. the employment of the many wireless scattered sensors permits the development of a additional correct map of the water standing, and permits the permanent readying of observation stations in locations of adverse access, with no the need of manual information retrieval[23].

### G. Natural Disaster Prevention

Wireless sensing element networks will effectively act to stop the implications of natural disasters, like floods. Wireless nodes have with success been deployed in rivers wherever changes of the water levels need to be monitored in real time.

### H. Industrial Monitoring

Machine health observance Wireless detector networks are developed for machinery condition-based maintenance (CBM) as they provide vital price savings and alter new functionality [24]. Wireless sensors are placed in locations troublesome or not possible to succeed in with a wired system, like rotating machinery and unbound vehicles.

### I. Data center Monitoring

Due to the high density of servers racks in an exceedingly information center, typically cabling and IP addresses square measure a difficulty. to beat that drawback a lot of and a lot of racks square measure fitted out with wireless temperature sensors to watch the intake and shot temperatures of racks. As ASHRAE recommends up to six temperature sensors per rack, meshed wireless temperature technology offers a bonus compared to ancient cabled sensors[25].



### J. Data Logging

Wireless detector networks also are used for the gathering of information for watching of environmental information [26], this could be as straightforward because the watching of the temperature in a very electric refrigerator to the extent of water in overflow tanks in atomic power plants. The applied mathematics info will then be accustomed show however systems are operating. The advantage of WSNs over standard loggers is that the "live" information feed that's doable.

### K. Water/Waste Water Monitoring

Monitoring the standard and level of water includes several activities like checking the standard of underground or surface water and making certain a country's water infrastructure for the advantage of each human and animal. it's going to be accustomed shield the wastage of water.

### L. Structural Health Monitoring

Wireless device networks will be accustomed monitor the condition of civil infrastructure and connected geo-physical processes near real time, and over long periods through information work, victimization fitly interfaced sensors.

### M. Wine Production

Wireless sensor networks are used to observe wine production, both in the field and the cellar<sup>[27]</sup>.

## V. LITERATURE REVIEW

In [28] Hind Alwan and Anjali Agarwal, presented a heuristic neighbor selection mechanism in WSCNs that make uses of the geographic routing mechanism united with the QoS needs to produce multi-objective QoS routing (MQoS) for various application needs. They designed QoS routing as link, and path-based metrics. Dependability, delay, distance to sink, and energy were sorted into link based mostly metrics. End-to-end delay, dependability of information transmission, and network time period were conjointly sorted into path based mostly metrics. The simulation results shows higher performance and conjointly provided energy-efficient resolution to increased network time period.

Mirela Fonoage, Mihaela Cardei, and et al [29] projected a QoS based mostly routing protocol for wireless sensor network applications, which support each periodic and event-based knowledge news. A geographic routing mechanism combined with QoS support is employed to forward packets within the network. Knowledge is routed supported the packet sort. To route packets with completely different priorities, multiple transmission queues square measure used. In selecting consecutive hop, the node that's nearer to the sink, has high residual energy, high link quality, and low load is chosen. Congestion management is achieved by employing a ring or barrier mechanism that captures and aggregates messages that report a similar event to a similar sink. They present the most operations of the barrier mechanism, as well as barrier formation, repair, enlarge, shrink, and termination. Simulation results using JIST/SWANS simulator show the performance of their routing protocol compared with different connected works

R. Sumathi and M.G.Srinivas[30], conferred "A Survey of QoS primarily based Routing Protocols for Wireless detector Networks" With the increasing demand for real time applications within the Wireless Sensor Network (WSN), real time crucial events associate degreecipate an economical quality-of-service (QoS) primarily based routing for information delivery from the network infrastructure. Planning such QoS primarily based routing protocol to fulfill the responsibleness and delay guarantee of crucial events whereas conserving the energy potency may be a difficult task. right smart analysis has been targeted on developing strong energy economical QoS primarily based routing protocols. in this paper, they gift the state of the analysis by summarizing the work on QoS primarily based routing protocols that has already been printed and by highlighting the QoS problems that area unit being self-addressed. The performance comparison of QoS primarily based routing protocols like SAR, MMSPEED, MCMP, MCBR, and EQSR has conjointly been analyzed using ns-2 for varied parameters.

Shiva Murthy G, R.J. DSouza,[31] and Varaprasad G, "Reliability Analysis of Route Redundancy Model for Energy economical Node Disjoint Multipath Routing in Wireless detector networks," WSCNs are a large assortment of detector nodes that have restricted battery power and restricted procedure capability. the power limitation causes the nodes to premature dead that the node power ought to be used with efficiency to prolong the network time period. In time crucial applications, the info ought to reach the destination among a point in time and with none packet loss which implies the QoS metrics like responsibleness and delay area unit terribly essential for delivering the info to destination. one among the important challenges for analysis in wireless detector networks is that the implementation of routing protocols that deliver the goods each Quality of Service (QoS) and energy potency.

the most task of the routing protocol is to find and maintain the routes to transmit the info over the network. At present, to extend the performance of the networks, to realize load leveling and to produce fault tolerance multipath routing techniques are wide used instead of single path routing technique. They conferred a review on the prevailing routing protocols for WSN by considering energy potency and QoS. They targeted on the most motivation behind the event of every protocol and justify the operation of various protocols intimately. They compared the protocols supported energy potency and QoS metrics. Finally they ended the study by giving future analysis directions.

Jeong, wife Sharafkandi, [32] and et al Energy-aware scheduling with quality of surveillance guarantee in wireless detector networks .They projected associated measure an energy-efficient programming algorithmic program for detection of mobile targets in wireless detector networks. A typical example would be wherever some sensors area unit deployed on the doorway roads of a town to find the vehicles coming into town and alternative sensors will awaken and track the vehicles when detection. They showed a crucial relationship between the general energy consumed by the sensors and also the average detection time of a target, each of that are very important aspects in our drawback. By minimizing the energy consumed, they maximized the period of the detector network. Also, alongside the standard of surveillance guarantee, we have a tendency to make sure that no target goes undetected . They in theory derive the edge on the period of the detector network for a given QoS guarantee and prove that our technique will continually reach this edge. They simulation results validate the claims created on the algorithmic program optimality and QoS guarantee.

David H.C. [33] Energy Aware programming with Quality of surveillance Guarantee in Wireless detector Networks Du. They take into account a setting wherever the sensors area unit deployed for each road police investigation and mobile target pursuit. They show a crucial relationship between the general energy consumed by the sensors and also the average detection time of a target, each of that area unit terribly important aspects in our drawback. to the present finish, they outlined the standard of surveillance (QoSv) because the reciprocal worth of the typical detection time for vehicles. They propose associate optimum scheduling algorithmic program that guarantees the detection of each target with such that QoSv and at identical time minimizes the general energy consumed by the detector nodes.

### VI. FINDINGS

| Protocols  | Extending Life Time | QoS |
|--|---------------------|-----|
| MQoS[28]   | ✓                   | ✓   |
| QoS based routing protocol[29]                       | ✓                   | ✓   |
| SAR[30]  | ✓                   | X   |
| MMSPEED[30]  | ✓                   | X   |
| MCMP[30]   | ✓                   | X   |
| MCBR[30]   | ✓                   | X   |
| EQSR[30]   | ✓                   | X   |
| Energy Efficient Node Disjoint Multipath Routing[31] | ✓                   | X   |
| Energy-efficient scheduling algorithm[32]            | ✓                   | ✓   |
| Optimal scheduling algorithm [33]                    | ✓                   | ✓   |

### VII. CONCLUSION

One of the most challenges within the design of routing protocols for WSNs is energy efficiency because of the scarce energy resources of sensors. the ultimate objective behind the routing protocol design is to stay the sensors in operation for as long as doable, therefore extending the network lifespan. The energy consumption of the sensors is dominated by information transmission and reception. Therefore, routing protocols designed for WSNs ought to be as energy economical as doable to prolong the lifespan

of individual sensors, and therefore the network lifespan. In this paper, we have surveyed a sample of routing protocols by taking into consideration many classification criteria, together with location info, network layering and in-network process, information centrality, path redundancy, network dynamics, QoS necessities, and network heterogeneity. For each of these categories, we have mentioned some example protocols. Finally we tend to conclude that also would like additional enhancements on routing protocols for WSCNs.

## REFERENCES

- [1] Nic, C. Lu, and T. Abdelzaher. Speed: A stateless protocol for realtime communication in sensor networks. In Proceedings of the 23rd International Conference on Distributed Computing Systems, 2003.
- [2] H. S. Kim, T. F. Abdelzaher, and W. H. Kwon. Dynamic delay-constrained minimum energy dissemination in wireless sensor networks. *Trans. on Embedded Computing Sys.*, 2005.
- [3] R. Benkoczi, H. Hassanein, S. Akl, and S. Tai. QoS for data relaying in hierarchical wireless sensor networks. In Proceedings of the 1st ACM international workshop on Quality of service & security in wireless and mobile networks, 2005.
- [4] J. Jeong, S. Sharafkandi, and D. H. C. Du. Energy-aware scheduling with quality of surveillance guarantee in wireless sensor networks. In Proceedings of the 2006 workshop on Dependability issues in wireless ad hoc networks and sensor networks, 2006.
- [5] J. B. Deb, S. Bhatnagar, and B. Nath. ReInForM: Reliable information forwarding using multiple paths in sensor networks. In Proceedings of the 28th Annual IEEE International Conference on Local Computer Networks, 2003.
- [6] J. Zhu, S. Papavassiliou, and J. Yang. Adaptive localized QoS-constrained data aggregation and processing in distributed sensor networks. *IEEE Trans. Parallel Distrib. Syst.*, 2006.
- [7] J. H. Li, P. Shenoy, and K. Ramamritham. Scheduling communication in real-time sensor applications. In Proceedings of the 10th IEEE Real-Time and Embedded Technology and Applications Symposium, 2004.
- [8] C. H. Rentel and T. Kunz. Mac coding for QoS guarantees in multi-hop mobile wireless networks. In Proceedings of the 1st ACM international workshop on Quality of service & security in wireless and mobile networks, 2005.
- [9] J. Jeong, S. Sharafkandi, and D. H. C. Du. Energy-aware scheduling with quality of surveillance guarantee in wireless sensor networks. In
- [10] A. Boukerche, X. Cheng, and J. Linus. A performance evaluation of a novel energy-aware data centric routing algorithm in wireless sensor networks. *Wireless Network*, 2005.
- [11] L. Xing and A. Shrestha. QoS reliability of hierarchical clustered wireless sensor networks. 25th IEEE International Performance, Computing, and Communications Conference, 2006.
- [12] K. Akkaya, M. F. Younis, and M. Bangad. Sink repositioning for enhanced performance in wireless sensor networks. *Computer Networks*, 2005
- [13] Q. Zhao and L. Tong. QoS specific medium access control for wireless sensor networks with fading. 2003.
- [14] K. Akkaya and M. Younis. An energy-aware QoS routing protocol for wireless sensor networks. In Proceedings of the 23rd International Conference on Distributed Computing Systems, 2003
- [15] M. Perillo and W. Heinzelman. DAPR: A protocol for wireless sensor networks utilizing an application-based routing cost. 2004
- [16] Proceedings of the 2006 workshop on Dependability issues in wireless ad hoc networks and sensor networks, 2006
- [17] Jamal N. Al-Karaki Ahmed E. Kamal, "Routing Techniques in Wireless Sensor Networks: A Survey", ICUBE initiative of Iowa State University, Ames, IA 50011.
- [18] Anastasi, G., Farruggia, O., Lo Re, G., Ortolani, M. (2009) Monitoring High-Quality Wine Production using Wireless Sensor Networks, HICSS 2009
- [19] Bilal, Muhammad; et al. "An Authentication Protocol for Future Sensor Networks". *Sensors*.
- [20] J.K.Hart and K.Martinez, "Environmental Sensor Networks: A revolution in the earth system science?", *Earth Science Reviews*, 2006
- [21] Spie (2013). "Vassili Karanassios: Energy scavenging to power remote sensors". *SPIE Newsroom*. doi:10.1117/2.3201305.05.
- [22] Tiwari, Ankit; et al. "Energy-efficient wireless sensor network design and implementation for condition-based maintenance". *ACM Transactions on Sensor Networks (TOSN)*.
- [23] "Wireless temperature sensor for Data Centers". *ServersCheck*. Retrieved 2016-10-09.
- [24] L. Doherty, K. S. Pister, and L. E. Ghaoui, "Convex position estimation in wireless sensor networks
- [25] K. Akkaya and M. Younis, "An Energy-Aware QoS Routing Protocol for Wireless Sensor Networks," in the Proceedings of the IEEE Workshop on Mobile and Wireless Networks (MWN 2003), Providence Rhode Island, May 200
- [26] . F. Akyildiz, W. Su, Y. Sankarasubramaniam, and E. Cayirci, "Wireless sensor networks: a survey" *Computer Networks (Elsevier) Journal*, Vol. 38, no. 4, Mar. 2002, pp. 393-422
- [27] Kemal Akkaya and Mohamed Younis, "A Survey on Routing Protocols for Wireless Sensor Networks", *Ad hoc Networks*, vol. 3, no. 3, May 2005, pp. 325-349.
- [28] Hind Alwan and Anjali Agarwal L. Xing and A. Shrestha. , "MQoSR: A Multiobjective QoS Routing Protocol for Wireless Sensor Networks", *SRN Sensor Networks Volume 2013*, Article ID 495803, 12 pages.
- [29] Mirela Fonoage, Mihaela Cardei, and Arny Ambrose, "A QoS Based Routing Protocol for Wireless Sensor Networks".



- [30] A Survey of QoS Based Routing Protocols for Wireless Sensor Networks R.Sumathi and M.G.Srinivas Volume: 8, No: 4, Page: 589 ~ 602, Year: 2012 10.3745/JIPS.2012.8.4.589
- [31] Shiva Murthy G, R.J.DSouza,[31] and Varaprasad G, "Reliability Analysis of Route Redundancy Model for Energy Efficient Node Disjoint Multipath Routing in Wireless sensor networks.
- [32] Jeong, Sarah Sharafkandi,[32] and et al Energy-aware scheduling with quality of surveillance guarantee in wireless sensor networks
- [33] David H.C. Energy[33]-Aware Scheduling with Quality of Surveillance Guarantee in Wireless Sensor Networks Du
- [34] Jane K. Hart a, Kirk Martinez b,<sup>1</sup>[34] Environmental Sensor Networks





10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)