



iJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 6 Issue: VIII Month of publication: August 2018

DOI:

www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com



Air Quality and Hazardous Event Detection with a Smart Helmet for the Mining Industry

Ms. M. Sangeetha¹, Dr. Amit Gangopadhyay²

¹M.Tech Scholar, ECE Deptt, Sree Dattha Institute of Engineering and Science, JNTUH, Telangana State, India

²HOD, ECE Department, Sree Dattha Institute of Engineering and Science, JNTUH, Telangana State, India

Abstract: The security head defenders but advancement adding in it for excavators when a related digging machine has faced or encountered a risky event. A sharp mining top was made that can distinguish hazardous events, for instance, danger level of dangerous gasses. The gas centers can be measured by interfacing CO and CO₂ sensors with ARM course of action microcontroller. The ARM controller identifies the data and fills in as requirements be. If high thickness gas obsession is recognized, microcontroller starts the flag which gives an exasperating sound. Zigbee advancement is used to bestow the data over PC. In future, we can add GSM to send the message to affirmed individual if any risky events are recognized.

Keywords: Excavator, hazardous, sensors, ARM, microcontroller, Zigbee

I. INTRODUCTION

South Africa is known for its expansive and different mineral resources and colossal mining industry [20]. The issue tended to in this paper was the difference in a mining defensive top remembering the true objective to ensure greater security care between diggers. A mining defensive top changed in accordance with upgrade digger security by adding knowledge to the head defender. If an inquiry falls on a digger despite when wearing his head defender he can wind up detectably careless or stationary. The system must choose if a digger has overseen unsafe harm. These two events are portrayed as dangerous events. Thirdly, dangerous gasses recognized and detailed.

A certified fundamental issue in mines is hazardous gasses. Structures used as a piece of a mine can make outrageous vibrations and augmentation the level of perilous gasses, for instance, CO, SO₂, NO₂ and particulate issue. The working or application conditions and situations can be degree rambunctious and diggers don't watch each different dependably. Diggers have a tendency to stay in social affairs and will be near 5 meters (m) from each other. A notice structure be solidified that will alert diggers inside a 5 m run that an excavator is experiencing a hazardous event. This system process and transmit the event inside 1 second (s). These systems measure the earth and these don't prepare the digger at all or simply alert the excavator discern ably. These structures alert excavators, however when a digger is obstructed or hurt, an external information is required from ground control. Starting late, procuring advancement has expected an indispensable part in the scope of mine applications. The work on mines advancement is open however highly compelled. Nutter, et al. proposed a technique for recognizing security dangers regular in underground watching and control. They created potential prosperity chance rigging. They made methods in perspective of logical contraptions and PC based gear/programming systems.

Using the accessible associations of GSM and GPS advances to make a sharp is sent in a blaze to the fundamental individual contains: the patient name, heart rate, body temperature, the patient's zone and the relating UTC time-stamp. Electrocardiogram (ECG) could be drawn by sending the examining to a particular processor.

A. CPU Platform

uProcessors are often of 2 clear classes: chip (μ P) and littler scale controllers (μ C). Littler scale controllers have worked in peripherals on-chip, decreasing structure's size. The famous variety of CPU structures used as a piece of emplanes.

B. Interrupt Based System

Associate in Nursing impede may well be used, by checking in an exceedingly predefined repeat, or by an interface controller obtaining a computer memory unit. The low torpidity is needed by the system properties handlers of short and clear for this reason. These systems run a necessary task in a necessary circle, but this endeavour is not particularly fragile to surprising deferrals. The handler's length and the loop to interrupt idleness to a base. One or two of times longer assignments square measure intercalary to a line structure within an interfere handler to be started with a commonplace circle later. This passes on structure nearly a multitasking phase with separate methodology.

C. CPU Platform

The 2 specific classes related are: microchips (μP) and tiny scale controllers (μC). A related arrangement is to use a Field Programmable Group Array portal display (FPGA) needs to be reprogrammed with including the CPU.

D. Tools

As for other programming, embedded structure organizers use compilers, building specialists, and supporting debug facility make embedded system programming. Regardless, they may to use devices:

- 1) An (ICE) is a hardware that replaces or fittings into the chip, and offers workplaces to quickly stack and investigate exploratory code.
- 2) For systems using propelled hail architects use a math workbench, for instance, Math CAD or Mathematical to mirror the science.
- 3) Some compiler software and linkers used to upgrade the specific hardware.
- 4) An introduced system can have phenomenal vernacular or arrangement instrument, or add changes to a present lingo.

II. SOFTWARE TOOLS SOURCES

- 1) Software association to aptitude in embedded marketing.
- 2) The G.N.U programming change devices.1.5 Debugging.
- 3) Planted Debugging is also at completely different levels performance of workplaces offered, going from get along or source-level investigation with on chip person or program, to yield from serial analysis ports or JTAG interface, to a duplicated circumstance operational on a laptop.
- 4) As the versatile nature of embedded structures creates, bigger sum mechanical assemblies and working systems good equipment where it looks good. For example, telephones, individual propelled associates and other buyer PCs every step require basic programming that is given by a man the developing equipment an open programming condition.

A. Interrupt Controlled System

Some implanted structures are dominantly thwarting controlled with errands performed by the structure are enacted by different events. By and large these structures run a direct endeavor in a rule circle moreover, yet this errand isn't greatly fragile to startling deferrals. The endeavors performed, in middle with handlers should be required short encroach inaction to a base. Many times longer assignments are added to a structure with handler to be set up in the basic circle later. The technique passes on the system close to a multitasking segment with discrete methods.

B. Preemptive Multitasking

A code exchanges between errands searching a clock. This is the level at which the systems here are considered to have a "working structure", and exhibits each one complexities of managing different assignments running evidently meanwhile.

III. PROPOSED METHOD

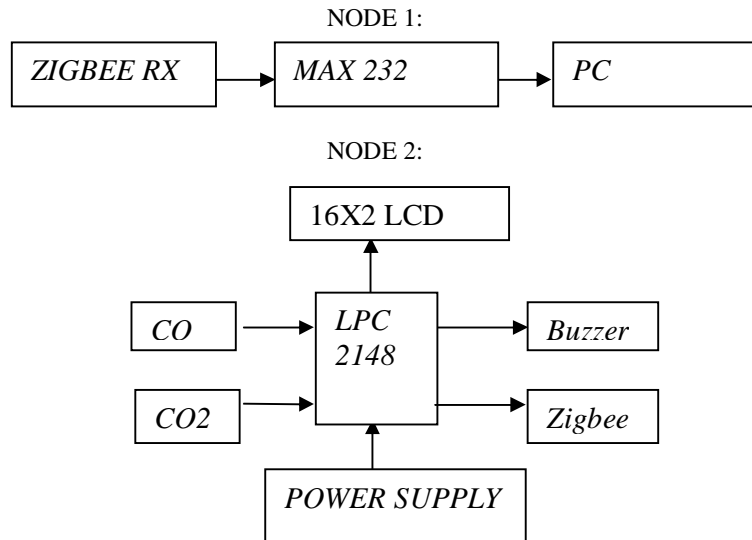


Fig 3.1 Block diagram of Mine worker Helmet

IV. ARM PROCESSORS FOR EMBEDDED DESIGNS

A. The Complex Instruction Set Computer

All of the present microcontrollers depend on the idea of C.I.S.C architecture. The commonplace C.I.S.C microcontroller has well much guidelines to intense and exceptionally particular for particular control assignments. The advantage of the C.I.S.C design is enabling the developer to utilize one direction set up of numerous difficult directions.

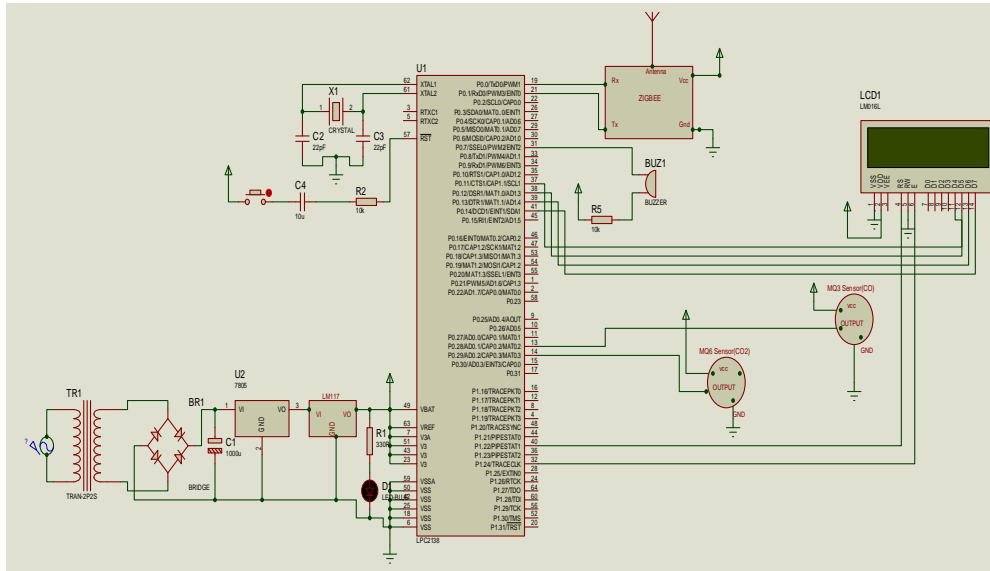


Fig 4.1 Schematic diagram

B. Cache

As said some time as of late relationship between a brisk processor and by and large direct memory could transform into a bottleneck. This issue is had a tendency by introducing stores. A save is a more common, speedier memory store data with main and useful memory regions. Right when the processor wishes to scrutinize or form a territory on a basic level memory, it at first checks whether that memory zone is in the save. The memory region is within the save then we are saying that successful store went on else we need to mention a save miss. A save hit the processor rapidly scrutinizes or makes the info within the store line. A save miss, most stores dole out another section, which includes the data from the memory essentially missed. Exactly when holding of data, it should provide runtime process in guideline memory moreover.

C. ARM LPC2148

The LPC2148 microcontroller relies upon a 32/16 bit ARM7TDMI-S CPU with progressing duplicating and embedded take after reinforce, that joins the microcontroller with introduced quick burst memory stretching out from 32 kB to 512 kB. In view of their unassuming size and low power usage, LPC2148 is ideal for applications where downsizing is a key essential; for instance, get the chance to control and reason for offer.

D. Serial Communication Port

PCs will move information in 2 ways: the parallel technique and serial technique.

The parallel information trades. Instances of parallel information trade area unit printers and arduous plates; every usage joins with several wire strips. To trade to a device discovered many meters away, the serial method is compulsory.

In data transmission it is a duplex transmission. This is rather than simplex transmissions, for instance in which the PC just sends data. Duplex transmissions can be half system or full system duplex, dependent upon paying little respect to whether the data trade can be synchronous. If data is transmitted one course on the double, it is suggested as half duplex. If the data can go the two courses meanwhile, it is full duplex. Clearly, full duplex requires two wire courses for the data lines, one for transmission and one for social occasion, with a particular true objective in the data trading and security.

E. Zigbee Networks

Zigbee gadgets can frame systems with Mesh, Star and Generic Mesh topologies among themselves. The system can be extended as a bunch of littler systems. A Zigbee system can have three sorts of hubs: Zigbee Coordinator (ZBC), Zigbee switch (ZBR) and Zigbee End Device (ZBE) each having some extraordinary property

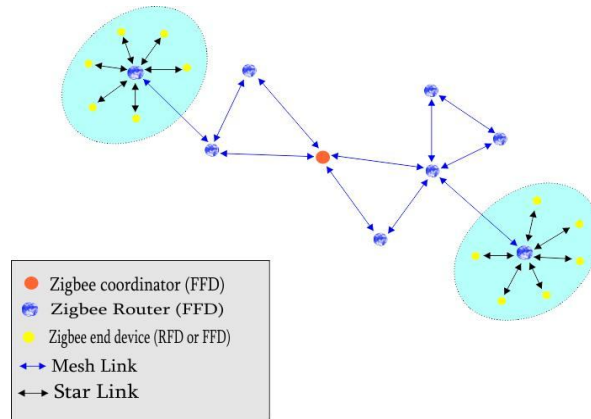


Fig 4.2 Zigbee network

F. Architectural Overview

Zigbee Device Objects (ZDO) gives an interface between the application protocols, the gadget profiles, and the APS layer in Zigbee gadgets.

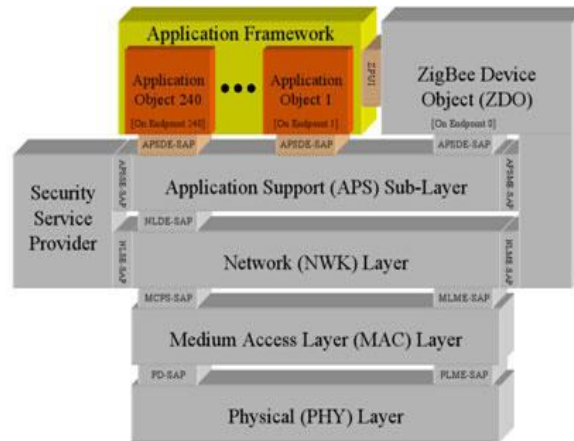


Fig 4.3 Architectural block diagram

G. Data Transfer Modes

This information can be moved in two modes: Beacon Mode and Non-signal mode. In reference point mode, the information is sent intermittently finished the system.

Table 4.1 Comparison between zigbee and Bluetooth

Parameter	Zigbee	Bluetooth
Power Requirements	10mA	100mA
Development Costs (Codesize in Zigbee/Codesize in Bluetooth)	0.5	1
Sensitivity	-92dbm	-82dbm
Number of supported nodes	65536 (mesh)	7 (star)
Security	AES (128 bit)	SAFER (64/128 bit)
Latency requirements	Optional Guaranteed Time Slot	None
Range	~75m (LOS)	10m
Maximum Data Rate	20-250 KB/s	720 KB/s
System Resources	4KB-32KB	250+KB
Battery Life (days)	100-1000+	1-7
Network Size	65K+	7
Range(m)	1-100+	1-10+

In the middle of the day and age when the gadgets are not sending information, they may enter a low power rest state to limit control utilization. In a non-reference point mode, the facilitators and the switches dynamic in the system need to remain conscious for more often than not to listen approaching information and thus require solid power supplies.

In the long run, zigbee may coincide with Bluetooth similarly as Bluetooth has come to live with Wi-Fi.

H. Sensors

MQ-6 ALCOHOL GAS SENSOR: Touchy material of MQ-6 and SnO₂, which with bring down conductivity. At the purpose once the target flammable gas exist, the sensor's conduction is higher aboard the gas fixation rising. MQ-6 gas device has high feebleness to gas, paraffin and LPG, in addition reaction to fossil fuel. The device might be utilised to differentiate numerous burnable gas; it's with bottom effort and applicable for varied application.

V. RESULTS

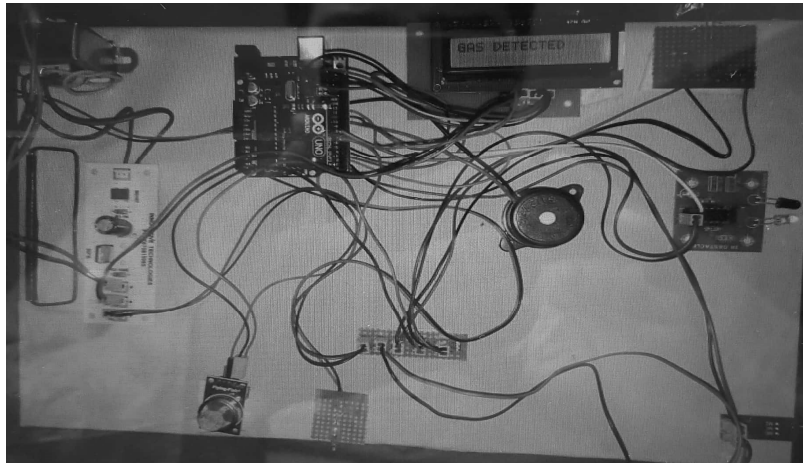


Fig 5.1 Hazardous Gases are detected

VI. CONCLUSIONS AND FUTURE SCOPE

A shrewd mining defensive top was made that can recognize three sorts of risky events. The hazardous events were named a digger clearing the mining top off their head. An off-the-rack IR sensor was then used to viably choose when the defensive top is on the excavator's head. Another perilous event is portrayed as an event where diggers are struck by a dissent against the head with a power outperforming an estimation of 1000 on the HIC (Head Injury Criteria). An accelerometer was used to gage the enlivening of the head and the HIC was figured in programming. The accelerometer arrangement was then changed to precisely alter the accelerometer.

The getting ready speed of the structure can be improved to consider more exact accelerometer estimation. The IR sensor can be upgraded to work inside the head defender by not enacting in perspective of reflections. The structure can be upgraded by including all the additionally measuring contraptions to check the digger's circulatory strain and heart rate. In future, it could similarly be considered if such modules can be used for helper organizations, for instance, confinement of workers in regard to each other.

VII. ACKNOWLEDGMENT

The authors are thank full to the management of Sree Dattha Institute of Engineering and Science for providing the lab resources. They are also thank full to the central library resources i.e digital library, ebook and other books.

REFERENCES

- [1] C. Qiang, S. Ji-ping, Z. Zhe, Z. Fan, "ZigBee Based Intelligent Helmet for Coal Miners", IEEE World Congress on Computer Science and Information Engineering (WRI 2009), vol. 3, pp. 433-435, 31 Mar.-2 April 2009.
- [2] H. Hongjiang, W. Shuangyou, "The application of ARM and ZigBee technology wireless networks in monitoring mine safety system", IEEE International Colloquium on Computing Communication Control and Management (ISECS 2008), pp. 430-433, 3-4 Aug. 2008.
- [3] X. Liu, J. S. Huang, Z. Chen, "The research of ranging with timing over packet network for the mine safety application", Journal of Networks, vol. 7, no. 7, pp. 1054-1062, Jul. 2012.
- [4] R. S. Nutter, "Hazard evaluation methodology for computer-controlled mine monitoring/control systems", IEEE Trans. on Industry Applications, vol. IA-19, no. 3, pp. 445-449, May/June 1983.
- [5] R. S. Nutter, "A distributed microprocessor monitoring and control system for coal mines", Proc. 4 th WVU Conf. on Coal Mine Electrotechnology, Aug. 2-4, 1978.



- [6] R. S. Nutter, M. D. Aldridge, "Status of mine monitoring and communications", IEEE Trans. on Industry Applications, vol. 24, no. 5, pp. 820-826, Sep./Oct. 1998.
- [7] A. D. Kock, J. W. Oberholzer, "The development and application of electronic technology to increase health safety and productivity in the South African coal mining industry", IEEE Trans. on Industry Applications, vol. 33, no. 1, pp. 100-105, Jan/Feb. 1997.
- [8] P. Misra, S. Kanhere, D. Ostry, S. Jha, "Safety assurance and rescue communication systems in high-stress environments: a mining case study", IEEE Communications Magazine, vol. 48, no. 4, pp. 66-73, April 2010.
- [9] A.P. Squelch, "Virtual reality for mine safety training in South Africa", The Journal of The South African Institute of Mining and Metallurgy, pp. 209-216, July 2001.
- [10] A. E. Forooshani, S. Bashir, D. G. Michelson, S. Noghian, "A survey of wireless communications and propagation modelling in underground mines", IEEE Communications Surveys and Tutorials, vol. 15, no. 4, pp. 1524-1545, Nov. 2013.
- [11] C. P. Kruger, G. P. Hancke, "Implementing the Internet of Things vision in industrial wireless sensor networks", IEEE Int. Conf. on Industrial Informatics, pp. 627-632, July 2014.
- [12] 13. A. Kumar, G. P. Hancke, "Energy efficient environment monitoring system based on the IEEE 802.15.4 standard for low cost requirements", IEEE Sensors Journal, vol. 14, no. 8, pp. 2557-2566, Aug. 2014.
- [13] D. M. Han, J. H. Lim, "Smart home energy management system using IEEE 802.15.4 and ZigBee", IEEE Trans. on Consumer Electronics, vol. 56, no. 3, pp. 1403-1410, Aug. 2010.
- [14] C. P. Kruger, G. P. Hancke, "Benchmarking Internet Of Things devices", IEEE Int. Conf. on Industrial Informatics, pp. 611-616, July 2014.
- [15] K. Gill, S. H. Yang, F. Yao, X. Lu, "A ZigBee-based home automation system", IEEE Trans. on Consumer Electronics, vol. 55, no. 2, pp. 422-430, May 2009.
- [16] J. Byun, S. Park, "Development of a self-adapting intelligent system for building energy-saving and context-aware smart services", IEEE Trans. on Consumer Electronics, vol. 57, no. 1, pp. 90-98, 2011.
- [17] I. F. Akyildiz, W. Su, Y. Sankarasubramaniam, E. Cayirci, "Wireless sensor networks: a survey", Computer Networks, vol. 38, pp. 393-422, 2002.
- [18] V. C. Gungor, G. P. Hancke, Industrial Wireless Sensor Networks: Applications Protocols and Standards, Published by CRC Press, 2013.
- [19] M. A. Hermanus, "Occupational health and safety in mining-status new developments and concerns", The Journal of The Southern African Institute of Mining and Metallurgy, vol. 107, pp. 531-538, Aug. 2007.
- [20] "Zigbee wireless standards", [online] Available: www.didgi.com/technology/rf-articles/wireless-zigbee.
- [21] [online] Available: <http://www.contiki-os.org/>.
- [22] B. Silva, A. Kumar, G. P. Hancke, "Experimental Link Quality Characterization of Wireless Sensor Networks for Underground Monitoring", IEEE Trans. on Industrial Informatics, vol. 11, no. 5, pp. 1099-1110, Oct. 2015.
- [23] R. Fisher, L. Ledwaba, G. P. Hancke, C. Kruger, "Open Hardware: A Role to Play in Wireless Sensor Networks?", Sensors, vol. 15, no. 3, pp. 6818-6844, 2015.
- [24] AM Abu-Mahfouz, GP Hancke, "An efficient distributed localisation algorithm for wireless sensor networks: based on smart reference-selection method", International Journal of Sensor Networks, vol. 13, no. 2, pp. 94-111, May 2013.



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)