



iJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 3

Issue: IV

Month of publication: April 2015

DOI:

www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com

Medical Algorithm for Bilirubin Identification with its Treatment Modes

J. Thomaslin Veron Atheena¹, A. Kokilavani², M. Madhu Sudha³, A. Kalaiarasi⁴

^{1,2,3}PG Scholar, Dept. of EST, ⁴Assistant Professor, Dept of EEE

RVS College of Engineering and Technology, Coimbatore

Abstract—The baby liver has a limited ability to process unconjugated bilirubin. Therefore, infant youngsters are slanted to a gathering of unconjugated bilirubin, and can make jaundice. Starting late, light transmitting diodes which work in the 410 - 490 nm wavelength spans have been made. These gallium nitride sapphire LEDs can convey high irradiance with low control necessities. These LEDs release light inside the top ingestion extent of bilirubin, are simplicity, and have long operational lifespans. Bilirubin can be depicted as the yellowish substance that is made by the liver, when old cells are divided. If the levels of bilirubin in the body are inside the regular achieve, it doesn't make an issue; on the other hand, now and again it is possible for the measure of bilirubin in the body to move to an unusual state, which hence can incite certifiable wellbeing ensnarement's. A great part of the time, a man could encounter the evil impacts of jaundice, on the off chance that the levels of bilirubin in the body move high. Likewise, if the levels are not controlled soon, it could incite cerebrum hurt too. In the midst of the first week of life all children have extended bilirubin levels by adult measures, with pretty almost 60% of term babies and 85% of preterm youngsters having evident jaundice. The larger part of these cases is caring yet it is indispensable to perceive those babies at risk of exceptional bilirubin encephalopathy and kernicterus/interminable encephalopathy. Jaundice may moreover be an evidence of a veritable basic affliction.

Index Terms—Bilirubin level, Characteristics of Jaundice, Bilirubin Risk component, Hepatitis-B recognizable proof, Medical calculation use.

I. INTRODUCTION

Bilirubin can be depicted as the yellowish substance that is made by the infant offspring of the liver, when old cells are divided. In case the levels of bilirubin in the body are inside the standards achieve, it doesn't make an issue; regardless, once in a while it is workable for the measure of bilirubin in the body to move to an unusual state, which hence can provoke bona fide wellbeing troubles.

Bilirubin has perceived and the treatment mode has been determined in a capable sensation. It can be created by using pic microcontroller and focus on programming reenactment could be conceivable by the proteus. Bilirubin can be depicted as the yellowish substance that is made by the infant of the liver, when old cells are divided. If the levels of bilirubin in the body are inside the regular degree, it doesn't make an issue; then again, every so often it is workable for the measure of bilirubin in the body to move to an anomalous state, which therefore can provoke certified prosperity impairments.

Focus of the endeavor is to screen the bilirubin level of children to avoid the jaundice. To avoid jaundice to the new imagined babies, light radiating diodes (LEDs) which work in the 410 - 490 nm wavelength degree (top at 475 nm) have been created. Driven is used to screen the bilirubin level. This could be conceivable with the aid of microcontroller and ZigBee. ZigBee is used for remote correspondence.

The child's liver has a confined ability to process unconjugated bilirubin. In this way, infant youngsters are slanted to an accumulating of unconjugated bilirubin, and can make jaundice.

This endeavor is done with the help of PIC 16F877A, Photo locator, ZigBee. Photo identifier is used to watch the wavelength. PIC 16F877A have the determinations like inbuilt ADC, USART, Timers et cetera., Inbuilt ADC is used to stay far from the usage of separated IC. ZigBee correspondence is used to transmit the data through remote correspondence.

This endeavor is for the most part used as a piece of recuperating focuses to screen the new imagined newborn children continually without taking the blood from the heel.

Treatment for diminishing the unconjugated bilirubin will be done by using phototherapy system. The begin and term of phototherapy is portrayed by a specific extent of total bilirubin qualities in perspective of an infant kid's postnatal age and the

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

potential risk for bilirubin neurotoxicity.

Focus of the assignment is to screen the bilirubin level of infant kids to keep up a vital separation from the jaundice.

II. PRINCIPLE OF OPERATION

The child's liver has a compelled ability to process unconjugated bilirubin. In like manner, infant youngsters are slanted to a hoarding of unconjugated bilirubin, and can make jaundice (hyperbilirubinemia).

This endeavor is done with the help of PIC 16F877A, Photo identifier, ZigBee. Photo marker is used to watch the wavelength. PIC 16F877A have the determinations like inbuilt ADC, USART, Timers et cetera., Inbuilt ADC is used to avoid the use of specific IC. ZigBee correspondence is used to transmit the data through remote correspondence.

The Bilirubin is an uncommon parts that movement's resistance. Microcontroller gets the straightforward worth from this sensor through ADC. The microcontroller is the burst sort of reprogrammable microcontroller in which we viably altered by thought. APR9600 is single-chip voice recording & playback contraption. The voice is starting now recorded by undertaking thought. This stockpiling is capable through a mix of the Sample and Hold circuit and the Analog Write/Read circuit. These circuits are timed by either the Internal Oscillator or an outside clock source. Exactly when playback is looked for the as of now secured recording is recuperated from memory, low pass filtered, and expanded .These voice control signs are given by microcontroller as indicated by the straightforward estimation of the flex sensor. Keypad is used to control the voice summon. LCD used to demonstrate the information about sensor regard and control information of APR9600.

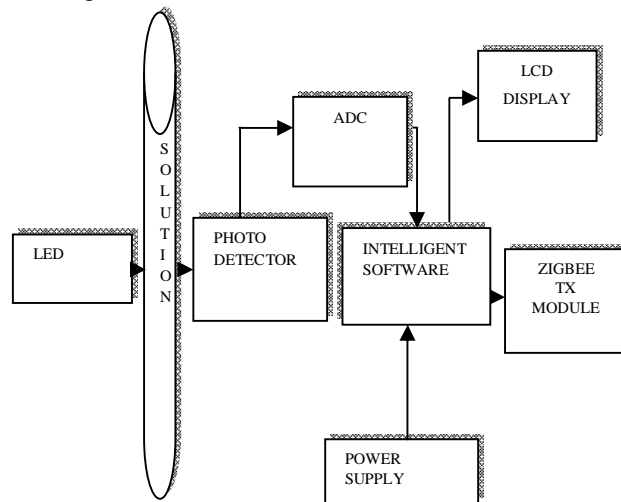


FIG: TRANSMITTER BLOCK

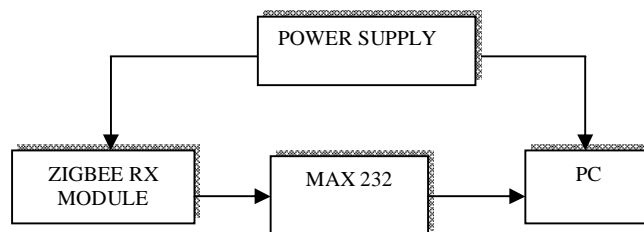


FIG:RECEIVER BLOCK

III. SYSTEM DESCRIPTIONS

A. PIC 16F877A

The microcontroller used as a piece of this circuit is PIC16F877A. PICs are extraordinary with both mechanical architects and pros alike due to their straightforwardness, wide openness, broad customer base, expansive get-together of use notes, availability of insignificant exertion or free change gadgets, and serial programming limit.

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

- 1) PIC 16F877A Microcontroller
 - a) Only 35 single word bearings to learn
 - b) All single cycle bearings beside framework augmentations, which are two-cycle
 - c) Operating speed: DC - 20 MHz clock information DC - 200 ns rule cycle
 - d) 2K x 14 outflows of Program Memory, 128 x 8 bytes of Data Memory (RAM)
 - e) Pin out great to PIC16C72/72A and PIC16F872
 - f) Interrupt capacity
 - g) Eight-level significant gear stack
 - h) Direct, Indirect and Relative Addressing modes
 - i) 1,000 erase/form cycle FLASH framework memory typical
 - j) Power-on Reset (POR), Power-up Timer (PWRT) and Oscillator Start-up Timer (OST)
 - k) Watchdog Timer (WDT) with its own specific on-chip RC oscillator for strong operation
 - l) Programmable code protection
 - m) Power saving SLEEP mode
 - n) Selectable oscillator choices

There are two memory hinders in the PIC16F72 device. These are the task memory and the data memory. Each piece has separate transports with the objective that concurrent access can happen. Program memory and data memory are elucidated in this fragment. Program memory can be examined inside by the customer code. The data memory can further be divided into the extensively valuable RAM and the Special Function Registers (SFRs). The operations of the SFRs that control the "focal point" are portrayed here. The SFRs used to control the periphery modules are depicted in the portion discussing each individual periphery module. The PIC16F87XA contraptions have a 13-bit program counter fit for watching out for a 8K colloquialism x 14 bit program memory space. The PIC16F876A/877A devices have 8K words x 14 bits of Flash task memory, while PIC16F873A/874A contraptions have 4K words x 14 bits. Becoming acquainted with zone over the physically completed area will bring about a wraparound. The Reset vector is at 0000h and the interrupt vector is at 0004h. The data memory is allotted into diverse banks which contain the General Purpose Registers and the Special Function Registers. Bits RP1 (Status<6>) and RP0 (Status<5>) are the bank select bits. Each bank connects up to 7Fh (128 bytes) [2]. The lower regions of each bank are put something aside for the Special Function Registers. Over the Special Function Registers are General Purpose Registers, executed as static RAM. All realized banks contain Special Function Registers.

B. LCD Display

LCD (Liquid Crystal Display) screen is an electronic showcase module and find a far reaching assortment of employments. A 16x2 LCD presentation is outstandingly central module and is normally used as a piece of diverse devices and circuits [3]. These modules are supported more than seven segments and other multi area LEDs. The reasons being: LCDs are commonsense; smoothly programmable; have no obstruction of indicating one of a kind & even custom characters (not under any condition like in seven areas), exercises subsequently on [4].

A 16x2 LCD infers it can demonstrate 16 characters each line and there are 2 such lines. In this LCD each character is indicated in 5x7 pixel grid. This LCD has two registers, particularly, Command and Data. The summon register stores the request rules given to the LCD. A summon is a course given to LCD to do a predefined undertaking like instating it, passing its screen, setting the cursor position, controlling presentation and so on [5]. The data register stores the data to be demonstrated on the LCD. The data is the ASCII estimation of the character to be demonstrated on the LCD. Click to take in all the more about inside structure of a LCD.

C. LED

A light-transmitting diode is a two-lead semiconductor light source. It is a crucial pn-crossing point diode, which radiates light when incited. Exactly when a fitting voltage is joined with the leads, electrons have the ability to recombine with electron crevices inside the contraption, releasing imperativeness as photons [6]. This effect is called electroluminescence, and the shading of the light (contrasting with the essentialness of the photon) is directed by the imperativeness band hole of the semiconductor.

Infrared LEDs are still constantly used as transmitting segments as a piece of remote-control circuits, for instance, those in remote controls for a wide mixture of client hardware [7]. The principle perceptible light LEDs were in like manner of low constrain, and

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

confined to red. Progressed LEDs are open over the detectable, splendid, and infrared wavelengths, with high shine [8].



FIG: RGB LED

1) RGB

Tri-shading LEDs with red, green, and blue emitters, all things considered using a four-wire relationship with one standard lead (anode or cathode). These LEDs can have either general positive or essential negative leads. Others in any case, have only two leads (positive and negative) and have a verifiable little electronic control unit.

Table: LED and its Range

LED	RANGE
BLUE LED	410 – 490nm
GREEN LED	50 – 100nm
YELLOW LED	100 – 150nm
RED LED	150 – 200nm

The RGB shading model is an included substance shading model in which red, green, and blue light are incorporated in diverse ways to reproduce a wide group of tones. The name of the model begins from the initials of the three included substance key shades, red, green, and blue.

The RGB shading model is an included substance shading model in which red, green, and blue light are incorporated in distinctive ways to duplicate a wide group of shades. The name of the model begins from the initials of the three included substance key tones, red, green, and blue. To structure shading with RGB, three shaded light columns must be superimposed. Each of the three poles is known as a piece of that shading, and each of them can have a subjective power, from totally off to totally on, in the mixture.

The RGB shading model is included substance as in the three light bars are incorporated, and their light spectra incorporate, wavelength for wavelength, to make the last shading's reach.

Exactly when one of the parts has the strongest force, the shading is a tint near to this key shading (rosy, greenish, or to a degree blue), and when two sections have the same strongest power, then the shading is a shade of a helper shading (a shade of cyan, maroon or yellow)[9]. A discretionary shading is confined by the aggregate of two vital shades of comparable force: cyan is green+blue, red is red+blue, and yellow is red+green. Every discretionary shading is the supplement of one crucial shading; when a vital and its equal helper shading are incorporated, the result is white: cyan supplements red, fuchsia supplements green, and yellow supplements blue [10].

The RGB shading model itself does not describe what is suggested by red, green, and blue calorimetrically, subsequently the delayed consequences of mixing them are not showed as by and large, however as for the key shades. Right when the exact chromaticity of the red, green, and blue primaries are described, the shading model then transforms into an altogether shading space, for instance, sRGB or Adobe RGB; see RGB shading spaces for more details[12].

The choice of vital tones is related to the physiology of the human eye; extraordinary primaries are jars that support the difference between the responses of the cone cells of the human retina to light of particular wavelengths, and that thusly make an immense shading triangle.

D. Zigbee

ZigBee is a specific for a suite of unusual state correspondence traditions used to make individual extent frameworks produced from little, low-control electronic radios. ZigBee is in perspective of an IEEE 802.15 standard [13]. Disregarding the way that its low

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

control usage limits transmission partitions to 10–100 meters perceptible pathway, dependent upon power yield and characteristic qualities, ZigBee contraptions can transmit data over long detachments by going data through a cross segment arrangement of center devices to achieve more evacuated ones. ZigBee is typically used as a piece of low data rate applications that require long battery life and secure frameworks organization. ZigBee has a portrayed rate of 250 Kbit/s, in a perfect world prepared for unpredictable data transmissions from a sensor or information gadget [14]. Applications consolidate remote light switches, electrical meters with in-home-demonstrates, development organization structures, and other purchaser and mechanical supplies that obliges short-range low-rate remote data transfer [16]. The development described by the ZigBee determination is proposed to be less troublesome and less exorbitant than diverse remote individual area frameworks (WPANs, for instance, Bluetooth or Wi-Fi).

ZigBee was imagined in 1998, institutionalized in 2003, and updated in 2006. The name alludes to the waggle move of bumble bees after their come back to the bee locale.

The ZigBee framework layer by regional standards supports both star and tree frameworks, and nonexclusive Mesh sorting out. Every framework must have one facilitator contraption, tasked with its creation, the control of its parameters and principal backing. Inside star frameworks, the facilitator must be the central center point. Both trees and cross sections allow the use of ZigBee changes to expand correspondence at the framework level.

ZigBee develops the physical layer and media access control portrayed in IEEE standard 802.15.4 for low-rate WPANs. The determination fuses four additional key fragments: framework layer, application layer, ZigBee device objects (ZDOs) and creator described application objects which consider customization and bolster total mix [18]. ZDOs are accountable for different endeavors, including staying educated with respect to contraption parts, regulating sales to join a framework, and moreover device exposure and security.

E. Pressure Sensor

A weight sensor measures weight, routinely of gasses or liquids. Weight is an announcement of the force expected to keep a fluid from broadening, and is for the most part communicated the extent that power each unit zone. A weight sensor by and large goes about as a transducer; it delivers a sign as a limit of the weight constrained. For the reasons of this article, such a sign is electrical. Weight sensors are used for control and checking as a piece of an extensive number of normal applications. Weight sensors can moreover be used to in an indirect manner measure distinctive variable, for instance, fluid/gas stream, speed, water level, and rise. Weight sensors can then again be called weight transducers, weight transmitters, weight senders, weight markers, piezometers and manometers, among distinctive names.



FIG: Pressure Sensor

Weight sensors can change fundamentally in development, layout, execution, application suitability and cost. A dynamic examination would be that there may be more than 50 headways and no under 300 associations making weight sensors far and wide. There is in like manner a class of weight sensors that are expected to gage in a component mode for getting high speed changes in weight. Some weight sensors, for instance, those found in some development approval cams, work in a twofold (off/on) way, i.e., when weight is associated with a weight sensor, the sensor exhibitions to complete or break an electrical circuit. These sorts of sensors are overall called a weight switch.

F. Proteus

1) *Proteus Software*: Proteus 8 is a best entertainment programming for diverse arrangements with microcontroller. It is generally standard in perspective of availability of all microcontrollers in it [19]. So it is a useful instrument to test undertakings and embedded frameworks for equipment expert. You can mirror your programming of microcontroller in Proteus 8 Simulation Software.

In the wake of reenacting your circuit in Proteus 8 Software you can particularly make PCB diagram with it so it could be an all in

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

one pack for understudies and specialists [20]. So I think now you have a small bit thought in regards to what is proteus programming.

a) Proteus Professional Starter Kit

- (i) Full trademark ISIS schematic find with sponsorship for different leveled design, transport pins, configurable bill of materials and much, significantly more.
- (ii) Net rundown based ARES PCB plan with sponsorship of up to 16 copper layers, 10nm determination, any point part course of action, full electrical and physical diagram fundamental checks and extensively more.
- (iii) Standard adjustment of our consolidated shape based auto-switch (totally mechanized coordinating just)
- (iv) External Auto router Interface - grants charge and import of arrangements (in the most extraordinary association) to/from a committed outside auto router.
- (v) Support for one shaped based ground plane each layer.
- (vi) Component libraries containing more than 10000 schematic parts and 1500 PCB foot molded impressions.
- (vii) Includes ProSPICE mixed mode test framework with 8000 models and 12 virtual instruments.
- (viii) 500 pin limit PCB design

IV. CONCLUSION

The result for customary mode, less hazard mode and high risk mode are shown as takes after. At the point when the yield appears to be normal in the meantime the marker LED green shading will sparkle and the treatment mode LED will all off, in light of the way that the blood test contains commonplace level of bilirubin substance.

At the point when the yield appears to be Less Danger at the same time the marker LED yellow shading will shimmer and the treatment mode LED will sparkle less awe inspiring, in light of the way that the blood test contains Less level of bilirubin substance.

At the point when the yield appears to be Danger in the meantime the pointer LED red shading will shimmer and the treatment mode LED will sparkle awesome, in light of the way that the blood test contains more level of bilirubin substance.

REFERENCES

- [1] C. J. Murray, J. A. Lauer, R. C. Hutubessy, L. Niessen, N. Tomijima, A. Rodgers, *et al.*, "Effectiveness and costs of interventions to lower systolic blood pressure and cholesterol: A global and regional analysis on reduction of cardiovascular-disease risk," *The Lancet*, vol. 361, pp. 717–725, Mar. 2003.
- [2] J. J. Rutherford, "Wearable technology," *IEEE Eng. Med. Biol. Mag.*, vol. 29, no. 1, pp. 19–24, May/June 2010.
- [3] S. Ahmad, M. Bolic, H. Dajani, V. Groza, I. Batkin, and S. Rajan, "Measurement of heart rate variability using an oscillometric blood pressure monitor," *IEEE Trans. Instrum. Meas.*, vol. 59, no. 10, pp. 2575–2590, Oct. 2010.
- [4] P. Dupuis and C. Eugene, "Combined detection of respiratory and cardiac rhythm disorders by high-resolution differential cuff pressure measurement," *IEEE Trans. Instrum. Meas.*, vol. 49, no. 3, pp. 498–502, Jun. 2000.
- [5] A. Silvani, D. Grimaldi, S. Vandi, G. Barletta, R. Vetrugno, F. Provini, *et al.*, "Sleep-dependent changes in the coupling between heart period and blood pressure in human subjects," *Amer. J. Physiol. Regulatory, Integrative Comparative Physiol.*, vol. 294, pp. 1686–1692, May 2008.
- [6] S. Ahmad, S. Chen, K. Souerdan, I. Batkin, M. Bolic, H. Dajani, *et al.*, "A prototype of an integrated blood pressure and electrocardiogram device for multi-parameter physiologic monitoring," in *Proc. IEEE Conf. Instrum. Meas. Technol.*, May 2010, pp. 1244–1249.
- [7] J. A. Kitterman, R. H. Phibbs, and W. H. Tooley, "Catheterization of umbilical vessels in newborn infants," *Pediatric Clin. North Amer.*, vol. 17, pp. 895–912, Nov. 1970.
- [8] S. Saponara, M. Donati, T. Bacchillone, L. Fanucci, I. Sanchez-Tato, C. Carmona, *et al.*, "Remote monitoring of vital signs in patients with chronic heart failure: Sensor devices and data analysis perspective," in *Proc. IEEE Conf. SAS*, Feb. 2012, pp. 1–6.
- [9] E. Balestrieri and S. Rapuano, "Instruments and methods for calibration of oscillometric blood pressure measurement devices," *IEEE Trans. Instrum. Meas.*, vol. 59, no. 9, pp. 2391–2404, Sep. 2010.
- [10] T. Weber, S. Wassertheurer, M. Rammer, E. Maurer, B. Hametner, C. C. Mayer, *et al.*, "Validation of a brachial cuff-based method for estimating central systolic blood pressure," *Hypertension*, vol. 58, pp. 825–832, Nov. 2011.
- [11] M. V. Moer and K. Barbe, "Influence of the cuff deflation mode on oscillometric blood pressure measurements," in *Proc. IEEE Int. Workshop Med. Meas. Appl.*, May 2011, pp. 652–656.
- [12] E. A. Zorn, M. B. Wilson, J. J. Angel, J. Zanella, and B. S. Alpert, "Validation of an automated arterial tonometry monitor using association for the advancement of medical instrumentation standards," *Blood Pressure Monitor.*, vol. 2, pp. 185–188, Aug. 1997.
- [13] K. Jagomagi, J. Talts, R. Raamat, and E. Lansimies, "Technical note: Continuous non-invasive measurement of mean blood pressure in fingers by volume-clamp and differential oscillometric method," *Clin. Physiol.*, vol. 16, pp. 551–560, Sep. 1996.
- [14] Y. Miyauchi, S. Koyama, and H. Ishizawa, "Basic experiment of blood pressure measurement which uses FBG sensors," in *Proc. IEEE Int. Conf. Instrum. Meas.*, May 2013, pp. 1767–1770.
- [15] L. A. Geddes, M. H. Voelz, C. F. Babbs, J. D. Bourland, and W. A. Tacker, "Pulse transit time as an indicator of arterial blood pressure," *Psychophysiology*, vol. 18, pp. 71–74, Jan. 1981.

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

- [16] E. Pinheiro, O. Postolache, and P. Girao, "Pulse arrival time and ballistocardiogram application to blood pressure variability estimation," in *Proc. IEEE Int. Workshop Med. Meas. Appl.*, May 2009, pp. 132–136.
- [17] R. Shriram, A. Wakankar, N. Daimiwal, and D. Ramdasi, "Continuous cuffless blood pressure monitoring based on PTT," in *Proc. ICBBT*, Apr. 2010, pp. 51–55.
- [18] G. Fortino and V. Giampa, "PPG-based methods for non-invasive and continuous blood pressure measurement: An overview and development issues in body sensor networks," in *Proc. IEEE Int. Workshop Med.Meas. Appl.*, Apr. 2010, pp. 10–13.
- [19] M. Y. M. Wong, C. C. Y. Poon, and Y. T. Zhang, "An evaluation of the cuffless blood pressure estimation based on pulse transit time technique: A half year study on normotensive subjects," *Cardiovasc Eng.*, vol. 9, no. 1, pp. 32–38, Apr. 2009.
- [20] J. Muehlsteff, X. L. Aubert, and M. Schuett, "Cuffless estimation of systolic blood pressure for short effort bicycle tests: The prominent role of the pre-ejection period," in *Proc. 28th Annu. Int. Conf. IEEE EMBC*, Aug. 2006, pp. 5088–5092.



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)