



IJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 7 Issue: IV Month of publication: April 2019

DOI: <https://doi.org/10.22214/ijraset.2019.4511>

www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com

Comparative Study of Reinforced Cement Concrete Slab System v/s Post Tensioned Slab System with Reference to IS and ACI standards

Shrawani A. Shende¹, Dr. A V. Patil²

¹Post Graduate Student in Structural Engineering, Department of Civil Engineering, Yeshwantrao Chavan College of Engineering, Nagpur, India

²Professor, civil Engineering Department, Yeshwantrao Chavan College of Engineering, Nagpur, India

Abstract: A parking garage with a typical size of $32m \times 32m$ in a multistoried building was considered for design with flat slab. RCC flat slab and PT flat slab were used for the comparison with respect to the cost. The slab system was designed using two different code of practice; Indian standard (IS) and American Concrete Institute (ACI) standards. From the cost analysis, it observed that Post Tensioned flat slab system gives better cost reduction approximately 21% in the cases IS and 23% in the case of ACI, it is concluded that the PT slab system using ACI standards is considered to be durable and tensile stress is restricted and designed as an uncracked section.

Key words: RCC flat slab, PT flat slab, Indian Standard (IS) and American Concrete Institute (ACI) Standards

I. INTRODUCTION

An increase in urban population has led to an increase in demand for usable space, resulting in higher cost. This cost increases with span. This has necessarily introduced a demand for efficient floor systems. The use of flat-slab and grid slab is becoming popular. Therefore it is necessary that the slab systems are studied for their relative safety and economy. The demand for large column free areas increasing day by day so it is essential to provide RCC flat slab system and PT flat slab system. These systems are normally chosen based on factors such as economy and safety in carrying the imposed load that satisfies the limit state of serviceability. However for the design practices using codes from different countries also cause substantial differences because each code gives special importance for particular criteria and different aspects to be satisfied.

II. STUDY OF POST TENSIONED SLAB SYSTEM

The first application of post-tensioning is believed to have been conceived by Eugene Freyssinet in 1933 for the foundation of a marine terminal in France and the technology was introduced to the United States in the 1950s. Post-tensioning now is used extensively in bridges, elevated slabs such as parking structures and residential or commercial buildings. Prestressed concrete offers great advantages in comparison with other forms of construction, such as reinforced and steel. In the case of fully prestressed member, which are free tensile stress under working loads, the cross section is more efficiently utilized when compared with a reinforced concrete section which is cracked under working loads. Prestressing is a suitable technique because it helps to control the deflection of the member at the serviceability limit state and to increase the punching shear strength at ultimate. Failures by punching are brittle and can spread to adjacent columns, thus triggering the progressive collapse of the entire structure. Previous research on punching of flat slabs has shown that post-tensioning has a number of potential beneficial influences, such as the in-plane compressive stresses that develop in concrete due to prestressing and lead to an increase in its capacity to carry shear force. Post-tensioning is simply a method of producing prestressed concrete, masonry, and other structural elements. The term prestressing is used to describe the process of introducing internal forces or stress into a concrete or masonry element during the construction process in order to counteract the external loads applied when service load applied to the structure. These internal forces are applied by tensioning high-strength steel, which can be done either before or after the concrete is placed. When the steel is tensioned before concrete placement, the process is called pretensioning. Post-tensioning is done onsite by installing post-tensioning tendons within the concrete form-work in a manner similar to installing rebar. The use of post-tensioned reinforcement to construct floor slabs can result in thinner concrete sections and longer spans between supports. Designers commonly take advantage of this method to produce buildings and structures with clear open spaces allowing more architectural freedom. Reducing the thickness of each structural floor in a building can reduce the total weight of the structure and decrease the ceiling to floor height of each level.

III. MODELING AND ANALYSIS OF SLAB SYSTEMS

The modeling and analysis of the RC slab systems and Post-tensioned slab systems are modeled and analyzed using ADAPT Floor Pro software and the design and cost comparison done manually. The properties of the material that are finalized before analysis of structure are the grade of steel used is Fe 415 and grade of concrete for beam is M35.

Table I Member dimensions

Material	Type	Slab depth (mm)	Drop depth (mm)	Column dimension (mm)
RC	Flat slab	230	200	1000×1000
Post-tensioned	Flat slab	200	200	1000×1000

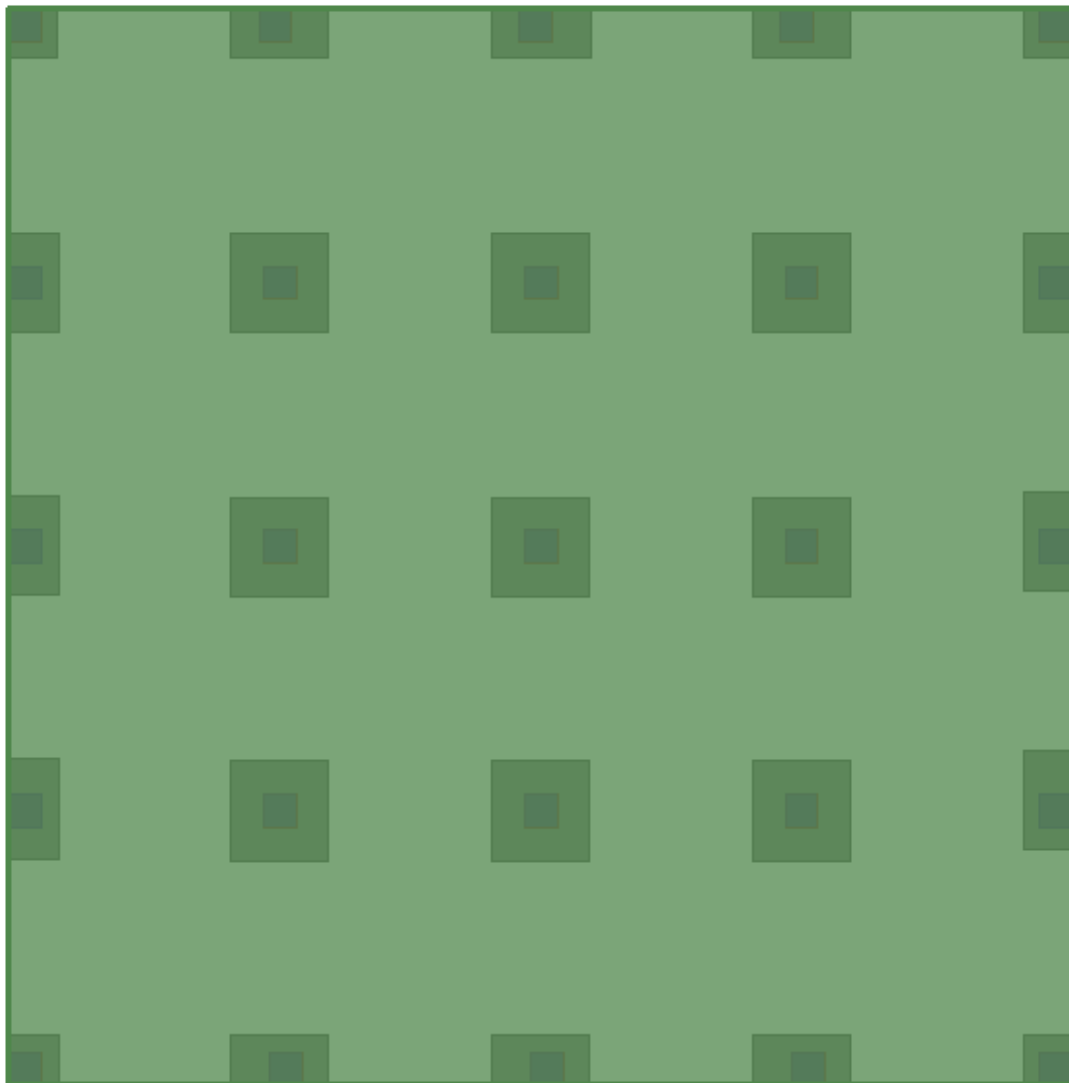


Fig.1 Structure plan showing the outline of the posttensioned slab, and its geometry in the analysis model (s = square; slab thickness 200 mm)

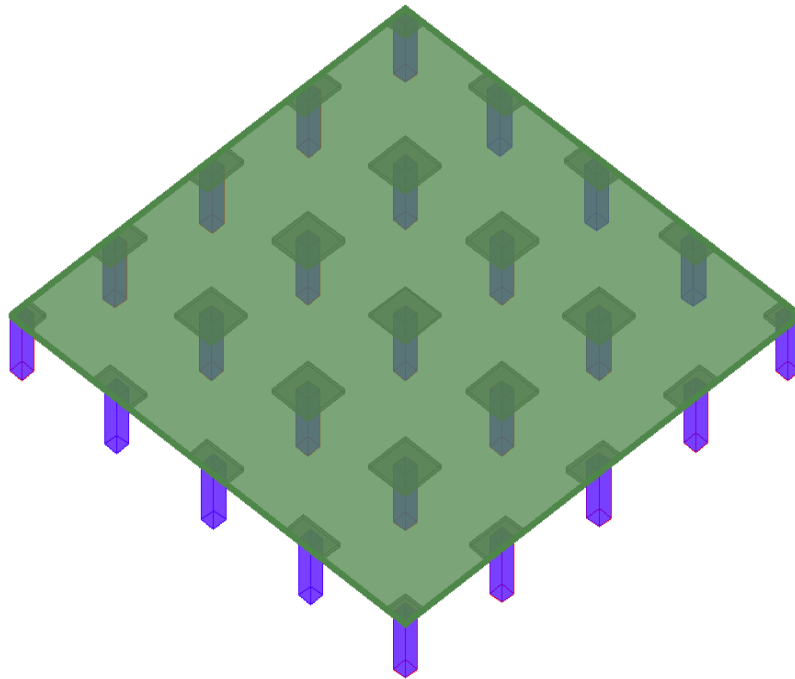


Fig2 Three dimensional view of the post-tensioned slab and its support arrangement

Table II .Load Pattern

Type	Loading (kN/m ²)
Live Load	4
Dead Imposed Load	6.75

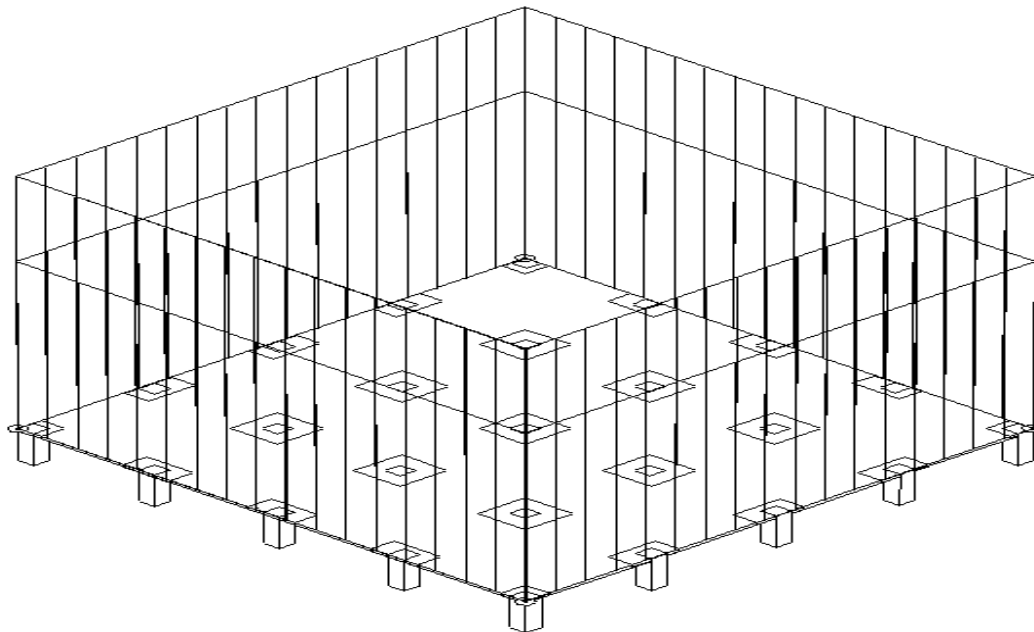


Fig 3 Assumed uniform load on the post-tensioned slab (not including self-weight) SDL = 6.75 kN/m²; LL= 4.00 kN/m²

A. RCC Slab System

Flat-slab building structures are more advantages over the slab-beam-column structures because of the free design of space, shorter construction time, and architectural –functional and economical aspects. The absence of deep beams and shear walls, flat-slab structural system is significantly more flexible for lateral loads then the RC frame system and that make the system more vulnerable under seismic events.

The RC slab-framing systems such as flat-slab were considered for the study and they were modeled and analyzed using ADAPT Floor Pro software. The loads are taken as per Indian Standards (IS), as shown in Table1. The flat-slab is modeled as a shell element as shown in fig no.3 and FEM analysis is done by automatic mesh generation. The column head is provided to reduce the punching shear in the slab.

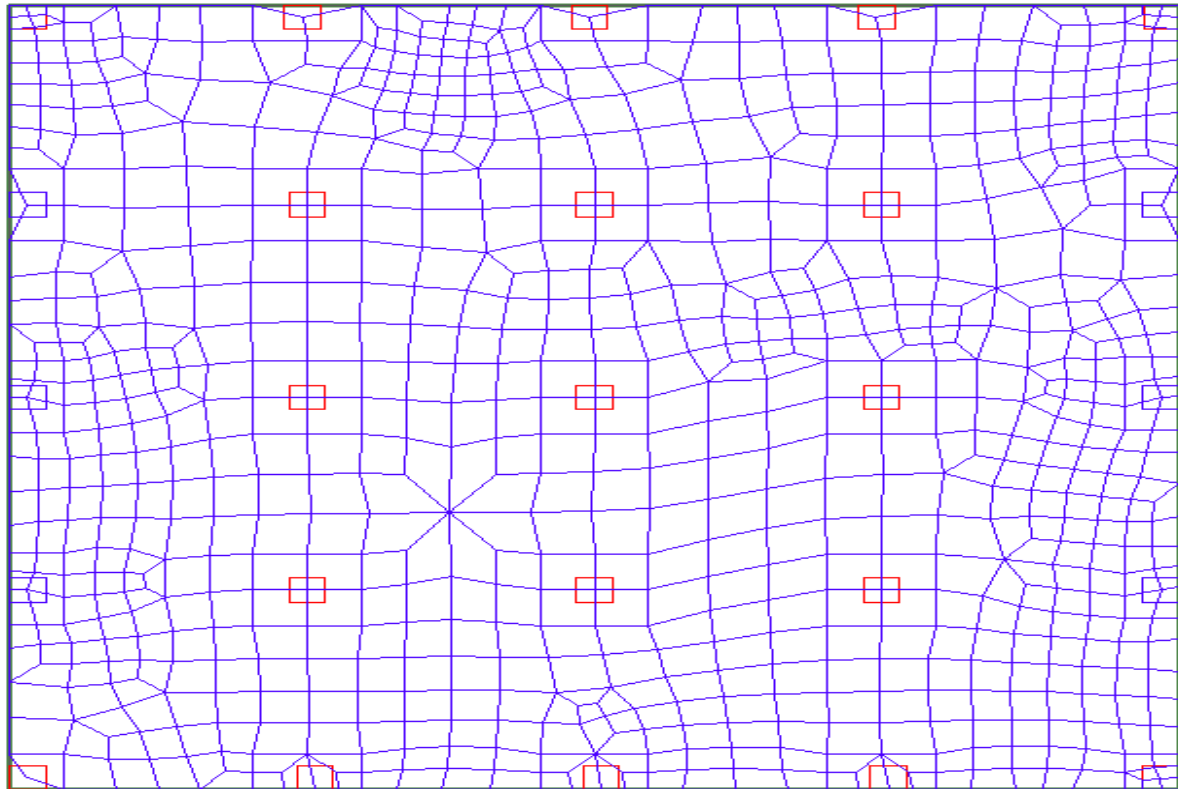


Fig.4 view of finite element mesh used for analysis

The flat slab is designed manually by IS, and American Concrete Institute (ACI) code provisions. The deflection limits were taken as per the IS standards ACI standards. RCC flat slab and flat plat are extremely indeterminate structure and its accurate analysis is difficult. An approximate analysis can be made by considering an interior panel of slab. An approximate analysis is done by Direct Design Method of IS 456:2000 by considering the interior panel of the flat slab, the bending moment and shear forces can be calculated easily. The Equivalent Frame Method gives more exact results than that of DDM.

B. Transfer of Moment to Column

The depth of the slab and drop is determined based on the span and the punching shear value. Generally, punching shear calculation is performed at the face of the column, d and $d/2$ distance from the face of the column, where d is the depth of the slab. To intensify the design, the shear created due to the transfer of moment from the slab to the column is also considered.

The moment from the RC flat-slab and the flat-plate systems was calculated by taking a cut section along the length of the slab, which gives an accurate percentage of column and middle strip moments instead of assuming them as per code provision. The moment diagram of the flat-slab system is shown in and the corresponding percentages of column strip and middle strip moments are tabulated in. Based on these moments, the area of the steel reinforcement was calculated, and estimation for the RC slab system was also calculated.

C. Post-tensioned Slab System

Post-tensioned slab systems, such as flat-slab were considered for the study, and were modeled and analyzed using ADAPT software. It consists of a 32m×32m slab panel, which designed using IS and ACI code provisions. Using IS code provisions, the stress is limited based on the type of member and the stress is limited to 3 N/mm². The post-tensioned flat-slab system is shown in Fig4. i.e., the ACI code does not permit crack formation in posttensioned flat-slab and flat-plate systems The slab system was modeled using ADAPT software and by limiting the stress, the slab depth and number of tendons can be determined. This can be cross-checked using manual calculation by considering the cross section of the slab. The tendons are arranged in such a way that they will not overlap the tendons running in the other direction. It is necessary to maintain the eccentricity values so that the loss of stress due to relaxation can be avoided. As per IS calculation, additional mild steel reinforcement has to be provided to avoid shrinkage cracks in the slab.

To obtain an economical result, these additional mild steel reinforcements are considered in the stress calculation so that the number of tendons can be reduced shown in fig 5. The area of additional reinforcement is calculated, and based on that, the corresponding moment of resistance provided by the additional steel reinforcement is calculated. The total moment of resistance is the sum of the moments of resistance offered by the tendon and steel. The stress diagram of the post-tensioned flat slab is shown in Fig 6 So the post-tensioned slab system designed according to ACI code provisions has zero crack width. The ACI code also states that there is no need for additional steel reinforcement in the positive moment area of the span if the tensile stresses are limited to σ_{st} or less. Hence the total moment of resistance is provided by the tendon. The cost analysis and the cost comparison are performed manually. Therefore the rates are taken as per the Indian construction cost.

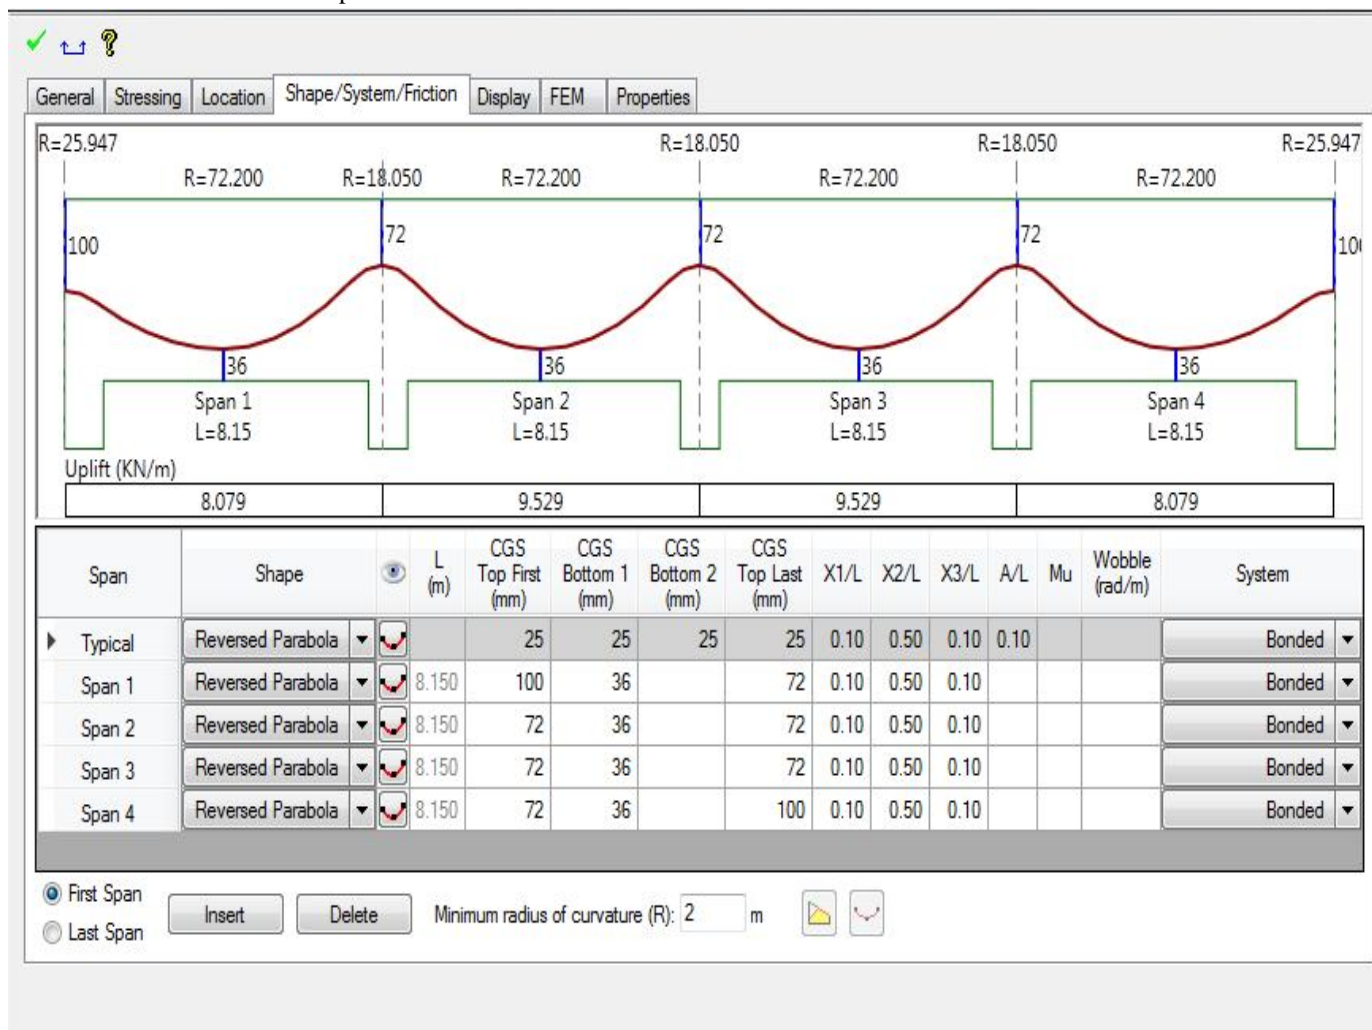


Fig. 5 Tendon arrangement in the post-tensioned flat slab; CGS = center of gravity of section.

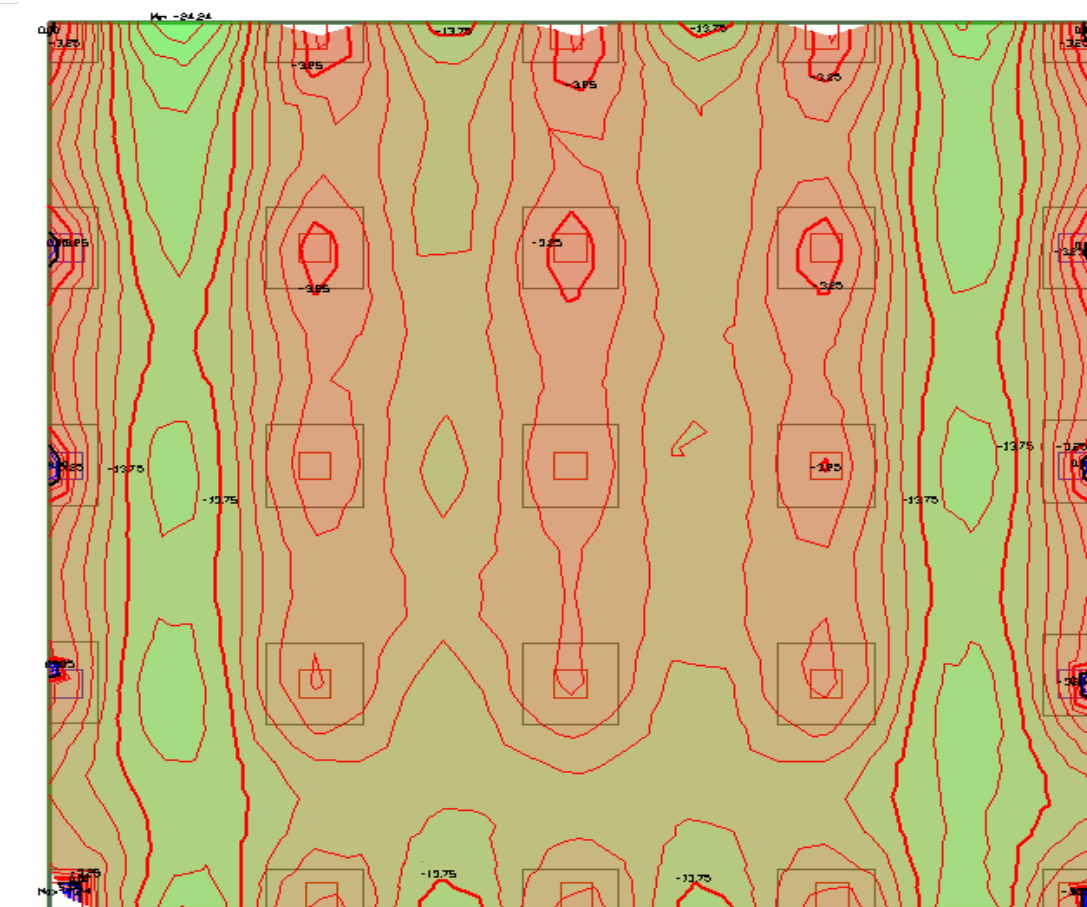


Fig 6 Stress diagram

Design Sections: Stresses, Top (N/mm²)
 said Combination: Service (Total Load)
 tensile stress positive
 max: 9.71
 min: -0.00

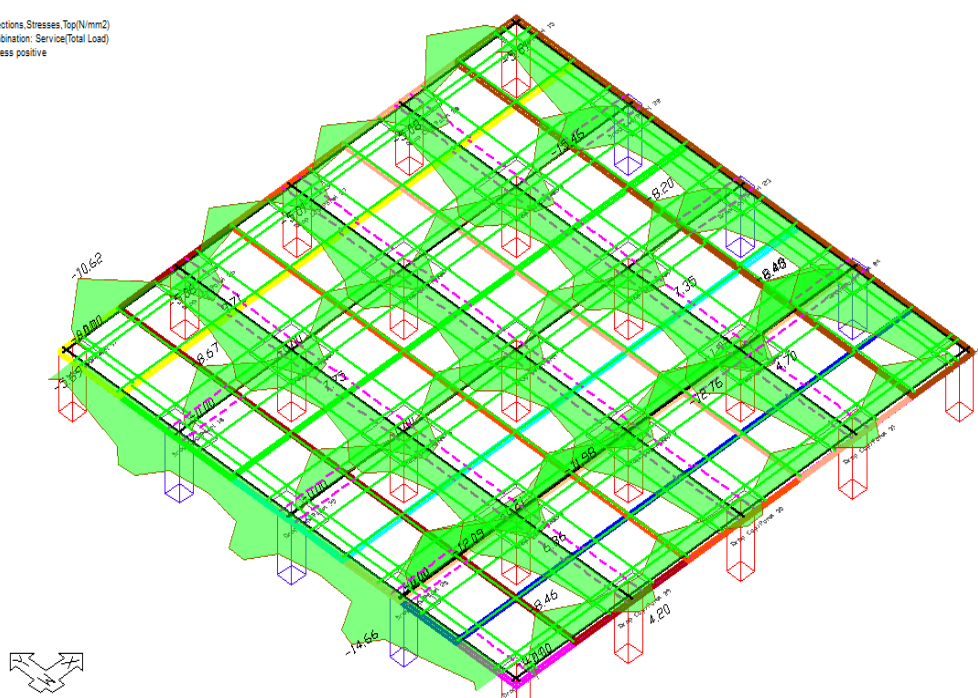


Fig 7 Top Stress diagram of the post-tensioned flat slab in X-Y direction

Design Sections:Stresses,Bottom(N/mm2)
 Load Combination: Service(Total Load)
 Result: stress positive
 Max: 9.42
 Min: -0.00


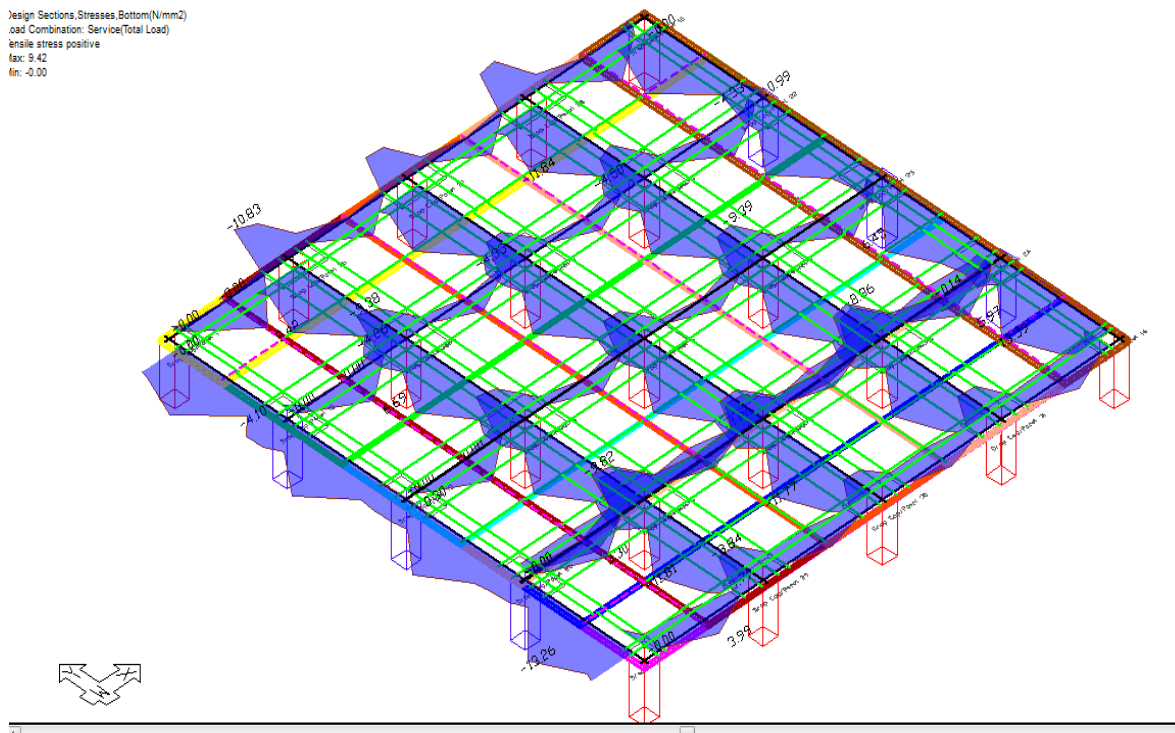


Fig 8 Bottom Stress diagram of the post-tensioned flat slab in X-Y direction

IV. RESULT AND DISCUSSION

The typical floor was considered for the analysis, which consists of a floor size of 32m×32m. The analysis was performed using the ADAPT Floor Pro software. The analysis results, such as bending moment and shear force, were obtained from the software analysis, and the design and cost estimation were performed manually. The slab systems were compared between two code provisions for safety and economy

A) Designing the PT slab according to IS standards shows a 21% reduction in cost using. So the overall cost can be reduced about INR (Indian Rupee) 103223.7039 per panel. The practical-application PT flat-slab option is feasible and can ultimately reduce the height of the building. The overall cost can be reduced approximately INR 1587517 when compared to the flat slab shown in chart 1

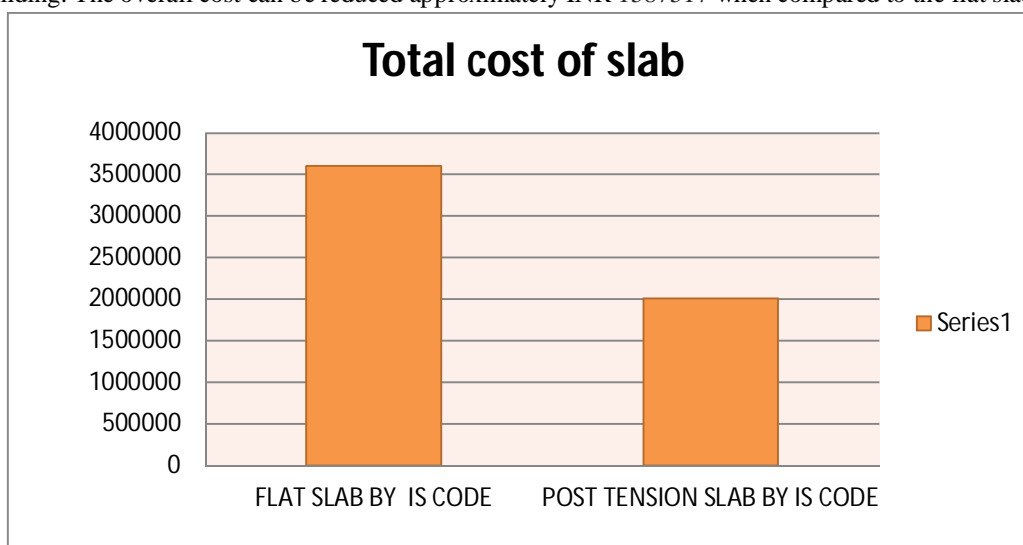

Char 1. Cost comparisons between the RC and post-tensioned (PT) slab system using IS.

B) Designing the RC and post-tensioned slab systems according to ACI shows that the post-tensioned flat-slab design yields a 23% reduction in the cost, so the overall cost can be reduced approximately INR 133466.1101 per panel when compared to the other RC and posttensioned slab systems. The comparison of post-tensioned steel take-off between different slab systems was taken from ADAPT, as shown in chart 2

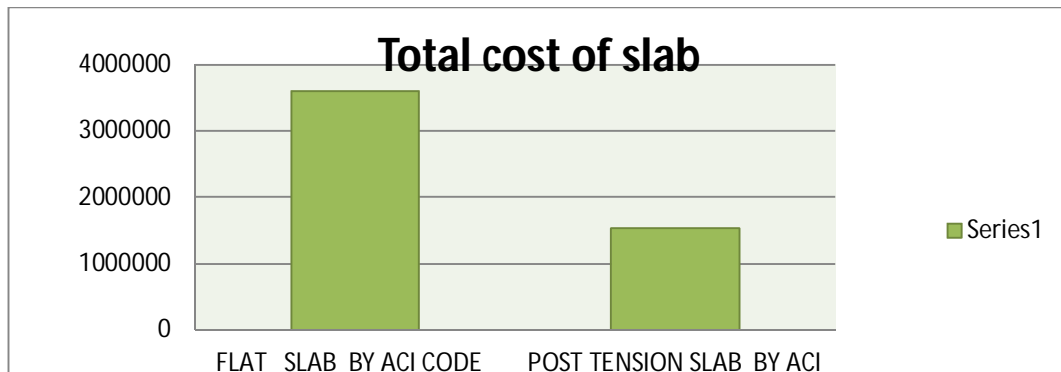


Chart2 Cost comparison between the RC and post-tensioned (PT) slab system using ACI

V. CONCLUSION

In this study, the cost and safety of RC and post-tensioned slab systems were investigated in detail. From the analysis, the following conclusions are drawn

- From the cost analysis, it is observed that the post tensioned flat-slab system provides better cost reduction of approximately 21% and 23% as per IS and ACI standards, respectively.
- However, from a safety point of view, the post-tensioned flat slab using the ACI standard is designed as an uncracked section.
- From the calculation, it is observed that stress developed in flat slab without drop is much less as compare to PT slab, so drop are important criteria in increasing the shear strength of the slab.

REFERENCE

- Safety and Economy in the Design of Reinforced and Post-tensioned Slab Systems Using IS, BS, and ACI Standards Arvind Jayalakshmi Satyanarayanan, A.M.ASCE1; Helen Santhi Mariadhas, Ph.D., F.M.ASCE2; and Prabu Dhanapalan3.
- Analytical and Experimental Evaluation of Progressive Collapse Resistance of a Flat-Slab Posttensioned Parking Garage Leila Keyvani, A.M.ASCE1; and Mehrdad Sasani, M.ASCE2
- Seismic Performance Evaluation of Posttensioned Hybrid Precast Wall-Frame Buildings and Comparison with Shear Wall-Frame Buildings H. A. D. Samith Buddika1 and Anil C. Wijeyewickrema, Ph.D.2
- Comparison of two rigid pavement design methods by david L. Guell,1 M. ASCE
- Analysis and design of doweled slab-on-grade pavement systems by Anastasios M. Ioannides1 and George T. Korovesis,2 Associate Members, ASCE
- Failure mechanisms in rc slabs by prodromos d. Zararis1
- Slab behavior in composite beams at openings. Ii: tests and verification by Soon Ho Cho1 and Richard G. Redwood2
- Behavior of rc bridge decks with flexible girders by L. Cao,1 Student Member, ASCE, J. H. Allen,2 Member, ASCE, P. B. Shing,3 Member, ASCE, and D. Woodham,4 Member, ASCE
- Practical estimation of two-way slab deflections by Kuan-Yung Chang1 and Shyh-Jiann Hwang,2 Associate Member, ASCE
- Nonlinear Modeling of Flat-Plate Systems Thomas H.-K. Kang, M.ASCE1; John W. Wallace, M.ASCE2; and Kenneth J. Elwood3
- Effects of Bottom Reinforcement on Hysteretic Behavior of Posttensioned Flat Plate Connections Sang nWhan Han, Ph.D., P.E.1; Seong-Hoon Kee2; Young-Mi Park3; Sang-Su Ha, Ph.D.4; and John W. Wallace, Ph.D., P.E.5
- Effects of Bottom Reinforcement on Hysteretic Behavior of Posttensioned Flat Plate Connections Sang Whan Han, Ph.D., P.E.1; Seong-Hoon Kee2; Young-Mi Park3; Sang-Su Ha, Ph.D.4; and John W. Wallace, Ph.D., P.E.5
- In-Situ Evaluation of Two Concrete Slab Systems. I: Load Determination and Loading Procedure Nestore Galati, M.ASCE1; Antonio Nanni, F.ASCE2; J. Gustavo Tumialan, M.ASCE3; and Paul H. Ziehl, M.ASCE4
- In-Situ Evaluation of Two Concrete Slab Systems. II: Evaluation Criteria and Outcomes Paul H. Ziehl, M.ASCE1; Nestore Galati, M.ASCE2; Antonio Nanni, F.ASCE3; and J. Gustavo Tumialan, M.ASCE4
- Innovative Flexible Structural System Using Prefabricated Modules Tharaka Gunawardena1; Tuan Ngo2; Priyan Mendis3; and Jose Alfano4
- Short-Span and Full-Scale Experiments of a Prefabricated Composite Floor-Building System Chris P. Pantelides, M.ASCE1; Bret A. Burkhardt2; Lawrence D. Reaveley3; and David Platt4
- Design of concrete floors with Particular Reference to Post-Tensioning Bijan O. Aalami, S.E.1, Gail S. Kelley, P.E.2



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)