



# IJRASET

International Journal For Research in  
Applied Science and Engineering Technology



---

# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume: 7      Issue: V      Month of publication: May 2019**

**DOI: <https://doi.org/10.22214/ijraset.2019.5089>**

**[www.ijraset.com](http://www.ijraset.com)**

**Call:  08813907089**

**E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)**

# Design Optimisation and Manufacturing Analysis of Transmission Fork of Heavy Motor Vehicles

Harikant Sahu<sup>1</sup>, Dheeraj Lal Soni<sup>2</sup>, Shailesh Singh Thakur<sup>3</sup>

<sup>1, 2, 3</sup>Mechanical Department, Kalinga University, Raipur

**Abstract:** During the process of Milling for  $v$  cut Slot minor Cracks are generated in fork Surface, which during induction hardening process converts in to deep cracks and can only be detected during the non-destructive testing like MPI (Magnetic Particle Inspection). This leads to higher rejection ratio and incur financial and material losses. The existing design of fork is heavy and not compact which leads to problems during assembly and leads to bending in rails. This necessitates a new design of fork which is compact and light weight. The second design is manufactured without  $v$  slot using standard manufacturing techniques which includes process flow diagrams and PFMEA.

**Keywords:** PFMEA, PFD, MPI Testing

## I. TRANSMISSION FORK

The fork of the car is one of the key parts of the car speed shifting system playing an important role in shifting the speed and changing the direction. The fork could move the ring gear of synchronizer to separate and unite thus the speed shifting is achieved. As a part of the car the fork has a bearing on the safety of the car and person. The clear speed gear and the smooth transition have always been the objective of the transmission control facility design and important index for evaluation of good transmission. The ingenious and flexible control facility could not only improve the comprehensive function of the transmission but also promote the comfortable feeling of driving and riding.

## II. OBJECTIVE

This project studies the inspection methods carried out in manufacturing of Transmission Fork. The inspection methods are intended to reduce defect rates in finished products and improve quality of product. The inspection methods involved are CMM testing, MPI testing, Induction Hardening, material testing, hardness testing.

## III. LITERATURE REVIEW

Dogan [1] has done critical work to reduce the movements and vibrations of the transmission. The torsional vibrations of the gears cause abrupt and rattling movements, these noises are troublesome. For the exploratory examinations, the transmission parameters have been modified to reduce the effects of vibration and blast noise.

Wang and Yang [2] studied the non-linearity of dental optics in the rigging elements. Adaptive force and frictional forces were used for digital reproduction light. In this study, the basic parameters were distinguished and the clutter, the branch with sliding friction taken into account.

Abouel-Seoud and Abdallah [3] used the method of investigation of the vibration reaction for the systematic search of the transmission frame of the vehicles. You have done scientific examinations and tests on a vehicle transmission frame. Using physical properties, they calculated the effectiveness of the radiation.

Vandi and Ravaglioli [4] show in this article the use of a fractional transmission model to complement a current vehicle dynamics model. The connection with and the wonders separated from the handle were examined.

Nacib and Sakhara [5] reflected on the huge helicopter transmission. In order to counter the separation and misdeeds of helicopters, the identification of blame is crucial. Cepstrum's scope review and investigation strategy is used to distinguish damaged material. The Fourier study is used for scientific results.

## IV. METHODOLOGY

The manufacturing process of transmission fork involved following steps:

- 1) *Arrangement of Raw Material:* Raw material of Fork received from an approved forger is SAE 1541. Forging Testing will be conducted on Fork for knowing the specifications of Fork. In this fork is also tested in lab for chemical composition test
- 2) *Test of Raw Material:* It is carried out on receipt of raw material at works. Also, samples will be taken from each heat and given to NABL Lab for Chemical Analysis which will be normally done for all grade of steel. Raw material will be issued for

- production only after confirming the Chemical specifications from NABL Lab and quenched hardness.
- 3) **Reduction Ratio Test:** Forging reduction is generally considered to be the amount of cross-sectional reduction taking place during drawing out of a bar or billet. The original cross-section divided by the final cross-section is the forging ratio (say 3:1). There is an equivalent reduction on upsetting for forgings being upset during forging (gear blanks, for example). In this case, the upset ratio of beginning billet length over final height is the upset ratio. This is similar in total reduction to the bar reduction.
  - 4) **Spark Testing:** Spark testing is a method of determining the general classification of non-ferrous materials. It normally entails taking a piece of metal, usually scrap, and applying it to a grinding wheel in order to observe the sparks emitted. These sparks can be compared to a Figure or to sparks from a known test sample to determine the classification.
  - 5) **Machining of Fork:** Machining of fork is firstly conducted on SPM milling machine In SPM milling part Is Rested horizontally, Fork Ribs rested on Bed and Milling will be conducted on both top of Fork. After Milling, Boring Operation is conducted on Fork. Vertical Milling Operation on Fork will be conducted with the help of Fork Fixture in Which fork horizontally rested on fixture, Hydraulic Clamping will be done on Fork Ribs. Then Pad Milling operation will be conducted on Fork. In this Pad Milling Operation Curve on Pads Also given.
  - 6) **Induction Hardening:** Induction hardening is a form of surface hardening in which a metal part is induction-heated and then quenched. The quenched metal undergoes a martensitic transformation, increasing the hardness and brittleness of the part. Induction hardening is used to selectively harden areas of a part or assembly without affecting the properties of the part as a whole.
  - 7) **Tempering:** Tempering the process step of tempering is applied post to the hardening process for almost all critical parts or parts subject to high stresses. The hardening process creates a stressed matrix which, although resulting in a high hardness due to C-atoms in solution, also leads to a high Microstructure distribution at the tapering out of the hardening zone.

### V. RESULTS AND DISCUSSION

A procedure flow diagram (PFD) is an outline that is normally utilized in procedure building to demonstrate the general stream of procedures. PFD demonstrates the most essential generation procedure of a segment. The stream chart of the howling procedure demonstrates the fork spoken to by the generation procedure as shown in figure 2.

Process Manual		METALMAN AUTO PVT. LTD				Doc. No. : 1792 / 871 / 001				
Process Code: NPD		PROCESS FLOW DIAGRAM				Origin Date : 01.01.2014				
Supplier Code	Part Name	New Fork Diff Lock		Part No	671	Rev. No./Date: 00				
Supplier Name : Metalman Auto Pvt. Ltd.						Orig. revision No. :-				
						Prepared Date :-07.03.18				
Operation No	Operation Description	Incoming Source of variation	Symbols				Product (Output) Characteristics	Special Product Characteristics	Process Characteristics	Remarks
			Operation	Inspection	Transportation	Storage				
10	RECEIPT INSPECTION	Dimensional Defects.. Chemical Microstructure					Parts must conform to Received Quality Inspection Checklist	-	Illuminated Inspection Area, Chemical report, Microstructure.	
20	SPM Milling	Forging Mismatch Forging bend					Total Length 506±0.2 Inner Diameter Ø20.056±0.016 Surface Roughness 3.2 Surface Roughness 1.6 Surface Roughness 3.2 Dimension 60-4±0.3	-	Feed, RPM (Operation run on VMC)	
30	Milling & Cross Drilling	OPN 20					ØD Outer 16.0 ± 0.04" ØD 16.8 ± 0.1 Flat Thickness 8.5±0.08 Surface Roughness 1.6 Dia 16.8 3±0.2 Dia 16.0 ± 0.1 ØD 16.8 Radius R3 Dimension 47.3±0.2 Surface Roughness 1.6 16.8 Dia 3 ± 0.1	Wrong Offset, Clamping Loose, Tool Dia Undersize, Insert Broken, Insert Wear Out, Coolant Flow, cleaning up heating pad.	In first operation, part will be verified visually for uniform wall thickness.	
40	Induction Hardening	OPN 30					Heating Area 50 mm Hardness 50 to 60 HRC Case Depth 1.5 mm At 45 HRC Min. Cool & Pre 1.5 ± 0.2 Min. Case Microstructure Fine Tempered Martensite at 400X 50% IT9 depth at 100X 50% Martensite Depth at 100X HARD at 100X Microstructure Grain Pearlite + Ferrite 5-8	Core		
50	MP	Overlapping of frictional friction generated during forging, Crack in Forging PM during Milling Process					No Crack	-	Time Variation , Current Variation UN/Light Visibility	
60	FINAL INSPECTION- PRE- DISPATCH INSPECTION	INCORRECT MACHINING, CRACKS, SURFACE CRACKS, HARDNESS NOT OK					Parts to conform to check points in Final inspection checklist		Skilled Inspector, Qualifying Gauges, Visual Inspection, Magnifying	
70	Oiling, Packaging and Storage	Dust, Burrs, Chips, Oil & Packing material specification Improper packed material							Part properly Sealed after packing, Damage free packing, Cartons to be placed in the specified area in a systematic manner, for dispatch	
80	Dispatch	Improper packed material, Rust, damage, Dust, Vehicle Type, Transporter					Packed Boxes Condition, No Damages, Rust, Timely Delivery		1) Covered Vehicle, 2) Loading Condition, 3) Vehicle Condition	

Fig. 2 Process Flow Diagram of 671 Fork

The analysis of the effective modes of process error is based on different parameters to determine the number of risk priorities obtained by the severity of the specifications, the appearance of errors and the detection of dimensions in different operations as shown in the Figure 3.

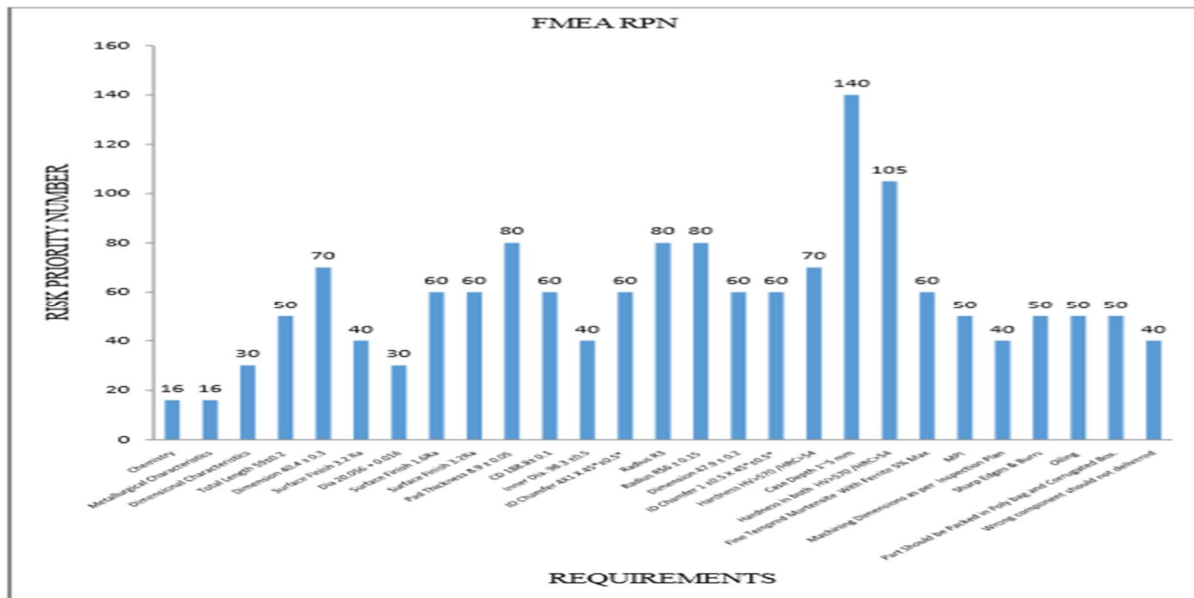


Fig. 3 Process Flow Diagram of 671 Fork

Risk priority number = severity x occurrence x detection

As should be obvious in the chart between the necessities and the quantity of hazard needs, the most extreme hazard in the fork is to keep up the profundity of the crate of 125 mm and accomplish the hardness in the acceptance procedure.


	<b>METALMAN AUTO PVT. LTD.</b> Forging Report	Form No.	MAPL/F/PROD/51									
		Issue:	01									
		Sheet No.	1/1									
Report No.	3023	Date	20/01/2018									
Part Name.	Fork Diff. Lock	Raw Material	SAE 1541									
Part No.	671	Raw Material Used	SAE 1541									
Material TC	Reviewed	Heat No./Heat code	17B2370/17L11									
Supplier Name	Harpreet Forgings	Qty	100 Nos									
<b>Chemistry (as per Std.) (Test Method – ASTM E415)</b>												
Composition	%C	%Mn	%Si	%P	%S	%Cu	%Cr	%Mo	%Ni	%Cr+Mo+Ni	%Ca	
Specified Min.	0.36	1.35	0.15	-	-	-	-	-	0.12	0.25	-	
Specified Max.	0.44	1.65	0.35	0.040	0.040	0.30	0.20	0.06	0.01	0.096	-	
Obs. Value T.C	0.40	1.46	0.23	0.020	0.021	0.006	0.090	0.001	0.005	0.096	-	
Inhouse Spectro	0.38	1.36	0.27	0.019	0.010	0.004	0.18	0.050	0.008	0.23	0.09	
<b>Inclusion Rating at 100X (as per Std.)</b>												
Type	(A) Sulphide			(B) Alumina			(C) Silicate			(D) Oxide		
	Thin	Heavy (Thick)		Thin	Heavy (Thick)		Thin	Heavy (Thick)		Thin	Heavy (Thick)	
Specified	4	3		4	3		3	2		2	2	
Observed												
Supplier T.C	1.5	-		1.0	-		1.0	-		1.5	-	
<b>Metallographic Observation:</b>												
Test	Specification					Observation					Remark	
Core Microstructure	Pearlite + Ferrite					Pearlite / Ferrite					OK	
Grain	5 – 8					7					OK	
Macro Test (T.C)	C2, R2, S2 Max					C2, R2, S2					OK	
Hardness	241 BHN Max					179 - 183 BHN					OK	
Remark: - OK												
Checked By: Jimmy						Approved By: S.G. Deshmukhe						

Fig. 4 Forging report of 671 Fork

As indicated by the test report of the distortion material, it gave the idea that the essential small scale organizing necessity, to be specific the blend of grains and ferrite, is seen in the tests dependent on the span of the required particles. 183 BHN was found as demonstrated in the past report. As appeared in Figure 4


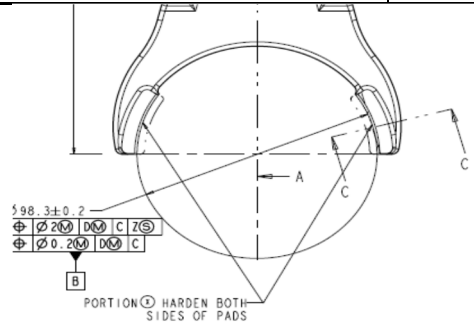
	<b>METALMAN AUTO PVT. LTD.</b> <b>Material Test Report</b>	<b>Form No.</b>	<b>MAPL/F/PROD/51</b>
Report No.	<i>18030018</i>	Date	15/04/2018
Part Name.	<i>FORK, DIFF LOCK SHIFTER</i>	Raw Material	SAE 1541
Part No./ Rev. No.	<i>R140671(218384RE/B)20010302</i>	Raw Material Used	SAE 1541
Material TC	<i>Received Ok</i>	Heat No.	B239(5567)
Heat Treatment Process	<i>Induction Hard. &amp; Temp. (HT30T)</i>	Quantity	10 Nos.
Induction Hardening Batch, done & date	<i>K22C18</i>	Chemical Composition Report No. & Date	
	<i>14/04/2018</i>		
Component Sketch			

Fig. 5: Material test report of 671 Fork

In the induction hardening model we performed the operation in position x as shown in the report, with an energy consumption of 18% after 2 seconds and a lifting speed of 150 mm with a cooling speed of 8 seconds. The depth of the box on a road is 2.4 mm. and b is 2.3 mm based on the required requirements. The microstructure is a well-designed martensite, a microstructure of ferrite core and a perlite with a grain size of 7 mm and a rigidity between 56 and 57 hc as shown in Figure 6 and Figure 7.

Machine no.	2	KW	100 KW	OK
Location	X	Location	X	
Power (kW)%	18 %	Rotation	no	
Start Heating Time	After 2 secs	Frequency KHZ	30 kHz	
Heat Dwell Time	1.65 Sec	Polymer% (Without factor)	2%	
Scan Speed (Feed)	150 mm/min	Total Cycle Time	14 Sec	
Total Heating Time	2 sec	Quenching Bath Temp.	27 °C	
Total Quenching Time	8 secs	Tempering Temp.	160°C @ 90 min.	

Fig. 6: Pattern testing report

Test	Specification	Observation		Remark
Case Microstructure	Fine Tempered Martensite at 400X	Fine Tempered Martensite		OK
	5% ITP depth at 100X	Paid 1	Paid 2	OK
		A- 1.3, B- 1.2 mm	A-1.4, B-1.3 mm	
	50 % Martensite Depth at 100X	A -1.9, B – 1.8 mm	A-1.8, B- 1.8 mm	OK
HAZ at 100X	A-2.5, B – 2.3 mm	A -2.5, B -2.3 mm	OK	
Core Microstructure	Pearlite + Ferrite	Ferrite / Pearlite		OK
Grain	5 – 8	7		OK

Case Depth @ Pad 1 Loc.

Dist. In mm	A	0.1	1.0	2.0	2.4		
Hard. In HV1		630	630	584	395		
Dist. In mm	B	0.1	1.0	2.0	2.3		
Hard. In HV1		623	627	500	260		

Case Depth @ Pad 2 Loc.

Dist. In mm	A	0.1	1.0	2.0	2.5		
Hard. In HV1		613	652	605	304		
Dist. In mm	B	0.1	1.0	2.0	2.2		
Hard. In HV1		664	675	522	271		


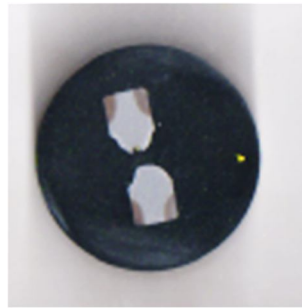

Pattern Photo		1	4.60 mm		L1	5.95 mm
		2	5.25 mm		L2	5.81 mm
		3	2.81 mm		L3	5.97 mm
		4	8.15 mm		L4	5.31 mm
Remark:	4	3	Pad 2			
Checked By: Jimmy Ashok Mansare					Approved By:	

Fig. 7 Case depth testing report

MPI testing is a kind of non-destructive test to detect cracks with a coil of approximately 1250 to 1400 amps with an oil concentration of 3.15- and 0.3-ml. Check the cracks that generate a magnetic field in the fork, apply the oil flow and then detect in the presence of UV rays. On the one hand, the magnetic field is generated and, on the other hand, the stress control generated by the ultraviolet rays to create cracks in the part during the process. 100% of the parts must be checked in MPI to eliminate the cause of the field failure in the vehicle function. In this process, the following parameters should be maintained as shown in fig 8.


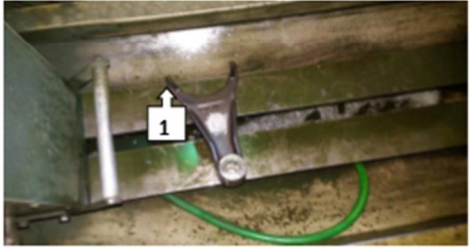
METALMAN		M.P.I. Check Sheet				Format No.:- MAPL/F/QC/110	
						Rev No. 00	
Process Parameter details:-	1. Machine No. 01	3. Demagnetize :- Working	4. Defective Sample:-Checked	7. Circular coil:-Working			
	2. Oil flow:- Yes	4. Bulb Intensity:- ok	2. Pie Testing:-Checked	8. L Coil :- Working			
	9. Oil level:-Yes	10. Calibration Status:- Yes	11.No. of Strokes :- 1	12.Type of Magnitized:- Combined			
	13. Coil knob setting:- 2+2High	14. L. Knob Setting:- 3	15.Copper bush availability:- N.A	OK			
Part details	Part Length:- 212 mm		Operator Name:				
	Part Name: Fork		Part Grade :- SAE-1541				
	Part Max. Dia :- 42 mm		Part Condition:- Forged, Bright bar:- Forged				
	Induction Batch No.- K28C18		Heat No.- THE FORGING				
Date:- 16.04.18		Lot Qty.- 10 NOS					
Setup	Required Current:-	Circular Coil:- 1250 ± 100	L. Coil :- 3.00 Kat Min.	Oil Concentrate :- 0.2~0.4 ml/ltr			
	Actual :-	1400 AMP	3.15 KAT	0.3 ml			
	Sl No.	Time	Quantity			Demagnetize	
			Checked	OK	NOT OK		
	1	8:00 PM	5	5	0	Yes	
	2	9:00 PM	5	5	0	Yes	
Total		10	10	0			
Remarks:-							
Checked By:-Mr. Akshay			Approved By:-Mr ASHOK MANEARE				

Fig. 8 M.P.I testing report

In the test section of the test machine of the test bench to control the adjacent dimensions, which is the required position of the indirect hole and the CD tent, which is the main dimension of the set. In CMM, the test was perpendicular and the parallelism and angle of the hole crossed within tolerance and strict specifications as can be seen in Figure 9.

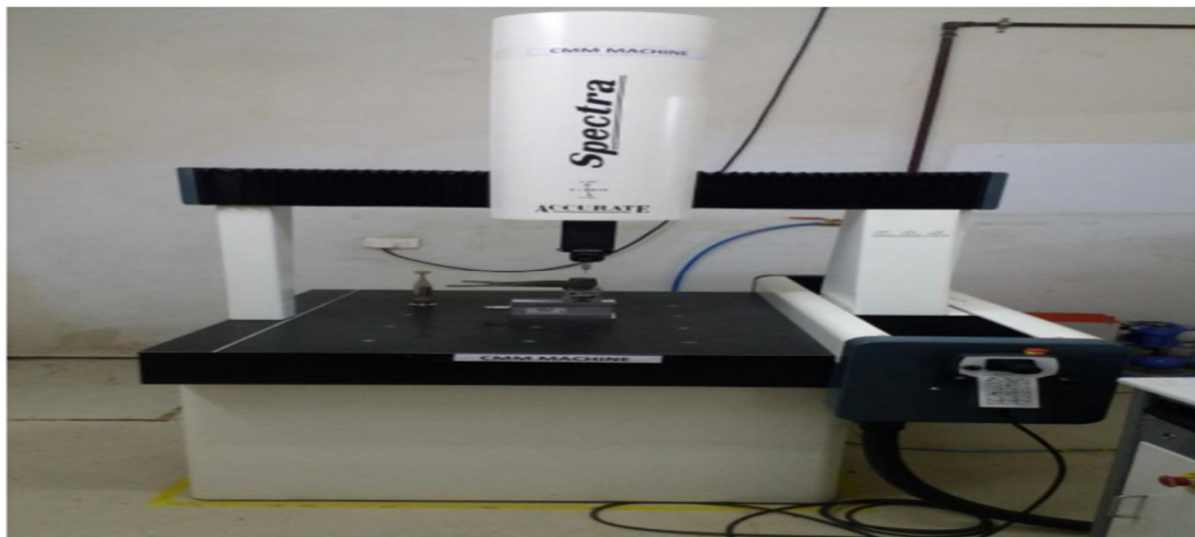


Figure 9: CMM testing machine

METALMAN AUTO PVT. LTD.						ACCURATE
Customer Name:	VECV			Date:	14-04-2018	
Part Name:	Fork			Time:	17:05:19	
Inspected By:	Pradeep Kumar Jha			Part No.:	R140671	
Approved By:	Ashok Mansare			CMM INSPECTION REPORT		
	A	N	D / E	L T	UT / T	OOT
●	POSITION_OF_HOLE_20.056 [CYL_2][POS]					
Pos	0.1612		0.0000		0.2000	
●	CD_188.80 [CYL_1 - CYL_2][DISTB]					
Dist	188.8800	188.8000	0.0800	-0.1500	0.1500	
●	PERPENDICULARITY_0.1 [CYL_2][PERP]					
Per	0.0226		0.0000		0.1000	
●	ANGLE_60 [PLA_6 - PLA_7][ANGLB]					
Dist	60.2765	60.0000	0.2765	-2.0000	2.0000	
●	ANGLE_39.9 [PLA_8 - LIN_1][ANGLE]					
Dist	39.9524	39.9000	0.0524	-0.5000	0.5000	
●	ANGLE_29.9 [PLA_12 - LIN_2][ANGLE]					
Dist	29.8925	29.9000	-0.0075	-0.5000	0.5000	
●	ANGULARITY_0.6 [PLA_8][ANGLR]					
Ans	0.0274		0.0000		0.6000	
●	CYL_1 [CYLINDER INNER]					
Dia	98.3805	98.3805	0.0000	-0.1500	0.1500	

Figure 10: CMM testing report

### VI. CONCLUSION

The test unit of the drive unit runs on the fork using the obtained programs that show that the fork without V-groove and U-groove work better than the fork with U and V grooves. They have helped to reduce weight. Along with this, the rejection rates that were higher in the notched forks are drastically reduced. Therefore, the elimination of the grooves has helped to reduce the weight and a great compactness is obtained that leads to a better adaptation of the interference in the assembly line and to decrease the waste speeds during manufacturing.

### REFERENCES

- [1] Dogan, S.N. (1999). Loose part vibration in vehicle transmissions Gear rattle. Transactions Journal of Engineering and Environmental Science, 23, 439-454. J. Breckling, Ed., The Analysis of Directional Time Series: Applications to Wind Speed and Direction, ser. Lecture Notes in Statistics. Berlin, Germany: Springer, 1989, vol. 61.
- [2] Wang, J.; Zheng, J.; and Yang, A. (2012). An Analytical Study of Bifurcation and Chaos in a Spur Gear Pair with Sliding Friction. Procedia Engineering, 31, 563-570..
- [3] Abouel-Seoud, S.S.; Mohamed, E.S.; Abdel-Hamid, A.A.; and Abdallah, A.S. (2013). Analytical Technique for Predicting Passenger Car Gearbox Structure Noise Using Vibration Response Analysis. British Journal of Applied Science & Technology, 3(4), 860-883.
- [4] Vandi, G.; Cavina, N.; Corti, E.; Mancini, G.; Moro, D.; Ponti, F.; and Ravaglioli, V. (2014). Development of a software in the loop environment for automotive powertrain systems. Energy Procedia, 45, 789 – 798.
- [5] Nacib, L.; Pekpe, K.M.; and Sakhara, S. (2013). Detecting gear tooth cracks using cepstral analysis in gearbox of helicopters. International Journal of Advances in Engineering & Technology, 5, 139-145.





10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)