



IJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 7 Issue: VI Month of publication: June 2019

DOI: <http://doi.org/10.22214/ijraset.2019.6396>

www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com

Analysis and Design of Castellated Beam using ANSYS

Naseem A. Ansari¹, Dr. R. S. Talikoti²

¹M. Tech Student, ²Professor, Department of civil engineering, School Of Engineering And Technology, Nashik, India

Abstract: Castellated beam is the steel structure which are made by flame cutting rolled beam along with centreline than rejoining two halves by the welding so that overall depth increase by 1.5% for improved structural strength of using same quantity of material. The beam is a flexural member than maximum bending moment in middle portion and shear for maximum occurs at support, in castellated beam hole are made in the web portion with different shape, the surface of hole in inner side shear stress are induced due to shear force which are may cause to failure of beam or its start to fail from hole we produce by cutting, so reduce the shear stress we have to closed the cutting hole by refilling of same material up to specified span of beam. in this paper we have to we have to analysis of different shape of beam with refilling/close the castellated hole from both side of support. The study and analysis based on two parameter, first we have to analyse regular castellated beam in software and second parameter is to closed the hole of beam and analysis with same software and compare both the result which are obtain from beam.

Keywords: Castellated beam, shear zone, critical section, economical, castellated hole, ANSYS.

I. INTRODUCTION

Engineering are trying to make the structure economical and more safer to all the failure condition this beam is one of the example of that. And continuous investigation and method is use to improve the strength and serviceability of Castellated beam. Which is made of flame cutting of I-section through its center line in zig zag pattern after cutting we rejoining the halves of beam to produce the shape of opening in the web of beam, generally Hexagonal, Square, Rectangular, Circular shape are used. This type of beam are more prefer for industrial building and now a day also used for small steel structure like Car parking, indoor stadium, foot over bridges etc. The depth of beam increase by 50% of its original depth, in design of structural element there depth is play vital role for its serviceability and safety. Its main advantage is that depth of beam increase without the increase the amount of steel which are make its cheap and light. other advantage of it that easy to assemble at site due to its light weight, good aesthetic view, its use as a duct for supply the fire pipe, electric pipe, AC pipe etc.

II. OBJECTIVE

- A. To increase the depths of beam without increase the amount of steel.
- B. To reduce the cost of structure for the same building using these beam.
- C. Make the structure economical.
- D. Handling and installation of this type of structural element are easier due to its light weight.
- E. It's also gives the good aesthetics view as compare to cellular beam.
- F. provide the pipe line for fire, electricity, AC duct etc
- G. Easy to assemble at site, painting, low maintenance etc.

III. MODEL DESCRIPTION

Two opening type of model has be Analysis by ANSYS software

- A. Castellated beam with Rectangular opening
 - B. Castellated beam with Circular opening
- In this paper deal with the six model of castellated beam.
- 1) Rectangular castellated beam Without hole close.
 - 2) Rectangular castellated beam With 1hole close.
 - 3) Rectangular castellated beam With 2hole close.
 - 4) Circular castellated beam Without hole close.
 - 5) Circular castellated beam With 1hole close.
 - 6) Circular castellated beam With 2 hole close.

Width of flange= $B_f=100$ mm
 Thickness of flange= $T_f=10$ mm
 Thickness of web= $T_w=7.6$ mm
 Height of section= $H=300$ mm
 Length of section = 6000mm

IV. ANALYSIS AND RESULT

1) Case-1 Castellated beam with rectangular opening

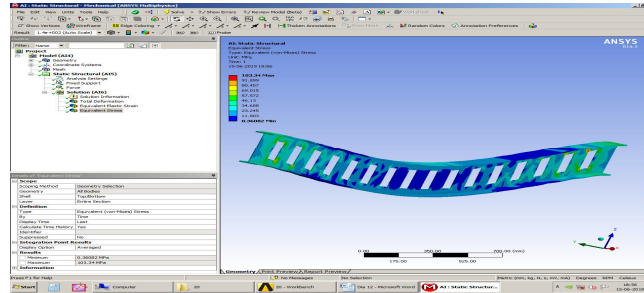


Figure. Castellated beam with rectangular opening

Load	Deflection	stress
10	0.4705	25.8355
20	0.941	51.671
30	1.4116	77.506
40	1.8821	103.342
50	2.3526	129.177
60	2.8232	155.013
70	3.293	180.848
80	3.764	206.684
90	4.234	232.519
100	4.7053	258.355

Table 4. rectangular opening without hole closing

2) Case-2 Rectangular beam with 1 hole close from both side of support.

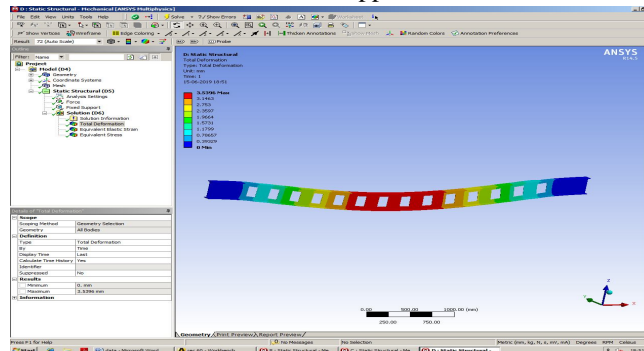


Figure. Rectangular with 1 hole close from both side of support.

Load (KN)	Deflection (mm)	Stress (N/mm ²)
10	0.4424	18.2965
20	0.8849	36.593
30	1.327	54.8895
40	1.7698	73.186

50	2.2122	91.4825
60	2.6547	109.779
70	3.0971	128.0755
80	3.5396	146.372
90	3.982	164.6685
100	4.4245	182.96

Table. One hole close near support of rectangular beam

3) Case-3 Two hole close near support of rectangular opening

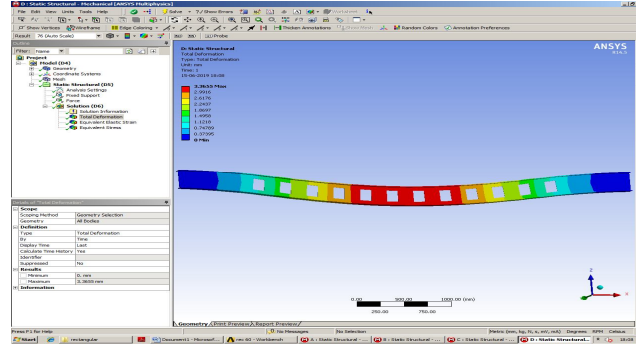


Figure 6. Two hole close near support

Load (KN)	Deflection (MM)	Stress (N/mm2)
10	0.4206	15.968
20	0.8413	31.924
30	1.2619	47.889
40	1.6826	63.865
50	2.1032	79.854
60	2.5239	95.768
70	2.9445	111.723
80	3.3652	127.689
90	3.7859	143.64
100	4.2065	159.689

Table 6. Two hole close near opening

4) Case-10 castellated beam with circle opening.

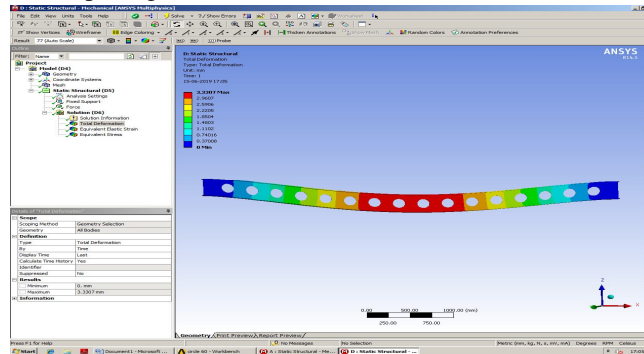


Figure. Castellated beam with circle opening.

Load (KN)	Deflection(MM)	Stress(N/mm2)
10	0.4163	18.325

20	0.8326	36.65
30	1.249	54.975
40	1.6657	73.352
50	2.0817	91.615
60	2.498	109.976
70	2.9143	128.275
80	3.3307	146.65
90	3.747	164.925
100	4.1634	183.25

Table. Castellated beam with circle opening.

5) Case-11 Circle opening with 1 hole close both side of beam

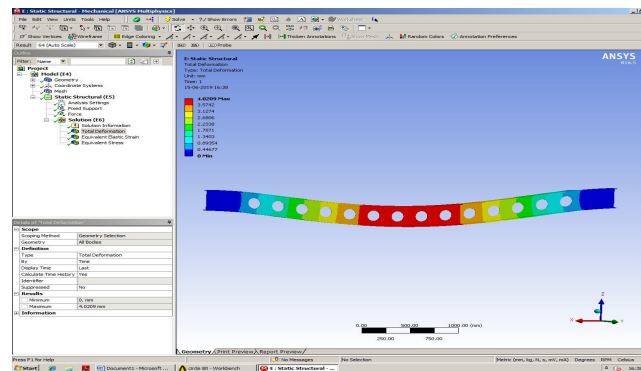


Figure. Circle opening with 1 hole close both side of beam.

Load (KN)	Deflection(mm)	Stress(N/mm2)
10	0.4021	14.543
20	0.8042	29.08
30	1.2063	43.623
40	1.6084	58.186
50	2.0105	72.754
60	2.4126	87.245
70	2.8147	101.734
80	3.2168	116.324
90	3.6189	130.867
100	4.021	145.654

Table. Circle opening with 1 hole close both side of beam.

6) Case-12 Circle opening with 2 hole close both side of beam.

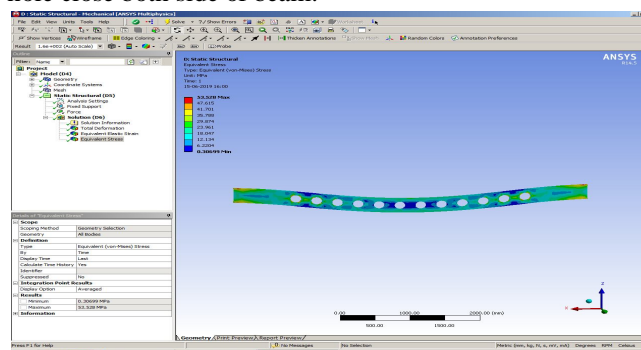


Figure. Circle opening with 2 hole close both side of beam.

Load(KN)	Deflection(mm)	Stress(N/mm2)
10	0.39	13.382
20	0.7818	26.764
30	1.1727	40.146
40	1.5636	53.528
50	1.9545	66.913
60	2.3454	80.292
70	2.7363	93.67
80	3.1272	107.056
90	3.5181	120.438
100	3.909	133.82

Table 12. Circle opening with 2 hole close both side of beam.

V. RESULT AND DISCUSSION

Best or economical castellated beam with there opening shape.

1) Castellated beam with Rectangular opening.

Load	2 hole closed		1 closed hole		Without hole closed	
	Deflection mm	Stress N/mm2	Deflection mm	Stress N/mm2	Deflection mm	Stress N/mm2
100 KN	4.2065	159.689	4.4245	182.96	4.7053	258.355

2) Castellated beam with Circular opening.

Load	2 hole closed		1 closed hole		Without hole closed	
	Deflection mm	Stress N/mm2	Deflection mm	Stress N/mm2	Deflection mm	Stress N/mm2
100 KN	3.909	133.823	4.021	145.654	4.1634	183.25

VI. CONCLUSIONS

Objective of this paper was reduce the stress at surface of castellated hole with the close the hole of shear zone of beam to avoid the shear failure of beam, we also observe that in result deflection of beam remains same or less with compare to without close the hole. The main reason to reduce the stress of beam by closing the castellated hole at support is that improve the bearing capacity of beam with same span and same size of hole. If we consider the rectangular opening without close hole stress is 258.355 N/mm2 after closing the 2 hole 159.689 N/mm2, stress is decrease by 98.666 N/mm2.

VII. ACKNOWLEDGMENT

I would like to express my deepest appreciation to all those who support me the possibility to complete this project. A special gratitude I give to my project manager, Dr. R. S. Talikoti, whose contribution in stimulating suggestions and encouragement, helped me to coordinate my project especially in writing this report.

REFERENCES

- [1] "Structural Analysis and Design of Castellated Beam in Fixed Action" ,Ajim S Sheikh 1, prof. Pankaj. B. Autade, International Journal of Innovative Research In Advanced Engineering (IJIRAE), Issue 08, Volume 3 (August 2016).
- [2] "Study of Positions of Stiffeners In Sinusoidal Castellated Beam", Dighe Komal Govindrao*1, Prof.V. R. Rathi, International Journal of Engineering Sciences & Research Technology, February, 2017.
- [3] "Parametric study of castellated beam with varying depth of web opening", Wakchaure M.R. *, Sagade A.V.*, Auti V. A. International Journal of Scientific and Research Publications, Volume 2, Issue 8, August 2012.
- [4] "Review on Study of Castellated Beam with&without Stiffeners", Miss. Pooja P. Ruge Prof. Pallavi K. Pasnur, IJSTE - International Journal of Science Technology & Engineering | Volume 3 | Issue 09 | March 2017.
- [5] "Improving Behavior of Castellated Beam by Adding Spacer Plat and Steel Rings", Hayder Al-Thabhawee, Muslim Al-Kannoon, Journal of University of Babylon, Engineering Sciences, Vol.(26), No.(4): 2018.
- [6] "Finite Element Analysis of Castellated Beam: A Review", A. M. Jamadar P. D. Kumbhar, International Journal of Innovative Research in Advanced Engineering (IJIRAE) ISSN: 2349-2163 Volume 1 Issue 9 (October 2014).
- [7] "Parametric Study of Castellated Beam with Circular and Diamond Shaped Openings", Jamadar A. M.I, Kumbhar P. D., International Research Journal of Engineering and Technology (IRJET), Volume: 02 Issue: 02 | May-2015.



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)