



iJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 7 Issue: VII Month of publication: July 2019

DOI: <http://doi.org/10.22214/ijraset.2019.7098>

www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com

Automatic Irrigation System using Solar Power

Karan Gupta¹, Himani Mahajan², Kanav Singh Chandel³, Ankita Kasav⁴, Maneesh Kundal⁵, Shubham kumar Azad⁶,
Rakesh Kumar⁷

¹Associate Professor, ^{3,4,5,6,7}Research Scholar, GCET, Jammu

²Assistant Professor, Department of Electrical Engineering, GCET, Jammu

Abstract: India's population is raised to beyond 1.2 billion and population rate is increasing day by day and then after some years there will be serious problem of food, so development of agriculture is necessary. Indian agriculture depends on the monsoon which is not a reliable source of water. Therefore, there is a need for an irrigation system in the country which can provide water according to their soil types. The main aim of this paper is to provide information about automatic irrigation to the plants which helps in saving money and water. We are more concern with the use of solar energy in our project. The system is using a programmed Micro Controller which takes signals from the sensors i.e. Moisture, light and temperature sensor and this will give signal to motor to sprinkle the water when it is required.

Keywords: Light Sensor, Micro Controller, Temperature Sensor.

I. INTRODUCTION

In a country like India, the agriculture plays the important role in the economy and development of country. At present farmers have been using irrigation techniques in India through the manual control in which farmers irrigate the land at the regular intervals. In this farmers have to check when to on or off the system. This process consumes more water or sometimes the water reaches late due to which crops get dried. So there is a need for the automation in the system [1]. This paper tells us about the automation using different sensors with the help of micro controller. Solar power is absolutely perfect for use with irrigation systems for gardens, allotments & greenhouses. When the sun is shining you need more water and so the solar power is there for the pump. By adding a marine battery power can be made available 24 hours per day enabling watering in the evening the best time to water plants in the summer so that water has a chance to soak into the ground. We will also install some lights which will be automatically ON during night and OFF during day time using Light Dependent Resistor (LDR)[2]. And for the automation in the sprinkling system we will use moisture sensors and temperature sensors. The available traditional irrigation techniques are: ditch irrigation; terraced irrigation; drip irrigation and sprinkler system.

India receives annual average rainfall of about 1190 mm, which is highly variable temporally and spatially[3]. It has been as sensed that there is potential it of bring in ground 45 million hectares land under micro irrigation in India. Out of which 30 million hectares are suitable for sprinkler irrigation for crops like cereals, pulses, fodder, oil seeds etc. Around 12 million hectares are suitable for drip irrigation for crops like cotton, sugarcane, fruits, vegetables, spices, condiments, pulses etc. Apart from this two, around 2.8 million hectares are suitable for mini sprinkler crops like potato, onion, garlic, ground nut, short stature vegetable crops like cabbage, cauliflower etc.

Drip irrigation is a form of irrigation that saves water and fertilizer by allowing water to drip slowly to the roots of many different plants, either on to the soil surface or directly onto the root zone, through a network of valves, pipes, tubing and emitters[10]. It is done through narrow tubes that deliver water directly to the base of the plant. Solar powered automated drip irrigation system can be used for efficient drip irrigation.

II. LITERATURE SURVEY

Solar powered irrigation technique is the future for the farmers and a solution for the energy crisis. According to the survey conducted by the Bureau of Electrical Energy in India in 2015, there are around 18 million agriculture pump sets and around 0.5 million new connections per year is installed with average capacity of 5 hp. Total annual consumption in agriculture sector is 131.96 billion kWh.

Almost 70% of India's population depends on agriculture either directly or indirectly. While 44% of the 140

Million sown hectares depend on irrigation, the rest relies on the monsoons. Irrigation, therefore, is essential for good crop yield. Most electrical consumption in this sector goes towards operating pump sets for irrigation. In 2006-7, India's agricultural sector accounted for 22% of the total electricity consumption, up from 10% in the 1970s[4]. There are about 21 million irrigation pump sets in India, of which about 9 million are run on diesel and the rest are grid-based. Grid electricity for agriculture in India is

provided at very low tariffs - in most cases, flat rates are charged based on the ratings of the pump. This is largely due to logistical difficulties faced with metering and charge collection. But this practice of providing electricity to farmers at highly subsidized rates has led to increasingly high consumption patterns and widespread use of inefficient pumps across the nation. Also, pumps of lower ratings are used to power applications requiring higher power. These factors, among others, have led to an invidious irrigation-energy nexus. Apart from this, limited and unreliable supply of grid electricity has led to farmers' extensive dependence on diesel for water pumping. In addressing this challenge, the efforts of the Gujarat government are noteworthy. They introduced the Jyoti gram Yojana, a programme that seeks to provide a reliable supply of power for agricultural and domestic purposes in rural areas[5].

According to the survey conducted by the Bureau of Electrical Energy in India in 2011 there are around 18 million agricultural pump sets and around 0.5 million new connections per year is installed with average capacity 5HP. Total annual consumption in agriculture sector is 131.96 billion KWh (19% of total electricity consumption). Solar powered smart irrigation technique is the future for the farmers and a solution for energy crisis[6]. Sine PWM technique has been used for inverter operation for minimum harmonics which further increases the efficiency of the system. The rating of the system was calculated corresponding to the pump specifications[7].

III. AUTOMATIC IRRIGATION SYSTEM USING SOLAR POWER

In this proposed system, we utilize the solar energy from solar panels to automatically pump water from bore well directly into a ground level storage tank depending on the intensity of sunlight.

On the input side we will use three sensors .Soil moisture sensor will check the moisture of the soil as per the crop which is to be cultivated .When the moisture level of the soil goes above or below the set value, it will direct the micro controller whether it should pump the water or not. Temperature sensor will check the temperature of the surroundings. If the temperature goes above or below the set value which is needed for a crop to grow, the micro controller will direct the shedding to shed the entire field thereby maintaining the temperature needed by the crop for its healthy growth. The light sensor will automatically turn ON during night and OFF during day.LCD display is used to notify what actions are being taken by the micro controller.

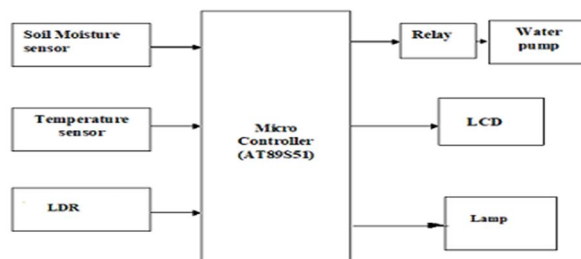


Fig 1:- Block Diagram of the Automatic Irrigation System using Solar Power

The specifications of automatic irrigation system components such as pump, batteries , solar panel ,soil moisture sensor ,are described below:

- 1) *Solar Panel*: The solar panel with RatedPower:10W±5%, Rated Voltage: 12V and Rated Current Capacity: 7Ah is used in the system.
- 2) *Voltage Regulator (LM 7805)*: Voltage regulator IC converts fluctuating ac voltage in to constant dc voltage .This has rated voltage of 5V taking voltage in the range of 7–35V.7805 IC provides +5 volts regulated power supply[16].
- 3) *Filters*: Filter circuit includes one 1000micro Farad capacitor and one 470 micro Farad capacitor. Filter circuit provides pure dc voltage for the system.
- 4) *Microcontroller (AT89S52)*: This system has supply voltage of range 4.5 -12.5V and supply of max. current of 10A.There are 40 pins include input ,output , supply and control ports[17].This will help to take inputs from the sensors and produce output in output ports. The supply provided to microcontroller is 5V.
- 5) *Relay*: Relay is an electromagnetic switch which is used to convert high Voltage or Current using low power circuit .It is used to isolate two circuits Electrically and Magnetically. They are very useful devices and allow one circuit to switch another one while they are completely separate .They are often used to interface an Electronic circuit (working at a low voltage) which works at very high Voltage. .Relay of Voltage Rating of 12V and Current Rating of 5 ampere is used. Relay will give output voltage of 12V for fan, pump and light .This is connected at the output port of microcontroller.

- 6) *Transistor BC547*: Range of collector rating from 100-200mA and have power dissipation rating of 500MW. It will help to regulate the output voltage to 12V.
- 7) *Light Emitting Diode (LED)*: LED with voltage rating of 3.5V and Current Rating of 30mA is used.
- 8) *Light Dependent (LDR)*: LDR is also called a photo resistor or photo conductor. It basically a photocell that works on the principle of photoconductivity. The passive element is basically a resistor whose resistance decreases when the intensity of light decreases. It will switch OFF the device when light falls on it. With this device we can make the automatic lightning system. Voltage rating of 100V, Power Rating of 100mW and resistance @Lux is 100 kΩ and Operating Temp. min. of -30C.
- 9) *Soil Moisture Sensor*: Soil is non conductive by nature but presence of water in soil increases its conductivity due to the presence of conduction ions in water. Soil resistivity is a measure of a soil's ability to retard the conduction of an electric current. Normally, the soil resistivity varies from 0 to 5 kilo-ohms. The soil moisture sensor has probes to be inserted into soil. Specifications of Soil Moisture Sensor with Operating Voltage: 3.3V-5V, Dual output, 4 wire interface, Panel PCB dim.: 3cm x 1.5cm, Soil Probe dim.: 6cm x 3cm, Cable length : 21cm, Digital output (DO) and Analog output (AO) interface are used. Voltage will be developed between the PIN AO and GND, the development of voltage is depends upon the moisture condition of the soil and the sensor length kept in side the soil. The sensor will produce high voltages say 4.5 to 5V when the soil is completely dry [12]. Voltage level will decrease w.r.t. increase in moisture content. When the soil is completely wet, the output voltage will be 0.88 to 1.0V.

In fruit trees, moisture sensor should be placed on the sunny side of the treat 30-45cm from the emitter. In vegetable crops, moisture sensor should be placed at 10-15 cm depth. For trees, thumb rule is to irrigate 60% of the shaded area. To understand the functional behavior of soil moisture sensors, batteries charging voltage, batteries discharging voltage while running the pump by drawing the power from battery alone (i.e., keeping solar panel disconnected from the circuit) and batteries discharging voltage while running the pump drawing power from batteries and simultaneously it is also kept in charged condition from SPV, the following Table I illustrates the voltage developed by the moisture sensor w.r.t. addition of water [13].

Table I:-Moisture sensor voltage w.r.t. water content in the soil

Soil Cup No.	Weight of soil, (g)	Added water quantity, (ml)	Moisture sensor output voltage, (V)	Soil moisture, (%)
1	200(dry)	0	4.5	0
2	200	12	3.1	38.67
3	200	24	2.6	52.48
4	200	36	2.1	66.29
5	200	48	1.4	85.63
6	200(wet)	60	0.88	100

- 10) *Temperature Sensor*: LM35 gives the voltage in the range of -55 -150amp. The LM35 is an integrated circuit sensor that can be used to measure temperature with an electrical output proportional to the temperature (in °C). It can measure temperature more accurately than a using a thermistor [14]. Temperature is a important factor for the change of the moisture level in the environment. Another important characteristic of the LM35DZ is that it draws only 60 micro amps from its supply and possesses a low self-heating capability. The sensor self-heating causes less than 0.1°C temperature rise in still air. The LM35 generates a higher output voltage than thermocouples and may not require that the output voltage be amplified.
- 11) *Analog to Digital Converter (ADC0808)*: ADC is an 8 bit analog to digital converter with eight input analog channels, i.e., it can take eight different analog inputs. The inputs which are to be converted to digital from can be selected by using three address lines. The voltage reference can be set using the V ref+ and V ref- pins. The step size is decided based on set reference value. Step size is change in analog input to cause a unit change in the output of ADC. The default step size is 19.53mV corresponding to 5V reference voltage. ADC0808 needs an external clock to operate. The ADC needs some specific control signals for its operations like start conversions and bring data to output pins. When the conversions is complete the EOC pins goes low to indicate the end of conversion and data ready to be packed up.

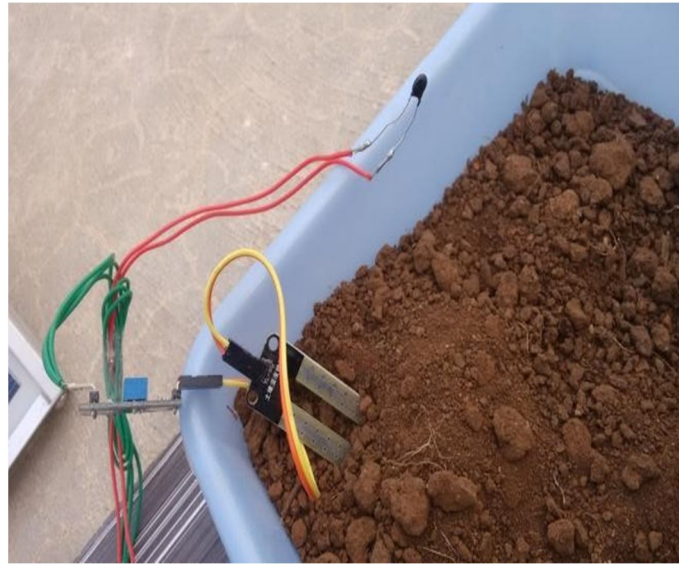


Fig.3 Setup Of Solar Powered Automatic Irrigation System

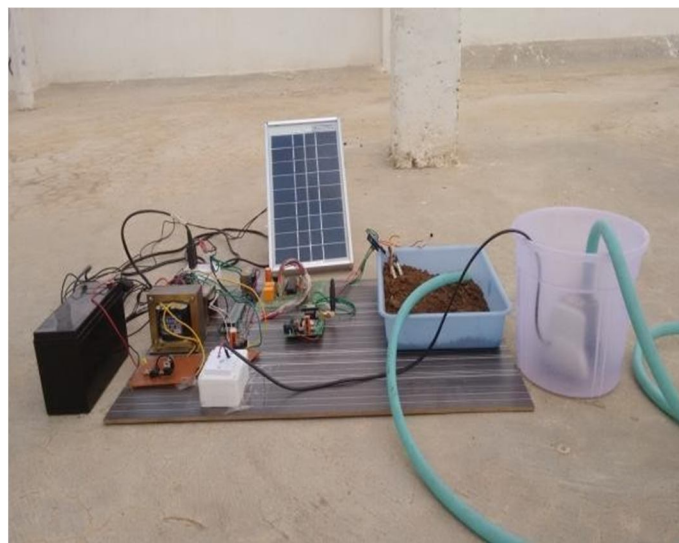


Fig.4 Soil moisture and temperature sensors

A. Working

The deficiency of water in the field is sensed by the op-amp based sensor. Whenever there is need of water in the particular field, the high signal (“1”) appears on the output pin of the sensor of that particular field. The output pins of all the sensors are connected to the PORT 2 of microcontroller [20]. The high signal (logic 1) from the sensor is entertained by the microcontroller at a particular pin. By knowing the position of the pin on which signal appears, the microcontroller rotates the water funnel type cup at the desired speed by using DC motor connected at PORT 0 in clockwise direction. & switch ON the RELAY (i.e. Water pump) connected at port 0. Now water starts flowing into the required field. After completion of watering the sensor sends low signal (logic 0) to microcontroller. When microcontroller receives this signal, it switches OFF the water pump & rotates the stepper motor in anticlockwise direction to the previous angle to bring the funnel cup in its initial position. Now microcontroller starts sensing the signal at PORT 2. Whenever there is signal at any pin the microcontroller repeats the above process. So this process continues & we get the automatic irrigation the fields by using intelligent device microcontroller AT89S52.

IV. COST ANALYSIS

Table2 . Cost Analysis of proposed Automatic irrigation system using solar panel

S.No.	Components	Unit Cost in Rs/-	Quantity	Total Cost(Rs)
1	Solar Panel	1050	1	1050
2	Battery	1700	1	1700
3	1000 μ F Capacitor	7	1	7
4	470 μ F Capacitor	3	1	3
5	7805 Voltage Regulator	15	1	15
6	1k Ω resistor	7.5	2	15
7	Reset Switch	60	1	60
8	AT89S52 Microcontroller	130	1	130
9	LDR	10	1	10
10	Soil Moisture Sensor	65	1	65
11	Temperature Sensor	250	1	250
12	Analog to Digital Converter	140	1	140
13	LCD Display	150	1	150
14	Relay Circuit	200	3	600
15	Pump	100	1	100
16	Fan	250	1	250
17	LED	10	4	40
18	Lamp	100	1	100
	TOTAL COST(Rs)			Rs.4685

V. CONCLUSION

By implementing the proposed system there are various benefits to both the government and the farmers. This can be a solution for the government in the present state of energy crisis. By using the automatic irrigation system one can optimize the usage of water by reducing wastage and reduces the human intervention [15]. The excess energy produced using solar panels can also be given to the grid with small modifications in the circuit, which can be a source of the revenue of the farmer, thus encouraging farming in India and same time giving a solution for energy crisis. Proposed system is easy to implement and environment friendly solution for irrigating fields. The system was found to be successful when implemented for bore holes as they pump over the whole day. Solar pumps also offer clean solutions with no danger of borehole contamination. The system requires minimal maintenance and attention as they are self-starting. Even though there is high capital investment required for this system to be implemented, the overall benefits are high and in long run this system is economical.

REFERENCES

- [1] G.L. Barbosa, F. D. A. Gadelha, N. Kublik, R. U. Halden, "Comparison of Land, Water, and Energy Requirements of Lettuce Grown Using Hydroponic vs. Conventional Agricultural Methods", International Journal of Environmental Research and Public Health, 2015.
- [2] Deweshree Rane, P.R. Indurkar, D.M. Khatri, "Review Paper Based On Automatic Irrigation System Based On RF Module", IJAICT Volume 1, Issue 9, January 2015
- [3] Archana P, Priya R, "DESIGN AND IMPLEMENTATION OF AUTOMATIC PLANT WATERING SYSTEM", International Journal of Advanced Engineering and Global Technology Vol-04, Issue-01, January 2016, ISSN No: 2309-4893
- [4] Karan Kansara, Vishal Zaveri, Shreyans Shah, Sandip Delwadkar, Kaushal Jani, "Sensor based Automated Irrigation System with IOT", International Journal of Computer Science and Information Technologies, Vol. 6 (6), 2015, 5331-5333.

- [5] https://en.wikipedia.org/wiki/Electricity_sector_in_India#cite_ref-GES_3-13(accessed on 16-01-2019).
- [6] Ministry of Power, Central Electricity Authority, "Growth of electricity sector in India from 1947-2016", May 2016.
- [7] S. Darshna, T.Sangavi , Sheena Mohan, A.Soundharya, Sukanya Desikan , "Smart Irrigation System", IOSR Journal of Electronics and Communication Engineering Volume 10, Issue 3, Ver. II (May - Jun.2015).
- [8] Karan Kansara, Vishal Zaveri, Shreyans Shah, Sandip Delwadkar, Kaushal Jani, "Sensor based Automated Irrigation System with IOT: A Technical Review", Karan Kansara et al, / (IJCSIT) International Journal of Computer Science and Information Technologies, Vol. 6 (6), 2015, 5331-5333
- [9] Abhinav Rajpal, Sumit Jain, Nistha Khare and Anil Kumar Shukla, "Microcontroller based Automatic Irrigation System with Moisture Sensors", Proceedings of the International Conference on Science and Engineering, 2011, pp. 94-96
- [10] Venkata Naga RohitGunturi, "MicroController Based Automatic Plant Irrigation System", International Journal of Advancements in Research & Technology, Volume 2, Issue4, April-2013
- [11] Dr.S. Raman, "Micro Irrigation status and Technology Adoption in India", National Congress on New Challenges and Advances in Sustainable Micro Irrigation, March, 2017, Pages-21-35.
- [12] Sabe, A.y., Venaagmoothy, G.K."Efficient Utilization of renewable energy sources by Gridable Vehicles in Cyber-Physical energy System Journal,IEEE-sept 2010n cycle control.
- [13] Garg, H.P. 1987. Advances in solar energy technology, Volume 3. Reidel Publishing, Boston,MA.
- [14] Halcrow, S.W. and Partners. 1981. Small-scale solar powered irrigation pumping systems: technical and economic review. UNDP Project GLO/78/004.Intermediate Technology Power, London, UK. A. Harmim et al., "Mathematical modeling of a box-type solar cooker employing an asymmetric compound parabolic concentrator," Solar Energy, vol.86, pp. 1673–1682,2012.
- [15] K. K. Tse, M. T. Ho, H. S.-H. Chung, and S. Y. Hui, "A novel maximum power point tracker for PV panels using switching frequency modulation," IEEE Trans. Power Electron., vol. 17, no. 6, pp. 980–989,Nov.2002.
- [16] Haley, M, and M. D. Dukes. 2007. Evaluation of sensor-based residential irrigation water application. ASABE 2007 Annual International Meeting, Minneapolis, Minnesota, 2007. ASABE Paper No.072251.
- [17] Prakash Persada, Nadine Sangsterb, Edward Cumberbatch, Aneil Ram khalawand and AatmaMaharajh, "Investigating the Feasibility of Solar Powered Irrigation for Food Crop Production: A Caroni Case," ISSN 1000 7924 The Journal of the Association of Professional Engineers of Trinidad and Tobago, Vol.40, No.2, pp.61-65, October/November2011.
- [18] L. Prisilla, P.S.V. Rooban and L. Arockiam, "A novel method for water irrigation system for paddy fields using ANN," InternationalJournal of Computer Science and Network, Vol.1, No. 2, April2012.
- [19] L. Longchang and W. Yanjun, "Pipeline Water Delivery Technology,"China Water Power Press, pp. 33-35, March1998.
- [20] <http://www.edgefxkits.com/automatic-irrigation-system-on-sensing-soil-moisture-content>(accessed on 26.01.2019)



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)