



iJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 7 Issue: VII Month of publication: July 2019

DOI: <http://doi.org/10.22214/ijraset.2019.7175>

www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com

Contact Stress Analysis of Spur Gear for different Materials using Ansys and Hertz Equation

Smt. S. Mounika¹, Mr. M. Padmanabham²

¹PG Student ²Assistant Professor, Viswanadha Institute of Technology and Management, Visakhapatnam, Andhra Pradesh, India

Abstract: Gears have a wide variety of applications. Their applications vary from watches to very large mechanical units like the lifting devices and automotives. Gears generally fail when the working stress exceeds the maximum permissible stress. Contact stress analysis between two spur gear teeth was considered in different contact positions representing a pair of mating gears during rotation. The contact stress in the mating gears is the key parameter in gear design. Deformation of the gear is also another key parameter which is to be considered. These two parameters are inverse to each other which require a material which satisfies both the conditions. This project represents the stress analysis of mating teeth of spur gear to find maximum contact stress in the gear teeth. The results obtained from Finite Element Analysis (FEA) are compared with theoretical Hertzian equation values. Current methods of calculating gear contact stresses use Hertz's equations, which were originally derived for contact between two cylinders. To enable the investigation of contact problems with FEM, the stiffness relationship between the two contact areas is usually established through a spring placed between the two contacting areas. The materials used in the gears are changed and a set of combinations of different gears are used in order to find out the contact stresses involved in by different materials. The project gives the contact stresses and deformations that occur by taking different material compositions to arrive at the best possible combination. The study in this paper shows that the complex design problem of spur gear which requires fine software skill for modeling and also for analyzing. The project aims at the minimization of both contact stress as well as deformation to arrive at the best possible combination of driver and driven gear. The results of the two dimensional FEM analysis from ANSYS are presented. These stresses were compared with the theoretical values. Both results agree very well. This indicates that the FEM model is accurate

Keywords: Contact stress, Spur gear, Hertz's equation, ANSYS, FEM.

I. INTRODUCTION

Gears are one of the oldest of humanity's inventions. Nearly all the devices we think of as machines utilize gearing of one type or another. Nevertheless, the design or specification of a gear is only part of the overall system design picture. From industry's standpoint, gear transmission systems are considered one of the critical aspects of Contact Stress Analysis. Investigators analyzing the gear tooth for stresses have done several studies. Research article on Modeling and Finite Element analysis of Spur Gear is done by Vivek Karaveer, Ashish Mogrekar and T. Preman Reynold Joseph [1] in which the contact stresses of gears is found out by ANSYS and HERTZ equation which is for finding contact stress in gears. In detail study of the contact stress produced in the mating gears is the most important task in design of gears as it is the deciding parameter in finding the dimensions of gear (Mr. Bharat Gupta et al 2012)[2]. DhavaleA.S., Abhay Utpat [3] paper explores when gear is subjected to load, high stresses developed at the root of the teeth, Due to these high stresses, possibility of fatigue failure at the root of teeth of spur gear increases. T. Shoba Rani et al. [4] have used cast iron, nylon and polycarbonate as the materials used for the project of spur gear for finite element analysis. Sushil Kumar Tiwari [5] found out the contact stress and bending stress for involute spur gear teeth in meshing by finite element method.

II. THEORETICAL CALCULATION OF CONTACT STRESSES

PITTING is a surface fatigue failure resulting from repetitions of high contact stress. The surface fatigue mechanism is not definitively understood. Pitting commonly appears on operating surfaces of gear teeth, a fundamental cause is excessive loading that raised contact stresses beyond critical levels. Contact stress has been expressed clearly in this work by finite element model; according to the angular motion. The domain in this study was the angular location of the point of contact on the arc of action from the beginning to the end of contact between this pair of teeth. Target and contact elements were used in both sides of the contact pattern between the surfaces of this pair of teeth.

A. Spur Gear Contact

The transfer of power between gears takes place at the contact between the acting teeth. The stresses at the contact point are computed by means of the theory of Hertz. The theory provides mathematical expressions of stresses and deformations of curved bodies in contact. Fig. 1 shows a model applied to the gear-two parallel cylinders in contact.

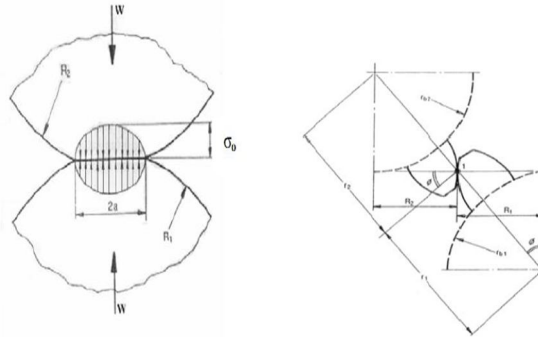


Fig1.Parallel cylinders in contact Fig2.Two involutes teeth in contact

The Hertz theory assumes an elliptic stress distribution, as seen in the Fig. 1; the maximum stress

$$\sigma_0 = \sqrt{\frac{W(1/R_1 + 1/R_2)}{F\pi[(1-\nu_1^2)/E_1 + (1-\nu_2^2)/E_2]}}$$

σ_c = maximum value of contact stress (N/mm²)

W= force pressing the two cylinders together (N)

B = half width of deformation (mm)

L= axial length of cylinders (mm)

d1, d2 = diameters of two cylinders (mm)

E1, E2 = moduli of elasticity of two cylinder materials (N/mm²)

μ_1, μ_2 = Poisson's ratio of the two cylinder materials (Unit less)

Where W is the load, F is the face width of pinion. Same equation can be apply for teeth, assuming for R1 and R2 the respective radii of the involute curve at the contact point, as shown in Figure. Let us assume that the contact takes place at point 1, and then the respective radii are equal to: R1= rp1 sin ϕ ; R2 = rp2 sin ϕ Hence, the Hertz equation for contact stresses in the teeth becomes,

$$\sigma_0 = \sqrt{\frac{L^{b1} E_1 [(1-\nu_1^2) \setminus E^1 + (1-\nu_2^2) \setminus E^2] 2W \phi}{M (1 + L^{b1} \setminus L^{b2})}}$$

Where rp1 and rp2 are the pitch radii of the pinion and gear and ϕ is the pressure angle. The stress correlations derived heretofore and Eq. (3) are based on a number of simplifying assumptions, such as pure bending of short beam and elliptic distribution of stresses at tooth contact.

III. DETERMINATION OF CONTACT STRESS IN ANSYS

ANSYS originally a finite element analysis (FEA) code for structural mechanics. ANSYS Workbench contains Design Modeler in which the gear is designed from basic drawing tools.

A. Design of Spur Gear in ANSYS Design Modeler

The model is done in design modeler of ANSYS Workbench. In this study, maximum contact stress is determined. During the transmission of torque of 15000 lb-in or 1694.7725 Nm by steel, grey cast iron, aluminum spur gears, using finite element analysis. The dimensions of the gears are given in Table below.

The Effect of Local Fuel/Air Ratio on the Performance and Pollutant Emission Formation of a Compression Ignition Engine

Table1.Spur Gear Specifications

| Dimension | Unit | Symbol | Value (For both gears in assembly) |
|-----------------------|---------|--------|------------------------------------|
| Number of Teeth | - | Z | 20 |
| Pitch Circle Diameter | mm | D | 127 |
| Pressure Angle | Degrees | Φ | 20 |
| Addendum Radius | mm | RA | 69.85 |
| Dedendum Radius | mm | RB | 55.88 |
| Face Width | mm | B | 101.60 |
| Shaft Radius | mm | Rs | 31.75 |

ANSYS Design Modeler gives you some handful of options in order to create a working design of the spur gear. The spur gear is designed by giving the coordinates of the involute curve from involute equation and creating the profile of an involute. Then the basic operations like replicate are used to duplicate the involute curve and reverse it in order to get the profile of gear.

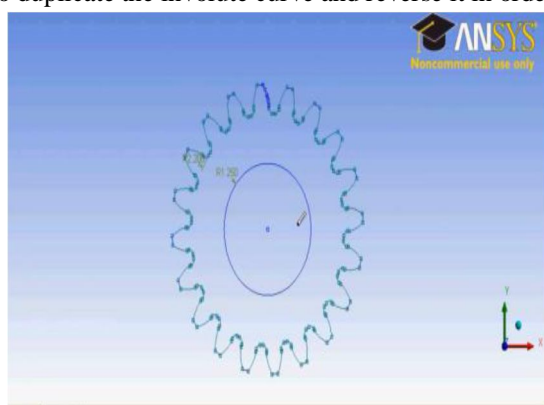


Fig3.spur gear design in Design Modeler

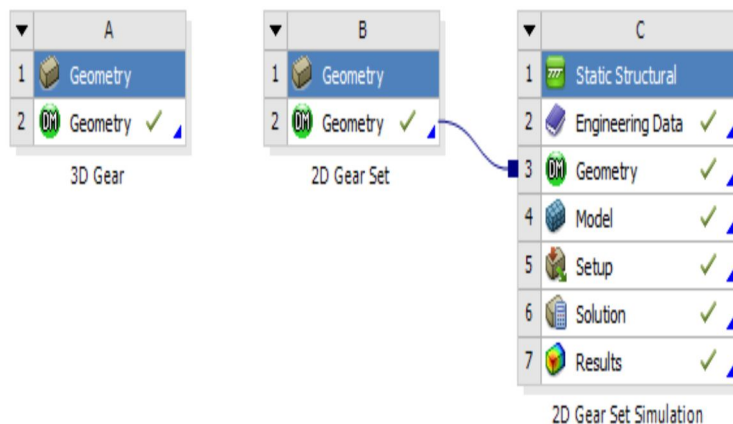


Fig4.static structural

The materials comprises of structural steel, grey cast iron aluminum. First two materials are conventional materials whereas the other two materials are a kind of advanced materials to deal with the contact stresses. The material properties are entered in ANSYS Engineering data and the formulation is completed.

Table2. Spur Gear material specifications

| MATERIAL | STRUCTURAL STEEL | GREY CAST IRON | ALUMINIUM |
|----------------------|------------------|----------------|-----------|
| Young's Modulus(Mpa) | 2E+5 | 1.1E+5 | 0.7E+5 |
| Poisson's Ratio | 0.3 | 0.28 | 0.33 |

B. Automatic Mesh Generation

Mesh generation is one of the most critical aspects of engineering simulation.. ANSYS [6] Meshing technology provides a means to balance these requirements and obtain the right mesh for each simulation in the most automated way possible.

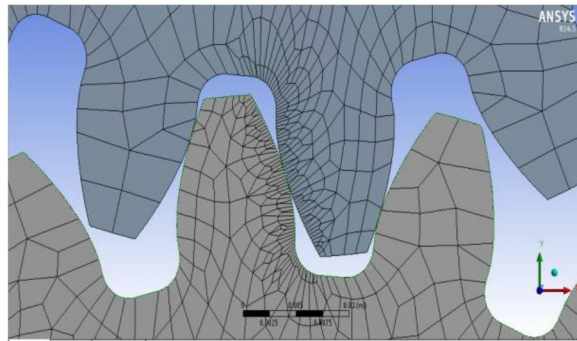


Fig5.Mesh Generation

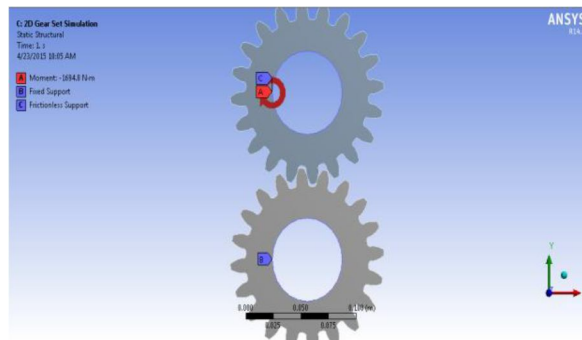


Fig6.2D Gear Set Simulation

C. Stress Analysis in ANSYS Mechanical

Fixed support is applied on inner rim of the lower gear. Frictionless support is applied on the inner rim of upper gear to allow its tangential rotation but restrict from radial translation. Moment of 15000 lb-in or 1694.7725 N-m is applied on the inner rim of upper gear in clockwise direction as a driving torque. The mating gear is created by translating a copy of the original copy of gear and by giving an interference which is equal to the center distance of the two mating gears.

D. ANSYS Results




Fig7(a).Stress b/w Steel (driver) & steel (driven)




Fig7(b).Deformation b/w steel (driver) & steel (driven)




Fig8(a).Deformation b/w steel (driver) & cast iron (driven)




Fig8(b).Stress b/w Steel (driver) & cast iron (driven)




Fig9 (a). Stress b/w Steel (driver) & aluminum (driven)




Fig9 (b). Deformation b/w steel (driver) & aluminum (driven)




Fig10 (a) Stress b/w Cast iron(driver) & steel(driven)





Fig10(b) Deformation b/w cast iron(driver) & steel(driven)

The Effect of Local Fuel/Air Ratio on the Performance and Pollutant Emission Formation of a Compression Ignition Engine International

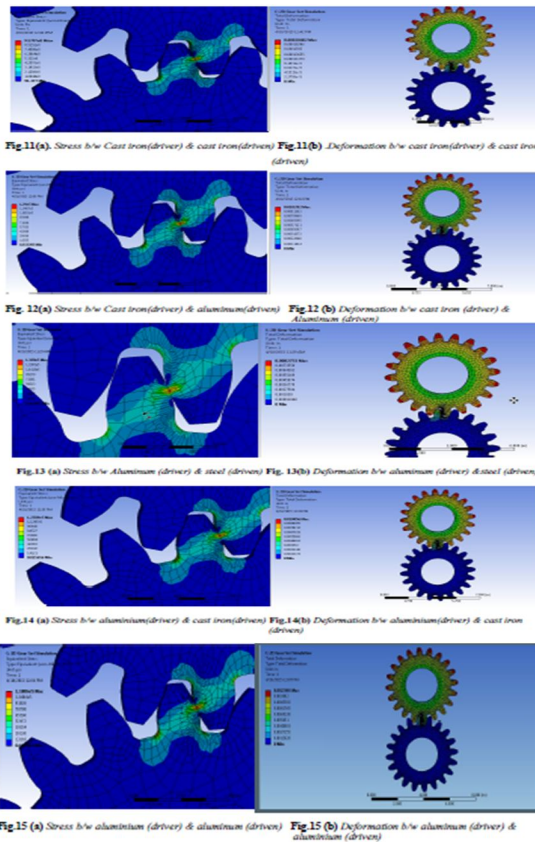

IV. RESULTS AND CONCLUSION

The use of different materials in gear manufacturing provides a range of contact stresses. This range of contact stresses and deformation is useful in the selection of material in different applications. The use of different materials in gear manufacturing provides a range of contact stresses. This range of contact stresses and deformation is useful in the selection of material in different applications. The values obtained by Hertz’s equation and Ansys agree with each other with each other with a maximum error of 4% which is acceptable. It shows that the simulation done in ANSYS is compatible and copes up with the hertz equation for a range of materials used in the experiment. Aluminum on the other hand provides less contact stress when mated with any of the gears. The lowest contact stress is recorded when aluminum is used as both driver as well as driven gear. The Contact stresses from ANSYS and Hertz equation are tabulated as below.

Table.3 Contact stress result

| MATERIALS | CONTACT STRESS (Mpa) | | |
|-------------------------------------|----------------------|---------|--------|
| | ANSY | Hertz | Error |
| Structural Steel & Structural Steel | 1334.76 | 1300.89 | 2.603 |
| Cast Iron & Structural Steel | 1017.18 | 1091.4 | 6.8004 |
| Aluminium & Structural Steel | 923.2 | 948.98 | 2.792 |
| Structural Steel & Cast Iron | 1104.54 | 1091.4 | 1.2 |
| Cast Iron & Cast Iron | 889.42 | 857.8 | 3.73 |
| Aluminium & Cast Iron | 876.25 | 919.83 | 4.97 |
| Structural Steel & Aluminium | 941.34 | 948.98 | 0.805 |
| Cast Iron & Aluminium | 889.42 | 919.83 | 3.419 |
| Aluminium & Aluminium | 813.99 | 783.27 | 3.774 |



REFERENCES

- [1] VivekKaraveer, AshishMogrekar and T. PremanReynold Joseph "Modeling and Finite Element Analysis of Spur Gear" International Journal of Current Engineering and Technology Vol.3, No.5, December-2013.
- [2] Gupta, Mr Bharat, "Contact stress analysis of spur gear", In International Journal of Engineering Research and Technology, Vol. 1, No. 4, ESRSA Publications, June-2012.
- [3] Dhavale A.S and AbhayUtpat, "Gear tooth stresses using ANSYS" International Journal of Current Engineering and Technology Vol.2, December-2012.
- [4] T.Shoba Rani, "SPUR GEAR."International Journal of Computational Engineering Research", Vol. 3, No.11, 2013.
- [5] Sushil Kumar Tiwari, "Stress analysis of mating involute spur gear teeth", In International Journal of Engineering Research and Technology, Vol.1, No. 9, ESRSA Publications, November-2012.



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)