



# **iJRASET**

International Journal For Research in  
Applied Science and Engineering Technology



---

# **INTERNATIONAL JOURNAL FOR RESEARCH**

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume: 7      Issue: XII      Month of publication: December 2019**

**DOI: <http://doi.org/10.22214/ijraset.2019.12061>**

**[www.ijraset.com](http://www.ijraset.com)**

**Call:  08813907089**

**E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)**

# A Seismic Study on Shear Wall Positions for High Rise Structures in Different Zones

Dr. S. Kamal Mohd. Azam<sup>1</sup>, Prof. Shaik Abdulla<sup>2</sup>, Lingraj Mavanoorkar<sup>3</sup>, Prof. Nadeem Pasha<sup>4</sup>, Prof. S.M. Hashmi<sup>5</sup>

<sup>1, 2, 4, 5</sup>Professor Department of Civil Engineering

<sup>3</sup>Student of M. Tech Department of Civil Engineering

**Abstract:** *This study presents the procedure for seismic performance estimation of high-rise buildings based on a concept of the capacity spectrum method.. Many reinforced concrete buildings in urban regions lying in active seismic zone may suffer moderate to severe damages during future ground motion. Therefore it is essential to mitigate unacceptable hazards to property and life of occupant. In this study, 3d analytical model of thirty storied buildings have been generated for symmetric buildings Models and analyzed using structural analysis tool ETABS Various important components are considered in the model building that influences the mass, strength, stiffness and deformability of the structure. To debate the outcome of the shear wall and core wall at dissimilar location during earthquakes seismic analysis using linear static (equivalent static method) and linear dynamic (response spectrum method ) have been performed .The deflections at each storey level has been compared by performing Equivalent static and response spectrum method.*

**Keywords:** *Shear wall, Equivalent static method, Response spectrum method, storey drift ,displacement, Base shear Zone 2 3 4 5.*

## I. INTRODUCTION

Earthquake calamity had continuously been one of the terrific usual tragedies conviction upon the manhood considering the fact that stage immemorial and fetching in its awaken indefinable despairs and trouble towards the human beings disturbed.

In a country like India whose population is growing rapidly the design of tall buildings is mandatory because the available topographic land is very less compare to the available population hence tall buildings are preferred in these region. For the design of tall buildings the effect of wind forces and earthquake forces should be taken into account separately during selection of load combination. Apart from these vertical walls called shear walls are to be designed in such a way that they should resist the lateral and gravity loads from the walls and columns.

Structures designed permitting towards present seismic codes afford least protection to hold lifespan and in a huge seismic activity, they guarantee minimum gravity load bearing factors of non-vital amenities will nevertheless feature and offer certain verge of protection. Conversely, amenability by usual ensures no such enactment. They commonly do not cope with presentation of non-structural components neither offers changes in presentation between dissimilar structural systems. This is for the reason that it cannot correctly evaluate the inelastic strength and deformation of every associate because of linear elastic analysis.


## II. OBJECTIVES

To carry out lateral load evaluation on dissimilar building models according to the code. To study the impact of providing shear wall in a structure which is subjected to horizontal forces in different seismic zones. To study the impact of concrete shear wall provided in different positions (at centre, corners in different direction) of the building.


To evaluate story drift and deflection at separate stories using different seismic analysis method.

## III. ANALYTICAL MODELLING


- 1) *Model 1:* Bare frame
- 2) *Model 2:* Bare frame with shear walls at corners
- 3) *Model 3:* Bare frame with and core wall at centre
- 4) *Model 4:* Bare frame with core wall at centre and shear walls at corners
- 5) *Model 5:* Bare frame with core walls at corners
- 6) *Model 6:* Bare frame with core wall at centre and core walls at corners

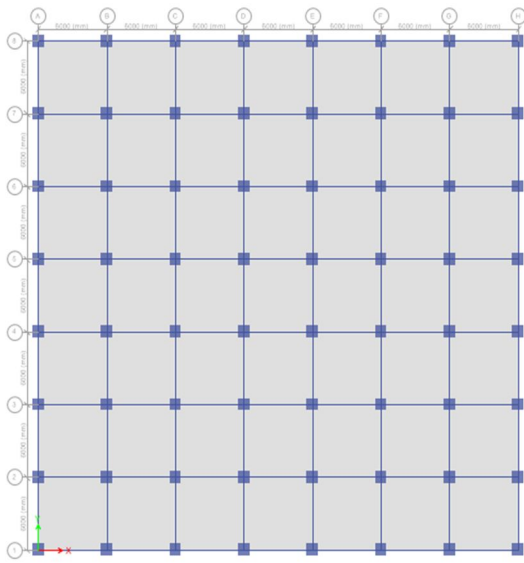


Model 1

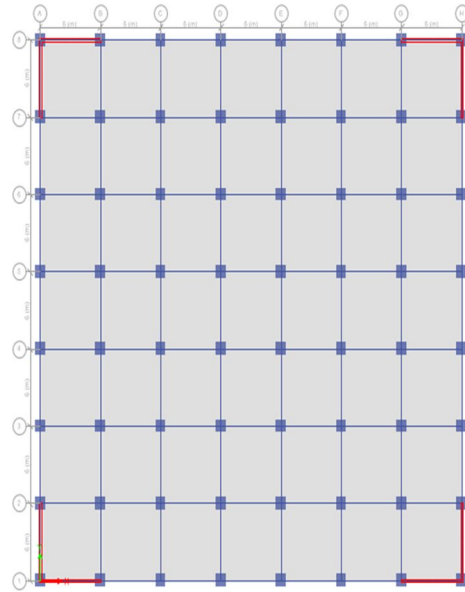


Model 2

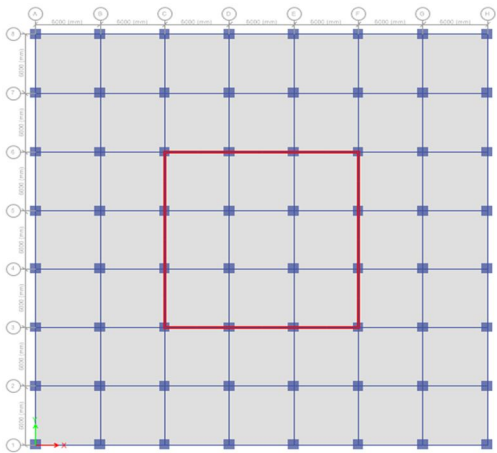


Model 3

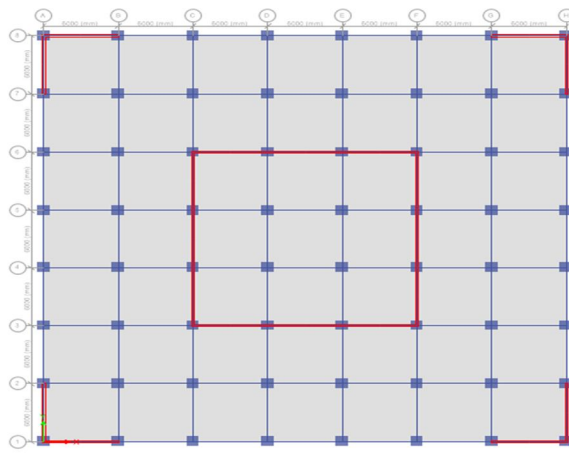

model 4

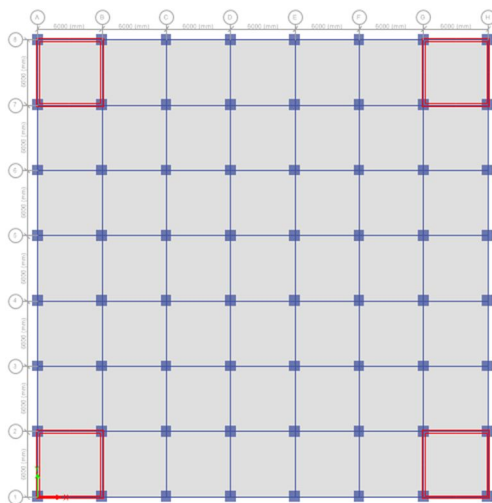

Model 5

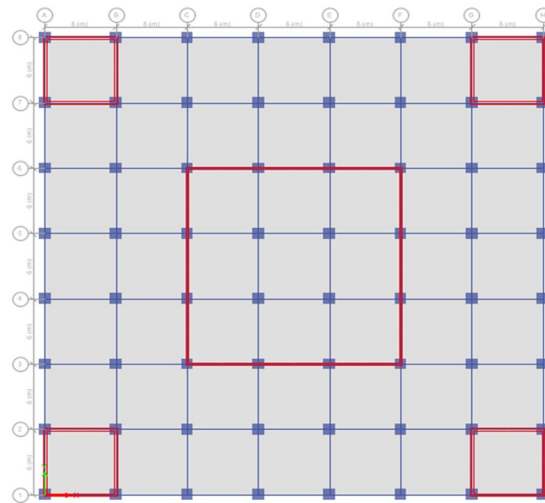

Model 6

**A. Design Data**

Material Properties:

Young's modulus of (M40) concrete, E =  $31.63 \times 10^6$  kN/m<sup>2</sup>

Density of Reinforced Concrete = 25kN/m<sup>3</sup>

Assumed Dead load intensities

Floor finishes = 1.5kN/m<sup>2</sup>

**B. Live Load Intensities**

Imposed loads = 3.0KN/ m

**C. Member Properties**

Thickness of Slab = 0.150m

Column size: = (0.10m x 0.10m)

Beam size: = (0.3m x 0.6m)

Thickness of concrete wall = 0.25m

Design Spectrum

1) Eq zones-2 3 4 5

2) Importance factor-1


3) Response reduction factor-5

**IV. RESULTS AND CONCLUSIONS**

The results of displacement ,drift, time period and base shear are obtained by equivalent static and response spectrum method.

Time Period for Zone-2,3,4,5


| Zone-2,3,4,5       |       |
|--------------------|-------|
| Time Period in sec |       |
| model 1            | 5.133 |
| model 2            | 3.917 |
| model 3            | 2.199 |
| model 4            | 2.12  |
| model 5            | 3.494 |
| model 6            | 2.061 |

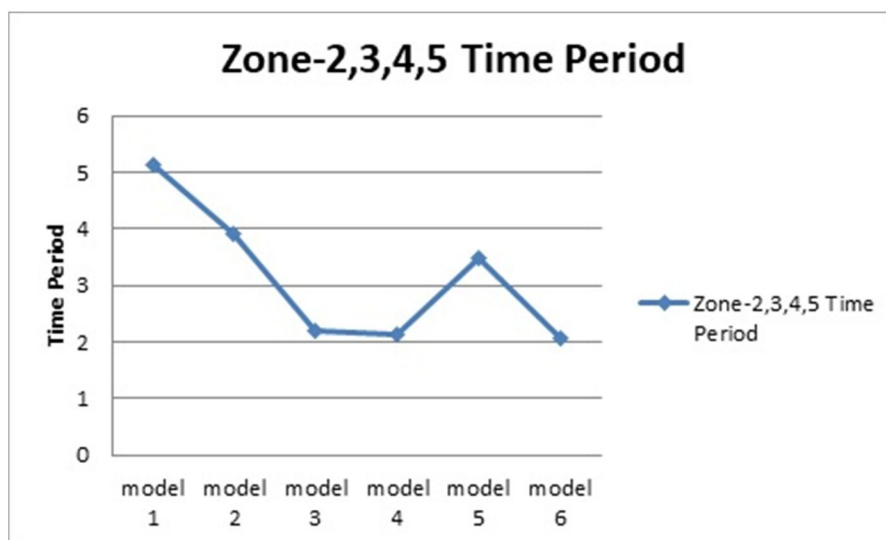




A. Base Shear

Comparison of base shear by Equivalent Static Method and Response Spectrum Method for various models.



|        |          | Equivalent static method |          | Response spectrum Method |          |
|--------|----------|--------------------------|----------|--------------------------|----------|
|        |          | X-dir                    | Y-dir    | X-dir                    | Y-dir    |
| Zone-2 | model 1  | 2746.169                 | 2746.169 | 2796.857                 | 2796.857 |
|        | model 2  | 2854.208                 | 2854.208 | 2895.01                  | 2900.48  |
|        | model 3  | 4367.01                  | 4367.012 | 4433.76                  | 4433.76  |
|        | model 4  | 5414.01                  | 5414.01  | 5764.57                  | 5764.57  |
|        | model 5  | 3256.2                   | 3256.203 | 3306.97                  | 3306.97  |
|        | model 6  | 5664.37                  | 5664.97  | 5724.62                  | 5742.62  |
| Zone-3 | model 7  | 4397.87                  | 4397.87  | 4474.97                  | 4474.97  |
|        | model 8  | 4566.733                 | 4566.733 | 4632.02                  | 4640.72  |
|        | model 9  | 8206.467                 | 8206.467 | 8358.13                  | 8358.13  |
|        | model 10 | 8662.417                 | 8662.417 | 8743.31                  | 8743.31  |
|        | model 11 | 5209.924                 | 5209.924 | 5291.16                  | 5291.16  |
|        | model 12 | 9063.952                 | 9036.952 | 9159.4                   | 9154.4   |
| Zone-4 | model 13 | 6590.8                   | 6590.8   | 6712.45                  | 6712.45  |
|        | model 14 | 6580.09                  | 6580.09  | 6948.04                  | 6961.15  |
|        | model 15 | 12309.69                 | 12309.69 | 12537.2                  | 12537.2  |
|        | model 16 | 12993.62                 | 12993.62 | 13114.96                 | 13114.97 |
|        | model 17 | 7814.886                 | 7814.886 | 7814.88                  | 7814.88  |
|        | model 18 | 13595.92                 | 13595.92 | 13739.1                  | 13739.1  |
| Zone-5 | model 19 | 9886.2                   | 9886.2   | 10068.68                 | 10068.68 |
|        | model 20 | 10275.14                 | 10275.14 | 10422.06                 | 10337.31 |
|        | model 21 | 18464.54                 | 18464.54 | 18805.8                  | 18805.8  |
|        | model 22 | 19490.43                 | 19490.43 | 19672.45                 | 19672.45 |
|        | model 23 | 11722.32                 | 11722.32 | 11905.11                 | 11905.11 |
|        | model 24 | 20393.89                 | 20393.89 | 20608.65                 | 20608.65 |

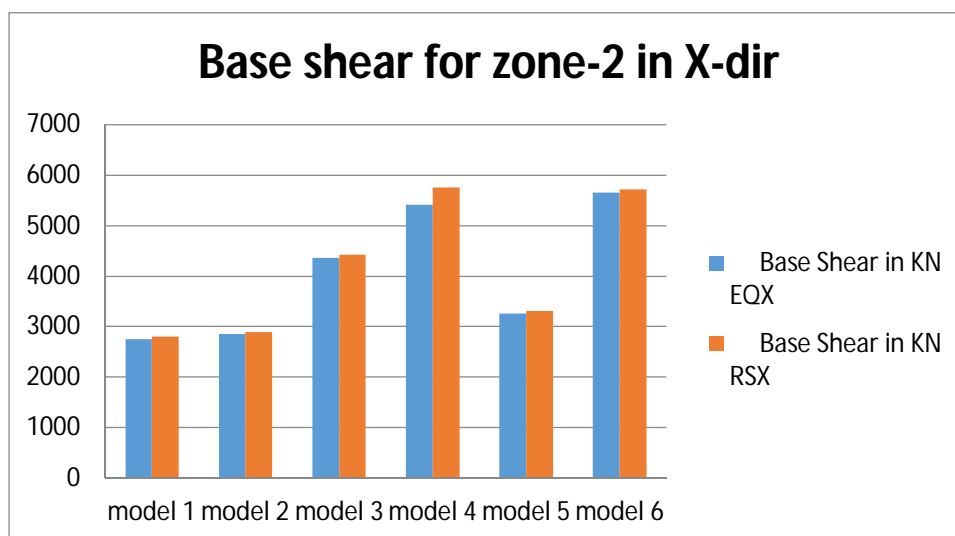




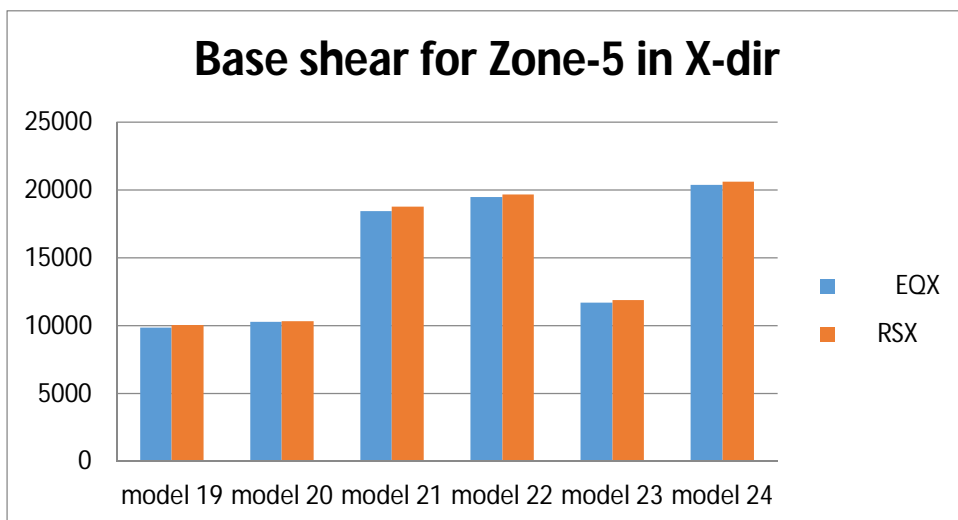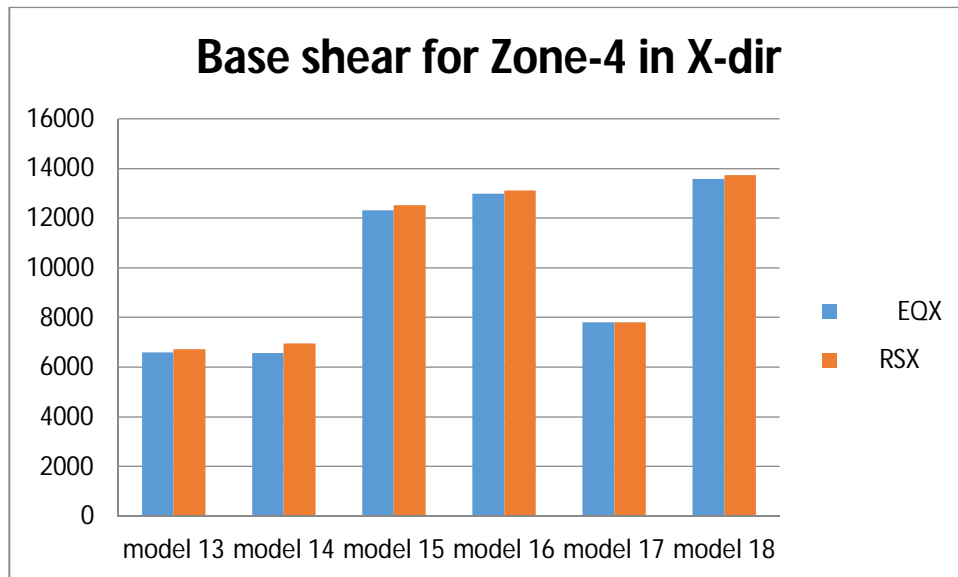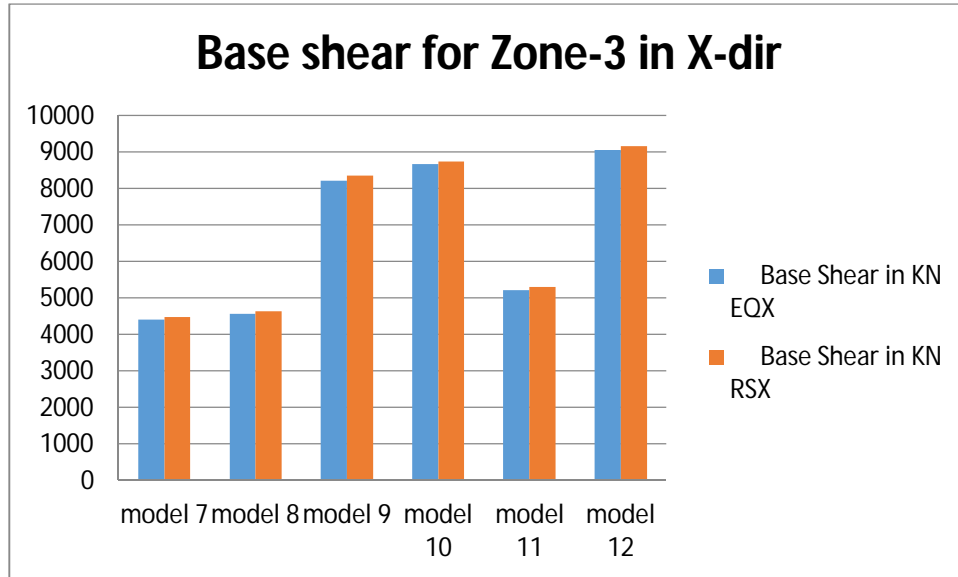


B. Displacement

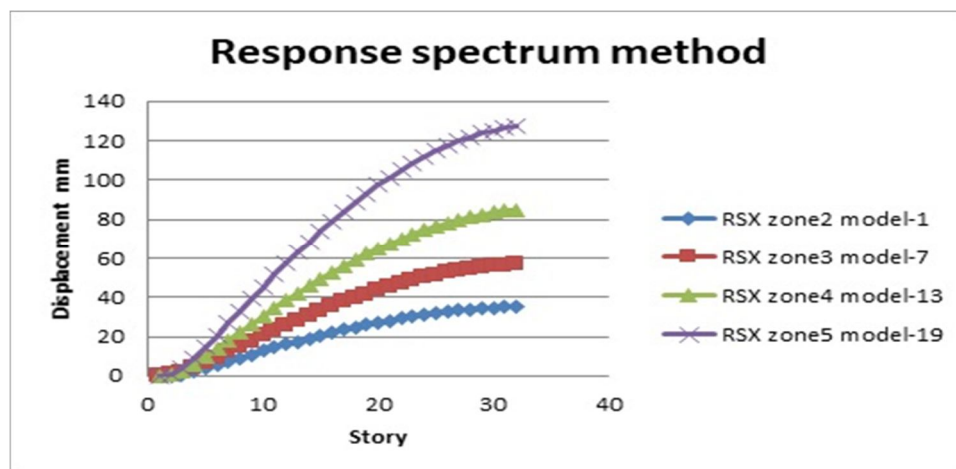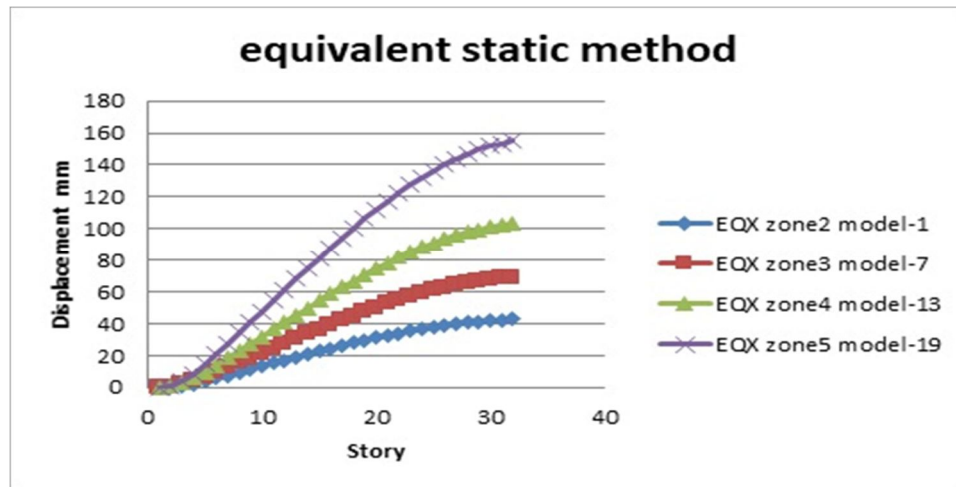

C. Drift

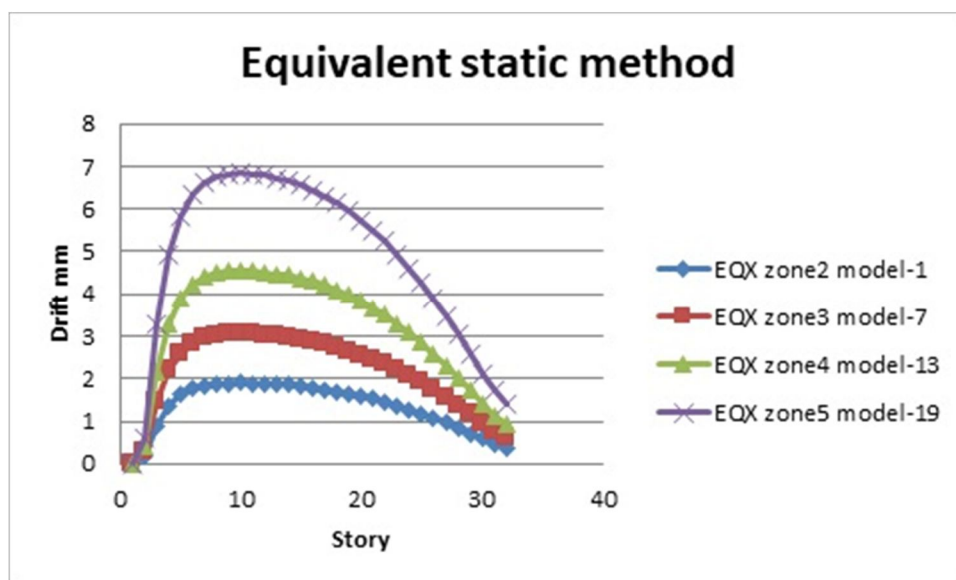

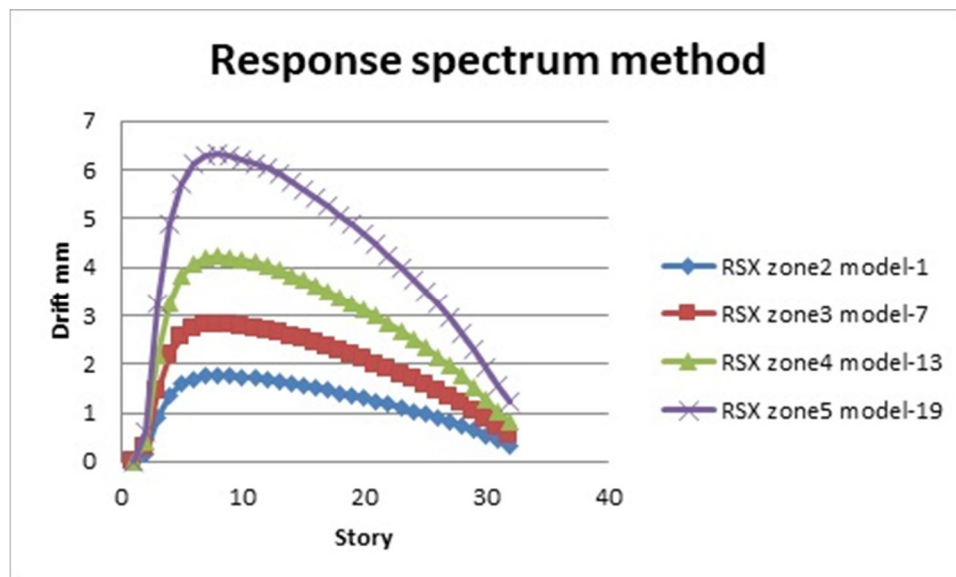

## V. CONCLUSIONS

- A. The natural period decreases while consequence concrete core wall is taken at centre and at corners
- B. Storey drifts are initiated inside the boundary as indicated by code (IS 1893-2002 Part-1) in linear dynamic and static analysis.
- C. The dynamic response of a structure is decreased efficiently by using bay wide and story height shear wall.
- D. The displacement in model with corewall at centre is less than the model with base frame in Zone-2 in Equivalent static method.
- E. The displacement in model with corewalls at centre and corner is less than the model with bare frame in Zone-3,4,5 in Equivalent Static method as well as response spectrum method.
- F. The drift in model with Bare frame is less as compared to remaining models in Zone-2,3,4,5.
- G. The time period in model with corewall at centre and shear wall at corners is less than all remaining models in all zones
- H. The base shear in model with core wall at centre and corners is less than all models in Zone-2, 3, 4, 5.
- I. The base shear values obtained from response spectrum method is more than that of equivalent static method.

## REFERENCE

- [1] "[Analysis of RCC Building with shear Walls at Various Locations and In Different Seismic Zones" by (Sylviya B , Eswaramoorthi) ISSN:2278-3075,Volume-8 Issue-2S December,2018
- [2] [G S S RAM TEJ 1\*,Dr.DUMPA VENKATESHWARLU 2\*[IJRSAT]TM Volume 2,Issue 15,PP:124-132,AUGUST 2016 studied on "Behaviour of Rcc Building With Different characteristics at seismic zones 2 and 5".
- [3] [C.Subramanian,B.Priyadharshini ] conducted a study on "Comparative Study on Seismic Behaviour of R.C. Shear Wall at Different Location in R.C. Building".ISSN:2278-3075,Volume-8 Issue-2S December,2018
- [4] [P.P. Chandurkar , (2013)]<sup>14</sup>,conducted a study for a tall building(ten story)for all the seismic zone the deflection drift and cost of the building is estimated.
- [5] Dynamic Response of High Rise Structures under the influence of shear walls by Syed Khasim Mutwalli,Dr.Shaik Kamal mohammed Azam.ISSN:2248-9622,Vol.4,Issue(Versoin 6)September 2014,pp.87-96.
- [6] Seismic Performance Evaluation of Multistoried RC framed buildings with Shear wall by Shaik Kamal Mohammed Azam and VInod Hosur ISSN 2229-5518 Volume4,Issue 1, January-2013.





10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)