



iJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 3

Issue: V

Month of publication: May 2015

DOI:

www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com

Design and Analysis of Low Power High Speed Current Latch Sense Amplifier

Jyoti Sharma¹, Rajesh Parihar²

¹M.Tech Scholar, CBSGIs, Jhajjar

²Asst. Professor, H.O.D., ECE/EE, CBSGIs, Jhajjar

Abstract- This paper is about the comparison of the conventional CLSA and a current latch sense amplifier with body bias controlled CLSA. In late, used for speed up of the precharging time of Sense Amplifier. The CLSA is capable of high-speed pre-charging with little increase in transistors counts. We will also verify the various result like Power consumption, Offset Voltage and noise margin at 180 nano meter technology. Here in this Paper we will see that when Vdd increases circuit the ability to avoid the noise increases but power consumption are increases. Simulation result shows that speed of Sense Amplifier are increased by 11% at same time the power dissipation reduced by 80%.

Keywords – Sense Amplifier (SA), CLSA, BB-CLSA, Offset voltage, Sensitivity.

I. INTRODUCTION

Static random access memory (SRAM) that occupies a large area in a digital LSI system is an indispensable building block for digital signal processing. Data stored in an SRAM cell are read by a sense amplifier circuit. The sense amplifier amplifies the voltage or current difference between two bit lines, BL and BLB, connected to the SRAM cells. So the sense amplifier (SA) is the most important peripheral circuits in memory devices. The choice and design of Sense Amplifier robustness of bit line sensing impacting read speed and power [1]. Due to variety of Sense Amplifiers in semiconductor memories and the impact they have on final specs of memory, the sense amplifiers have become a separate class of circuit. Sub threshold operation of MOSFETs has been attracting much attention as an alternative to conventional low-power techniques [1].

The LSIs that operate in the sub threshold region of MOSFETs can achieve ultra-low power dissipation compared to conventional circuit design. Sub threshold operation, however, degrades the speed of digital circuits due to the extremely low drive-current of less than microampere. Sub threshold logic also provides extremely low power consumption since the power supplies are kept below the threshold voltage and the small sub-threshold current of MOS transistors is used as drive current. But in most of the implementations using sub threshold MOS circuits, body effect i.e. dependence of sub-threshold current on potential difference between body or substrate and source terminal (V_{SB}) is either neglected or it has not been taken into account using simplified equation. In deep submicron technology, body effect cannot be neglected. Body effect degrades the linearity of the circuit due to nonlinear behaviour of transconductance of MOS transistor with respect to input. So amplifiers play a major role in the functionality Performance and reliability of memory circuits. In a sense amplifier, precharging of the sense amplifier is required for correct sensing and amplifying. The pre-charge time generally determines the speed of the sense amplifiers.

Therefore, a sense amplifier circuit with a high-speed pre-charge is strongly required. In particular, the sense amplifier performs the following functions namely.

A. Amplification

In certain memory structure such as the DRAM, amplification is required for proper functionality since the typical circuit swing limited to 100 millivolts

B. Delay Reduction

The amplifiers compensate for restricted Fan out driving capability of the memory cell by accelerating The bitline transition or by detecting and amplifying small Transition on the bitline to large signal output

C. Power Reduction

Reducing the signal swing on bit line can eliminates a substantial part of power dissipation related to charging and discharging of bit

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

lines [6, 7].

General parameter characterizations of a sense amplifier are

Gain- V_{out}/V_{in}

Sensitivity- Minimum detectable Difference signal.

Offset Voltage- Minimum difference between bit lines voltage at which sense amplifier gives altered outputs.

CMRR-Common mode rejection ratio

Simultaneous optimization of above parameter is a difficult task involving balancing the circuit complexity, lay out area, reliability power speed and environmental tolerances.

II. CONVENTIONAL SENSE AMPLIFIER

Figure 1 shows a schematic of a conventional CLSA [4], [5]. This CLSA consists of nine transistors. Transistors MP1, MP2, MN1, and MN2 form a cross-coupled complementary structure, and two bit lines, BL and BLB, are connected to the gate nodes of transistors MN3 and MN4. Unlike the Voltage sense Amplifier, the CLSA has its outputs isolated from the inputs.

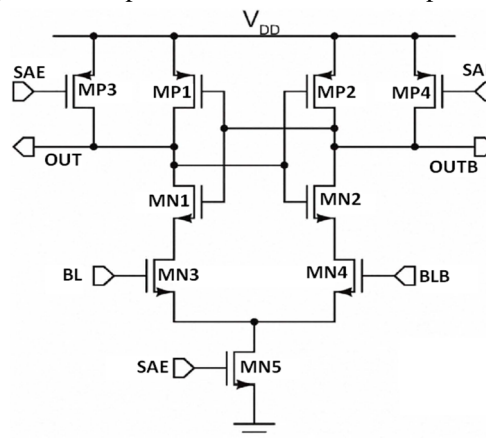


Fig 1: Schematic of conventional CLSA.

When a pre-charge control signal (SAE) is low, pre-charge transistors MP3 and MP4 turn On. Output nodes V_{OUT} and V_{OUTB} are then charged to the supply voltage (V_{DD}) through MP3 and MP4. When SAE is high, pre-charge transistors MP3 and MP4 turn off and transistor MN5 is on state. When the bit lines are connected to gate of transistors MN3 and MN4 by column selector circuit. Due to this an activated SRAM cell induces the small voltage difference between BL and BLB depending on the data stored in the cell, the cross-coupled complementary structure of the sense amplifier amplifies the voltage difference to a full swing voltage when control signal SAE kept high. Sensing must be performed after output nodes V_{OUT} and V_{OUTB} are pre-charged. So, the time for pre-charge determines the speed of the sense amplifiers. Therefore, a sense amplifier circuit capable of high-speed pre-charging is required.

III. BODY BIAS TECHNIQUE

One of the most promising ways to attain both high speed and low stand-by power consumption at low supply voltage is to modulate the threshold voltage of MOS (V_T) transistor electrically by applying source-to-body voltage (V_{SB}) at body terminal. A MOS transistor can be operated at a lower threshold voltage or higher threshold voltage by using body relation given by following equation biasing techniques. In this V_T is modulated by V_{SB} .

$$V_T = V_{TO} + \gamma \left(\sqrt{|2\phi_F| + V_{SB}} - \sqrt{|2\phi_F|} \right)$$

Where V_{TO} is the threshold voltage at $V_{SB} = 0V$ and depends on the manufacturing process. V_T is threshold voltage other than 0 of V_{SB} , γ is the body effect coefficient, ϕ_F is the surface potential at threshold and finally V_{SB} is the source to body voltage of MOS transistor.

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

the power dissipation of the sense amplifiers.

In the simulations, the bit lines were first discharged with a SRAM cell and the sense amplifiers amplified the voltage difference. Pre-charging was then evaluated. Sense amplifier enable when minimum detectable signal 50 mV. Sense amplifier' Speed are increased when corresponding Vdd are increases but corresponding power dissipation are also increases.

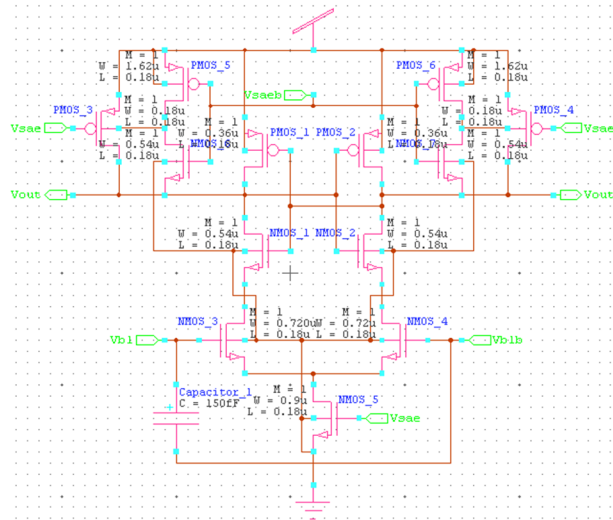


Fig.3. Implementation of body bias controlled CLSA

Pre-charging was then evaluated. Sense amplifier enable when minimum detectable signal 50 mV. Sense amplifier' Speed are increased when corresponding Vdd are increases but corresponding power dissipation are also increases. When we increases threshold voltage of input transistors corresponding delay are also increases. The main reason of power consumption during high Vdd is time window of transition region are large so there device found more time to short between Vdd and ground.

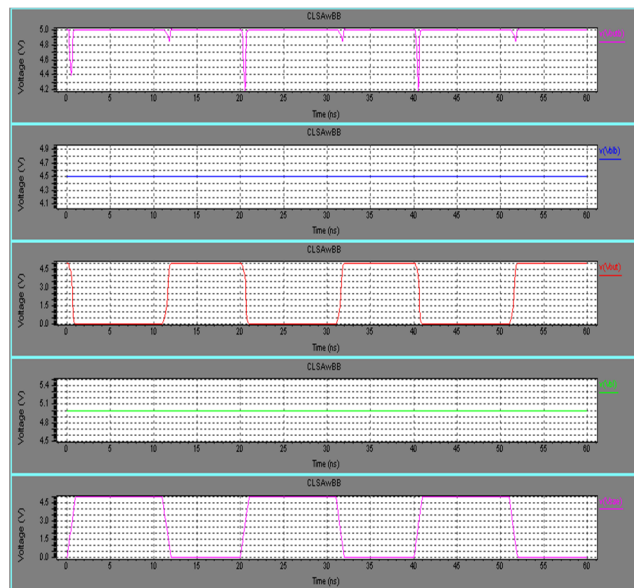


Fig.4: Simulated Waveform of sense amplifier

It also computed from the formula $P = CV^2F$. Offset voltage of sense amplifiers arise from unavoidable mismatch in the differential mismatch at differential stage caused by mismatches in transistor pair, drain current drain resistance. In the case of sensitivity when we increases the threshold, corresponding sensitivity increase because it take more time to sense the signal. In the case of CMRR for any amplifier it value should be high. Same applicable or sense amplifier also. Speed of sense amplifier increases when CMRR

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

increases the reason behind that better CMRR helps to suppressed common mode signal.

VI. RESULT AND ANALYSIS

Analysis and comparison of various parameters of CLSA & BB-CLSA is shown in this section

Table 1: Delay and Power dissipation with varying supply voltage

VDD (V)	CLSA		Body Biased CLSA	
	Delay (pS)	Power dissipation (μW)	Delay (pS)	Power dissipation (μW)
5	199.43	227.585	179	120.505
4	202.48	232.025	211.13	74.045
3	219.98	16.635	221.98	28.13
2	297.84	24.225	241.04	12.695
1	480.43	3.54	467.59	5.25

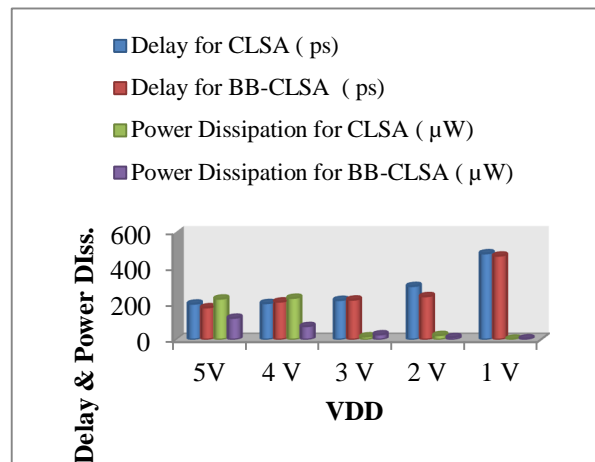


Fig 5: Graph b/w Delay and power with varying supply voltage

VII. CONCLUSION

We Compare the results of CLSA and body bias controlled -CLSA sense amplifier with using a technique called body bias controlled technique for improving high-speed pre-charging. The pre-charge time decreased by 11% and power dissipation decreased by only 80% compared to the conventional CLSA.

REFERENCES

- [1] Chotaro Masuda, Tetsuya Hirose, Kei Matsumoto, Yuji Osaki, Nobutaka Kuroki, and Masahiro Numa. "High Current Efficiency Sense Amplifier Using Body-Bias Control for Ultra-Low-Voltage SRAM". IEEE Transaction; Pp:978-1-61284-857; 2011
- [2] Janm Rabaey, Anantha Chandakasan, Borivoje Nikolic. "Digital Integrated Circuits", Second Edition, PHI Publication 2008.
- [3] Tuli Dake and Erhan Ozaleveli "A Precision High-Voltage Current Sensing Circuit" IEEE Transaction on CIRCUIT and SYSTEM Vol-55 pp: 1197-1202; JUNE 2008.
- [4] Sherwin Paul R. Almazan, Zarsuela, Anastacia P. Ballestil, Louis P. Alarcon "A Study on Effect of Varying Voltage Supply on the Performance of voltage Sense Amplifier for 1 T DRAM Memories. IEEE pp: 108-112, ICSE 2008.
- [5] Antonino Conte, Gianbattista Lo Giudice P. alumbo, Alfredo "A High Performance Very Low Voltage current sense amplifier for Nonvolatile Memories" IEEE JOURNAL of SOLID STATE CIRCUIT. Vol -42 No 2 pp: 507-514, Feb. 2005.
- [6] Tang Young, Feng Quan Yuan, Pictor Nasalski "A New Flash Memory Sense Amplifier In 0.18μm CMOS Technology" IEEE SYMPOSIUM of QUALITY ELECTRONIC DESIGN pp: 138-141 2005.
- [7] Joseph F. Ryan and Benton H. Calhoun "Minimizing Offset for Latching Voltage-Mode Sense Amplifier for Sub-threshold Operation" 9th International Symposium on Quality Electronic Design pp: 127-132, 2008.

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

- [8] Sreerama Reddy G M, P. Chandrasekhara Reddy "Design and Implementation of 8k-bit low Power SRAM in 180-nm Technology" Proceedings of the International MultiConference of Engineers and Computer Scientists 2009 Vol II IMECS 2009, March 18-20, 2009, Hong Kong.
- [9] Ya -Chun Lai and Shi-Yu Huang "Resilient and Power Efficient Automatic -Power Down Sense Amplifier for SRAM Design" IEEE Transactions on Circuits and Systems, Vol 55, No.10, October 2008.
- [10] Anantha P. Chndrakasan and Robert W.Brodersen,"Minimizing Power Consumption in Digital CMOS Circuit" IEEE Vol 83, No 4, pp: 498-521, April 1995.
- [11] Bao Nguyen and W.David Smith "Nulling Input Offset Voltage of Operational Amplifiers" Mixed signal Products, Texas Instruments, pp:1-14, August 2000.
- [12] Anantha P. Chandrakasan, et al. "Next Generation Micro-power Systems," IEEE Symposium on VLSI Circuits, 2008.
- [13] K. Ueno, et al. "CMOS smart sensor for monitoring the quality of perishables," IEEE JSSC, vol. 42, pp. 798-803, 2007.
- [14] Pavlov and M. Sachdev, CMOS SRAM Circuit Design and Parametric Test in Nano-Scaled Technologies, Springer 2009.
- [15] T. Kobayashi, et al. "A Current-Controlled Latch Sense Amplifier and a Static Power-Saving Input Buffer for Low-Power Architecture," IEEE JSSC, VOL. 28, NO. 4, APRIL 1993.
- [16] Hsu, et al. "New Current-Mirror Sense Amplifier Design for HighSpeed SRAM Applications," IEICE TRANSACTIONS on Fundamentals of Electronics, Communications and Computer Sciences, VoL.E89-A, No.2, pp. 377-384, 2006.
- [17] Ratan Lal Regar, Kumkum Verma, Sanjay Kumar Jaiswal and Dheeraj Jain. "Design of High Speed Body bias controlled Voltage Latch Sense Amplifier". IEEE Transaction 2013 International Conference on Machine Intelligence Research and Advancement; Pp:383-386; 2013



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)