



IJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 8 Issue: V Month of publication: May 2020

DOI: <http://doi.org/10.22214/ijraset.2020.5114>

www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com

Prediction of Road Lanes for Driver Assistance System

Vishal Singh Rathore¹, Abhay Kumar²

¹ UG Scholar, ² Professor, School of Computing Science and Engineering, Galgotias University, Uttar Pradesh 203201, India

Abstract: This paper explains about detecting lanes width. Width of lane is calculated by using lane detection algorithm. Vision system is deployed in autonomous vehicle system because the camera sensor provide of the encompassing environment the developed project obtained during human operation. Other than camera's exact viewpoint along with the track thickness is received by active standardization. The preferred point of view uses predicting track transforming thickness and therefore the process of tracing to trace track spotting and explain location of track markings on each parts effectively when other part is obstructed. The travelable lane knowledge is very important specific in unorganized structure.

Keyword: Advanced Driver Assistance System, Finite state machine, Adaptive cruise contro

I. INTRODUCTION

Driving[2] assistance system and analysis of self determining vehicles involves data of paths to select guiding ways of vehicles. Barrier perception system can be concerned to decide the location of blocks, which is very important for handling harmless. Barriers[3] on traveling roads involves high concentration, so statistics of blocks and travelling roads is necessary to conclude the effect of block on the driving for protection. Moreover, the outcome of road observation is too effected by obstruction of blocks. So, how to get better to obstruction is a clue to path perception. Here in survey, knowledge of paths are computed by graphical calculation and active standardization. The Finite State Machine (FSM) is useable for the extriction of path properties[9], and merged with path detecting to express absolute knowledge of lane with the familiar knowledge of single part of the path where the another part is blocked. Path perception will be initialized by taking path properties[9,10]. for instance, there is path marking on each parts of the moving path, while time to time only the borders of the path remains without any path evaluating[5]. Many portions of path markings are similar to two similar ribbons with minor difference, such as existing linear or bend, existing linear lines or dotted lines[4]. Obstruction of buildings, shrubs and their shades forms it harder to trace the locations of paths, and their clearance, which differs with radiance, and also effect the outcome of observation[4]. A number of analyst use boundary observation to manage the extriction of path properties[2]. They divide the gained positions to determine path borders. The benefits of this method is that even without path labeling, paths still could be formed only with the knowledge of boundary[2]. But, issues also found. Such as, border observation is time-taking because of large period of evaluation[2] so it's difficult to be a synchronous system. Moreover border observation involves properties of boundary on paths each parts.

II. LITERATURE SURVEY

A. Camera Model

The location of any place in this 3-D globe coordinates (X, Y, Z) forecasted to a 2-D representation level (u, v) can be computed using viewpoint and position variation. Plotting a 3-D location on to the 2-D representation stage is a many-to-one conversion [6]. The Y, Z coordinates are linked to the v -coordinate on which the end is forecasted, while the X and Z coordinates requires the forecasting on to the u -coordinate [6]. In contradiction, plotting a place on the frontline view of the camera on an image plane is a one-to-one conversion. Because the place is on the view, it's Y -coordinate can be concluded, and thus the Z -coordinate controls where on the v -coordinate the point is forecasted[6]. The three gradients are computed clockwise when glancing along the turning axis concerning the origination. Figure 1 shows a camera model for figure development method, where O_w represents the origination of the globe coordinates (X, Y, Z) , and O_i denotes the origination of the image coordinates (u, v, w) . Hence, this process can be used to approximate the interspace connecting the camera and a point $P1$ [6].

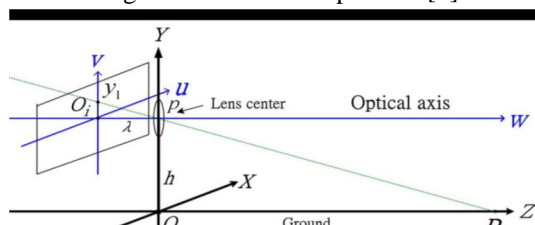


Fig.1. Camera model for figure development.

B. Lane Marking Extraction

Lane Marking Extraction[9] (LME) Finite State Machine (FSM) was recommended to take out the characteristics of byroad labeling. Two points, PA and PB , are placed in each tier for observation. The [9] gap connecting the two points is dm . When PA and PB proceed concurrently from the left to the right, the variation between their gray levels Gd , would transform respect to them. Every [9] time when proceeding single element to the right, a new Gd named Gin rises. Gin is an input signal of LME FSM. If properties of path labeling occurs in the region m where PA and PB are proceeding, the input of Gin would form the situation of LME FSM changes from state 0 one by one to state 5. Hence [9], the location and dimension of each path labeling can be observed based on the changes of the state.

$$dm = \text{ratio} \times wm (N)$$

where dm means the interspace between PA and PB . In Fig. 4, when properties of path labeling occurs in their image, their respective situations to PA and PB may be five feasible types because of the right move of PA and PB .

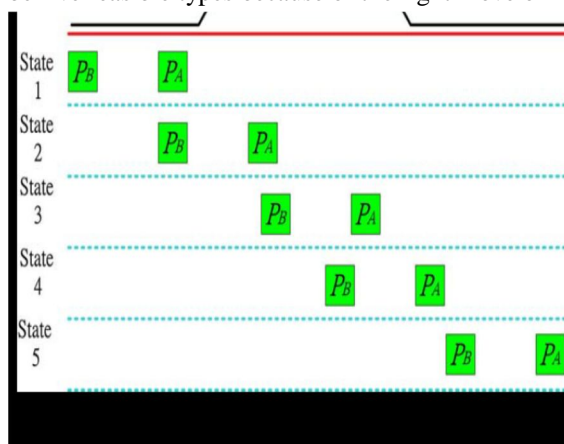


Fig. 4. With various shapes, path labeling position with PA & PB .

C. Single and Tracking Mode

The [4] capture of path labeling is classified as single mode and tracking mode. In single mode, the searching range is the entire image. Features similar to lane labeling are viewed for by fuzzy reasoning. After [4] the features are found, the tilt and the width of the lane and the lane marking would be calculated with dynamic calibration. Then the [4] network will launch the search again to make the result more precise. Because the slant of camera and the width of the lane needs knowledge of two lanes, the frontier part of the path is used for calibration. When the detection of single mode is completed, the tracking mode is applied. Some lane labeling are dash lines and some may be occluded. Therefore, the found features of lane marking cannot represent the lane in the whole area. Lane [4] markings usually would not change a lot in the consecutive images, so the search area of lane markings is confined in the area close to the discovered spot in the last image in the tracking mode. So the two markings of the front lane close to the camera are both needed in the single mode.



(a) Capture on road paths.




(b) Capture on lane with two middle line.

III. PROPOSED SYSTEM



(a) Analysis of slope angle

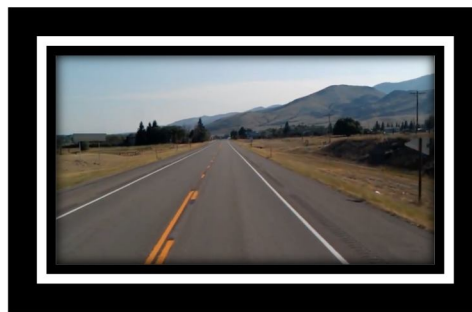


(a) Compensation for indifference knowledge regarding paths.

As here seen in (a), four huge black marks upon drive marking are utilized to analyze angle, and two black arc denotes the last and the first borders. (b) indicates that the last side does not have any knowledge about path labeling while the other side still would be visible. The angular location of the right path labeling can be calculated with the knowledge about the breadth of the path. At last the group are calculated and the two groups with the most number of lines in them are the one that are considered as lanes.

A. Lane Detection Algorithm Model

This section will describe the algorithms used for lane detection that have been implemented on the demonstrator of this project. The lane detection process starts with grabbing a frame from the Raspberry Pi camera and applying a few preprocessing steps to the image. The following step is to convert the image to gray scale to prepare it for next coming operations. Figure shows how the acquired image looks in the first stages of the lane detection process. The gray scale image is the input to the canny edge detection function.


As described in the state of the art section the output of the canny function is a thresholded image where all the pixels that are part of edges are set to white and all pixels that are not part of edges are set black.

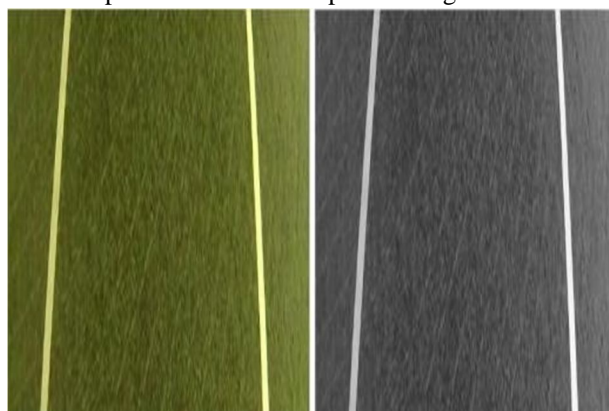

(a) Input image

(b) Converted to grayscale

This thresholded image is used as an input to the Hough transform function that is used for line detection. The two figures below show the input image with lines drawn in different colors. The different colors of the lines indicate what kind of line it is. The red lines in the image are all the lines that the lane detection algorithm finds. From the red lines that are close to each other, blue lines indicate the center of the road marking. The green line show the center of the road lane. The concept behind the lane detection algorithm is described below figure.

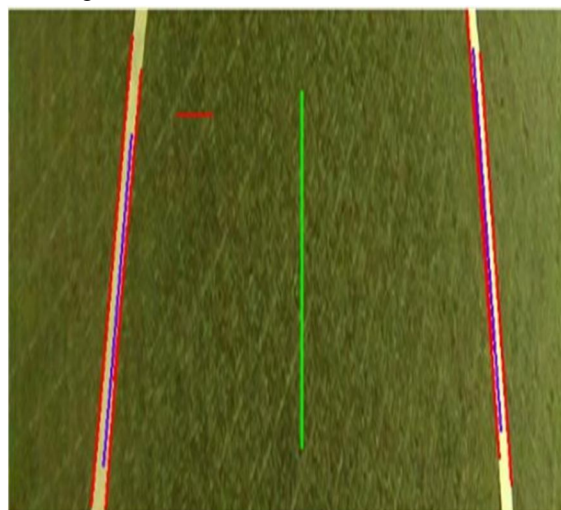

IV. RESULT AND DISCUSSIONS

The safety of the developed system was guaranteed by ensuring that the host vehicle remain outside the safe time gap during overtaking. the host vehicle, cars was able to execute the overtaking maneuvers without exceeding a safe limit longitudinal acceleration, headings angle, yaw rate, and velocity, thus, maintaining the comfort level while driving. The characteristics of fuzzy controllers that were observed during its performance validation stage were quite satisfactory. fact based on the results of performance validation, System was concluded that the developed fuzzy controllers were suitable for pplication to steering control even at a higher speed. the system is robust enough.

The developed system is feasible since it uses the sensors and ADAS systems (ACC) which are available in the automotive market. It has shown to a very capable structure that divides tactical planning from decision-making and control. Also, the development of subsystems is performed independently which might be beneficial to the future optimization of the system under study and in implementation into a real vehicle. The system can be said to be optimized for real-time implementation.

V. CONCLUSION

The problem of autonomous highway overtaking was solved. The test protocol for highway overtaking assist was developed which was further used for the development of an automated driving system for the autonomous highway overtaking. The developed test protocol was validated analytically using mathematical equations and the automated driving system was tested virtually. The simulation results were found to be in accordance with the desired host vehicle behavior. The system drives the host vehicle through the selected use cases in a safe and efficient manner, while interacting with target vehicles operating in the traffic environment. The proposed autonomous highway overtaking system has the characteristics like Safe, comfortable, and robust.

Feasible and modular frame of autonomous highway overtaking system. The developed system is feasible since it uses the sensors and ADAS systems. The development of subsystems performed independently which might be beneficial to the future optimization of system under study and implementation into a real vehicle.

The simulation for the flying overtaking were also carried out. The future extension of this thesis could be test procedure development, and verification and validation of the control strategy for remaining two categories, Piggy backing.

REFERENCES

- [1] B. F. Wu and C. T. Lin, "Real-Time Fuzzy Vehicle Detection Based on Contour Size Similarity," *Int. J. Fuzzy Systems*, vol. 7, No. 2, pp. 54-62, June 2019
- [2] B. F. Wu, C. T. Lin, and C. J. Chen, "A Fast Lane and Vehicle Detection Approach for Autonomous Vehicles," in *Proc. the 7th IASTED International Conference Signal and Image Processing*, Aug., 2018, pp. 305-310.
- [3] A. Broggi, M. Bertozzi, Lo Guarino, C. Bianco, and A. Piazzzi, "Visual perception of obstacle and vehicles for platooning," *IEEE Trans. Intelligent Transport. Syst.*, vol. 1, no. 3, pp. 164-176, Sept. 2019.
- [4] M. Bertozzi and A. Broggi, "GOLD: A parallel real-time stereo vision system for generic obstacle and lane detection," *IEEE Trans. on Image Processing*, vol. 7, pp. 62-81, Jan. 2018.
- [5] Y. S. Son, W. Kim, S.-H. Lee, and C. C. Chung, "Predictive virtual lane method using relative motions between a vehicle and lanes," *Int. J. Control, Autom. Syst.*, vol. 13, no. 1, pp. 146-155, 2018
- [6] S. Nedeveschi, R. Schmidt, T. Graf, R. Danescu, D. Frentiu, T. Marita, F. Oniga, and C. Pocol, "3D lane detection system based on stereovision," in *Proc. IEEE Intell. Transp. Syst. Conf.*, Oct. 2019, pp. 161-166.
- [7] J. McCall and M. M. Trivedi, "Video-based lane estimation and tracking for driver assistance: Survey, system, and evaluation," *IEEE Trans. Intell. Transp. Syst.*, vol. 7, no. 1, pp. 20-37, Mar. 2015.
- [8] C. Gackstatter, S. Thomas, P. Heinemann, and G. Klinker, *Advanced Microsystems for Automotive Applications*. Berlin, Germany: Springer-Verlag, 2010, pp. 133-143.
- [9] N. Apostoloff and A. Zelinsky, "Robust vision based lane tracking using multiple cues and particle filtering," in *Proc. IEEE Intell. Vehicles Symp.*, Columbus, OH, USA, Jun. 2016, pp. 558-563.
- [10] O. G. Lotfy, A. A. Kassem, E. M. Nassief, H. A. Ali, M. R. Ayoub, M. A. El-Moursy, and M. M. Farag, "Lane departure warning tracking system based on score mechanism," in *Proc. IEEE 59th Int. Midwest Symp. Circuits Syst. (MWSCAS)*, Abu Dhabi, United Arab Emirates, Oct. 2016
- [11] O. Russakovsky, J. Deng, H. Su, J. Krause, S. Satheesh, S. Ma, Z. Huang, A. Karpathy, A. Khosla, M. Bernstein et al., "Imagenet large scale visual recognition challenge," *International Journal of Computer Vision*, vol. 115, no. 3, pp. 211-252, 2015.
- [12] G. J. Brostow, J. Fauqueur, and R. Cipolla, "Semantic object classes in video: A high-definition ground truth database," *Pattern Recognition Letters*, vol. 30, no. 2, pp. 88-97, 2009.



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)