



iJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 8 Issue: V Month of publication: May 2020

DOI: <http://doi.org/10.22214/ijraset.2020.5264>

www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com

Comparative Study on Seismic Behaviour of RC Frame Building with and without Staircase

Sneh B. Patel¹, Arjun M. Butala²

¹Postgraduate, ²Ass. Prof, CED, U.V. Patel College of Engineering, Ganpat University, Gujarat, India

Abstract: In this paper, analysing the effect on building with staircase and without staircase during earthquake have been studied. In design of building, the staircase is generally not analysis & considered. Staircase is secondary Structural member in the RC frame building. Staircase is the one of the main portions of the building. So, Not considering in Analysis & design it causes vulnerable damage in the structure. Here comparing the staircase with different location comparing without staircase to check how seismic effect affect the building when staircase is placed different location and absent of staircase in the building.

Keywords: Stair case, Story Drift, Story Displacement, Earthquake, Location.

I. INTRODUCTION

Earthquake is an impulsive event and acts quite differently. The force generated by seismic action of earthquake is different than other types of loads, such as, gravity, Dead load, Live load and wind load. It strikes the weakest spot in the whole Structural frame building. Ignorance in structural design and poor quality & maintenance of construction result many weaknesses & faults in the structure member and Structural Building also, thus cause vulnerable damage to life and Structural property of building. In RC frame structural buildings, the primary structural system to resist Lateral & Gravity load are beams and columns. Besides, primary frame structural system, some structural member also contributes to lateral load resistance. These elements fall in the category of secondary systems. Secondary system can be structural secondary like staircase, structural partition etc and non-structural secondary like storage tanks, machinery etc. A special case of structural secondary members which are normally designed for non-seismic force are concrete staircase. In the present study, the effects of staircase on the seismic performance of the RC frame structural buildings of different location of staircase have been studied. In this paper with different structural seismic parameter e.g. Story drift & Story displacement result are studied.

II. GEOMETRY & PARAMETER

A. Geometry Parameter

TABLE -1: GEOMETRY PARAMETER

Total Height of Building	20m
Column Size	450mmX450mm
Beam Size	230mmX450mm
Slab Thickness	150mm
Staircase Slab Thickness	200mm
Story Length in X & Y Direction	20m
Each Story Height	3m
Total Building height	19.5 m
Time Period in X & Y-Direction	0.3823 Sec.
Live load on Slab	2 kN/m ²
Live load on Stair case	3 kN/m ²
Floor Finish on slab	1.25 kN/m ²
Floor finish on Stair case	2.25 kN/m ²
Self-Weight	Auto Calculate by Software (Etabs)
Seismic Zone	IV
Soil type	Medium

B. Geometry View

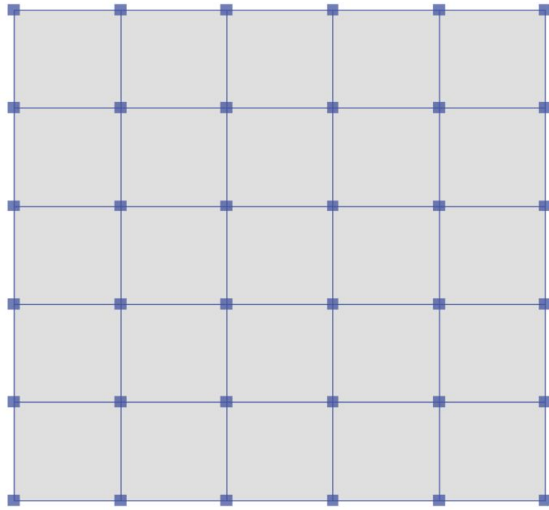


Fig-1: Building without staircase

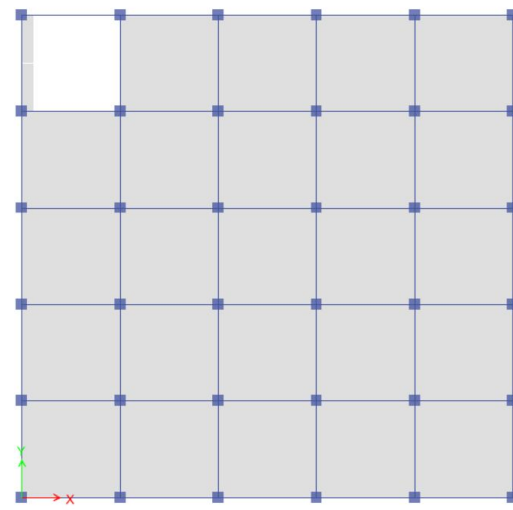


Fig-2: Building with staircase at one corner location

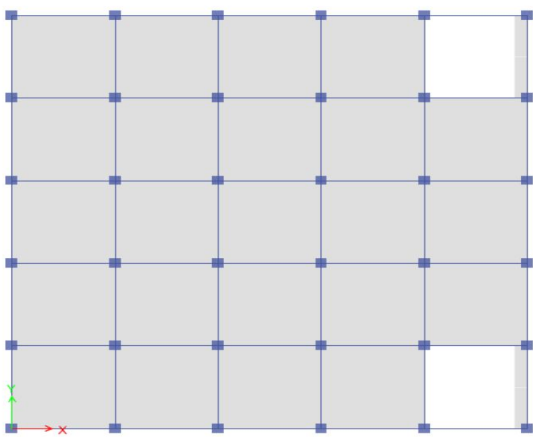


Fig-3: Building with 2-staircase at alternate corner location

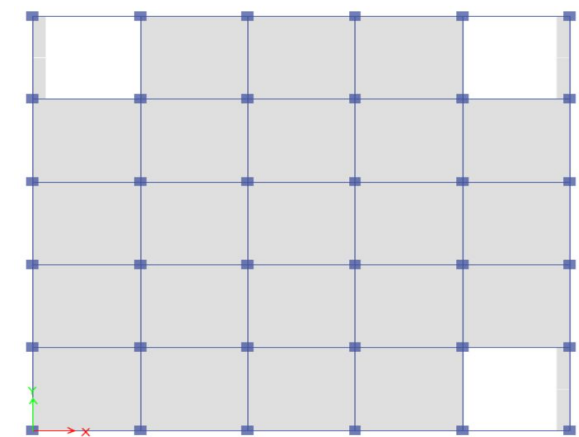


Fig-4: Building with 3-staircase at three corner location

III.RESULTS AND COMPARISON

A. Displacement Results

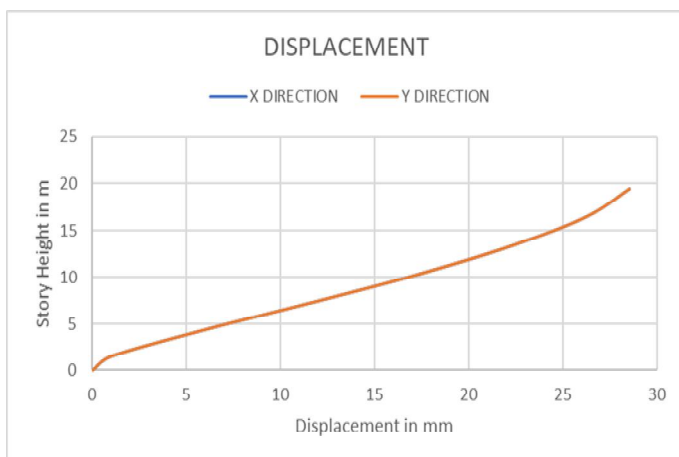


Fig-5: Building without staircase

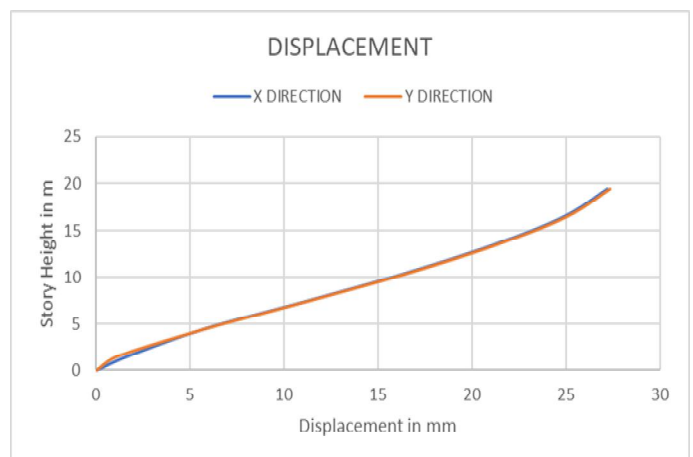


Fig-6: Building with staircase at one corner location

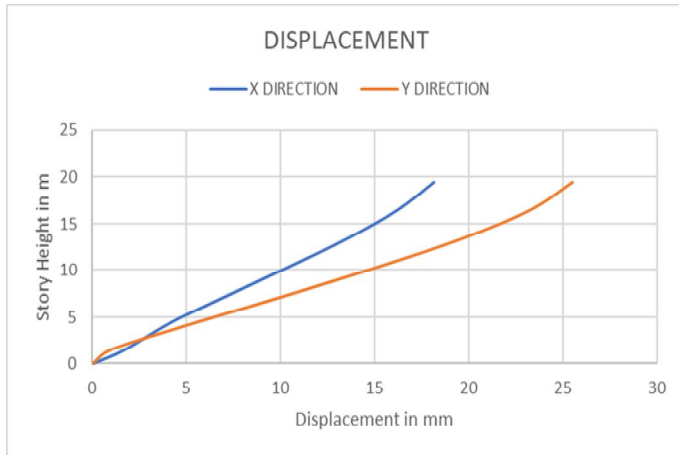


Fig-7: Building with 2-staircase at alternate corner location

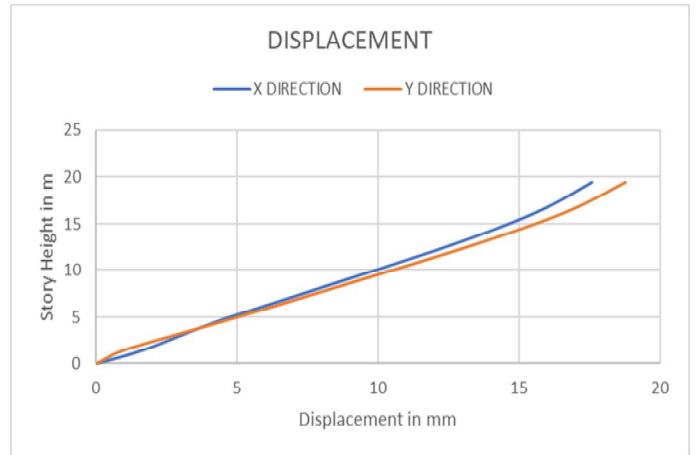


Fig-8: Building with 3-staircase at three corner location

B. Drift Result

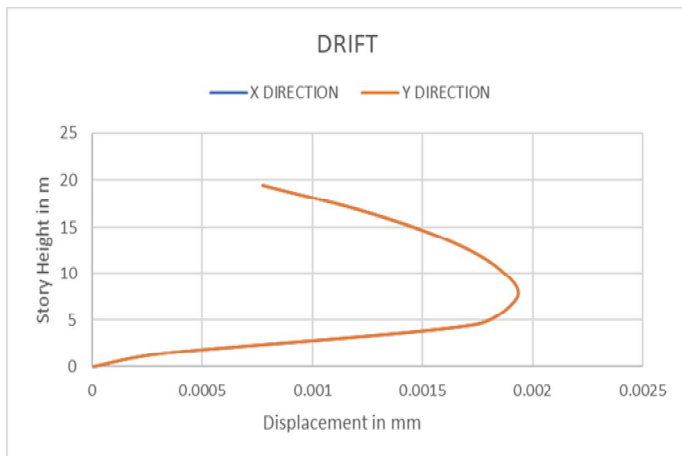


Fig-9: Building without staircase

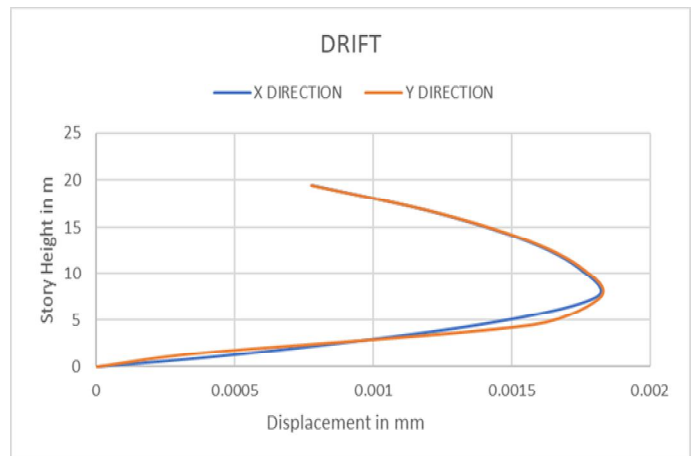


Fig-10: Building with staircase at one corner location

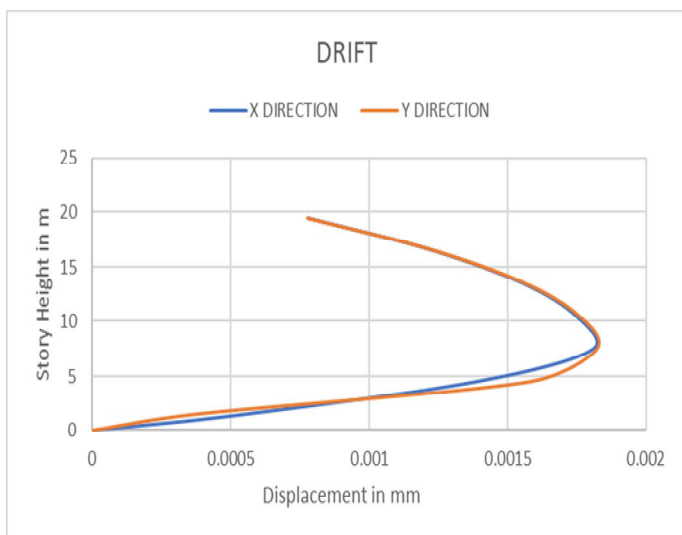


Fig-11: Building with 2-staircase at alternate corner location

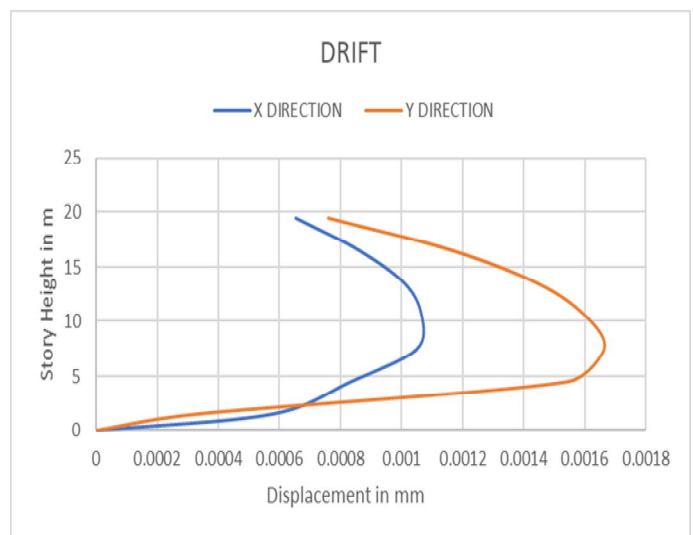


Fig-12: Building with 3-staircase at three corner location

C. Comparative Displacement Value in X-Direction & Y-Direction

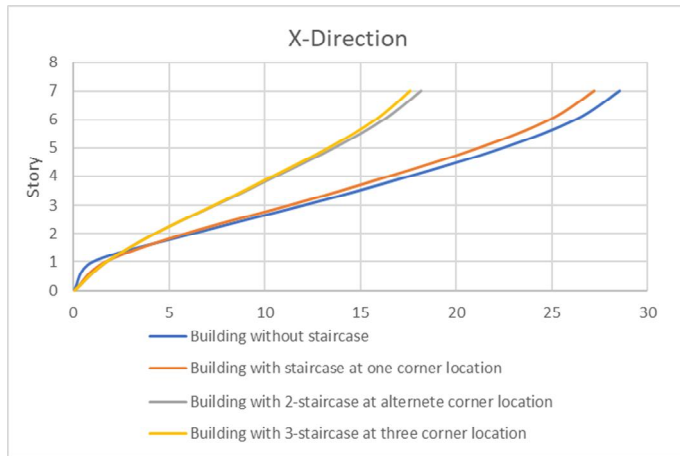


Fig-13: All model Displacement in X-Direction

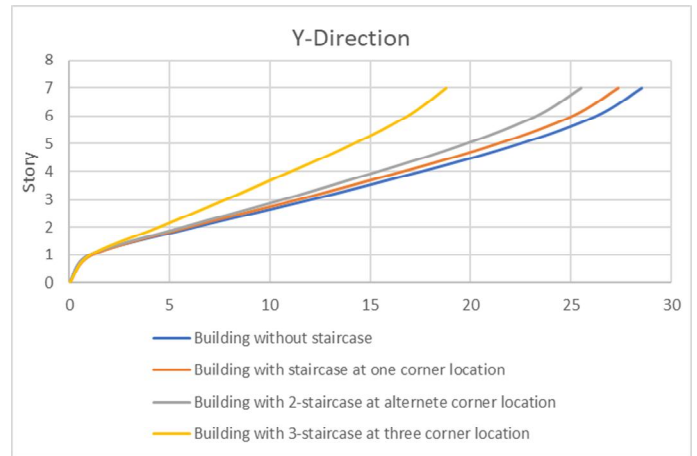


Fig-14: All model Displacement in Y-Direction

D. Comparative Story Drift Value in X-Direction & Y-Direction

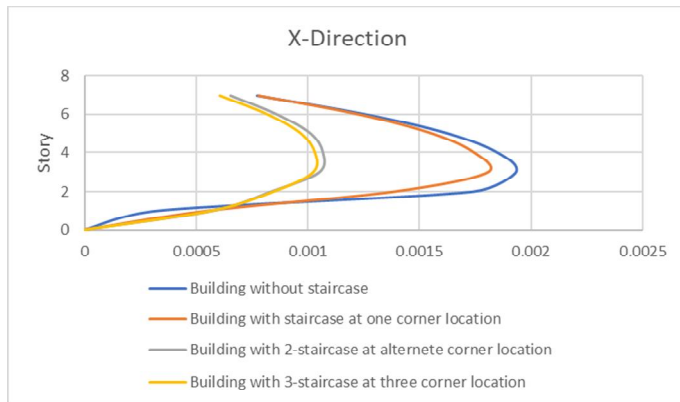


Fig-15: All model Story Drift in X-Direction

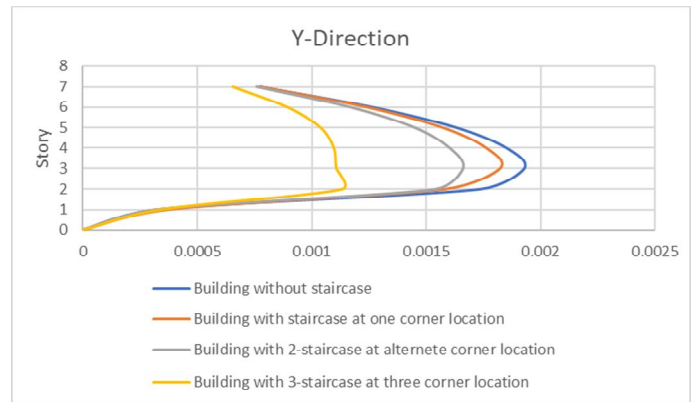


Fig-16: All model Story Drift in Y-Direction

IV. CONCLUSIONS

From the result made by the study of G+5 Building, following conclusions have been made.

- A. Having staircase in the building tremendously increase stiffness in the building.
- B. Story displacement value is decrease with staircase model comparing without staircase model.
- C. In tall building drift value control by increase shear capacity.
- D. Staircase cause change in column force, that affected by the position of the staircase.
- E. After comparing the result of story drift there is decrease in story drift with the increase the number of stairs in a building as compare to without stair.

REFERENCES

- [1] "Seismic Performance of Stairs in The Existing Reinforced Concrete Building", The 14th World Conference on Earthquake Engineering October 12-17, 2008, Beijing, China.
- [2] "Seismic Analysis of High-Rise R.C Frame Structure with Staircase at Different Location", The International Journal of Engineering and Science (IJES).
- [3] "Analysis and Design of Staircases against seismic loadings ", 4th ECCOMAS Thematic Conference on Computational Methods in Structural Dynamics and Earthquake Engineering.
- [4] "Effects of Staircase on the Seismic Performance of RCC Frame buildings", International Journal of Advance Engineering and Research Development.
- [5] "Effects of Staircase on the seismic Performance of RCC Frame building", International Journal of Engineering Science and Technology (IJEST).
- [6] "Seismic Effect on Staircase in Performance of RC Frame Building", International Research of Engineering and Technology (IRJET).



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)