



# **iJRASET**

International Journal For Research in  
Applied Science and Engineering Technology



---

# **INTERNATIONAL JOURNAL FOR RESEARCH**

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume: 8      Issue: VI      Month of publication: June 2020**

**DOI: <http://doi.org/10.22214/ijraset.2020.6108>**

**[www.ijraset.com](http://www.ijraset.com)**

**Call:  08813907089**

**E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)**

# Assurance of Vehicle: A Multi-Sensor Approach

Brijesh Kr. Dubey<sup>1</sup>, Pushpendra Pal<sup>2</sup>, Ravi Raj Gautam<sup>3</sup>

<sup>2,3</sup>Student, (Electrical & Electronics), Pranveer Singh Institute of Technology, Kanpur.

<sup>1</sup>Assistant Professor, (Electrical & Electronics), Pranveer Singh Institute of Technology, Kanpur.

**Abstract:** A multi sensor approach - based vehicle is essentially a coordinated bundle of individual mechanized frameworks working in show. This framework gives an exceptional strategy to control put and sleepy individuals. This framework contains a sensor like LiDAR, Alcohol, eye blink, smoke and temperature sensor implanted in the vehicles the undertaking is intended to forestall the Accident and to educate crisis about. The framework sensors like Alcohol sensor (which recognizes the utilization liquor by the driver and consequently bolts the motor so the driver can't begin the vehicle) temperature and smoke sensor (which detects any fire Accidents inside the motor of the vehicle and cautions the driver about fire crisis), LiDAR sensor (which consistently screens the close by snags to the vehicle and alerts the driver during murkiness condition) and weight sensor related with GSM and GPS system (which distinguishes the incident to the vehicle and instruct about the disaster and educate about the Accident to predefined number with the real area where the Accident got occurred) and naturally imparts the sign to ringer, GSM and LCD. Right now yields of sensors are given to the microcontroller for correlation. On the off chance that the worth ranges as far as possible, at that point naturally GSM will send the SMS, signal will create sound and LCD will show the message.

**Keywords:** LiDAR sensor, Eye blink (IR) sensor, GSM, GPS, Temperature sensor, Smoke sensor, Alcohol sensor, weight sensor, vehicle safety.

## I. INTRODUCTION

Vehicle incidents are commonly typical if the driving is inadequate. These happen on most factors if the driver is lazy or in occasion that he is alcoholic. Driver lethargy is seen as a huge factor in the vehicle incidents. It was shown that driving execution stall with extended tiredness with coming about Accidents containing over 20% of all vehicle incidents. Nevertheless, the presence lost once can't be re-winded. Pattern setting advancement offers some desire avoid these up fairly. This undertaking incorporates measure and controls the eye blink utilizing IR sensor. The IR transmitter is utilized to transmit the infrared shafts in our eye and the IR gatherer is utilized to get the reflected infrared light emanations. If the eye is closed strategies the yield of IR beneficiary is high regardless the IR recipient yield is low. This to comprehend the eye is shutting or opening position. This yield is accommodating reason circuit to show the alert. This assignment incorporates controlling setback due to unaware through eye blink (IR) sensor. Here one eye blink sensor is fixed in vehicle where if anybody loses mindful and show through alert. Vehicle following structures have conveyed this development to the ordinary presence of the standard person. Today GPS used in vehicle like automobiles, transport vehicles are ordinary sights in the city of made countries. These wheels are worked using 12V dc motor. The vehicle watching and security structure is a GPS based vehicle following system that is used for security application as well. All the present development support following the vehicle spot and status the GPS/GSM based system is one of the most critical structures, which fuse both GSM and GPS progressions. A vehicle test framework study was planned to accumulate physiological data for endorsement of this advancement. Framework for examination of physiological data, self-sufficient assessment of driver tiredness and headway of sluggishness recognizable proof and assurance of backslide models is shown. LiDAR sensor surrenders spatial knowledge of to 50 meters before the vehicle and there is a circumstance affirmation of 500 meters. This sensor surrenders spatial information on to 50 meters before the vehicle and there is a circumstance affirmation of 500 meters. Vehicles driving ahead and individuals by walking in like manner have an arrangement of traffic signals and on-road markings that are distinguished and have been consigned a spatial get-together. The data from short-go LiDAR sensors that are arranged all around the vehicle similarly as from long-expand LiDAR sensors with derived go recognizable proof limits gives data on the great and the LiDAR sensor helps in recognition of articles, walkers, vehicles or individuals. It makes a structure to distinguish objects that are proceeding onward road. This system distinguishes moving features based generally related to incorporate centers projection. Most of the extreme vehicles have prosperity quantifies yet negligible exertion vehicle with less security measures. So people's option for clear thing like safe and travel effortlessly adventure.

## II. LITERATURE REVIEW

Accidents resulting in any area not being followed very quickly to save the lives of explorers. GPS and GSM modules used for local area and send messages on a pre-recorded number. Squares important of these modes is a microcontroller, a setback parameter evasion, prosperity and security of drivers and gob well. Motor getting warmed up can cause important problems that our efforts to work with the way the engine temperature display. If the temperature exceeds an engine needs things, by the structure of the driver alert. The rate of accidents is extended from the ongoing back; the incident was to a large extent oversee vehicle to vehicle or any obstructions. In order to seek to sway between the vehicle we are using accelerometer associated with ARM processor to thwart a disaster. Accelerometer attached to the vehicle that triggered the airbags for safety reasons. The aim of the work is to develop an accident avoid vehicle braking system uses LiDAR sensors and to design vehicles with less human attention to drive. Currently in the vehicle there was no technology to Preventing accidents. But they have introduced a sensor to detect obstacles. We have designed the system uses LiDAR sensors for detecting obstacles and breaking system to stop the vehicle automatically. There is also another concept in this project. It is a vehicle automation. Monitoring the level of air in the tire vehicles only through it manually in the existing system. But we have designed that the level of air and fuel level and temperature level in the car will automatically monitor and if one case goes to a lower level than the level recorded, then will remind the driver to use voice module and LCD AVR displayed. At any point the incident due to the frontal crash explorer get really injured by a head. Airbag security tools proposed to just explode in moderate to exceptional frontal crash for reasons of human welfare. CO gas from the exhaust into the vehicle stops were destroyed or out of restricted air frame, etc. can lead to surprising end gob. Gas sensors are used for these centres look different gases; with significant exertion and is suitable for different applications. An HD camera nearest the LiDAR sensor is used to provide important data from this reality comes to vehicles. This vehicle is prepared to appear in the destination administered safely and cleverly then avoid the danger of human Bumbles. Many estimate that there is such a way area, capturing ID unite together to provide significant control of the vehicle. convincing strategy proposed for action to avoid accidents of vehicles to understand the block present in front of and beside the vehicle helpless. The driver made a warning to a method for the ringing and LED signs as a partition between the vehicle and reducing barriers and appear on the display board. The LiDAR sensor that condition of articles whether it is moving or static on the vehicle. This system is significant to observe vehicles such as bicycles, vehicles and individuals with walking through the even side of the vehicle. Another structure of dental products with unobtrusive and uses less power arranged things to get information from the driver sleepiness incidents and demonstrate knowledge of the drivers in the hope of setbacks. A decent course of action vehicle incident negligence system introduced by the inventor of alcohol has been proposed. The system is ready to alert the driver about deliriousness level by showing the condition in the LCD appears. It moreover creates alarm from combine to make the driver take care of their own condition and for others aware of combining districts. The most prosperity segments provide by this structure is at a raised level dazed driver is not permitted to drive the vehicle as the initial system will be disabled.

## III. PROPOSED SYSTEM

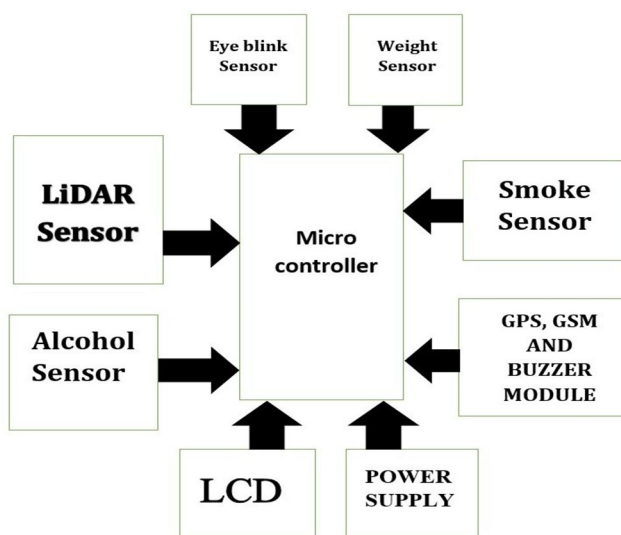


Figure 1. Block diagram of Proposed system.



As a result of nonattendance of thought, speed and new development manufactures the higher probability of Accident. In our country numbers of cases in road accident is so much higher than the other country in all over world according to WHO report. Right when accident happens, life of human loses, which is really huge. Exactly when road is curve or road is at that moment continuously number of accident occur. when the driver operates a car but at any instant of point, driver cannot see the vehicles at opposite side.

The both vehicles may be fast Out of this the two vehicles are foregoing each other and throughout they can't control their vehicles speed and So, Accident happen and huge life has lost. To vanquish this issue existing structure, we developed the new system where Accidents can be swearing off using LiDAR sensor. Exactly when vehicles are starting from right side then controller understands that the vehicles are beginning from right side so controller offers direction to the other side light. By then light will be sparkle or sign will ring on the left side.

When there is shining light or ringing signal on the left side then individual in the vehicle will understand that on the contrary side vehicles is accessible and driver will be alert. When the opposite sides of vehicles are reachable then apart sides light will be sparkling or bugger will ring and the other side driver will be attentive. Because of offering this hint the different sides vehicles drivers will be alert with the objective that they diminish their speed and drive mindfully. This structure avoids Accidents just as recuperation the significant human life.

#### A. Working Procedure

The Block Diagram of Proposed Framework is Delineated in figure 1; it consists of LiDAR sensor, Eye blink (IR) sensor, GSM, GPS, Temperature sensor, Smoke sensor, Alcohol sensor, weight sensor, Microcontroller, Buzzer and LCD.

#### B. LiDAR Sensor

It is utilized to identify the good ways from deterrents the collision can be maintained a strategic distance from. It is the totally based depend on the echolocation procedure. Transmitted sound waves ricocheted back and recovered with some time contrast that assists with figuring the separation.

#### C. IR Sensor

Infrared sensor produces to watch encompassing perspectives. It is used for the obstacle identification on road. An IR sensor gauges the warmth of an item and identifies the movement also. As a rule in the infrared range, all the items transmit some type of warm radiations. At the point when IR light falls on the photograph diode, the protections and these yield voltages change with respect to the greatness of the IR light got. This Eye flicker sensor is IR based. The Variation Across the eye will shift according to eye squint. On the off chance that the eye is shut methods the yield is high in any case yield is low. This to realize the eye is shutting or opening position. This yield is given to rationale circuit to demonstrate by the alert.

#### D. Alcohol Level Detection

Drowsiness of driver can cause setback avoidance that can be an explanation of death. MQ3 sensor with breath analyzer is utilized here to check the alcohol level.

#### E. GPS Module

The Global Positioning System (GPS) is a space based satellite route framework that gives area and time data in every climate condition, anyplace on or approach the earth. A GPS recipient computes its situation by absolutely timing the signs sent by GPS satellites high over the Earth. GPS information payload outline shows longitude and scope it assists with identifying accurate area of vehicle including date and time. It is also utilizing to determine or to decide the current location of vehicle driver. GPS module has POT earthenware receiving wire that empowers GPS routes to follow the item with high affectability. TTL sequential convention is utilized to speak with microcontroller.

#### F. GSM Module

GSM is a computerized remote correspondence convention for cell phones. It is given numerous other helpful highlights, for example, security, confirmation and also the capacity to change telephones without the requirement to reconfigure the Mobile phone with the presence of the SIM card.

### G. Power Supply

In this framework we are utilizing 5V power supply for microcontroller of Transmitter segment just as collector area. We are using rectifiers for converting the alternate current (A.C) into direct current (D.C) and use a step down transformer to step down or change the voltage level. Microcontroller during this work the miniaturized scale controller is assuming an enormous job.

### H. Weight Sensor

A weight sensor is a gadget for pressure estimation of gases or fluids. Weight is a presentation of the power required to keep a fluid from developing, and is normally expressed as far as power per unit region. A weight sensor generally goes about as a transducer; it produces a sign as an element of the weight forced. For the reasons for this article, such a sign is electrical.

### I. Micro-Controllers

Micro-Controllers were initially utilized as segments in muddled procedure control frameworks. In any case, in view of their little estimate and low cost, Micro-controllers are presently additionally being utilized in controllers for singular control circles. The reason for this work is to show control hypothesis that is applicable to the investigation and structure of Micro-controller framework with an accentuation on fundamental idea and thoughts. It is expected that a Microcontroller with sensible programming is accessible for calculations and re-enactments such huge numbers of dull subtleties can be left to the Microcontroller. The control framework configuration is additionally completed up to the phase of usage as controller programs in low level OR in C-Language for computing construct.

### J. Alcohol Sensor

This Alcohol sensor is appropriate for distinguishing Alcohol fixation on your breath, much the same as your normal Breathalyzer. Sensor gives a simple yield dependent on liquor focus.

### K. LCD

LCD is utilized to show the information. LCD we have utilized is 16x2 for example 16 characters in 1 line, absolute 2 lines are there. We could have utilized a superior goals LCD yet because of impediment of cash and for venture necessity 16x2 LCD is adequate.

### L. Temperature Sensor

A temperature sensor is a gadget, commonly, a thermocouple or RTD that accommodates temperature estimation through an electrical sign. A thermocouple (T/C) is produced using two different metals that create electrical voltage in direct extent to changes in temperature.

## IV. RESULT



Figure 2. An image showing the Smoke alert when the level of smoke is exceed.



Figure 3. An image showing the drowsiness alert when eye blink is more than 20 sec.



Figure 4. An image showing the temperature, humidity and distance observation by temperature and LiDAR sensor respectively.



Figure 5. An image showing the concentration of alcohol.



Figure 6. An image showing the latitude and longitudes of the vehicle location.

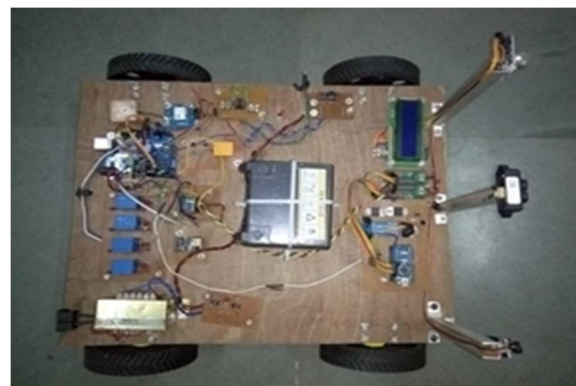


Figure 7. An image showing the complete model of multi-senor approach based car.

## V. APPLICATION

This gadget gives a lot of cutting edge offices in now daily's life as it very well may be handily executed in vehicle like Car, school transport and so forth. It is important for visit and travel organization. It can in like manner be used in schools, colleges, working environments and some open spots taking thought of put individuals. This gadget gives wellbeing and Avoid Accident to government and private vehicles. Military application where high power seeing of contender is required.

## VI. CONCLUSION

Our Project Assurance of vehicle: a multi-sensor approach was actualized effectively. In this way, thusly, we can diminish alcohol and apathetic related road setbacks and from now on these sorts of markers have an uncommon relevance. We have consolidated the major robotized domain for the smooth running of a vehicle. This task includes the measure and controls the drowsiness utilizing eye blink (IR) sensor, identification of obstructions utilizing LiDAR sensor and Alcohol sensor distinguishes if driver is devoured liquor. This gadget gives much-propelled offices in now daily's life as it tends to be handily executed in vehicles. Right now, we have a likewise utilized a weight sensor that distinguishes event of accident and temperature sensor that recognizes any high varieties in temperature because of fire within the vehicles and proposed a completely unique technique for discovery of the precise area of vehicle by utilizing GPS and GSM innovation. Our present world has built up a great deal in each field so we need some robotization in our own and government vehicles. There is a good deal to carter to this field and it has a tremendous investigating field stretched out for advancement in security and accommodation. Through the examination displayed right now, we propose a multi-sensor vehicle for accident prevention and making the world a much better and safe place to live.

## VII. ADVANTAGE

- A. Prevention of drowsiness and alcoholic accidents.
- B. The huge smashing separation during Accident.
- C. The safe-keeping of vehicle external body.
- D. Easily reasonable and adaptable.
- E. Safety and solace capacity of current vehicle.

## REFERENCES

- [1] Wang Wei, Fang Hanbo, —Traffic accident automatic detection and remote alarm device, Proceedings of IEEE International Conference on Electric Information and Control Engineering, pages: 910-913, 2011.
- [2] Mr.S. Iyyappan and Mr.V. Nandagopal, Accident Detection and Ambulance Rescue with Intelligent Traffic Light System, published in International Journal of Advanced Technology and Engineering Research, 2013.
- [3] K. Athavan; S. Jagadeeshwaran, G. Balasubraminan, N. Dinesh, G. Abhilash, G. Gokul —Automatic ambulance rescue System, Proceedings of 22nd IEEE International Conference on Tools with Artificial Intelligence, pages:190-195, 2012.
- [4] Amnesh Goel, SukanyaRay, Nidhi Chandra, —Intelligent Traffic Light System to Prioritized Emergency Purpose Vehicles based on Wireless Sensor Network, published in International Journal of Computer Applications, Volume 40– No.12, February 2012.
- [5] Muhammad Ali Mazidi, Rollin D. Mack inlay, PIC Microcontroller and Embedded systems Using Assembly and c, Danny Causey; Pearson International Edition.
- [6] NJ. -P. Hubaux, S. C Apkun, and J. Luo “The security and privacy of smart vehicles”, IEEE security and Privacy magazine, vol2. no3, pp 49-55, 2004.
- [7] Joonwoo Son Seon Bong Lee, Man Ho Kim Suk Lee\*, Kyung Chang Lee\*\*” Intelligent Rain Sensing and Fuzzy Wiper Control Algorithm for Vision-based Smart Windshield Wiper System.
- [8] Shane Hutchinson, MesutBaran and Srdjan Lukic, “Power Supply for an Electric Vehicle Charging System for a Large Parking Deck”, IEEE Annual Meeting report of Industry Applications Society, 2009. IAS 2009.
- [9] M. Reinhardt “Guide to Fingerprint Identification and Classification”, July, 2016. W Dong, X Wu, Driver fatigue detection based on the distance of eyelid. Proceedings of the IEEE International Workshop on VLSI Design and Video Technology (IWVDVT '05), May 2005, Suzhou-China, 397–400
- [10] S. Sonika, Dr.K. Sathiyasekar, S. Jaishree, (2014), Intelligent Accident Identification System using GPS, GSM modem, IJARCCCE, Vol 3, Issue 2, pp 5487-5489.
- [11] S. Sonika, Dr.K. Sathiyasekar, S. Jaishree, (2014), Intelligent Accident Identification System using GPS, GSM modem, IJARCCCE, Vol 3, Issue 2, pp 5487-5489
- [12] An article published by Times of India on 'Strategy on road safety must' on 7th March, 2009.
- [13] Fabio Lo Castro, “Class I Eye Blink Detector” CNR-Institute of Acoustics, Via del Fosso del Cavaliere 100, 00133 Rome, Italy.
- [14] Steven B. Ryan, Krystal L. Detweiler, Kyle H. Holland, Michael A. Hord and Vlastislav Bracha, “A long-range, wide field-of-view infrared eye blink detector”.
- [15] Triveni Shinde and B. V. Pawar, —Car anti-collision and intercommunication system using communication protocol, International journal of engineering sciences and research technology ISSN:2319-7064, Volume-2, No-6, pp.187-191, June-2013
- [16] S. Saravanan, T. Kavitha, —Vehicle navigation and obstacle detection system using RFID and GSM, Journal of Theoretical and Applied Information Technology, Vol. 38, No2, pp.206-209, 30th April 2012
- [17] <http://drowsydriving.org/about/facts-and-stats/>



- [18] <http://www.arduino.cc>
- [19] Global Status Report on Road safety 2013 by World Health Organization (WHO).
- [20] [www.google.com](http://www.google.com)
- [21] [www.wikipedia.org](http://www.wikipedia.org)
- [22] 8051 Microcontroller Complete Reference, 3rd Edition





10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)