



IJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 8 Issue: IX Month of publication: September 2020

DOI: <https://doi.org/10.22214/ijraset.2020.31390>

www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com

Design and Fabrication of Rocker Bogie Mechanism Automated Combat Rover

Roshan Sharma¹, Rajesh Jaiswal², Ankit Yadav³, Subash Roy⁴

^{1, 2, 3, 4}Dept. of Mechanical Engineering, Nitte Meenakshi Institute of Technology, Bangalore-560064, Karnataka, India

Abstract: "Design and fabrication of Rocker Bogie Mechanism Automated Combat Rover" offer the indispensable thing of improving the Rover to utilize it for Military reasons. The Rover should work on landscape surface wherein our ordinary Defense Rover can't travel and for which it is structured anyway a few components limit its operational abilities, so the focal point of our exploration is to vanquish those limitations. Our examination on the issue of the Rover led with the guide of our group particularly centered around the alteration of the Rover which can be directly utilized for Space Exploration, the linkage of the Rover from different issues that had been acquired from the literature review and studies in this way, research was led on the most proficient method to overcome that. The Rover is completely made of using PVC to expand its capacity to withstand Mechanical shock, vibrations, and mechanical failures brought about by the territory surfaces where its miles worked on. Using planning programming CATIA the structure of the Rocker bogie mechanism Rover was made. Utilizing the model and stay check all the enhancements and capacity have been incorporated into the Rover. The consequence of the endeavor transformed into the usage of fair directional oversee using least force modules which builds the presentation of the battery and will expand the running time of the Rover. In this manner, the different updates had been made like live-streaming camera Remote-control gadget with temperature sensors, separation Measuring framework with appropriate mechanical structure, and mechanical attainability.

Keywords: Gear Motor, Raspberry pi, camera, Remote control system

I. INTRODUCTION

The "Rocker-Bogie Mechanism" have gotten intended to be utilized at steady speeds. It can conquer deterrents which might be at the request for the elements of a wheel. In any case, while conquering a gigantic obstacle, the vehicle's movement accurately stops while the front wheel climbs the hindrance. When running at low speed (more noteworthy than 10cm/second), powerful stuns are limited while this occurs. For some fate planetary missions, rovers will work at human level velocities (~1m/second). Stuns owing to the effect of the

front wheel contrary to a hindrance could hurt the payload or the vehicle. This paper portrays a technique for utilizing a rocker-bogie vehicle all together that it can effectively stairs over the most extreme obstructions instead of affecting and hiking over them. A large portion of the advantages of this procedure can be accomplished with none

mechanical adjustment to introduce plans - handiest a change in control technique. Some mechanical changes are forewarned to gather the most extreme advantage and to enormously blast the incredible operational speed of future rovers.

The rocker-bogie mechanism is the suspension system advanced in 1988 to be utilized in NASA Mars Rover Sojourner, and which has since become NASA's favored format for the rover. It has been utilized inside the Mars Exploration Rover undertaking Rover Spirit and Opportunity, at the Mars Science Laboratory task's Rover Curiosity and is scheduled to be utilized inside the Mars 2020 rover.

The "rocker" some portion of the term originates from the shaking thing of the bigger, forward leg on each aspect of the suspension gadget. These rockers are identified with each extraordinary and the vehicle case utilizing a differential. Comparative with the suspension, when one rocker is going up, the option is going down. The frame proceeds with the regular pitch demeanor of the two rockers. One finish of a rocker is outfitted with a constrained wheel, and the opposite end is rotated to the bogie. The "bogie" some portion of the timeframe alludes to the littler, rearward leg that turns to the rocker inside the middle and which has a force wheel at each quit.

Intruders had been normally utilized as burden wheels in the tracks of military tanks as idlers disseminating the weight over the territory and had been furthermore ordinarily used in trailers of semi-trailer trucks. The two tanks and semi-trailers presently pick trailing arm suspensions.

II. DESIGN OF ROCKER BOGIE MECHSNISM

The critical factor in the amassing of the rocker-bogie segment is to choose the components of rocker and bogie linkages and focuses on them. The lengths and purposes of this instrument can be changed by need. In the work, the fact of the matter is to make the rocker-bogie framework that can overcome the blocks of 150 mm height (like stones, wooden squares) and can move overstrides of height 150 mm. In like manner, another goal is to climb any surface at an edge of 45°. To achieve the above targets The structure of the rocker-bogie model was made by expecting stairs stature 150 mm and length 370 mm. Using Pythagoras theories, find the estimations of the model. It has the two edges of the linkages that are 90°.

A. Design Calculation

The objective of the research canvases is stairs climbing. To accomplish legitimate stairs climbing the size of linkages must be appropriate. Accept the stairs top and length 150 mm and 370 mm individually. To climb stairs with higher strength, it is necessitated that the least complex one sets of wheels should be in a rising job at once. Subsequently, to find the size of bogie linkages, the first pair of wheels must be put at even position route at the quit of the ascending as appeared in Fig. What's more, 2d pair should be put only sooner than the start of rising. There must be far between the vertical edge of stairs and the second pair of the wheel to putting of wheels.

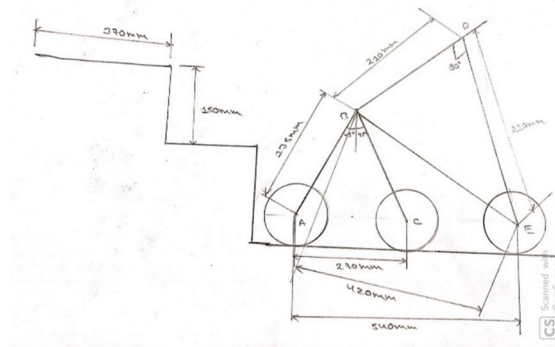


Figure 2.1 Drawing for First Triangle

Presently, need to acquire the separation among first and second wheel (270 mm). Considering the privilege calculated triangle ABC,

Utilizing Pythagoras in triangle ABC expect lengths AB and BC is x,

$$AC^2 = AB^2 + BC^2$$

$$270^2 = x^2 + x^2$$

$$270^2 = 2x^2$$

$$x = 135 \text{ mm}$$

Subsequently, AB = BC = 135 mm

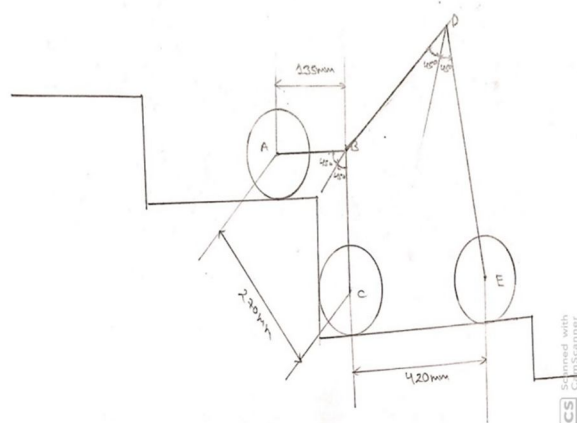


Figure 2.2 Drawing for Second Triangle

Likewise, to find measurements for rocker linkages initial two-wheel sets should be situated at even position. Unnecessary extra person wheel pair should practically finish its ascending before the start of ascending of the first pair of wheels. By placing the wheel in such a manner, the element of linkage BE(420mm) was acquired

Presently consider? BDE

$$420^2 = BD^2 + DE^2$$

$$420^2 = 2y^2$$

$$y = 210$$

Henceforth, $BD = DE = 210$

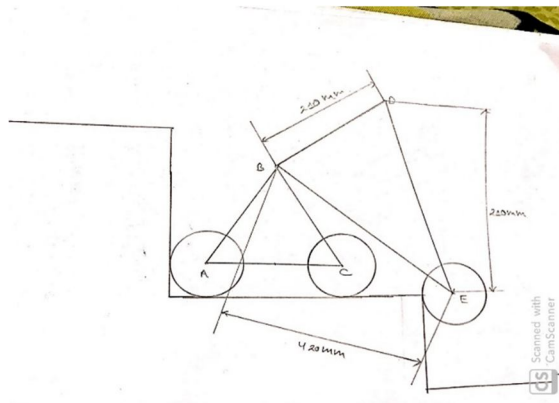


Figure2. 3 Drawing for both Triangles

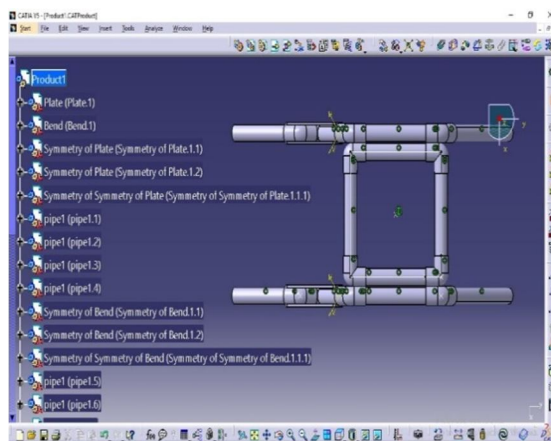
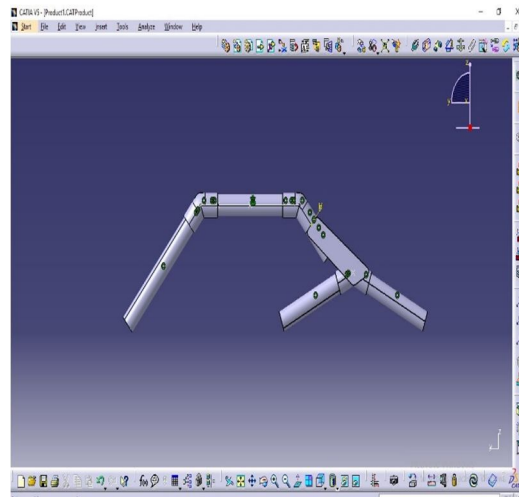


Figure 2.4 3D Model of Rover Frame

B. Design And Selection Of Wheel

Speed is determined for expected speed. Utilizing determined pace esteem need to find distance across of wheel is 95.35 mm. Consequently, The wheel of 105 mm diameter was chosen. The selection of elastic string attached to the wheel makes its gentle weight and strong, gives super footing, grating. These plastic wheels give a minimal effort arrangement that is sturdy adequate for a battle mechanical yet by the sufficiently light to be functional. For automated utilized six wheels,

Wheel width: 40 mm

Shaft Diameter: 6mm

Wheel Diameter: 105 mm

C. Selection Of Acceleration For Rover

For a run of the mill robot on a level landscape, it's needed to take quickening about a portion of the most pace. The most extreme speed of automated is 0.5 m/s. Subsequently, the speeding up of the robot will be 0.5/2 methodology 0.25 m/s². This implies it'd take 2 seconds to arrive at most speed. If the robot is going up slants or through the troublesome territory, you will need a superior increasing speed on account of countering gravity. We expected to climb the viewpoint as much as 45°. Henceforth,

For an average robot on the level landscape, it's expected to take speeding up to about a portion of the most extreme speed. The greatest speed of burglarizing is expected to climb the edge up to 45°. Henceforth,

1) Acceleration of Inclines

$$= 9.81 * \sin \text{edge of tendency} * \pi$$

$$180$$

$$= 0.121 \text{ m/s}^2$$

$$\text{Complete Acceleration} = 0.25 + 0.121 = 0.371 \text{ m/s}^2$$

III. WORKING PRINCIPLE

The rocker-bogie configuration comprising of no springs and stub axles in each wheel which permits the skeleton to move over any deterrents, For example, rocks, trench, sand, and so forth that are up to twofold the wheel's distance across in size while keeping all wheels on the ground greatest time.

When contrasted with any suspension framework, the tilt solidness is constrained by the stature of the focal point of gravity and the proposed framework has the equivalent. Frameworks utilizing springs will in general tip all the more effectively as the stacked side yields during the deterrent course.

Subordinate upon the focal point of in general weight, any vehicle created based on Rocker bogie suspension can withstand a tilt of in any event 50 degrees toward any path without upsetting which is the greatest bit of leeway for any overwhelming stacking vehicle. The framework is structured to be actualized in low speed working vehicles, for example, overwhelming trucks, Bulldozers which work at a moderate speed of around 10 centimeters every second (3.9 in/s) to limit dynamic stuns and considerable harm to the vehicle while overcoming sizable impediments.

IV. METHODOLOGY

According to the exploration, it's miles fine that the rocker-bogie machine diminishes the development with the guide of half in contrast with other suspension frameworks because every one of the bogie's six wheels has an impartial component for development and wherein the two front and two back wheels have character controlling structures which permit the vehicle to appear in area as 0 recognition turning proportion.

Each wheel additionally has thick spikes that offer grasp for hiking in delicate sand and scrambling over rocks effortlessly. To overcome vertical hindrance faces, the front wheels are constrained contrary to the obstruction by methods for the inside and back wheels which produce the greatest required force.

The revolution of the front wheel at that point lifts the front of the vehicle up and over the hindrance and impediment overwhelmed. Those wheels which stay inside the center are then squeezed contrary to the obstruction utilizing the back haggles towards the obstacle by the front till the time it's far lifted up and over. Finally, the back wheel is pulled over the obstruction with the guide of the front wheels because of utilizing pull power. During each wheel's traversal of the snag, forward improvement of the vehicle is eased back or stopped which at long last saves vehicles focus of gravity.

V. OBSERVATION AND RESULT

A. Observation

The fundamental issue related to contemporary suspension frameworks snared in overwhelming stacking vehicle rovers (counting the ones with exuberant and semi energetic suspension frameworks) is their moderate pace of development which wreck the musicality to absorb the stuns produced by utilizing wheels which remain the aftereffect of two components. To start with, to ignore hindrances, the vehicle should be equipped down considerably to take into consideration adequate force to raise the mass of the vehicle. Subsequently, this diminishes normal pace which can't go on without serious consequences on account of overwhelming stacking vehicles. Second, if the vehicle is traveling at an exorbitant speed and experiences an obstruction (tallness more prominent than 10 percent of wheel span), there could be huge amazement transmitted utilizing the body which could harm the suspension or bring down the whole vehicle. That is the reason present-day substantial stacking vehicles venture at a speed of 10cm/s utilizing lopsided landscape. The product-based settling with a rocker-bogie suspension machine portrays the energy and productivity-related utilities in a combined way.

B. Result

The essential issue related to current suspension structures presented in considerable stacking vehicles drifters (tallying those with dynamic and semi-dynamic suspension systems) is their moderate speed of development which crashes the rhythm to hold the paralyzes created by wheels which remain the eventual outcome of two segments. In any case, to dismiss impediments the vehicle must be furnished down basically to consider enough power to raise the mass of the vehicle. Subsequently, this decreases all-around speed which can't go on without genuine results by generous stacking vehicles. Second, if the vehicle is going at a quick and encounters a hindrance (height more noticeable than 10 percent of wheel clear), there will be a tremendous daze transmitted through the body which could hurt the suspension or topple down the entire vehicle. That is the explanation current significant stacking vehicles travel at a speed of 10cm/s through a disproportionate domain. The item-based testing of the rocker-bogie suspension structure depicts the vitality and capability related utilities in a consolidated manner.

Various tests were coordinated to choose how the improved vagabond would perform against its predecessor plans by use of Negative Moment versus Deterrent Height and their responses were gained and their outlines were plotted and assessments were made.

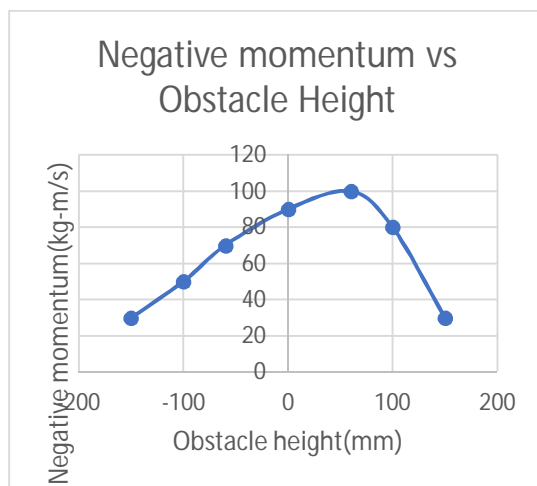


Figure 2.2.1 Graph Negative momentum vs Obstacle Height

VI. CONCLUSIONS

The proposed paper presents a special design in seeking after of developing the rocker-bogie portability framework in customary overwhelming stacking vehicle conduct while high-pace traversal is required and to expand the battery effectiveness and working time of the Rover, which become made achievable the use of the autonomous directional control machine which utilizes least power modules organized upon the working condition and circumstance. Under reasonable suppositions, it's far conceivable to decide the meanderer demeanor and setup, given its capacity and ground qualities, and whether the Rover will slide, spill or safeguard its soundness the utilization of sensors and instruments. The almost 0 tilt machine the utilization of the rovers quality flexibly appended to the fundamental body of the Rover as a stabilizer and self-balance itself diminishes the offer and odds of tilt or toppling.

The mechanics of the Rover has been created, and the over-rotation of the framework prompts the possibility to influence the common powers by applying specific wheel forces. This property has been approved tentatively and might be utilized for the plan of a vigorous footing control. A graphical interface might be structured and actualized onto the contemporary geo survey meanderer configuration to improve the know-how of the framework and to see all data in regards to its activity with a reason to be helpful incomparably propelling the gadget. This work demonstrates how rocker-bogie machine chips away at explicit surfaces. Following the particular weight performing on decides, force did on it. By accepting right stairs measurements, precisely dimensioned rocker-bogie can climb the stairs with magnificent strength. The structure and produced model can climb the edge as much as 45° . Additionally tried for the Webcam with AV recording snared on rocker-bogie framework and discovered great execution of its capacities for giving picture and video data.

REFERENCE

- [1] S. Hirose, A. Kawakami, K. Kato, and H. Kuwahara, et al.(1999) "Super-Mechano-Colony and SMC Rover with Detachable Wheel Units", Proc. COE workshop '99, pp.67-72.
- [2] Miller, David P.; Lee, Tze-Liang et al. (March 17–21, 2002). "High-speed traversal of rough terrain using a rocker-bogie mobility system"
- [3] Lamon, P, Krebs, A, Lauria, M, et al. (ICRA 2004), "Wheel torque control for a rough terrain rover. In: IEEE international conference on robotics and automation 2004." IEEE: ETH-Zurich.
- [4] Lindemann, RA, Voorhees, CJ. et.al(2005) "Mars exploration rover mobility assembly design, test and performance. In: IEEE international conference on systems, man and cybernetics", Vol. 1, Waikoloa, HI,pp. 450–455. IEEE.
- [5] Mongkol Thianwiboon and Viboon Sangveraphunsir et.al(2006) , "Traction Control for a Rocker-Bogie Robot with Wheel-Ground Contact Angle Estimation" Rovers", In Missions, Technologies, and Design of Planetary Mobile Vehicle, pages 531-37, Toulouse, France, September 28-30, 1992.
- [6] Chen Bai-chao et.al(2007) ,"Design and Simulation Research on a New Type of Suspension for Lunar"
- [7] Hacot, H.,et al. (1998)" The Kinematic Analysis and Motion Control of a Planetary Rover", Master's Thesis, Department of Mechanical Engineering, Massachusetts Institute of Technology, Cambridge, MA,

AUTHORS

Roshan Sharma,Btech,ME, roshan404.rs@gmail.com
Rajesh Jaiswal,Btech,ME, jaiswalrajesh328@gmail.com
Ankit Yadav,Btech,ME, ankit.yadav98982@gmail.com
Subash Roy,Btech,ME, subashroy815@gmail.com

Under Guidance Of

Dr. Desai Gowda H.S., desaigowda.hs@nmit.ac.in
Professor, Nitte Meenakshi institute of Technology
Bangalore-560064, Karnataka, India



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)